

50 HERTZ, 5 X 4 X 8 ANSI Flanged

### MOTOR DIMENSIONS




NEMA JP FRAME 3 PHASE 1450 RPM

HP	Type	Frame	D	E	F	O	AB	BG	L	MH
5	ODP	JP213	5.25	4.25	2.75	10.14	7.97	7.00	6.45	0.41
7.5	ODP	JP215	5.25	4.25	3.50	10.14	7.97	7.75	5.69	0.41
5	TEFC	JP213	5.25	4.25	2.75	10.41	8.67	6.00	8.41	0.41
7.5	TEFC	JP215	5.25	4.25	3.50	10.37	8.19	6.77	9.16	0.41

Dimensions are the next larger 60Hz motor derated for 50HZ operation.


D105JP215

DRAWING DEPICTS 215JP 10HP ODP MOTOR

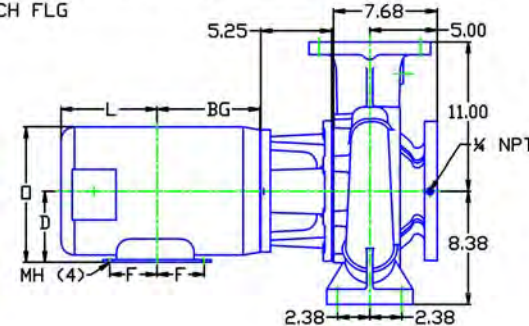

ALL DIMENSIONS IN INCHES.

DRAWING REPRESENTS APPROXIMATE PUMP DIMENSIONS.

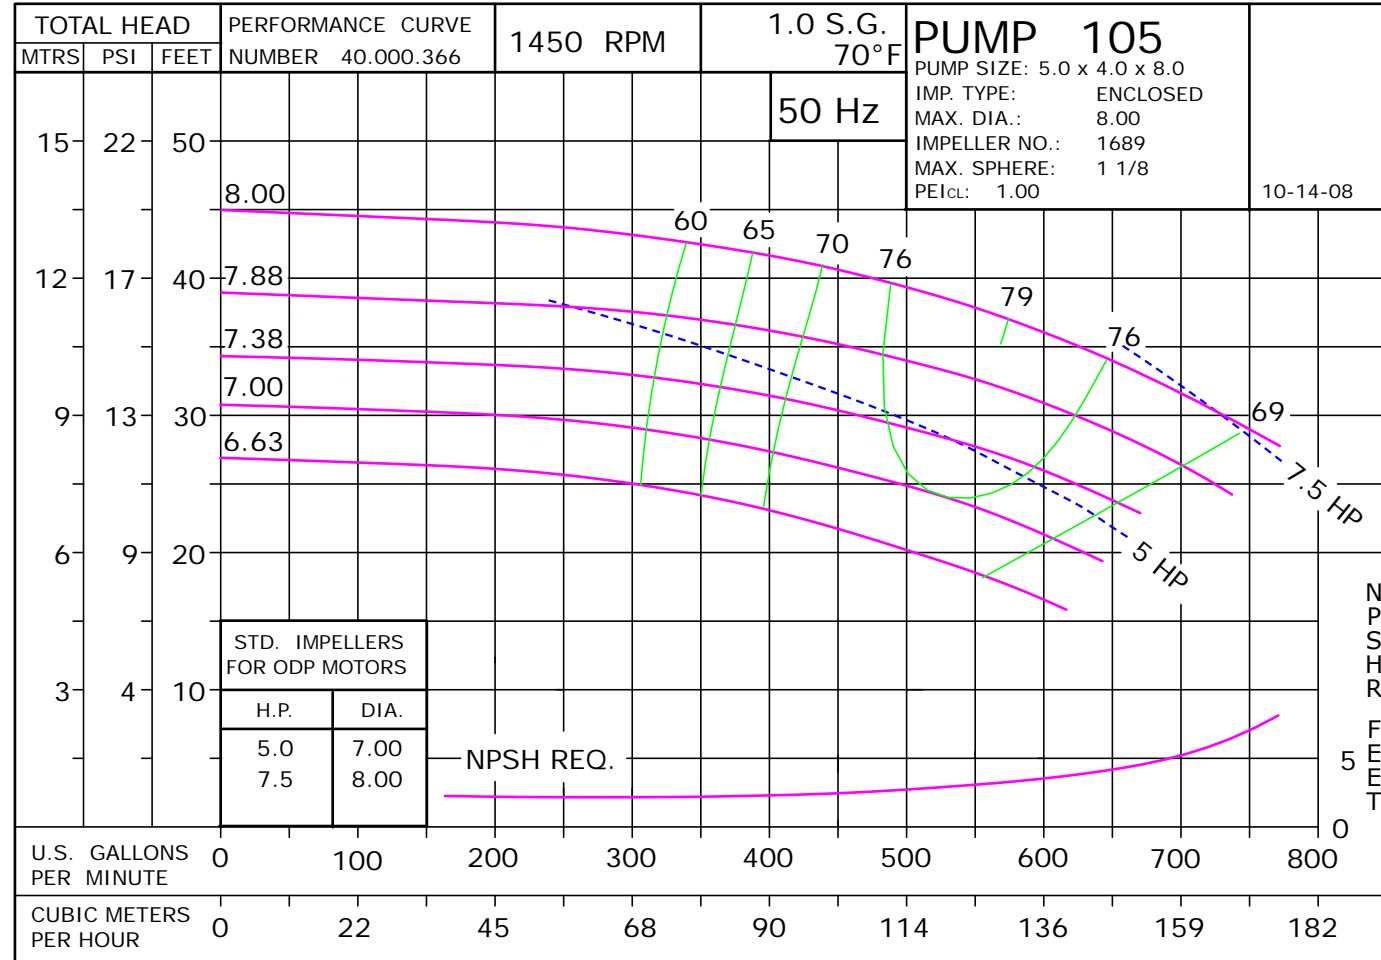

10510TE

D105JP215  
1051450

# 105 JP

1051450JP  
81.001.482 M19

# 50 Hertz Pump & Motor Data

A 3-phase 50 Hertz Motorpump™ can be obtained in several ways. The most common options are listed below:

1. Most 60 Hz pumps available from Scot Pump can be operated on a 3-phase 50 Hz 190/380V power. However, when operated on 50 Hz power, the speed is reduced by approximately 20%, and a significant reduction in performance is realized. The charts below indicate these reductions in performance.
2. Pumps will produce the performance indicated in the performance curves when operated on 50 Hz power. The motors for these selections can be obtained through *derated 60 Hz motors* and *wound 50 Hz motors* (see below).

Contact factory for 1 Phase applications.

## Derated 60 Hz Motors

The most common practice and readily available method of obtaining a 50 Hz motor is by using the next larger 60 Hz motor and derating it to the desired horsepower on 50 Hz. We will require the country the motor is being exported to, frequency in hertz and specific voltage to ensure that a nameplate with applicable efficiency and country markings (if required) is supplied. In utilizing this practice, service factors may be derated to 1.0. Please contact the factory for approval of the rating for your specific application.

## Wound 50 Hz Motors

Specially wound 50 Hz motors are available. These motors are not normally a stock item and require an extended lead time.

The impeller and horsepower combination sized (taking the reduction in speed into consideration) may not be suitable for operation on 60 Hz power. The increase in speed, performance and load may overload the system and the electric motors. **Pumps sized for 50 Hz operation SHOULD NOT be tested on 60 Hz.**


<b>60 Hz Pump on 50 Hz Power</b>		
<b>No Impeller Change</b>		
<b>50 Hz</b>	<b>60 Hz</b>	<b>Factor</b>
GPM =	GPM x	0.829
Head =	Head x	0.687
BHP =	HP x	0.569

<b>To Size 60 Hz Pump Using 50 Hz Data,</b>		
<b>Obtain 60 Hz Data As Follows:</b>		
<b>60 Hz</b>	<b>50 Hz</b>	<b>Factor</b>
GPM =	GPM x	1.2
Head =	Head x	1.45
BHP =	HP =	$\frac{\text{GPM} \times \text{Head} \times \text{SG of}}{3960 \times \text{Eff}}$

<b>Change of Speed (RPM)</b>		
	<b>How Varies:</b>	<b>Examples</b>
GPM	Directly	Double RPM = (2)(RPM) = (2)(GPM) Triple RPM = (3)(RPM) = (3)(GPM)
Head	Square	Double RPM = (2)(RPM) = (2) <sup>2</sup> = (2)(2) = (4)(Head) Triple RPM = (3)(RPM) = (3) <sup>2</sup> = (3)(3) = (9)(Head)
BHP	Cube	Double RPM = (2)(RPM) = (2) <sup>3</sup> = (2)(2)(2) = (8)(BHP) Triple RPM = (3)(RPM) = (3) <sup>3</sup> = (3)(3)(3) = (27)(BHP)

<b>Change of Impeller Diameter (Dia.)</b>		
	<b>How Varies:</b>	<b>Examples</b>
GPM	Directly	Double Dia. = (2)(Dia.) = (2)(GPM) Triple Dia. = (3)(Dia.) = (3)(RPM)
Head	Square	Double Dia. = (2)(Dia.) = (2) <sup>2</sup> = (2)(2) = (4)(Head) Triple Dia. = (3)(Dia.) = (3) <sup>2</sup> = (3)(3) = (9)(Head)
BHP	Cube	Double Dia. = (2)(Dia.) = (2) <sup>3</sup> = (2)(2)(2) = (8)(BHP) Triple Dia. = (3)(Dia.) = (3) <sup>3</sup> = (3)(3)(3) = (27)(BHP)

# Pump 105 • Iron • JP Frame • 1450 RPM

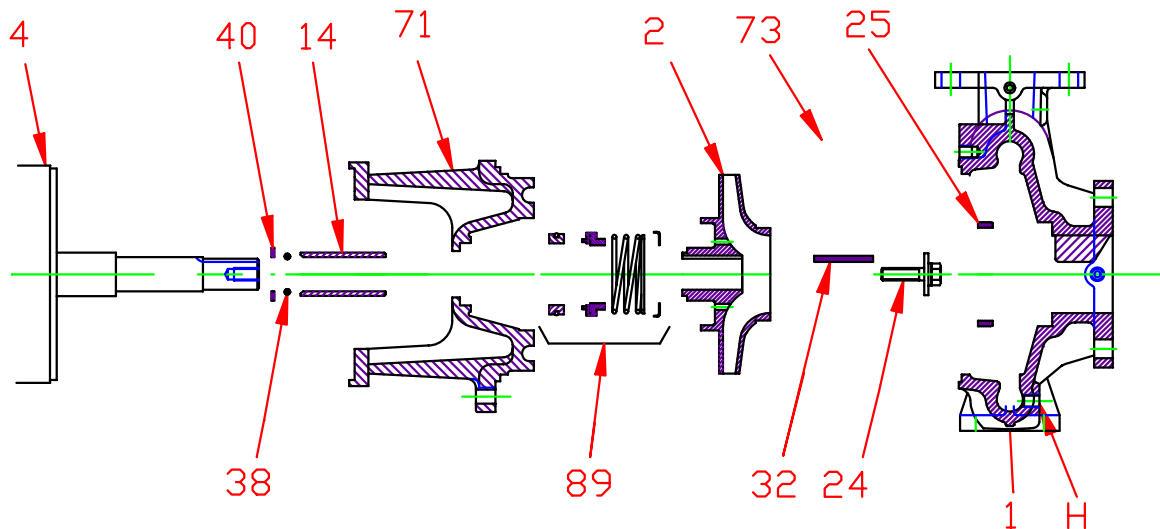

KEY NO.	PART NAME	PUMP NO. 105
1+	CASE, IRON, 5 x 4 FLG	<a href="#">130.000.311X</a>
2	IMPELLER, 1¼" KEYED, ENCLOSED, SPECIFY DIAMETER: IRON	<a href="#">137.000.107</a>
4	MOTOR, JP210/250	See 60HZ Chart
14*	SHAFT SLEEVE, BRONZE	<a href="#">110.000.398</a>
	SHAFT SLEEVE, STAINLESS	<a href="#">110.000.360</a>
25	WEAR RING, BRONZE	<a href="#">103.000.204</a>
	WEAR RING, STEEL	<a href="#">103.000.186</a>
26*	IMPELLER RETAINER, STAINLESS	<a href="#">118.000.640</a>
32*	KEY, STAINLESS	<a href="#">102.000.282</a>
38*	O-RING, SHAFT, BUNA	<a href="#">116.000.218</a>
	O-RING, SHAFT, VITON	<a href="#">116.000.218A</a>
40*	FLINGER, STAINLESS	<a href="#">104.000.200</a>
71	ADAPTER, IRON, JP210/250	<a href="#">132.000.374X</a>
73*	GASKET, CASE, FIBER	<a href="#">116.000.261</a>
89*	1¼" SEALS:	
	BN-CARB/CM	<a href="#">101.000.196</a>
	VN-CARB/CM	<a href="#">101.000.216</a>
	VN-CARB/SIL	<a href="#">101.000.221</a>
	VN-SIL/SIL	<a href="#">101.000.231</a>
	EPDM-CARB/SIL	<a href="#">101.000.196B</a>
	EPDM-SIL/SIL	<a href="#">137.001.555</a>
--	° REPAIR KITS:	
	BN-CARB/CM SEAL	<a href="#">118.000.412</a>
	VN-CARB/CM SEAL (S)	<a href="#">118.000.412A</a>
	VN-CARB/SIL SEAL	<a href="#">118.000.412B</a>
	VN-SIL/SIL SEAL (S)	<a href="#">118.000.412E</a>
	EPDM-CARB/SIL SEAL	<a href="#">118.000.412C</a>
	EPDM-SIL/SIL SEAL	<a href="#">118.000.412F</a>


\* DENOTES COMPONENTS INCLUDED IN REPAIR KIT.  
+ INCLUDES BRONZE WEAR RING. FOR STEEL WEAR RING, REPLACE SUFFIX "X" WITH "X1".  
° THE REPAIR KIT INCLUDES THE BRONZE SHAFT SLEEVE EXCEPT THE (S) INDICATED, WHICH IS STAINLESS.

E103JP

M15

P1051450JP

**Pump 105 • Iron • JP Frame • 1450 RPM**

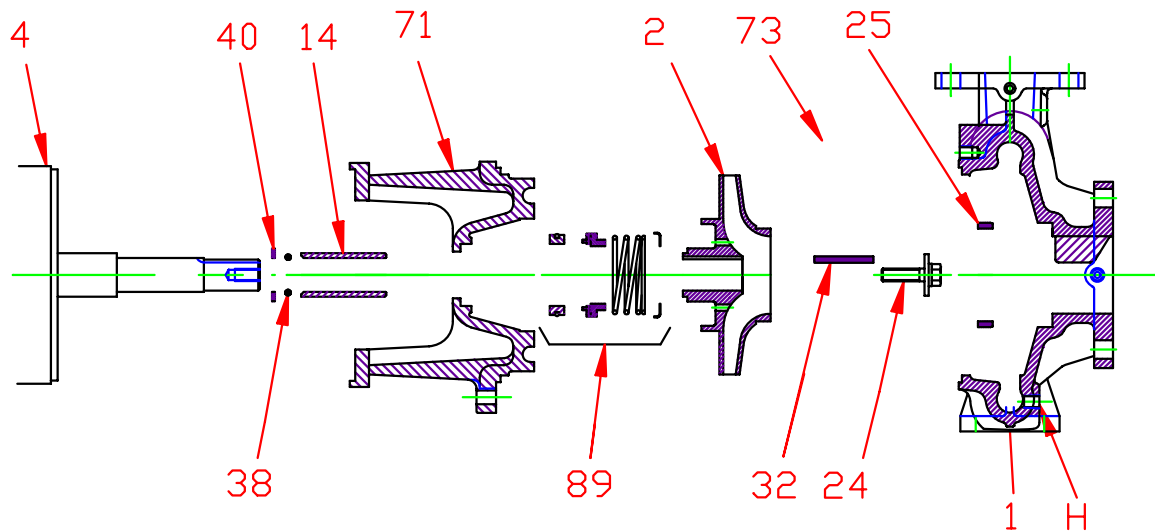

**CONSTRUCTION OPTIONS**

KEY	PART NAME	STANDARD FITTED	ALL IRON
1	Case	Iron	Iron
2	Impeller	Iron	Iron
14	Shaft Sleeve	Bronze	Stainless
25	Wear Ring, Case	Bronze	Steel
26	Impeller Retainer	Stainless	Stainless
32	Key	Stainless	Stainless
38	Shaft O-Ring	BUNA	BUNA
40	Flinger	Stainless	Stainless
71	Adapter	Iron	Iron
73	Gasket, Case	Fiber	Fiber
89	Mechanical Seal, Type 21 BN-CM	Standard	Standard
H	Plug, Drain	Brass	Plated Steel

E103JP

C11

C1051450JP