

wilo®



Wilo IPL Vertical Inline Pumps

Vertical Inline, Single Stage Pumps – March, 2013

Marcos D. Roimicher, Product Manager BS Market Segment, Product Management Department

Agenda

1. Features and Benefits
2. General Technical Specifications
3. Model Number Designation
4. Family Curves
5. Detailed Technical Features / Construction Details / Features and Benefits
6. Installation Instructions / Troubleshooting
7. Ordering Information
8. Application and Sizing Examples

Features and Benefits

WILO Brain “Easy Read” Model Numbering System

- References flange size and performance in standard North American units

Uses Baldor NEMA “C” Frame Motors (other Manufacturers are OK)

- All voltages and enclosures available
- Various efficiency types and VFD-ready
- Do not need to be Inverter Duty

Excellent Delivery Times – 72 hours

- Common pump ends and motors stocked in Thomasville, Georgia

¼” Pressure Gauge Tappings Standard

- Suction and discharge
- Using square-headed threaded plugs

Features and Benefits

External Snap Ring Fixes Impeller on Shaft

- Do not have to worry about “reverse threads” or application of Loctite® again!

Excellent Commercial Pump Warranty

- 24 months from date of purchase

German Designed and Built, specifically for the North American Market

- Heavy duty design – extremely robust!

General Technical Specifications

Size Range – Flange Size

- 1-¼" to 3"
- 15 Models @2 Pole (3600 RPM)
- 22 Models @ 4 Pole (1800 RPM)

Horsepower Range

- 2 Pole (3600 RPM) - 1.0 to 3.0 Hp
- 4 Pole (1800 RPM) – 1/3 to 1 1/2 Hp

Performance

- 2 Pole (3600 RPM), flows to 375 US GPM, heads to 65' TDH
- 4 Pole (1800 RPM), flows to 370 US GPM, heads to 38' TDH

General Technical Specifications

Standard Construction Material Specification

- Volute - Cast iron with cathodolysis coating for excellent corrosion resistance
- Impeller – Fibre-reinforced polypropylene (PPE) engineered composite
- Stub shaft – 420 Stainless steel

Operating Temperature Range

- 14°F (-10°C) to 250°F (120°C)
- Maximum ambient temperature 105°F (40°C)

System Pressures

- Maximum overall working pressure – 150 PSI max (10 bar)
- Minimum inlet (suction) pressure – dependent on NPSHR – see performance curves

General Technical Specifications

Mechanical Seal Details

- Standard type – Q1Q1XGG [all water/glycol solutions up to 200°F (93°C) and 50% concentration]
 - Rotating ring/head assembly – silicon carbide
 - Stationary seat – silicon carbide
 - Elastomers – EPDM, up to 104°F (40°C) and 40% concentration
 - Spring - Stainless Steel
 - For applications other than water and water/glycol mix, call Wilo

Model Number Designation

IPL 2.5 50/260 - 2

IPL

- Inline Vertical Pump, Single Suction, Dry Rotor, "Mechanical sealed"
- Cast iron flanged type

2.5 Suction and Discharge Size in Inches

- $\geq 2.5''$: 125# ANSI raised face standard (150# same as 125#)
- $\leq 2''$: non-ANSI pump flange

50 Maximum Pumping Head in Feet


260 Maximum Flow in US GPM

2 # of Poles


- 2 poles = 3500 RPM, 4 poles = 1750 RPM

Note: Complete units include motor HP, motor enclosure, # poles (RPM), frame size, phase and voltage

Family Curves – 4 Pole, 1750 RPM Models, 60 Hz

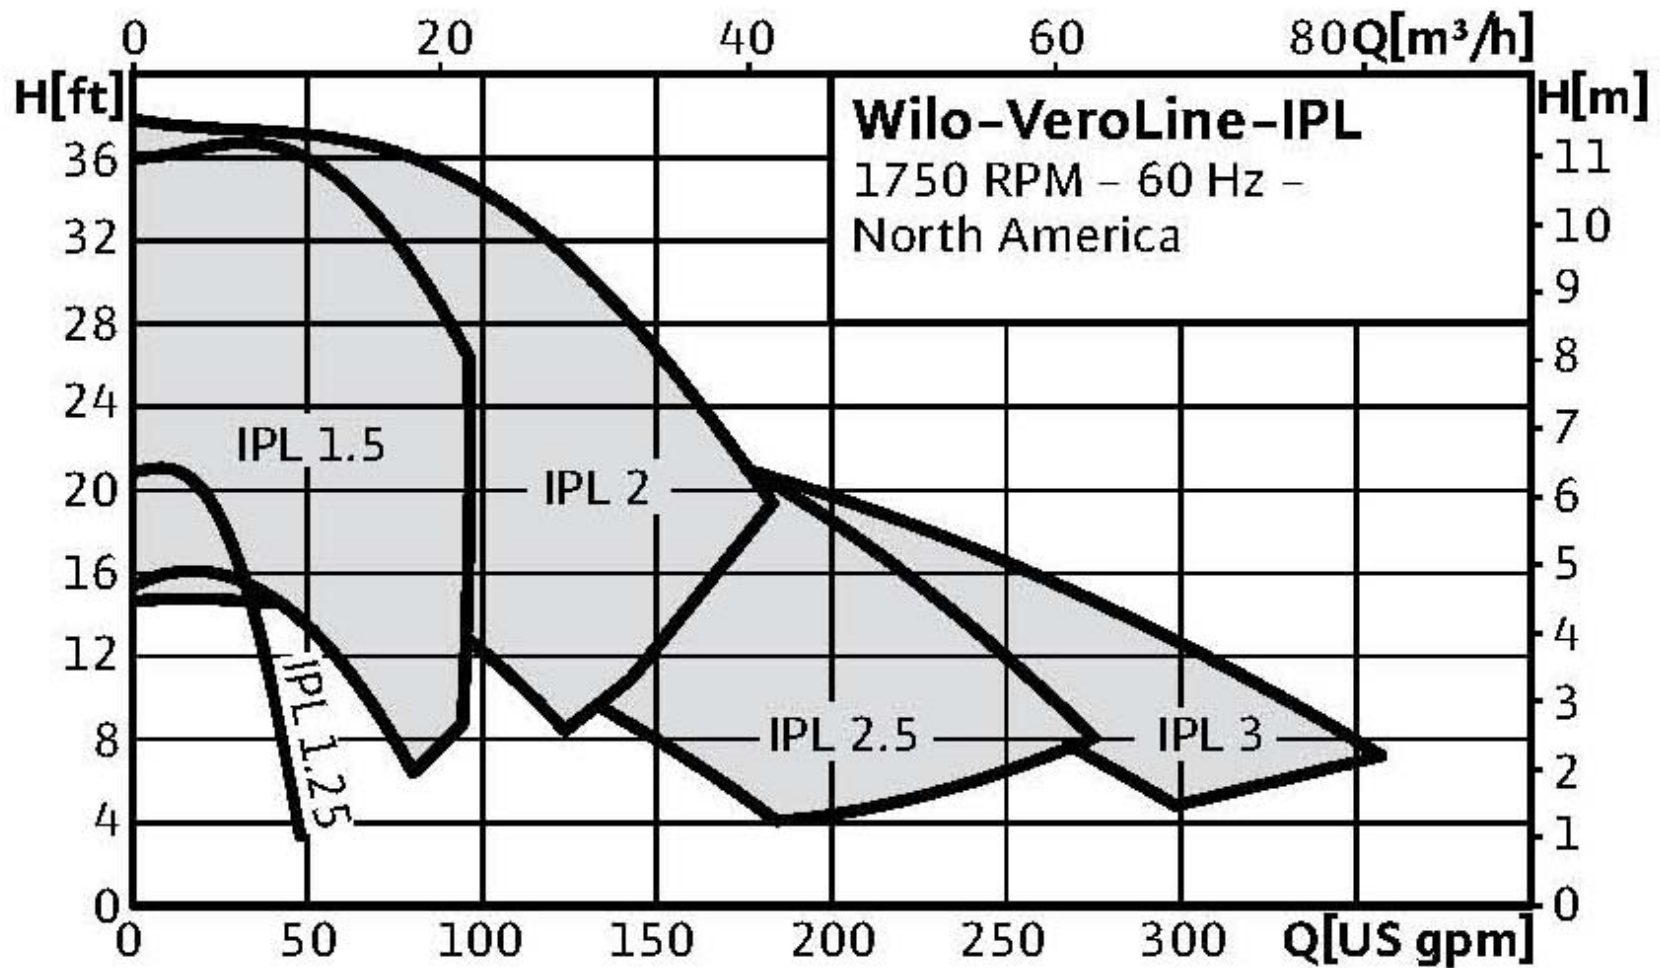

Family Curves – 2 Pole, 3500 RPM Models, 60 Hz

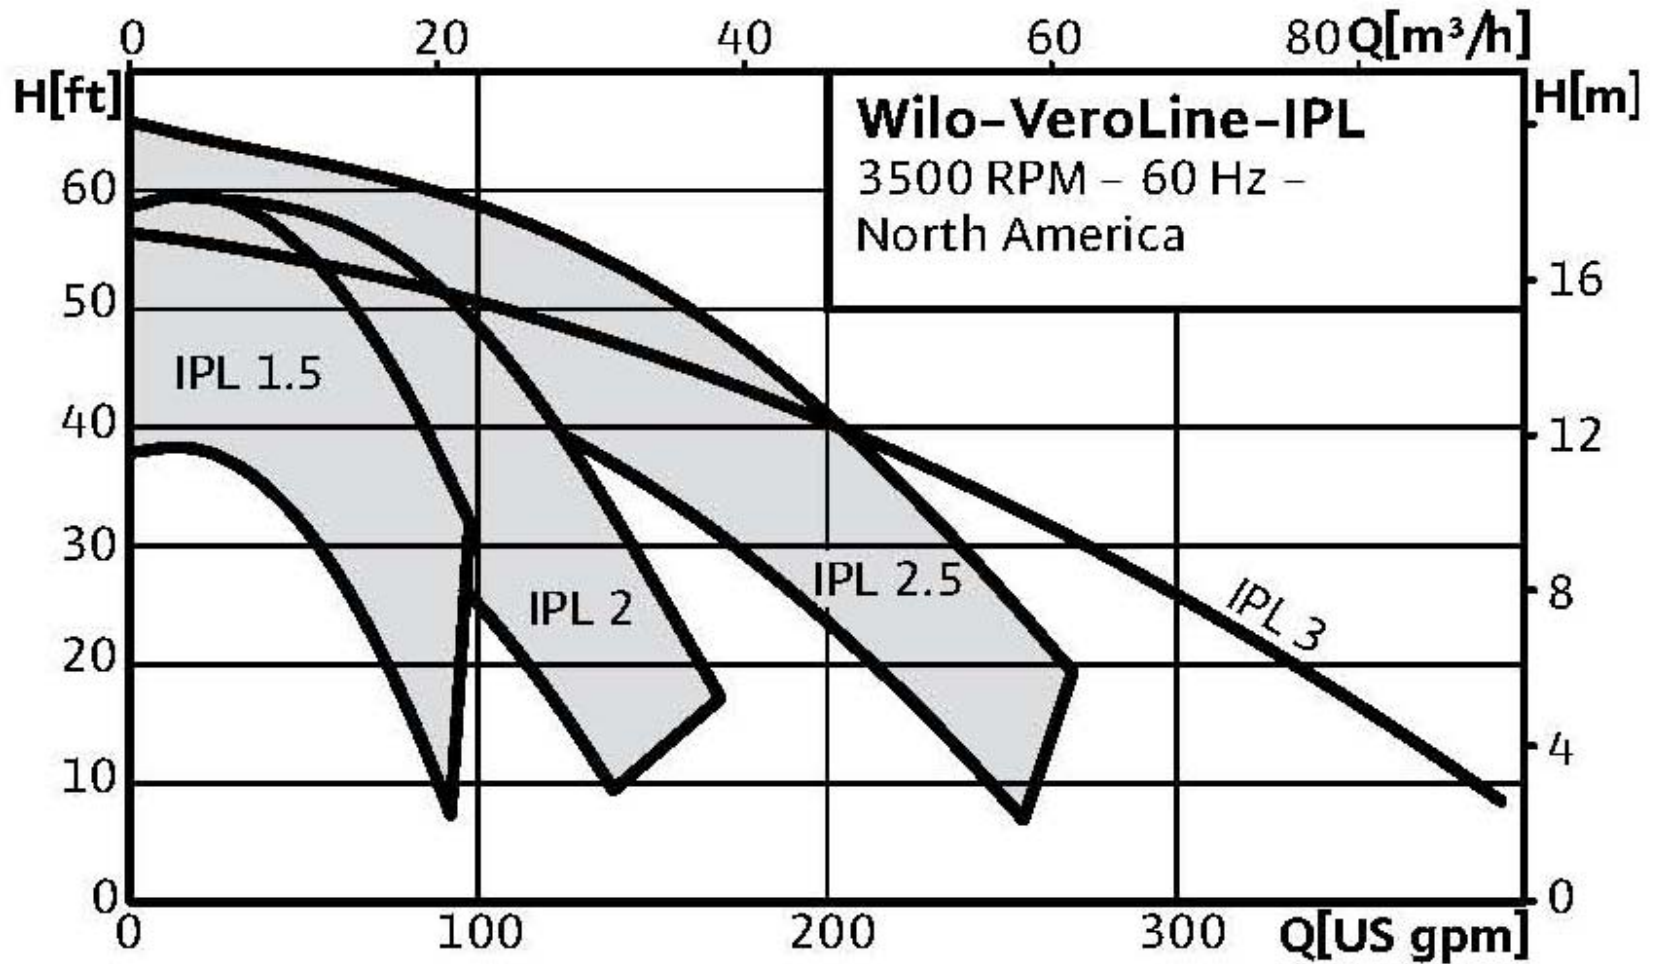

Detailed Technical Features

Construction Features

- Cathophoretic coating inside of the pump body and lantern
- Pressure rating (standard construction) 150 PSI, with 1.5 times the hydrostatic test pressure (Hydraulic Institute Standard)
- (2) Eye bolts for lifting
- Oversized radial ball bearings in the vertical motors

Ease of Installation

- Short lay length – (F to F dimension)
- Install shaft vertical (motor up) or horizontal
- Bottom of volute body is threaded for frame mounting
- Round 2½" and above flanged units – 125# (150#) ANSI type
 - 2" – (4) bolt round flanged type similar to non-ANSI North American grooved style
 - 1½" and 1¼" oval (2) bolt grooved style

Detailed Technical Features

Ease of Maintenance


- Standard Baldor NEMA "C" frame motors
- All bolts are SAE
- Bellows type mechanical seal
- Cathaphoresis coated cast iron volute and lantern – rust free!
- Stainless steel stub shaft – no need for dial indicators
- Snap rings fix impeller onto the shaft – no reverse threads, split cone nuts or Loctite®

Painting

- 2-part epoxy paint as per internal standards
- Primer: Red Oxide Zinc Coated ~ 40 microns thick
- Final top coat: Enamel paint ~ 40 microns thick - "Wilo green" (Pantone 334) as standard
- Customized paint available upon request, will require longer lead time and extra cost

Detailed Technical Features

420 SS stub shaft coupling:
1/8" Allen screws

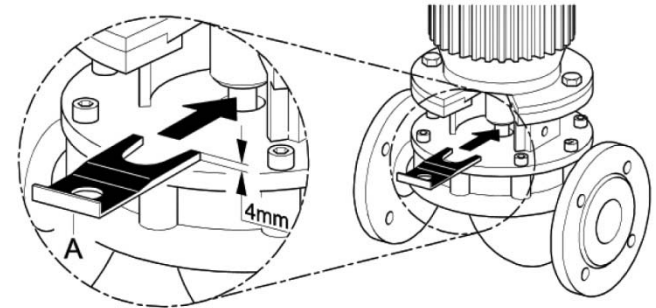

Seal pre-load instructions:
Use supplied tool – 4mm

1/4" NPT gauge tappings:
Squared headed plugs

Detailed Technical Features


One size, one-piece bellows mechanical seal

Standard Baldor NEMA C-face motors:
All voltages available
Oversized bearings

Motor to Lantern bolt torque:
9/16" - 25ft-lbs [34N-m]




Bottom legs :
3/8" SAE tapped

Lantern to volute bolt

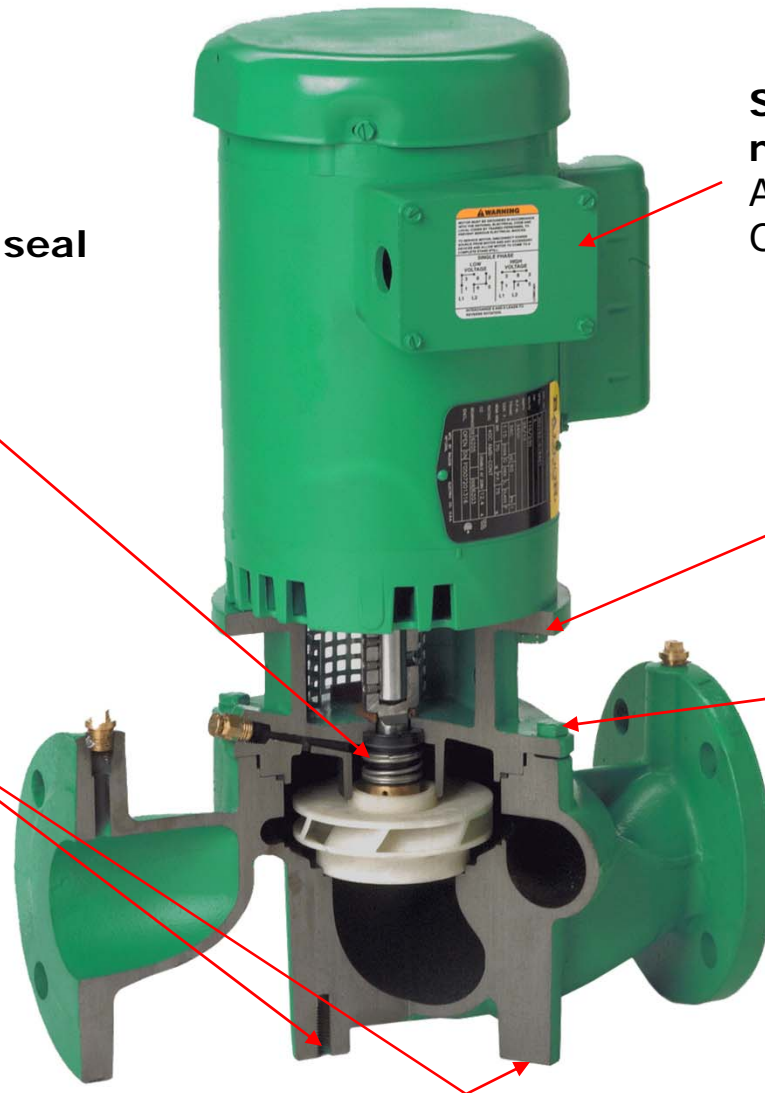




Installation Instructions

- Install with shaft horizontal or vertical (motor conduit facing up)
- Pump in any direction (vertical, horizontal, etc)
- If pumping vertical try to pump up (with air)
- Locate in system where suction pressure is as high as possible
 - Avoids cavitation
- Pump away from thermal expansion tank!
- Fluid should be relatively free of abrasive particles
 - Causes damage to mechanical seals and wears out PPE impellers
- When installing horizontally, read the IOM!
 - Watch motor and mechanical seal air vent orientation
- Do not install at the highest point (air)
- Do not install at the lowest point (dirt)

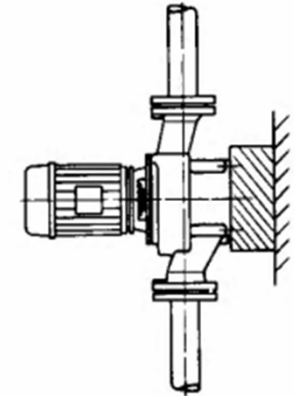

Installation Instructions

- Be careful with the suction side (laminar flow)
 - Recommendation – 5 pipe diameters or more of straight pipe or device
- Always CHECK ROTATION!

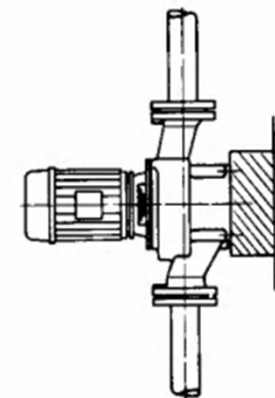

Troubleshooting


- Check power
- Check rotation - single phase also
- Confirm RPM on motor nameplate or use a tachometer
- Install pressure gauges on the suction and discharge flanges
- Check suction pressure
- Perform pressure differential test
- Do not assume!
- Read the IOM!

Pressure gauges:
installed at these locations

Motor nameplate

Pump nameplate

**Rotation
Arrow**

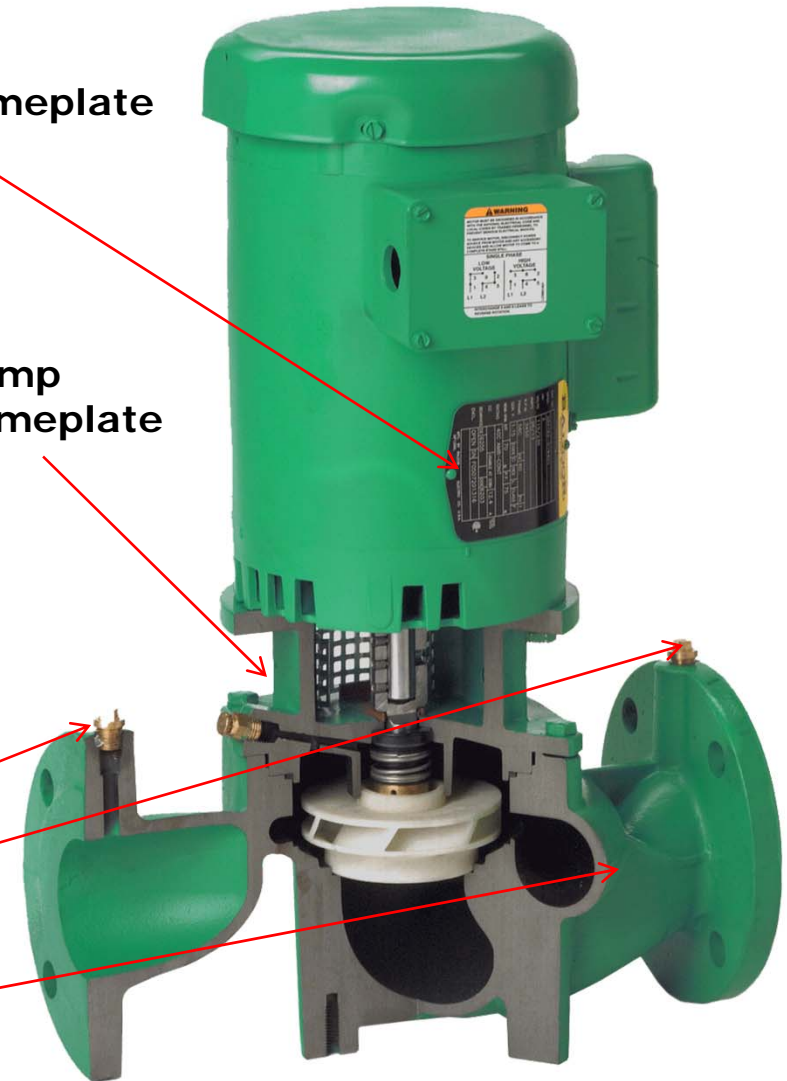

Ordering Information

Application Type

- Water and/or water/glycol, 50% concentration, 200°F (95°C) max.
 - Use standard Wilo mechanical seal
 - Elastomers – EPDM, up to 104°F (40°C) and 40% concentration
- Other applications – contact Wilo

Application Considerations

- Head and capacity required
- Available voltage and number of phases (1 or 3)
- Motor Enclosure (dependent of ambient conditions)
 - TEFC standard (for all “flange mount motor types” – C frame)
 - ODP optional
 - Motor efficiency ratings (EISA compliant – Premium or High E)

Application and Sizing Examples

Sizing Examples – Simplified Heating

- Determine BTU's and temperature differential (mostly given)
- Calculate flow (US GPM) = $\text{BTU per hour} / 500 \text{ (constant)} / \text{temperature differential (}^\circ\text{F)}$
 - Example: 100 US GPM will pump 1,000,000 BTU/hour @ 20° F differential
- Once flow is known, size pipe based on maximum velocity of 4 ft/sec
 - Higher velocities cause noise, erosion and air problems
- Once pipe is sized, estimate friction loss
 - Manifold systems heads are not additive – use the highest loss loop
- Once friction loss and flow are determined, match point to performance curve
- Remember to use the correct companion flanges

Questions/Comments?

