

50 HERTZ, 3 X 2 X 8 ANSI Flanged

MOTOR DIMENSIONS


NEMA JP FRAME 3 PHASE 1450 RPM

HP	Type	Frame	D	E	F	O	AB	BG	L	MH
1.5	ODP	JP145	3.50	2.75	2.50	6.75	5.87	5.25	5.38	0.34
2	ODP	JP182	4.50	3.75	2.25	8.56	6.70	5.75	6.65	0.41
3	ODP	JP184	4.50	3.75	3.75	8.56	6.70	6.25	7.34	0.41
1.5	TEFC	JP145	3.50	2.75	2.50	7.00	6.25	5.06	6.34	0.34
2	TEFC	JP182	4.50	3.75	2.25	8.85	7.57	5.01	7.14	0.41
3	TEFC	JP184	4.50	3.75	2.75	8.85	7.57	5.51	7.64	0.41

Dimensions are the next larger 60Hz motor derated for 50Hz operation.


D102JP182

DRAWING DEPICTS 182JP 3HP ODP MOTOR

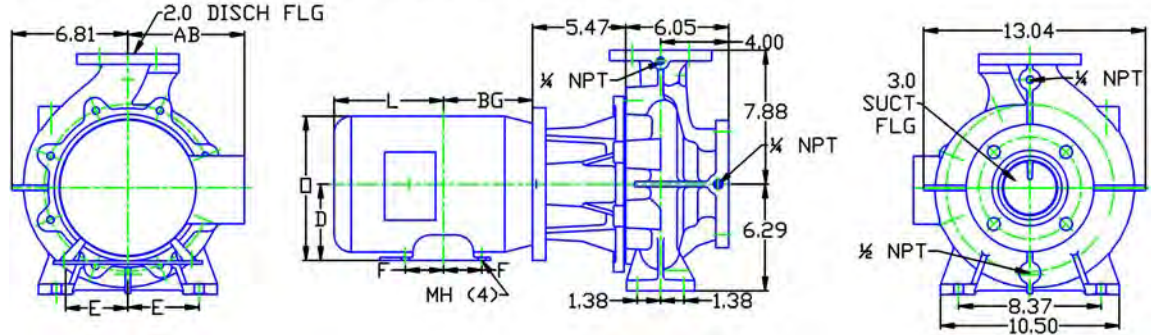

ALL DIMENSIONS IN INCHES.

DRAWING REPRESENTS APPROXIMATE PUMP DIMENSIONS. AUTOCAD DRAWING TO SCALE AVAILABLE FROM FACTORY.

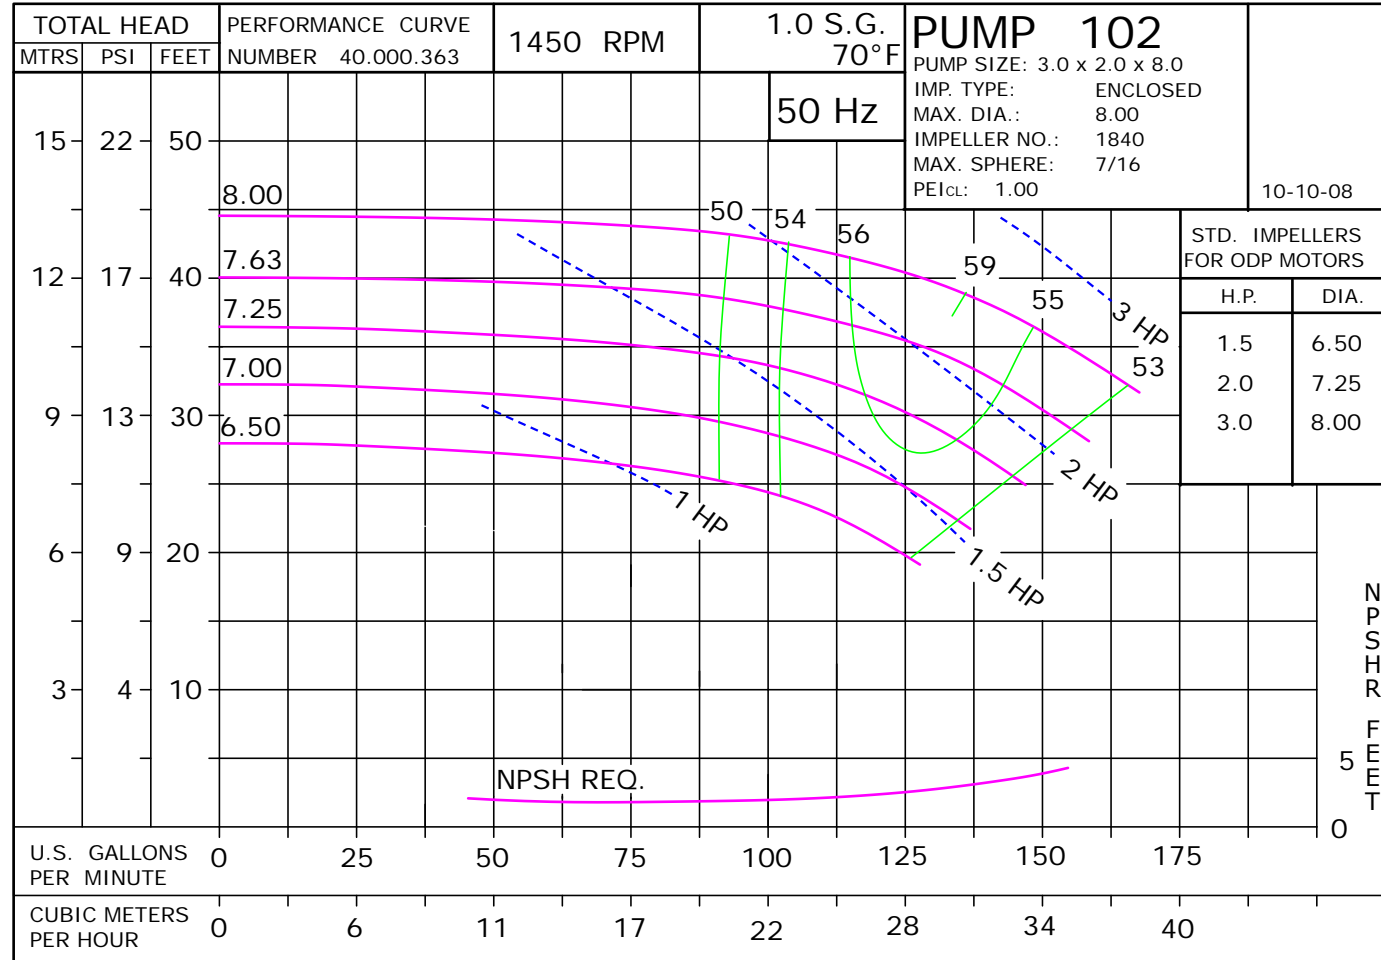

10205DP

D102JP182
1021450

102 JP

1021450JP
81.001.480 A20

50 Hertz Pump & Motor Data

A 3-phase 50 Hertz Motorpump™ can be obtained in several ways. The most common options are listed below:

1. Most 60 Hz pumps available from Scot Pump can be operated on a 3-phase 50 Hz 190/380V power. However, when operated on 50 Hz power, the speed is reduced by approximately 20%, and a significant reduction in performance is realized. The charts below indicate these reductions in performance.
2. Pumps will produce the performance indicated in the performance curves when operated on 50 Hz power. The motors for these selections can be obtained through *derated 60 Hz motors* and *wound 50 Hz motors* (see below).

Contact factory for 1 Phase applications.

Derated 60 Hz Motors

The most common practice and readily available method of obtaining a 50 Hz motor is by using the next larger 60 Hz motor and derating it to the desired horsepower on 50 Hz. We will require the country the motor is being exported to, frequency in hertz and specific voltage to ensure that a nameplate with applicable efficiency and country markings (if required) is supplied. In utilizing this practice, service factors may be derated to 1.0. Please contact the factory for approval of the rating for your specific application.

Wound 50 Hz Motors

Specially wound 50 Hz motors are available. These motors are not normally a stock item and require an extended lead time.

The impeller and horsepower combination sized (taking the reduction in speed into consideration) may not be suitable for operation on 60 Hz power. The increase in speed, performance and load may overload the system and the electric motors. **Pumps sized for 50 Hz operation SHOULD NOT be tested on 60 Hz.**


60 Hz Pump on 50 Hz Power		
No Impeller Change		
50 Hz	60 Hz	Factor
GPM =	GPM x	0.829
Head =	Head x	0.687
BHP =	HP x	0.569

To Size 60 Hz Pump Using 50 Hz Data,		
Obtain 60 Hz Data As Follows:		
60 Hz	50 Hz	Factor
GPM =	GPM x	1.2
Head =	Head x	1.45
BHP =	HP =	$\frac{\text{GPM} \times \text{Head} \times \text{SG of}}{3960 \times \text{Eff}}$

Change of Speed (RPM)		
	How Varies:	Examples
GPM	Directly	Double RPM = (2)(RPM) = (2)(GPM) Triple RPM = (3)(RPM) = (3)(GPM)
Head	Square	Double RPM = (2)(RPM) = (2) ² = (2)(2) = (4)(Head) Triple RPM = (3)(RPM) = (3) ² = (3)(3) = (9)(Head)
BHP	Cube	Double RPM = (2)(RPM) = (2) ³ = (2)(2) (2) = (8)(BHP) Triple RPM = (3)(RPM) = (3) ³ = (3)(3)(3) = (27)(BHP)

Change of Impeller Diameter (Dia.)		
	How Varies:	Examples
GPM	Directly	Double Dia. = (2)(Dia.) = (2)(GPM) Triple Dia. = (3)(Dia.) = (3)(RPM)
Head	Square	Double Dia. = (2)(Dia.) = (2) ² = (2)(2) = (4)(Head) Triple Dia. = (3)(Dia.) = (3) ² = (3)(3) = (9)(Head)
BHP	Cube	Double Dia. = (2)(Dia.) = (2) ³ = (2)(2) (2) = (8)(BHP) Triple Dia. = (3)(Dia.) = (3) ³ = (3)(3)(3) = (27)(BHP)

Pump 102 • Iron • JP Frame • 1450 RPM

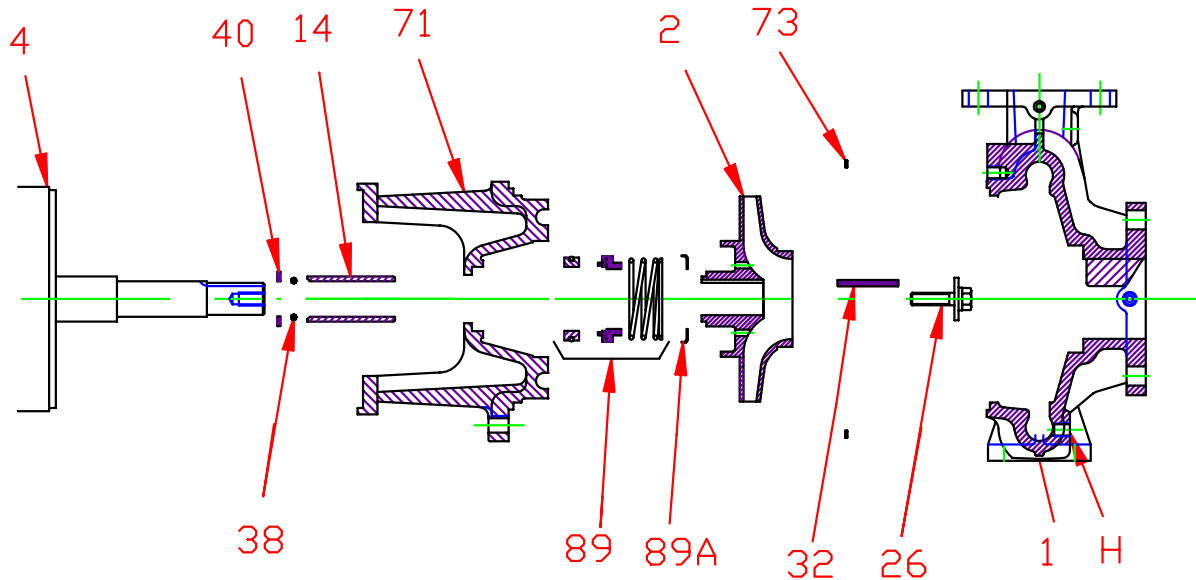


KEY NO.	PART NAME	PUMP NO. 102
1	CASE, IRON, 3 x 2 FLG	130.000.308X
2	IMPELLER, 7/8" KEYED, ENCLOSED, SPECIFY DIAMETER: IRON, TEFCOTED	137.000.174.TC
4	MOTOR, JP140/180	See 60HZ Chart
14*	SHAFT SLEEVE, BRONZE	110.000.399
	SHAFT SLEEVE, STAINLESS	110.000.361
26*	IMPELLER RETAINER, STAINLESS	118.000.635
32*	KEY, STAINLESS	102.000.256
38*	O-RING, SHAFT, BUNA	116.000.117
	O-RING, SHAFT, VITON	116.000.105
40*	FLINGER, STAINLESS	104.000.256
71	ADAPTER, IRON, JP140/180	132.000.391
73*	GASKET, CASE, FIBER	116.000.276
	1½" SEALS:	
89*	BN-CARB/CM	101.000.168
	VN-CARB/CM	101.000.191
	VN-CARB/SIL	101.000.175
	VN-SIL/SIL	101.000.204
	EPDM-CARB/SIL	101.000.175B
	EPDM-SIL/SIL	101.000.204A
89A*	SEAL RETAINER, STAINLESS	104.000.174
	° REPAIR KITS:	
--	BN-CARB/CM SEAL	118.000.413
	VN-CARB/CM SEAL (S)	118.000.413F
	VN-CARB/CM SEAL	118.000.413A
	VN-CARB/SIL SEAL	118.000.413B
	VN-SIL/SIL SEAL (S)	118.000.413G
	VN-SIL/SIL SEAL	118.000.413C
	EPDM-CARB/SIL SEAL	118.000.413D
	EPDM-SIL/SIL SEAL	118.000.413E

* DENOTES COMPONENTS INCLUDED IN REPAIR KIT.

° THE REPAIR KITS INCLUDE THE BRONZE SHAFT SLEEVE EXCEPT THE (S) INDICATED, WHICH IS STAINLESS

Pump 102 • Iron • JP Frame • 1450 RPM

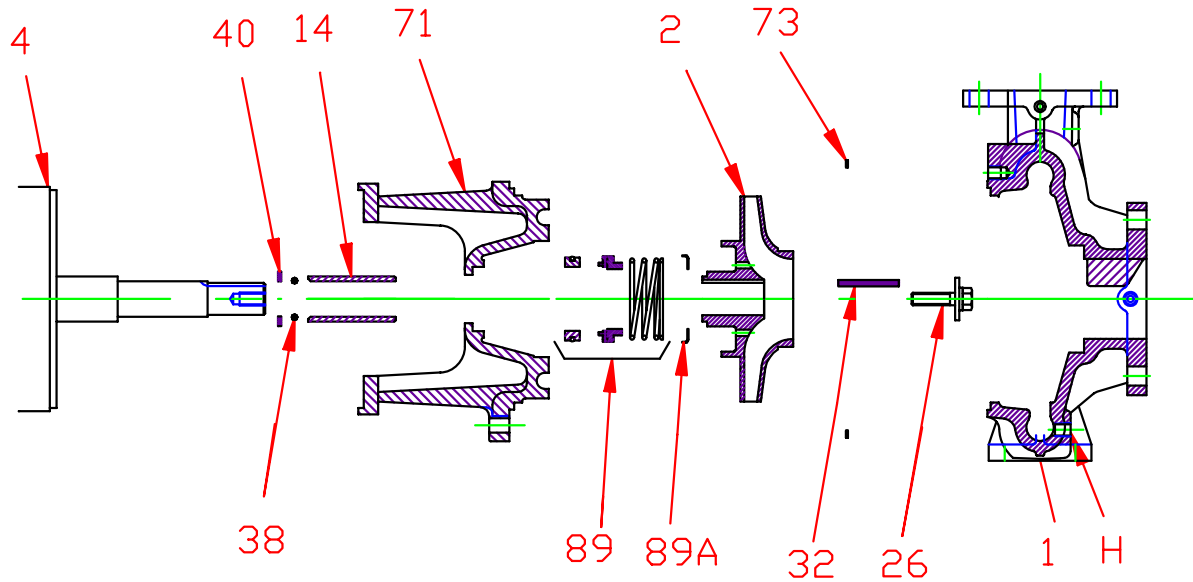

CONSTRUCTION OPTIONS

KEY	PART NAME	STANDARD FITTED	ALL IRON
1	Case	Iron	Iron
2	Impeller	Iron, Tefcoted	Iron, Tefcoted
14	Shaft Sleeve	Bronze	Stainless
26	Impeller Retaining Assy	Stainless	Stainless
32	Key	Stainless	Stainless
38	Shaft O-Ring	BUNA	BUNA
40	Flinger	Stainless	Stainless
71	Adapter	Iron	Iron
73	Gasket, Case	Fiber	Fiber
89	Mechanical Seal, Type 21 BN-CM	Standard	Standard
89A	Seal Spring Retainer	Stainless	Stainless
H	Plug, Drain	Brass	Plated Steel

E102JP180

A20

C1021450JP