

Pioneering for You

wilo

Edition - 2019 - 60 Hz

Wilo-MULTIVERT MVI





Wilo-MULTIVERT MVI

Wilo-MVI Series

Design

Non-self-priming multistage pump

Type key

Example: **MVI 7002/1-1/16/E/3-400-60-2**

MVI	Vertical high-pressure multistage centrifugal pump
70	Flow rate in m ³ /h
02	Number of impellers
1	Number of trimmed impellers;
1	Materials
	1 = 1.4301 (AISI 304); (only MVI 2,4,8,16/6)
	2 = 1.4404 (AISI 316L)
	3 = pump housing EN-GJL-250 (cataphoretic coating), hydraulics 1.4301 (AISI 304):
16	Flange type
	16 = flange PN16 (round or oval)
	25 = flange PN25 (round or oval)
E	Gasket type
	E = EPDM
	V = FKM (Viton)
	1 = 1~(single-phase current);
	3 = 3~ (three-phase current)
400	Connection voltage in V
60	Frequency in Hz

Special features/product advantages

- Corrosion-resistant impellers, diffusors and stage housing
- Drinking water approval for all components that come in contact with the fluid (EPDM version)
- MVI 1..-8.. All parts that in contact with the fluid are made of stainless steel.
- MVI 32, 52, 70, 95 are in stainless steel and/ or with pump housing made of cataphoretic-coated cast iron.
- All relevant component have KTW and WRAS approval


Application

- Water supply and pressure boosting
- Fire extinguishing systems
- Boiler feed
- Industrial circulation systems
- Process engineering
- Cooling water circulation systems
- Washing and sprinkling systems

Wilo - Multivert MVI (Overview Range)									
	2..	4..	8..	16-6..	16..	32..	52..	70..	95..
Max. volume flow (m ³ /h)	5	8	14	25	25	50	70	100	140
Max. delivery head (m)	230	210	230	130	240	220	180	172	150
Fluid temperature	-15°C...120°C								
Max. ambient temperature	40	40	40	40	40	40	40	40	40
Operating pressure	16/25	16/25	16/25	16/25	16/25	16/25	16/25	16/25	16/25
Inlet pressure	10	10	10	10	10	10	10	10	10
Nominal speed	2950								

Wilo-MULTIVERT MVI

Technical Data

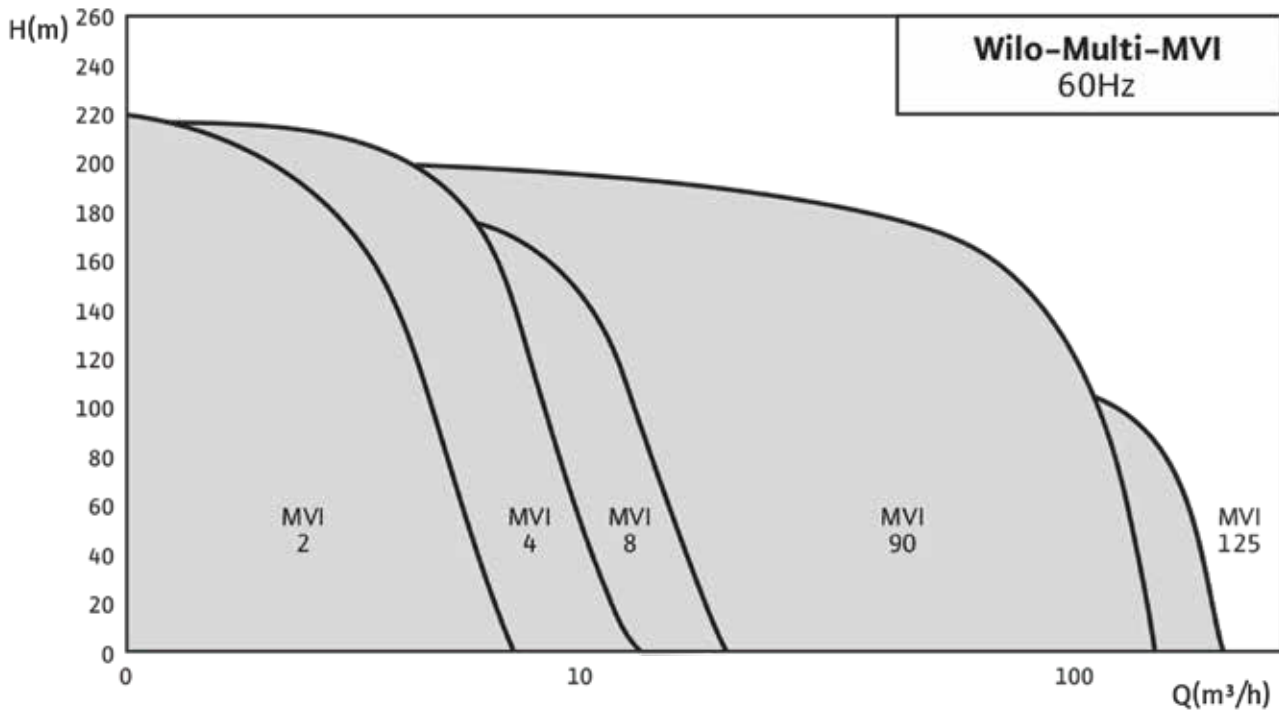

Materials	Wilo - Multivert MVI		
	2/4/8/16-6	16/32/52	70/95
Pump base EN-GJL-250 with cataphorec coating, hydraulics in AISI 304/316L	-	•	•
Parts in contact with fluid in AISI 304	•	-	•
Parts in contact with fluid in AISI 316L	•	•	-
Seal Version			
Seal	EPDM/Viton	EPDM/Viton	EPDM
Hydraulic connection			
Threaded connection	-	-	-
Oval flange	•	-	-
Round flange	•	•	•
Motor version			
Individual motors	optional	optional	optional
1~230V, 50 Hz	• (up to P = 1.5kW)	-	-
3~400V, 50 Hz	•	• (up to P = 4 Kw for 230/400 V; from P + 5.5 kW and higher only 400 V)	•
3~500V, 50 Hz	optional	optional	optional
Protection class	IP 55	IP 55	IP 55



Pioneering for You

WILO SE
Representative Office (Philippines)
8F Unit 810 The Infinity
26th St. Bonifacion Global City
Taguig 1634, Philippines
T+63 2 553 4016
F+63 2 553 0544
sales.ph@wilo.com
www.wilo.com