

Building Services

Reference Price List 2020

Heating, Air-Conditioning, Cooling,
Water Supply, Drainage and Sewage

Pumps, Pump Systems and Components

The article numbers
are directly linked to
the product information
in the Wilo Online
catalogue.



NOW. PUMP TECHNOLOGY OF THE FUTURE.



WILO-STRATOS PICO: THE HIGHEST DEGREE OF EFFICIENCY AND OPERATING CONVENIENCE.

The Wilo-Stratos PICO exemplifies efficient energy usage and resource conservation. In addition to its low power consumption and intelligent control functions, this premium high-efficiency pump also has self-protection programmes and is extremely user-friendly.

WILO BRINGS THE FUTURE.

Choose forward-looking technology:
www.wilo.com/stratos-pico



Pioneering for You

wilo

Overview

General notes	from page 12
Price groups and supply availability	12
General notes and abbreviations	13



Product range: Heating, air conditioning, cooling	from page 21
Heating, air conditioning, cooling	21
Domestic hot water	155
Systems	171
Accessories	179



Product range: Water supply	from page 256
Rainwater utilisation	256
Domestic water supply	267
Pressure boosting	289
Firefighting	423
Accessories	450
Raw water intake	467



Product range: Drainage and sewage	from page 521
Dewatering/flood control	521
Wastewater collection and transport	549
Accessories	667

Service units, mechanical seals, commissioning	from page 682
---	----------------------

Heating, air conditioning, cooling		
Glandless premium smart-pumps/ high-efficiency pumps		page 21
Single pumps	Wilo-Stratos PICO	21
	Wilo-Yonos PICO	23
Twin-head pumps	Wilo-Yonos PICO-D	25
Single pumps	Wilo-Varios PICO-STG	26
	Wilo-Yonos ECO...-BMS	28
	Wilo-Stratos MAXO	29
Twin-head pumps	Wilo-Stratos MAXO-D	33
Single pumps	Wilo-Yonos MAXO	36
Twin-head pumps	Wilo-Yonos MAXO-D	38
Standard glandless circulators for non-EU markets		page 244
Single pumps	Wilo-Star-RS	245
Twin-head pumps	Wilo-Star-RSD	247
Single pumps	Wilo-TOP-S	248
Twin-head pumps	Wilo-TOP-SD	250
Single pumps	Wilo-TOP-RL	252
	Wilo-Star-STG	253
Glanded high-efficiency pumps		page 40
Single pumps	Wilo-Stratos GIGA	40
Twin-head pumps	Wilo-Stratos GIGA-D	44
Single pumps	Wilo-Stratos GIGA B	48
Glanded energy-saving pumps		page 53
Single pumps	Wilo-VeroLine-IP-E	53
Twin-head pumps	Wilo-VeroTwin-DP-E	56
Single pumps	Wilo-CronoLine-IL-E	59
Twin-head pumps	Wilo-CronoTwin-DL-E	64
Single pumps	Wilo-CronoBloc-BL-E	69
Glanded standard pumps		page 75
Single pumps	Wilo-VeroLine-IPL	75
Twin-head pumps	Wilo-VeroTwin-DPL	79
Single pumps	Wilo-CronoLine-IL	83
Twin-head pumps	Wilo-CronoTwin-DL	97
Glanded special pumps		page 104
Single pumps	Wilo-VeroLine-IPH-W	104
	Wilo-VeroLine-IPH-O	106

Heating, air conditioning, cooling

Glanded monobloc pumps page 108

Single pumps	Wilo-BAC	108
	Wilo-CronoBloc-BL	110

Glanded norm pumps page 125

Single pumps	Wilo-Atmos GIGA-N	125
	Wilo-CronoNorm-NLG	152
	Wilo-VeroNorm-NPG	153

Glanded axially split case pumps page 154

Single pumps	Wilo-SCP	154
--------------	----------	-----

Domestic hot water

Glandless premium smart-pumps/ high-efficiency pumps page 155

Single pumps	Wilo-Star-Z NOVA	155
	Wilo-Stratos PICO-Z	157
	Wilo-Stratos MAXO-Z	159
	Wilo-Yonos MAXO-Z	162

Glandless standard pumps page 164

Single pumps	Wilo-Star-Z	164
Twin-head pumps	Wilo-Star-ZD	165
Single pumps	Wilo-TOP-Z	166

Glanded special pumps page 169

Single pumps	Wilo-VeroLine-IP-Z	169
--------------	--------------------	-----

Systems

Systems page 171

Wilo-SiFlux	171
Wilo-Plavis 011-C	173
Wilo-Plavis 013-C	174
Wilo-Plavis 015-C	175
Wilo-SiClean	176
Wilo-SiClean Comfort	177

Contents

6 Product range: Heating, air conditioning, cooling

Accessories

Mechanical accessories

page 179

Pipe assembly/installation/adapter fitting	179
Wall fixation/installation on a base	185
Thermal insulation	198

Electrical accessories

page 201

Pump control	201
Wilo-CC-HVAC system	201
Wilo-CCe-HVAC system	204
Wilo-SCe-HVAC system	209
Wilo-SC/SC-FC-HVAC system	211
Wilo-EFC	216
Wilo-interface modules (IF-modules-Stratos, IF-modules, CIF-modules)	219
Differential pressure measurement	223
Motor protection	231
Switching plug	232

Service/Commissioning

Wilo modular concept (spare motors RMOT)	233
Maintenance/Replacement	233
Operating and service units	240

Rainwater utilisation

Pump systems with system separation	page 256
Wilo-RAIN1	256
Wilo-RAIN3	257
Wilo-RainSystem AF Basic	258
Wilo-RainSystem AF Comfort	260
Wilo-RainSystem AF 150	262
Wilo-RainSystem AF 400	263

Accessories	page 265
Accessories rainwater utilisation	265

Domestic water supply

Self-priming pumps and systems	page 267
Wilo-Initial Jet	267
Wilo-Initial Jet System	268
Wilo-Jet WJ	269
Wilo-Jet FWJ	270
Wilo-Jet HWJ	271
Wilo-HiMulti 3	272
Wilo-HiMulti 3 H	274
Wilo-HiMulti 3 C	276

Non self-priming pumps and systems	page 278
Wilo-HiPeri	278
Wilo-EMHIL	279
Wilo-Electronic control	280
Wilo-Sub TWI 5/TWI 5-SE	281
Wilo-Sub TWI 5-SE Plug & Pump	283
Wilo-PB	284

Accessories	page 285
Accessories domestic water supply	285

Pressure boosting		
Single pumps		page 289
	Wilo-Helix EXCEL	289
	Wilo-Helix VE	294
	Wilo-Helix V	304
	Wilo-Helix FIRST V	322
	Wilo-Multivert MVIE	331
	Wilo-Multivert MVI	333
	Wilo-Multivert MVIL	336
	Wilo-Multivert MWISE	338
	Wilo-Multivert MVIS	339
	Wilo-Economy MHIE	341
	Wilo-Medana CH1 L	343
	Wilo-Medana CH1 LC	345
	Wilo-Economy MHI	347
	Wilo-Economy MHIL	349
	Wilo-Zeox-FIRST	351
Accessories		page 357
	Accessories high-pressure multistage centrifugal pumps	357
Single-pump systems		page 361
speed-controlled	Wilo-SiBoost Smart 1 Helix VE	361
	Wilo-SiBoost Smart 1 MWISE	364
	Wilo-Comfort Vario COR-1 MHIE...GE	368
	Wilo-Comfort Vario COR/T-1 Helix VE...-GE	370
with fixed speed	Wilo-Economy-CO-1 Helix V... /CE+	372
	Wilo-Economy CO/T-1 Helix V (unit with system separation)	375
	Wilo-Economy CO-1 MVI.../ER	377
	Wilo-Economy-CO-1 MVIS... /ER	379
Multi-pump systems		page 382
speed-controlled	Wilo-SiBoost Smart Helix EXCEL	382
	Wilo-SiBoost Smart Helix VE	384
	Wilo-SiBoost Smart MWISE	387
	Wilo-Comfort COR Helix VE.../CCe	389
	Wilo-Comfort-Vario MVIE.../SCe	392
	Wilo-Comfort-Vario COR MHIE.../ECe	394
	Wilo-SiBoost Smart (FC) Helix V	396
with fixed speed or speed-controlled base-load pump	Wilo-Comfort CO-/COR-Helix V... /CC	401
	Wilo-Economy CO-Helix V.../CE	409
	Wilo-Comfort CO-/COR-MVI... /CC	412
	Wilo-Comfort-N CO-/COR-MVIS... /CC	415
with fixed speed	Wilo-Economy CO-MHI... /ER	419
	Wilo-COE-2 MHIL BC	421

Firefighting		page 423
Fire-extinguishing systems	Wilo-FLA-1	423
	Wilo-FLA-2	425
	Wilo-FLA Compact-1 Helix V	427
	Wilo-FLA Compact-2 Helix V	429
	Wilo-SiFire EN	431
	Wilo-SiFire Easy	439
	Wilo-EMU sprinkler pumps D..., K... and KM...	449

Accessories		page 450
	Accessories pressure-boosting systems	450

Raw water intake

Single pumps		page 467
	Wilo-Actun OPTI-MS	467
	Wilo-Actun OPTI-QS	469
	Wilo-Sub TWU 3	471
	Wilo-Sub TWU 3 HS	472
	Wilo-Sub TWU 4	474
	Wilo-Sub TWU 4-...-GT	477
	Wilo-Sub TWU 4-QC	479
	Wilo-Sub TWI 4	483
	Wilo-Sub TWI 6	487
	Wilo-Sub TWI 8	492
	Wilo-Sub TWI 10	495

Systems		page 496
	Wilo-Sub TWU 3 Plug & Pump	496
	Wilo-Sub TWU 4 Plug & Pump	498

Accessories		page 500
	Accessories submersible pumps TWU und TWI	500

Dewatering/Flood control		
Self-priming drainage pumps		page 521
	Wilo-Drain LP	521
	Wilo-Drain LPC	523
Drainage pumps for hot water		page 527
	Wilo-Drain VC	527
	Wilo-Initial Drain	529
	Wilo-Drain TMT	530
Submersible drainage pumps		page 532
	Wilo-Drain TM/TMR/TMW 32	532
	Wilo-Drain TS/TSW 32	534
	Wilo-Drain TS 40	536
	Wilo-Padus UNI	539
	Wilo-EMU KS	542
	Wilo-Padus PRO	546
Submersible sewage pumps with macerator		page 549
	Wilo-Rexa CUT	549
	Wilo-Drain MTC	555
Submersible sewage pumps		page 561
	Wilo-Initial Waste	561
	Wilo-Rexa MINI3	562
	Wilo-Rexa UNI	565
	Wilo-Rexa FIT	573
	Wilo-Rexa PRO	586
	Wilo-RexaBloc RE	603
	Wilo-EMU FA (standard variant)	609
	Wilo-Drain TP 80/100	619


Wastewater collection and transport		
Wastewater lifting units		page 628
	Wilo-HiDrainLift 3	628
	Wilo-DrainLift Box	630
Sewage lifting units		page 632
	Wilo-HiSewlift 3	632
	Wilo-DrainLift S	634
	Wilo-DrainLift M	636
	Wilo-RexaLift FIT L	638
	Wilo-DrainLift XL	640
	Wilo-DrainLift XXL	642
	Wilo-EMUport CORE	644
Pumps stations		page 648
	Wilo-DrainLift WS 40 Basic	648
	Wilo-DrainLift WS 40-50	650
	Wilo-Port 600	655
	Wilo-Port 800	659
	Wilo-DrainLift WS 1100	663
Accessories		page 667
	Electrical accessories	667
	Mechanical accessories	674

General notes

12 Price group key and readiness for delivery key

Price group	Meaning
PG1	Small glandless circulators (screwed connection)
PG2	Large glandless circulators (screwed/flange connection)
PG3	Glanded pumps in in-line and monobloc design
PG4	Norm pumps
PG5	Pumps and systems for domestic water supply and rainwater utilisation
PG6	High-pressure multistage centrifugal pumps and pressure-boosting systems, systems for rainwater utilisation, the supply of firefighting water
PG7	Small wastewater/sewage pumps and lifting units
PG8	Large wastewater/sewage pumps and lifting units
PG9	Submersible mixers, recirculation pumps and aeration systems
PG10	Glanded pumps with axially split pump housing
PG11	Vertical turbine pumps with submersed axial or semi-axial hydraulics
PG12	Process pumps
PG14	Accessories (mechanical/electrical), switchgear, tripping and control devices, pump management
PG15	Spare parts (except spare motors RMOT)
PG16	Service and commissioning, services
PG17	Innovation: Stratos MAXO
PG18	Other

Supply availability key

 = Supply availability

L = normally available ex stock

C = components available ex stock, order-specific production within approx. 2 weeks

K = components available ex stock, order-specific production within approx. 4 weeks

A = delivery time on request

 = Please contact Wilo

This price list supersedes all previous price documentation which thus become invalid.

All product illustrations of respective product series are only symbolic presentations.

Article numbers in bold type

These products were modified or are new.

Abbreviation	
Abbreviations	Meaning
1~	1-phase current
3~	3-phase current
BACnet	Internationally defined company-neutral standard for data communication in building automation systems (ISO 16484-5).
blsf	Blocking current-proof, no motor protection required
CAN	CAN (Controller Area Network) – Multi master bus system, in which several equal CAN-devices may communicate via a 2-core bus within very short cycle times. The Wilo-CAN bus includes a CANopen Standard (EN 50325-4) which is independent of the supplier.
DM	Three-phase motor, 3~, L1/L2/L3/PE
DN	Nominal diameter of the flange connection
Δp	Differential pressure
$\Delta p\text{-c}$	Control mode for constant differential pressure
$\Delta p\text{-T}$	Control mode for differential pressure control depending on the fluid temperature
$\Delta p\text{-v}$	Control mode for variable differential pressure
ΔT	Control mode for differential temperature
EBM	Individual run signal
ECM technology	Electronically commutated motor with new wet rotor encapsulation, newly developed glandless drive concept for high-efficiency pumps
EEL	Energy Efficiency Index (according to the ordinance (EU) 641/2009 and 622/2012 “Glandless Circulation Pumps” for the ErP directive 2009/125/EC)
EM	Single-phase motor, 1~, L/N/PE
EnEV	German Energy Savings Ordinance
ErP	Stands for energy-related products. ErP Directive 2009/125/EC establishing a framework for the setting of environmentally-responsible requirements for energy-driven products. Formerly the Ecodesign Directive (EuP Directive 2005/32/EC).
ESM	Individual fault signal
Ext. Off	Control input “Overriding Off”
Ext. Min	Control input “Overriding Min”, e. g. for automatic setback operation
FI	Residual current device
BA	Building automation
GRD/GLRD	Mechanical seal
°dH	Degree of German water hardness; formerly used unit for assessing the water hardness. Is no longer used since the SI-unit mmol/l has been introduced. Conversion: 1 °dH = 0.1783 mmol/l
H, Hmax	Delivery head
IF	Interface
Int. MS	Internal motor protection: pumps with internal protection against unacceptably high winding temperatures
IR	Infrared interface
KDS	Capacitor
KLF	PTC thermistor sensor
Cataphoretic coating	Cataphoretic coating (electrophoretically deposited paint, EDP): paintwork with high adhesive strength for long-lasting corrosion protection
KTW	Approval for products with plastics, for utilisation in drinking water applications

Abbreviation	
Abbreviations	Meaning
LON	Local Operating Network (open data bus system, standardised and independent of any single manufacturer, in LONWorks networks)
MEI	Minimum efficiency index (according to the ordinance (EU) 547/2012 “Water Pumps” for the ErP directive 2009/125/EC)
Modbus	Communication protocol based on a master/slave architecture. Ethernet and RS485 are used as the media of transmission. Widespread in industrial and building automation applications.
mmol/l	Millimols per litre; SI unit for assessing water hardness (total hardness, or concentration of alkaline earth ions)
MOT	Motor module (drive motor + impeller + terminal box/electronics module) for replacement
P_1	Power consumption (power supplied from the network)
PELV	Protective Extra Low Voltage; PELV (“Protective Extra Low Voltage”, formerly “functional extra low voltage with safe isolation”) provides extra protection from electric shock. The voltage is so low that electrical shock currents are normally not dangerous. However, unlike SELV, active parts and components of the equipment must be earthed and connected with the protective earth conductor.
PLR	Pump master computer, Wilo-specific data interface
$Q (= \dot{V})$	Volume flow
RMOT	Spare motor (drive motor + impeller + terminal box/electronics module) for replacement
SELV	Safety Extra Low Voltage; SELV (formerly “safety low voltage”) is a low electrical voltage that offers special protection against electric shocks compared to electric circuits with higher voltages due to the low voltage level and the insulation. The voltage is so low that electrical shock currents are normally not dangerous.
SBM	Run signal or collective run signal
SSM	Fault signal or collective fault signal
Control input, 0 - 10 V	Analogue input for external activation of functions
TrinkwV 2001	Regulations governing the quality of water for human consumption (German Drinking Water Ordinance – TrinkwV 2001).
VDI 2035	VDI guideline for preventing damage in hot-water heating installations
Wilo-Control	Building automation management with pumps and accessories
WRAS	Water Regulations Advisory Scheme (drinking water approval for Great Britain and Northern Ireland)
WSK	Thermal winding contacts (in motor for monitoring the winding temperature, full motor protection through additional tripping unit)
⚡	Operating mode of twin-head pumps: individual operation of the relevant duty pump
⚡+⚡	Operating mode of twin-head pumps: parallel operation of both pumps
⚡	Number of poles of electric motors: 2-pole motor = approx. 2900 rpm at 50 Hz
⚡	Number of poles of electric motors: 4-pole motor = approx. 1450 rpm at 50 Hz
⚡	Number of poles of electric motors: 6-pole motor = approx. 950 rpm at 50 Hz

Material	Meaning	AISI
1.4021	Chromium steel X20Cr13	420
1.4034	Chromium steel X46Cr13	-
1.4057	Chromium steel X17CrNi16-2	431
1.4122	Chromium steel X39CrMo17-1	-
1.4301	Chromium-nickel steel X5CrNi18-10	304
1.4305	Chromium-nickel steel X8CrNiS18-9	303
1.4306	Chromium-nickel steel X2CrNi19-11	304L
1.4307	Chromium-nickel steel X2CrNi18-9	304L
1.4401	Chromium-nickel-molybdenum steel X5CrNiMo17-12-2	316
1.4408	Chromium-nickel-molybdenum steel GX5CrNiMo19-11-2	316
1.4409	Chrome nickel molybdenum steel X2CrNiMo19-11-2	316
1.4462	Chromium-nickel-molybdenum steel X2CrNiMoN22-5-3	329 (2205)
1.4541	Chromium-nickel steel with titanium addition X6CrNiTi18-10	321
1.4542	Chromium-nickel steel with copper and niobium additions X5CrNiCuNb16-4	630
1.4571	Chromium-nickel steel with titanium addition X6CrNiMoTi17-12-2	316Ti
Abrasite	Chilled cast iron material for use in strongly abrasive fluids	-
Al	Light metal material (aluminium)	-
Ceram	Coating with very high adhesive strength for long-lasting corrosion protection	-
Composite	High-strength plastic material	-

Your Wilo consultant will be happy to provide support with the use of special media.

Wear and tear

Pumps or parts of pumps are subject to wear in accordance with the current technical standards (DIN 31051/DIN-EN 13306). This wear may vary depending on the operating parameters (temperature, pressure, speed, water conditions) and the installation/usage situation and may result in the failure of the above products/components, including their electrical/electronic circuits, at different times. Wearing parts are all components subject to rotary or dynamic stress, including electronic components to which voltage is applied, including in particular:

- Gasket (including mechanical seal), seal ring
- Stuffing box
- Bearings and shaft
- Impellers and pump component
- Impeller wear ring and neck ring
- Neck ring/wear plate
- Macerator
- Capacitor
- Relay/contactor/switch
- Electronic circuit, semiconductor components etc.

Material	Meaning	AISI
EN-GJL	Cast iron with lamellar graphite, also referred to as grey cast iron. The use of grey cast iron in drinking water systems is governed by the Drinking Water Directive 98/83/EC and applicable recognised technical rules and standards!	-
EN-GJS	Cast iron with spheroidal graphite, also referred to as spheroidal cast iron. The use of spheroidal cast iron in drinking water systems is governed by the Drinking Water Directive 98/83/EC and applicable recognised technical rules and standards!	-
G-CuSn10	Zinc-free bronze	-
GfK	Fibreglass plastic	-
GG	See EN-GJL	-
GJMW	Special cast iron: white malleable cast iron (former designation: GTW)	-
GGG	See EN-GJS	-
Inox	Stainless steel	-
NiAl-Bz	Nickel-aluminium bronze	-
PPO	Trade name: Noryl, fibreglass-reinforced plastic	-
PP-GF30	Polypropylene, reinforced with 30% fibreglass	-
PUR	Polyurethane	-
RG	Version in red brass	-
SiC	Silicon carbide	-
St	Steel	-
V2A	Material group, e.g. 1.4301, 1.4306	304
V4A	Material group, e.g. 1.4404, 1.4571	316

Your Wilo consultant will be happy to provide support with the use of special media.

Pumps and continuous-flow machines (such as submersible mixers and recirculation pumps) and their coated components (cataphoretic, 2K or Ceram coating) are subject to constant wear due to the abrasive content of the fluids. For this reason the coating of these units is also counted as a wearing part!

We do not accept liability for faults or defects arising from natural wear and tear.

Disposal

Proper disposal and recycling of our products prevents damage to the environment and risks to personal health.



Products with this symbol should not be disposed of along with household waste. Therefore, please take the device to your local collection point in your town or district. Please also observe the installation and operating instructions. Further information about recycling at Wilo can be found at www.wilo-recycling.com

Information on dangers associated with permanent magnet motors with high-efficiency pumps

The interior of the glanded and glandless motors always generate a strong magnetic field that can cause injury and damage to property if they are dismantled incorrectly.

- The highly-magnetic components can cause fatal injury to people with medical implants during dismantling.
- In principle, motor components should be disassembled only by authorised personnel.
- It is vital to follow the instructions and safety instructions in the installation and operating instructions for the respective pump.
- In assembled condition, the rotor's magnetic field is guided in the motor's iron core. There is therefore no harmful magnetic field outside the engine.

Notice

In accordance with **German Energy Saving Ordinance [Energieeinspar-Verordnung EnEV]** as of the 1/2/2002 at a boiler output from 25 kW, heating pumps are to be equipped with switchgears for automatic performance control or **electronically controlled pumps** are to be installed.

In accordance with **TrinkwV 2001** and **DIN 50930-6**, only circulators with corrosion-resistant pump housings made of stainless steel or red brass (CC 499K) are to be utilised in domestic hot water circulation systems.

What does the EnEV 2014 regulate?

The 2014 energy-saving regulation prescribes various constructional standard requirements for efficient energy demand in buildings. The regulation is, among other things, intended to contribute to achieving a virtually climate-neutral building stock by 2050.

Among other things it regulates the following:

- As of the 1/2/2002 at a boiler output from 25 kW, heating pumps are to be equipped with switchgears for automatic power control or electronically controlled pumps are to be installed.
- In central heating systems with more than 25 kW rated power, during installation and replacement the circulators of the heating circuits must be equipped so that electric power consumption is automatically adapted to the operationally-determined pumping requirements in at least three stages, provided this does not raise any safety-specific concerns for the boilers.
- The circulators in hot water systems must be equipped with automatic switching on/off.
- When heat distribution or hot-water pipes/valves are installed or replaced in a building, they must be reduced in accordance with the EnEV requirements.

What does the German Drinking Water Ordinance (TrinkwV) 2001 regulate?

The TrinkwV 2001 is the regulation which governs the quality of water for human consumption. It stipulates, among other things, that only circulators with corrosion-resistant pump housings made of stainless steel or red brass (CC 499K) are to be utilised in domestic hot water circulation systems.

Pump replacement








Detailed information on the subject of "Replacing heating pumps" can be found in the current Wilo replacement guide for heating pumps.








Wilo – General Terms of Delivery and Service

The latest version of our General Terms of Delivery and Service can be found on the Internet at

www.wilo.com/legal

General notes

Fields of application:	
	Meaning
	Heating
	Domestic hot water
	Air conditioning
	Rainwater utilisation
	Water distribution/pressure boosting
	Firefighting
	Clean water treatment

Fields of application:	
	Meaning
	Raw water intake
	Desalination
	Professional irrigation/agriculture
	Wastewater collection/transport
	Wastewater treatment
	Drainage/flood control
	Energy/leisure/services


What does the ErP Directive regulate?

ErP stands for “energy-related products”. This guideline, adopted by the European Union in 2009, is a framework directive for the environmentally compatible design of products.

In specific regulations it also relates to circulators in glandless design, electric motors of glanded pumps and the glanded pumps themselves:

Glandless pumps

The efficiency of glandless pumps is indicated by means of the energy efficiency index (EEI). The Wilo product portfolio fully meets these requirements. The corresponding EEI value of our pumps is indicated in the data table.

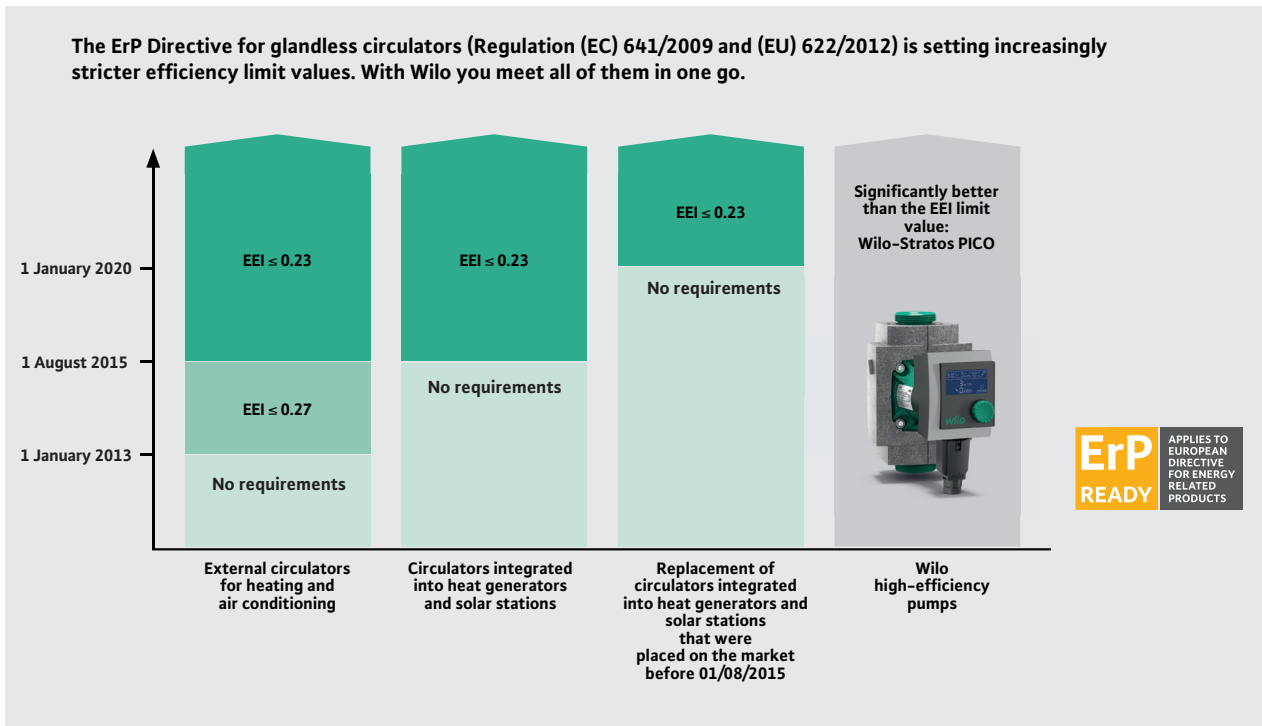


EEI = Energy Efficiency Index according to Regulations (EC) 641/2009 and (EU) 622/2012 of the EU Commission (is determined for different power consumptions within a load profile by comparing it to an average reference pump)

Glanded pumps

For glanded pumps the “International Efficiency” value (IE) specifies the efficiency class of electric motors. The Wilo product portfolio fully satisfies the requirements. Whenever possible Wilo will even go beyond requirements, such as with the Wilo-Stratos GIGA series, whose high motor efficiency is based on a special drive concept.

The regulations also apply to pumps integrated into pressure-boosting systems. Here too Wilo satisfies the requirements and exceeds them once more with the Wilo-Helix EXCEL series.

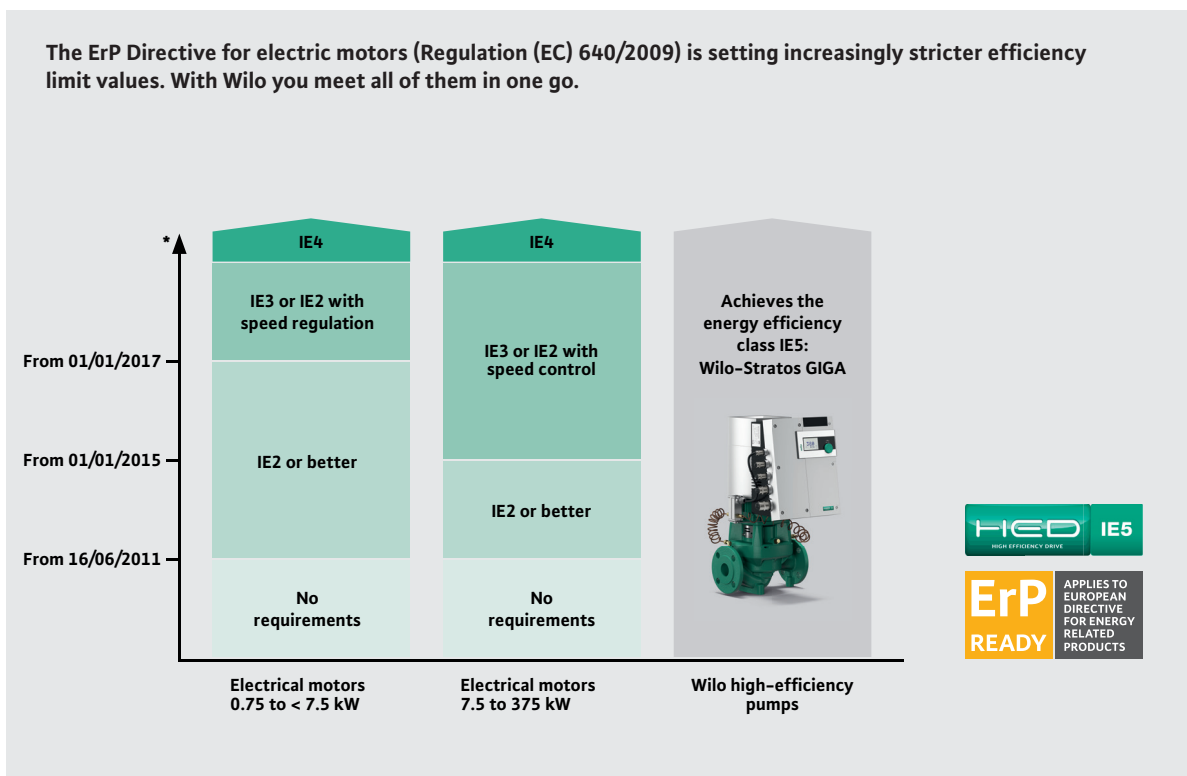

*Dates prescribed by EU regulation (EG) 640/2009, extended by (EU) 4/2014
 IE2, IE3, IE4 = Motor efficiency classes according to IEC 60034-30-1
 IE5 = Highest motor efficiency classes according to IEC TS 60034-30-2 (Ultra Premium Efficiency)

Water pumps:

For the first time, also the hydraulic part of water pumps was taken into account in the new ErP Directive whose drive eliminates a large portion of the consumption of natural resources and energy. According to one study, global energy consumption in 2005 for the drive of water pumps was 109 TWh and is estimated at 136 TWh for 2020. This would correspond to a CO₂ emissions of approximately 60 Mt. The special characteristic of the regulation (EU) 547/2012 is that in this case the attention was specifically focused on the hydraulic efficiency. The requirements for the motors are defined in the separate requirement (EC) 640/2009. The goal is to achieve an optimum energy yield from the unit by using high-efficiency motors and hydraulics. Therefore, energy savings of approx. 3.3 TWh are to be achieved by 2020.

Which hydraulics are involved?

The guideline is applicable for hydraulics of glanded pumps and multistage submersible pumps that can be used to pump clean water:

- Water pumps with axial inlet, own bearings
- Water pumps with axial inlet; monobloc design
- Monobloc water pumps with radial inlet, in-line version
- Multistage vertical water pumps
- Multistage submersible water pumps in 4" and 6" design

It does not apply to:

- Water pumps that are specifically designed for pumping clean water at temperatures below -10 °C or above 120 °C

- Water pumps intended only for firefighting
- Displacement water pumps
- Self-priming water pumps

The minimum efficiency index (MEI) as a comparison value

A classification of the hydraulics is achieved via the MEI value. The benchmark for the most hydraulically efficient water pumps is $MEI \geq 0.7$. Three points are of importance for evaluating the hydraulics:

2. Partial load (PL = Part Load): Duty point at 75 % of the volume flow at the best point
3. Overload (OL = overload): Duty point at 110% of the volume flow at the best point


For the determination of the MEI value, this must be above the measurement curve for all three duty points. The formula for the calculation for the pumps involved is defined in the regulation.

Two stages are currently defined for the introduction of the MEI.

- Since 1 January 2013: Only hydraulics with an $MEI \geq 0.1$ may be used.
- From 1st January 2015: Only hydraulics with an $MEI \geq 0.4$ may be used.

The MEI value is shown since 1 January 2013 on the rating plate and in the product documentation.

Introduction of the MEI as a measurement for the hydraulic efficiency of water pumps as per the ErP Directive (Regulation No. (EU) 547/2012)

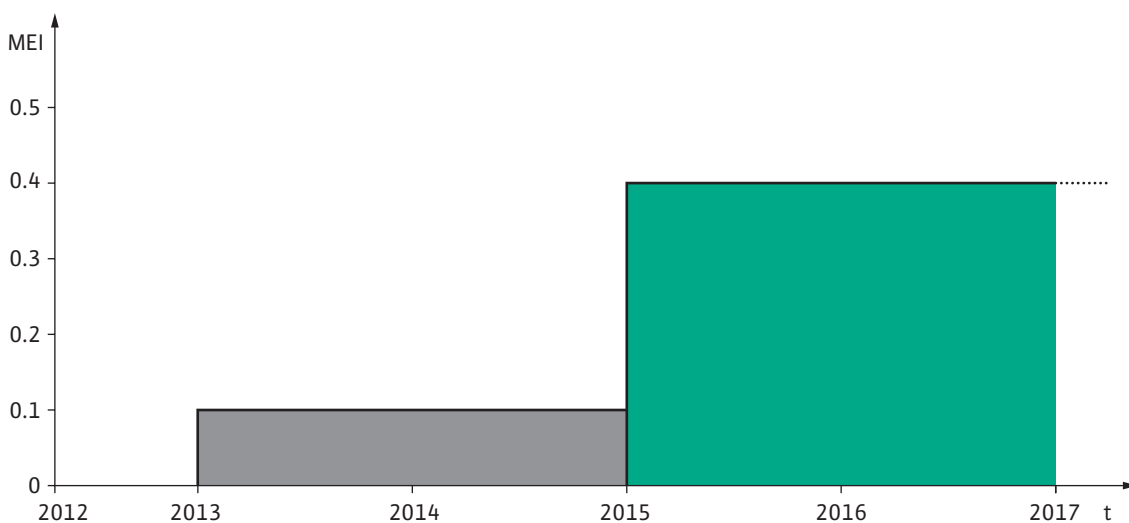


Variant	Code	Meaning
Mechanical seal variants	S1	Q1Q1X4GG for water-glycol mixtures with the following compositions: Glycol proportion of 20 to 40 vol.% and an operating temperature of 40 °C to 120 °C or glycol proportion > 40 to 50 vol.% and an operating temperature of -20 °C to 120 °C
	S2	AQ1VGG water-oil emulsions and water with oil components up to 90 °C
Housing variants	H1	EN-GJS-400-18-LT (formerly GGG 40.3) (spheroidal cast iron)
	H4	Combination flanges PN6/PN 10 for IPL; only for IPL 40, IPL 50 (1450 rpm), IPL 40, IPL 50, IPL 65 (2900 rpm)
	H5	Max. operating pressure PN 16 (for IPL/DPL and IP-E/DP-E)
Motor variants	K3	Integrated PTC thermistors (3 x, tripping units as accessories)
	N	Version N with IEC standard motor (only IPL/DPL)
Impeller variants	L1	Impeller made of red brass RG = G-CuSn10
Control variants	R1	Electronically controlled pump without sensor (DDG)

Pump control

The electrical operating conditions according to VDE 0160 must be observing when operating Wilo pumps with control devices or module accessories.

When operating glandless and glanded pumps with brands of frequency converters other than those supplied by Wilo, output filters for reducing motor noise and for preventing harmful voltage peaks are to be used and the following limit values are to be complied with:

- Glandless pumps with $P_2 \leq 2.2$ kW and glanded pumps with $P_2 \leq 1.1$ kW
 - rate of voltage rise $du/dt < 500$ V/ μ s
 - voltage peaks $\hat{u} < 650$ V
 - Sine filters (LC filters) are recommended instead of du/dt filters (RC filters) for the noise reduction of glandless pump motors.
- Glanded pumps with $P_2 > 1.1$ kW
 - rate of voltage rise $du/dt < 500$ V/ μ s
 - voltage peaks $\hat{u} < 850$ V

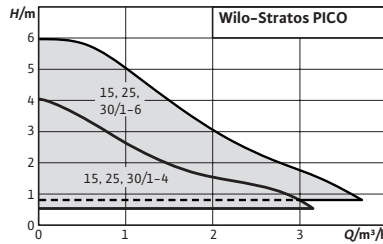

Accessories	Page
Pipe installation/ screwed connection	179
Pipe installation/ adaptor fitting	181



Select 4 online
All information at www.wilo-select.com

Wilo-Stratos PICO



Construction

Glandless circulator with screwed connection, blocking-current proof EC motor and integrated electronic power control.

Application

All hot-water heating systems, air-conditioning applications, industrial circulation systems.

Scope of delivery

- Pump
- Thermal insulation
- Wilo-Connector
- Gaskets
- Installation and operating instructions

Options

- Stratos PICO...N version with pump housing made of stainless steel for use in underfloor heating systems
- Stratos PICO...130 version with short port-to-port length of 130 mm

Your advantages

- Maximum energy efficiency thanks to the combination of EC motor technology, Dynamic Adapt and precise setting options for precise adjustment
- High reliability due to self-protecting routines such as the automatic dry-running detection and automatic restart
- Intuitive adjustment and maintenance via Green Button Technology for the activation of functions and operating modes on the LC display
- Easy monitoring of the current power consumption, flow and cumulative kWh
- Straight-forward electrical connection without any tools thanks to the Wilo-Connector

Notice


TÜV SÜD certificate can be viewed at: www.wilo.com/en/Legal.html

Price group: PG1


Ordering information									
Type	Pump connection	Energy efficiency index (EEI)	Port-to-port length	Max. operating pressure	Mains connection	Gross weight, approx.	Pieces per pallet	Art. no.	
			l0 mm	p bar		m kg			
Stratos PICO 15/1-4	G 1	≤ 0.17	130	10	1~230 V, 50/60 Hz	2.1	146	4216610	L EUR 419.-

The benchmark for the most efficient circulators is EEI ≤ 0.20

Price group: PG1


Ordering information										
Type	Pump connection	Energy efficiency index (EEI)	Port-to-port length	Max. operating pressure	Mains connection	Gross weight, approx.	Pieces per pallet	Art. no.		
			<i>l</i> mm	<i>p</i> bar		<i>m</i> kg				EUR
Stratos PICO 15/1-6	G 1	≤ 0.20	130	10	1~230 V, 50/60 Hz	2.1	146	4216611	L	484.-
Stratos PICO 25/1-4	G 1½	≤ 0.16	180	10	1~230 V, 50/60 Hz	2.3	146	4216612	L	362.-
Stratos PICO 25/1-4-130	G 1½	≤ 0.16	130	10	1~230 V, 50/60 Hz	2.2	146	4216616	L	362.-
Stratos PICO 25/1-6	G 1½	≤ 0.20	180	10	1~230 V, 50/60 Hz	2.3	146	4216613	L	418.-
Stratos PICO 25/1-6-130	G 1½	≤ 0.20	130	10	1~230 V, 50/60 Hz	2.2	146	4216617	L	418.-
Stratos PICO 25/1-6-N	G 1½	≤ 0.20	180	10	1~230 V, 50/60 Hz	2.3	146	4216618	L	503.-
Stratos PICO 30/1-4	G 2	≤ 0.16	180	10	1~230 V, 50/60 Hz	2.4	146	4216614	L	434.-
Stratos PICO 30/1-6	G 2	≤ 0.20	180	10	1~230 V, 50/60 Hz	2.4	146	4216615	L	501.-

The benchmark for the most efficient circulators is EEI ≤ 0.20

Accessories					
Type	Description	Art. no.		Price group	
					EUR
Angle plug	Angle plug, angled to the left, with permanently attached (cast) 2 m connection cable	4150229	L	PG14	22.-
Wilo-Connector	Wilo-Connector with 2 m connection cable and shockproof plug	4200870	L	PG14	24.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

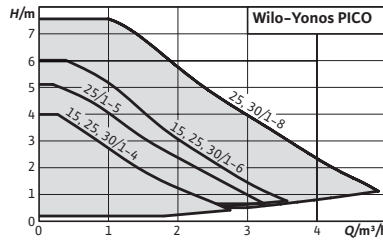

Accessories	Page
Pipe installation/ screwed connection	179
Pipe installation/ adapter fitting	181
Thermal insulation	198

Select 4 online

All information at www.wilo-select.com

Wilo-Yonos PICO



Construction

Glandless circulator with screwed connection, blocking-current proof EC motor and integrated electronic power control.

Application

All hot-water heating systems, air-conditioning applications, industrial circulation systems.

Scope of delivery

- Pump
- Wilo-Connector
- Gaskets
- Installation and operating instructions

Your advantages


- Maximum operating convenience owing to the Green Button Technology with new, intelligent settings, intuitive user interface and new functions
- Optimised energy efficiency owing to EC motor technology, settings with an accuracy of 0.1 m and display of current power consumption
- Quick and easy installation and smooth replacement owing to the new, optimised construction
- Easy maintenance and high degree of operational reliability thanks to automatically and manually triggered restart or pump venting function
- Maximum operational reliability thanks to proven technology

Price group: PG1


Ordering information										
Type	Pump connection	Energy efficiency index (EEI)	Port-to-port length	Max. operating pressure	Mains connection	Gross weight, approx.	Pieces per pallet	Art. no.		
			l0 mm	p bar		m kg				EUR
Yonos PICO 15/1-4	G 1	≤ 0.18	130	10	1~230 V, 50/60 Hz	1.8	198	4215511	L	348.-
Yonos PICO 15/1-6	G 1	≤ 0.20	130	10	1~230 V, 50/60 Hz	1.8	198	4215512	L	398.-
Yonos PICO 25/1-4	G 1½	≤ 0.18	180	10	1~230 V, 50/60 Hz	2	198	4215513	L	302.-
Yonos PICO 25/1-4-130	G 1½	≤ 0.18	130	10	1~230 V, 50/60 Hz	1.9	198	4215514	L	302.-


The benchmark for the most efficient circulators is EEI ≤ 0.20

Price group: PG1

Ordering information										
Type	Pump connection	Energy efficiency index (EEI)	Port-to-port length	Max. operating pressure	Mains connection	Gross weight, approx.	Pieces per pallet	Art. no.		
			<i>l</i> mm	<i>p</i> bar		<i>m</i> kg				EUR
Yonos PICO 25/1-5-130	G 1½	≤ 0.20	130	10	1~230 V, 50/60 Hz	1.9	198	4215522	L	317.-
Yonos PICO 25/1-6	G 1½	≤ 0.20	180	10	1~230 V, 50/60 Hz	2	198	4215515	L	348.-
Yonos PICO 25/1-6-130	G 1½	≤ 0.20	130	10	1~230 V, 50/60 Hz	1.9	198	4215516	L	348.-
Yonos PICO 25/1-8	G 1½	≤ 0.23	180	10	1~230 V, 50/60 Hz	2.2	198	4215517	L	512.-
Yonos PICO 25/1-8-130	G 1½	≤ 0.23	130	10	1~230 V, 50/60 Hz	2.1	198	4215518	L	516.-
Yonos PICO 30/1-4	G 2	≤ 0.18	180	10	1~230 V, 50/60 Hz	2.2	198	4215519	L	362.-
Yonos PICO 30/1-6	G 2	≤ 0.20	180	10	1~230 V, 50/60 Hz	2.2	198	4215520	L	418.-
Yonos PICO 30/1-8	G 2	≤ 0.23	180	10	1~230 V, 50/60 Hz	2.4	198	4215521	L	614.-

The benchmark for the most efficient circulators is EEI ≤ 0.20

Accessories					
Type	Description	Art. no.		Price group	
					EUR
Angle plug	Angle plug, angled to the left, with permanently attached (cast) 2 m connection cable	4150229	L	PG14	22.-
Wilo-Connector	Wilo-Connector with 2 m connection cable and shockproof plug	4200870	L	PG14	24.-
Thermal insulation shell	-	4206066	L	PG14	18.-

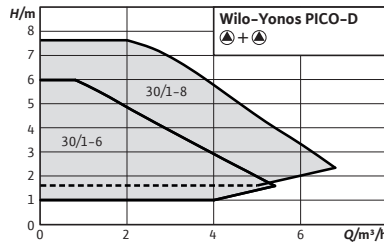

Accessories	Page
Pipe installation/ screwed connection	179
Pipe installation/ adaptor fitting	181

Series modification

Select 4 online

All information at www.wilo-select.com

Wilo-Yonos PICO-D



Construction

Glandless twin-head circulator with screwed connection, blocking-current proof EC motor and integrated electronic power control.

Application

All hot-water heating systems, air-conditioning applications, industrial circulation systems.

Scope of delivery

- Pump
- Wilo-Connector
- Gaskets
- Installation and operating instructions

Your advantages

- LED display for adjusting the setpoint in 0.1 m increments and showing effective consumption
- Electrical connection without tools using the Wilo-Connector
- Unique pump venting function per pump
- Twin-head pump for individual (Δp -c, Δp -v and constant speed) or parallel (Δp -c and constant speed) operation
- Very high starting torque for reliable starting


Price group: PG1

Ordering information										
Type	Pump connection	Energy efficiency index (EEI)	Port-to-port length	Max. operating pressure	Mains connection	Gross weight, approx.	Pieces per pallet	Art. no.		
			<i>l</i> mm	<i>p</i> bar		<i>m</i> kg				
Yonos PICO-D 30/1-6	G 2	≤ 0.20	180	10	1~230 V, 50/60 Hz	4.9	40	4230948	C	975.-
Yonos PICO-D 30/1-8	G 2	≤ 0.23	180	10	1~230 V, 50/60 Hz	5.2	40	4230949	C	1,179.-

The benchmark for the most efficient circulators is EEI ≤ 0.20

Accessories					
Type	Description	Art. no.		Price group	
					EUR
Angle plug	Angle plug, angled to the left, with permanently attached (cast) 2 m connection cable	4150229	L	PG14	22.-
Wilo-Connector	Wilo-Connector with 2 m connection cable and shockproof plug	4200870	L	PG14	24.-

🚚 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

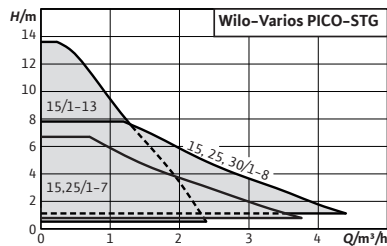

Accessories	Page
Pipe installation/ screwed connection	179
Pipe installation/ adapter fitting	181
Thermal insulation	198

Series extension

Select 4 online

All information at www.wilo-select.com

Wilo-Varios PICO-STG



Construction

Glandless circulator with screwed connection, blocking-current proof EC motor and integrated electronic power control.

Application

All hot-water heating systems, air-conditioning applications, industrial circulation systems. Primary circuits of solar and geothermal energy.

Scope of delivery

- Pump
- Cable with 3-pole pump plug and Wilo-Connector connection
- Wilo-Connector
- Gaskets
- Installation and operating instructions

Your advantages

- The most compatible replacement solution for all applications, including solar and geothermal, thanks to compact design, innovative control modes (such as iPWM) and the new Sync function
- Maximum operating convenience thanks to its LED display and Green Button Technology featuring a button for control mode and a button for setting the pump
- Easy installation owing to a compact design, adjustable Electrical connections and maintenance functions such as venting
- Maximum operational reliability based on proven technology

Price group: PG1


Ordering information										
Type	Pump connection	Energy efficiency index (EEI)	Port-to-port length	Max. operating pressure	Mains connection	Gross weight, approx.	Pieces per pallet	Art. no.		
			l0 mm	p bar		m kg				EUR
Varios PICO-STG 15/1-7	G 1	≤ 0.20	130	10	1~230 V, 50/60 Hz	1.8	198	4215540	L	569.-
Varios PICO-STG 15/1-8	G 1	≤ 0.23	130	10	1~230 V, 50/60 Hz	2	198	4232742	L	629.-
Varios PICO-STG 15/1-13	G 1	≤ 0.23	130	10	1~230 V, 50/60 Hz	2	198	4232746	L	657.-
Varios PICO-STG 15/1-13-180	G 1	≤ 0.23	180	10	1~230 V, 50/60 Hz	2.1	198	4232747	L	673.-
Varios PICO-STG 25/1-7	G 1½	≤ 0.20	180	10	1~230 V, 50/60 Hz	2.1	198	4215542	L	523.-

The benchmark for the most efficient circulators is EEI ≤ 0.20


= ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG1


Ordering information										
Type	Pump connection	Energy efficiency index (EEI)	Port-to-port length	Max. operating pressure	Mains connection	Gross weight, approx.	Pieces per pallet	Art. no.		
			<i>l</i> mm	<i>p</i> bar		<i>m</i> kg				EUR
Varios PICO-STG 25/1-7-130	G 1½	≤ 0.20	130	10	1~230 V, 50/60 Hz	1.9	198	4215541	L	525.-
Varios PICO-STG 25/1-8-130	G 1½	≤ 0.23	130	10	1~230 V, 50/60 Hz	2	198	4232744	L	570.-
Varios PICO-STG 30/1-8	G 2	≤ 0.23	180	10	1~230 V, 50/60 Hz	2.4	198	4232745	L	644.-

The benchmark for the most efficient circulators is EEI ≤ 0.20

Type	Description	Art. no.	Price group		
					EUR
Angle plug	Angle plug, angled to the left, with permanently attached (cast) 2 m connection cable	4150229	L	PG14	22.-
Wilo-Connector	Wilo-Connector with 2 m connection cable and shockproof plug	4200870	L	PG14	24.-
Bidirectional iPWM control cable	Bidirectional control cable for connection to the iPWM interface of the pump. 3-wire cable, length 1 m, with plug and bare cable end with ferrules.	4222049	A	PG14	☎

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo

 Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

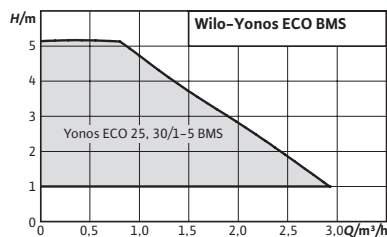

Accessories	Page
Pipe installation/ screwed connection	179
Pipe installation/ adapter fitting	181

Select 4 online

All information at www.wilo-select.com

Wilo-Yonos ECO...-BMS



Construction

Glandless circulator with threaded connection, EC motor with automatic power adjustment.

Application

Hot-water heating systems of all kinds, air-conditioning systems, closed cooling circuits, industrial circulation systems

Scope of delivery

- Pump
- Thermal insulation
- Wilo-Connector
- Control cable
- Gaskets
- Installation and operating instructions

Your advantages

- Potential-free collective fault signal contact (SSM) for connection to external monitoring units (e.g. building automation) and control input 0-10 V
- Control cable (4-wire, 1.5 m) for SSM connection and 0-10 V
- Wilo-Connector
- Thermal insulation as standard
- Pump housing with cataphoretic (KTL) coating protects against corrosion due to condensation formation


Price group: PG2

Ordering information										
Type	Pump connection	Energy efficiency index (EEI)	Port-to-port length	Max. operating pressure	Mains connection	Gross weight, approx.	Pieces per pallet	Art. no.		
			l0 mm	p bar		m kg				EUR
Yonos ECO 25/1-5 BMS	G 1½	≤ 0.20	180	10	1~230 V, 50/60 Hz	3	96	2150700	L	736.-
Yonos ECO 30/1-5 BMS	G 2	≤ 0.20	180	10	1~230 V, 50/60 Hz	3	96	2150701	L	759.-

The benchmark for the most efficient circulators is EEI ≤ 0.20

Accessories					
Type	Description	Art. no.		Price group	
Wilo-Connector	Wilo-Connector with 2 m connection cable and shockproof plug	4200870		L	PG14
					EUR
					24.-

= ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

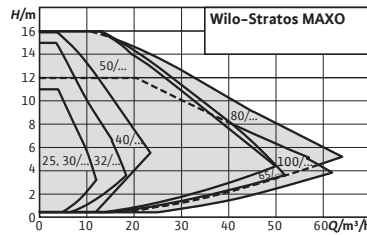

Accessories	Page
Pipe installation/ screwed connection	179
Pipe installation/counter flange	180
Pipe installation/ adapter fitting	181
Pump control/Interface module	219
Cold water insulation	200



Select 4 online
All information at www.wilo-select.com

Wilo-Stratos MAXO



Construction

Smart glandless circulator with screwed connection or flange connection, EC motor with integrated electronic power adjustment.

Application

Hot-water heating systems of all kinds, air-conditioning systems, closed cooling circuits, industrial circulation systems.

Scope of delivery

- Pump
- Optimised Wilo-Connector
- 2x threaded cable connection M16 x 1.5
- Washers for flange screws (for nominal connection diameters DN 32 - DN 65)
- Gaskets for threaded connection
- Thermal insulation
- Installation and operating instructions

Options

- Special versions for operating pressure PN 16


Your advantages

- Intuitive operation by means of application-guided settings with the Setup Guide plus the combination of a new display and operating button using Green Button Technology.
- Maximum energy efficiency thanks to the combination of optimised and innovative energy-saving functions (e.g. No-Flow Stop).
- Optimum system efficiency thanks to new and innovative intelligent control functions, such as Dynamic Adapt plus, Multi-Flow Adaptation, T-const. and ΔT -const.
- Latest communication interfaces (e.g. Bluetooth) for connection to mobile devices and direct pump networking for multiple pump control via Wilo Net.
- Maximum convenience in electrical installation thanks to a clearly arranged and spacious terminal room and the optimised Wilo-Connector.

Notice


TÜV SÜD certificate can be viewed at: www.wilo.com/en/Legal.html

Price group: PG17



Ordering information with screwed connection								
Type	Pump connection	Energy efficiency index (EEI)	Port-to-port length	Max. operating pressure	Gross weight, approx.	Art. no.		
			<i>l</i> mm	<i>p</i> bar	<i>m</i> kg			EUR
Stratos MAXO 25/0,5-4	G 1½	≤ 0.18	180	10	8.3	2164567	L	804.-
Stratos MAXO 25/0,5-6	G 1½	≤ 0.18	180	10	8.3	2164568	L	989.-
Stratos MAXO 25/0,5-8	G 1½	≤ 0.19	180	10	8.3	2164569	L	1,103.-
Stratos MAXO 25/0,5-10	G 1½	≤ 0.19	180	10	8.6	2164570	L	1,197.-
Stratos MAXO 25/0,5-12	G 1½	≤ 0.19	180	10	8.6	2164571	L	1,477.-
Stratos MAXO 30/0,5-4	G 2	≤ 0.18	180	10	8.3	2164572	L	948.-
Stratos MAXO 30/0,5-6	G 2	≤ 0.18	180	10	8.3	2164573	L	1,065.-
Stratos MAXO 30/0,5-8	G 2	≤ 0.19	180	10	8.3	2164574	L	1,186.-
Stratos MAXO 30/0,5-10	G 2	≤ 0.19	180	10	8.6	2164575	L	1,294.-
Stratos MAXO 30/0,5-12	G 2	≤ 0.19	180	10	8.6	2164576	L	1,675.-
Stratos MAXO 30/0,5-14	G 2	≤ 0.19	180	10	8.6	2164577	L	1,926.-

The benchmark for the most efficient circulators is EEI ≤ 0.20

Price group: PG17


Ordering information with flange connection								
Type	Pump connection	Energy efficiency index (EEI)	Port-to-port length	Max. operating pressure	Gross weight, approx.	Art. no.		
			<i>l</i> mm	<i>p</i> bar	<i>m</i> kg			EUR
Stratos MAXO 32/0,5-8	DN 32	≤ 0.18	220	10	14.2	2164578	L	1,214.-
Stratos MAXO 32/0,5-10	DN 32	≤ 0.18	220	10	14.5	2164579	L	1,349.-
Stratos MAXO 32/0,5-12	DN 32	≤ 0.18	220	10	14.5	2164580	L	1,876.-
Stratos MAXO 32/0,5-16	DN 32	≤ 0.17	220	10	18.8	2164581	L	2,251.-
Stratos MAXO 40/0,5-4	DN 40	≤ 0.19	220	10	14.8	2164582	L	1,279.-
Stratos MAXO 40/0,5-8	DN 40	≤ 0.19	220	10	15.1	2164583	L	1,963.-
Stratos MAXO 40/0,5-12	DN 40	≤ 0.17	250	10	19.9	2164584	L	2,324.-
Stratos MAXO 40/0,5-16	DN 40	≤ 0.17	250	10	19.9	2164585	L	3,192.-
Stratos MAXO 50/0,5-6	DN 50	≤ 0.18	240	10	17.2	2164586	L	2,210.-
Stratos MAXO 50/0,5-8	DN 50	≤ 0.17	240	10	21.3	2164587	L	2,542.-
Stratos MAXO 50/0,5-9	DN 50	≤ 0.17	280	10	22.2	2164588	L	2,871.-
Stratos MAXO 50/0,5-12	DN 50	≤ 0.17	280	10	22.2	2164589	L	3,063.-
Stratos MAXO 50/0,5-14	DN 50	≤ 0.17	340	10	31.3	2164590	L	3,742.-
Stratos MAXO 50/0,5-16	DN 50	≤ 0.17	340	10	32.4	2164591	L	4,157.-
Stratos MAXO 65/0,5-6	DN 65	≤ 0.17	280	10	23.9	2164592	L	2,695.-
Stratos MAXO 65/0,5-9	DN 65	≤ 0.17	280	10	23.9	2164593	L	3,109.-
Stratos MAXO 65/0,5-12	DN 65	≤ 0.17	340	10	33.8	2164594	L	3,496.-
Stratos MAXO 65/0,5-16	DN 65	≤ 0.17	340	10	34.9	2164595	L	4,249.-
Stratos MAXO 80/0,5-6	DN 80	≤ 0.17	360	6	35.1	2164596	L	3,639.-
Stratos MAXO 80/0,5-6	DN 80	≤ 0.17	360	10	35.1	2164597	L	3,874.-
Stratos MAXO 80/0,5-12	DN 80	≤ 0.17	360	6	36.2	2164598	L	4,641.-
Stratos MAXO 80/0,5-12	DN 80	≤ 0.17	360	10	36.2	2164599	L	4,876.-
Stratos MAXO 80/0,5-16	DN 80	≤ 0.17	360	6	36.2	2164600	L	5,568.-
Stratos MAXO 80/0,5-16	DN 80	≤ 0.17	360	10	36.2	2164601	L	5,804.-

The benchmark for the most efficient circulators is EEI ≤ 0.20

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG17


Ordering information with flange connection

Type	Pump connection	Energy efficiency index (EEI)	Port-to-port length	Max. operating pressure	Gross weight, approx.	Art. no.		
			<i>l</i> mm	<i>p</i> bar	<i>m</i> kg			EUR
Stratos MAXO 100/0,5-6	DN 100	≤ 0.17	360	6	38.2	2164602	L	4,208.-
Stratos MAXO 100/0,5-6	DN 100	≤ 0.17	360	10	38.2	2164603	L	4,444.-
Stratos MAXO 100/0,5-12	DN 100	≤ 0.17	360	6	39.3	2164604	L	5,608.-
Stratos MAXO 100/0,5-12	DN 100	≤ 0.17	360	10	39.3	2164605	L	5,843.-

The benchmark for the most efficient circulators is EEI ≤ 0.20

Price group: PG17


Ordering information with screwed connection PN16

Type	Pump connection	Energy efficiency index (EEI)	Port-to-port length	Max. operating pressure	Gross weight, approx.	Art. no.		
			<i>l</i> mm	<i>p</i> bar	<i>m</i> kg			EUR
Stratos MAXO 25/0,5-4	G 1½	≤ 0.18	180	16	8.3	2186255	C	1,169.-
Stratos MAXO 25/0,5-6	G 1½	≤ 0.18	180	16	8.3	2186256	C	1,354.-
Stratos MAXO 25/0,5-8	G 1½	≤ 0.19	180	16	8.3	2186257	C	1,468.-
Stratos MAXO 25/0,5-10	G 1½	≤ 0.19	180	16	8.6	2186258	C	1,562.-
Stratos MAXO 25/0,5-12	G 1½	≤ 0.19	180	16	8.6	2186259	C	1,842.-
Stratos MAXO 30/0,5-4	G 2	≤ 0.18	180	16	8.3	2186260	C	1,423.-
Stratos MAXO 30/0,5-6	G 2	≤ 0.18	180	16	8.3	2186261	C	1,540.-
Stratos MAXO 30/0,5-8	G 2	≤ 0.19	180	16	8.3	2186262	C	1,661.-
Stratos MAXO 30/0,5-10	G 2	≤ 0.19	180	16	8.6	2186263	C	1,769.-
Stratos MAXO 30/0,5-12	G 2	≤ 0.19	180	16	8.6	2186264	C	2,150.-
Stratos MAXO 30/0,5-14	G 2	≤ 0.19	180	16	8.6	2186265	C	2,401.-

The benchmark for the most efficient circulators is EEI ≤ 0.20

Price group: PG17


Ordering information with flange connection PN16

Type	Pump connection	Energy efficiency index (EEI)	Port-to-port length	Max. operating pressure	Gross weight, approx.	Art. no.		
			<i>l</i> mm	<i>p</i> bar	<i>m</i> kg			EUR
Stratos MAXO 32/0,5-8	DN 32	≤ 0.18	220	16	14.2	2186266	C	1,739.-
Stratos MAXO 32/0,5-10	DN 32	≤ 0.18	220	16	14.5	2186267	C	1,874.-
Stratos MAXO 32/0,5-12	DN 32	≤ 0.18	220	16	14.5	2186268	C	2,401.-
Stratos MAXO 32/0,5-16	DN 32	≤ 0.17	220	16	18.8	2186269	C	2,776.-
Stratos MAXO 40/0,5-4	DN 40	≤ 0.19	220	16	14.8	2186270	C	1,849.-
Stratos MAXO 40/0,5-8	DN 40	≤ 0.19	220	16	15.1	2186271	C	2,533.-
Stratos MAXO 40/0,5-12	DN 40	≤ 0.17	250	16	19.9	2186272	C	2,894.-
Stratos MAXO 40/0,5-16	DN 40	≤ 0.17	250	16	19.9	2186273	C	3,762.-
Stratos MAXO 50/0,5-6	DN 50	≤ 0.18	240	16	17.2	2186274	C	2,780.-
Stratos MAXO 50/0,5-8	DN 50	≤ 0.17	240	16	21.3	2186275	C	3,112.-
Stratos MAXO 50/0,5-9	DN 50	≤ 0.17	280	16	22.2	2186276	C	3,441.-
Stratos MAXO 50/0,5-12	DN 50	≤ 0.17	280	16	22.2	2186277	C	3,633.-
Stratos MAXO 50/0,5-14	DN 50	≤ 0.17	340	16	31.3	2186278	C	4,312.-


The benchmark for the most efficient circulators is EEI ≤ 0.20


 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo

 Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Ordering information with flange connection PN16								
Type	Pump connection	Energy efficiency index (EEI)	Port-to-port length	Max. operating pressure	Gross weight, approx.	Art. no.		
			<i>l</i> mm	<i>p</i> bar	<i>m</i> kg			EUR
Stratos MAXO 50/0,5-16	DN 50	≤ 0.17	340	16	32.4	2186279	C	4,727.-
Stratos MAXO 65/0,5-6	DN 65	≤ 0.17	280	16	23.9	2186280	C	3,320.-
Stratos MAXO 65/0,5-9	DN 65	≤ 0.17	280	16	23.9	2186281	C	3,734.-
Stratos MAXO 65/0,5-12	DN 65	≤ 0.17	340	16	33.8	2186282	C	4,121.-
Stratos MAXO 65/0,5-16	DN 65	≤ 0.17	340	16	34.9	2186283	C	4,874.-
Stratos MAXO 80/0,5-6	DN 80	≤ 0.17	360	16	35.1	2186284	C	4,499.-
Stratos MAXO 80/0,5-12	DN 80	≤ 0.17	360	16	36.2	2186285	C	5,501.-
Stratos MAXO 80/0,5-16	DN 80	≤ 0.17	360	16	36.2	2186286	C	6,429.-
Stratos MAXO 100/0,5-6	DN 100	≤ 0.17	360	16	38.2	2186287	C	5,119.-
Stratos MAXO 100/0,5-12	DN 100	≤ 0.17	360	16	39.3	2186288	C	6,518.-

The benchmark for the most efficient circulators is EEI ≤ 0.20

Accessories						
Type	Description	Art. no.		Price group		
						EUR
Immersion temperature sensor Pt 1000 AA	Pt 1000 AA immersion temperature sensor for installation in immersion sleeve. Connection to Wilo-Stratos MAXO.	2193422	L	PG14		27.-
Temperature sensor Pt 1000 B	Pt 1000 B temperature sensor to connect to piping. Connection to Wilo-Stratos MAXO-Z.	2193421	L	PG14		27.-
G ½ immersion sleeve, 100 mm	Immersion sleeve with 100 mm port-to-port length incl. screw-in thread G 1/2" to attach the Pt 1000 AA immersion temperature sensor.	2193424	L	PG14		24.-
G ½ immersion sleeve, 45 mm	Immersion sleeve with 45 mm port-to-port length incl. screw-in thread G 1/2" to attach the Pt 1000 AA immersion temperature sensor.	2193423	L	PG14		22.-
Wilo-Smart Gateway	REG device to establish communication between Wilo products with Wilo Net and the Wilo-Smart Cloud, as well as over the Internet. Enables remote monitoring and control of connected products using the Wilo-Smart Connect function in the Wilo Assistant app.	2197100	L	PG14		490.-

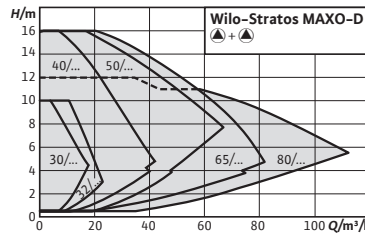

Accessories	Page
Pipe installation/ screwed connection	179
Pipe installation/counter flange	180
Pipe installation/ adapter fitting	181
Pump control/Interface module	219
Blind flanges	242

Select 4 online

All information at www.wilo-select.com

Wilo-Stratos MAXO-D



Construction

Smart glandless twin-head circulator with screwed connection or flange connection, EC motor with integrated electronic power adjustment.

Application

Hot-water heating systems of all kinds, air-conditioning systems, closed cooling circuits, industrial circulation systems.

Scope of delivery

- Pump
- 2x optimised Wilo-Connector
- 4x threaded cable connection M16 x 1.5
- Washers for flange screws (for nominal connection diameters DN 32 - DN 65)
- Gaskets for threaded connection
- Installation and operating instructions

Options

- Special versions for operating pressure PN 16

Your advantages

- Intuitive operation by means of application-guided settings with the Setup Guide plus the combination of a new display and operating button using Green Button Technology.
- Maximum energy efficiency thanks to the combination of optimised and innovative energy-saving functions (e.g. No-Flow Stop).
- Optimum system efficiency thanks to new and innovative intelligent control functions, such as Dynamic Adapt plus, Multi-Flow Adaptation, T-const. and ΔT-const.
- Latest communication interfaces (e.g. Bluetooth) for connection to mobile devices and direct pump networking for multiple pump control via Wilo Net.
- Maximum convenience in electrical installation thanks to a clearly arranged and spacious terminal room and the optimised Wilo-Connector.

Price group: PG17


Ordering information with screwed connection

Type	Pump connection	Energy efficiency index (EEI)	Port-to-port length	Max. operating pressure	Gross weight, approx.	Art. no.		
			<i>l</i> mm	<i>p</i> bar	<i>m</i> kg			EUR
Stratos MAXO-D 30/0,5-6	G 2	≤ 0.19	180	10	20.6	2164645	L	1,970.-
Stratos MAXO-D 30/0,5-10	G 2	≤ 0.19	180	10	21.2	2164646	L	2,394.-

The benchmark for the most efficient circulators is EEI ≤ 0.20


= ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG17



Ordering information with flange connection								
Type	Pump connection	Energy efficiency index (EEI)	Port-to-port length	Max. operating pressure	Gross weight, approx.	Art. no.		
			<i>l</i> mm	<i>p</i> bar	<i>m</i> kg			EUR
Stratos MAXO-D 32/0,5-8	DN 32	≤ 0.19	220	10	24.9	2164647	L	2,496.-
Stratos MAXO-D 32/0,5-12	DN 32	≤ 0.19	220	10	25.5	2164648	L	3,471.-
Stratos MAXO-D 40/0,5-8	DN 40	≤ 0.18	220	10	27.6	2164649	L	3,632.-
Stratos MAXO-D 40/0,5-12	DN 40	≤ 0.17	250	10	38.8	2164650	L	4,299.-
Stratos MAXO-D 40/0,5-16	DN 40	≤ 0.17	250	10	38.8	2164651	L	5,905.-
Stratos MAXO-D 50/0,5-6	DN 50	≤ 0.18	240	10	30.5	2164652	L	4,089.-
Stratos MAXO-D 50/0,5-8	DN 50	≤ 0.17	240	10	41.1	2164653	L	4,703.-
Stratos MAXO-D 50/0,5-9	DN 50	≤ 0.17	280	10	41.1	2164654	L	5,311.-
Stratos MAXO-D 50/0,5-12	DN 50	≤ 0.17	280	10	41.1	2164655	L	5,667.-
Stratos MAXO-D 50/0,5-16	DN 50	≤ 0.17	340	10	66.8	2164656	L	7,690.-
Stratos MAXO-D 65/0,5-6	DN 65	≤ 0.17	280	10	44.9	2164657	L	4,986.-
Stratos MAXO-D 65/0,5-12	DN 65	≤ 0.17	340	10	66.6	2164658	L	6,468.-
Stratos MAXO-D 65/0,5-16	DN 65	≤ 0.17	340	10	66.8	2164659	L	7,861.-
Stratos MAXO-D 80/0,5-6	DN 80	≤ 0.18	360	6	68.3	2164660	L	6,732.-
Stratos MAXO-D 80/0,5-6	DN 80	≤ 0.18	360	10	68.3	2164661	L	7,167.-
Stratos MAXO-D 80/0,5-12	DN 80	≤ 0.17	360	6	70.5	2164662	L	8,586.-
Stratos MAXO-D 80/0,5-12	DN 80	≤ 0.17	360	10	70.5	2164663	L	9,021.-
Stratos MAXO-D 80/0,5-16	DN 80	≤ 0.17	360	6	70.5	2164664	L	10,301.-
Stratos MAXO-D 80/0,5-16	DN 80	≤ 0.17	360	10	70.5	2164665	L	10,737.-

The benchmark for the most efficient circulators is EEI ≤ 0.20

Price group: PG17

Ordering information with screwed connection PN16								
Type	Pump connection	Energy efficiency index (EEI)	Port-to-port length	Max. operating pressure	Gross weight, approx.	Art. no.		
			<i>l</i> mm	<i>p</i> bar	<i>m</i> kg			EUR
Stratos MAXO-D 30/0,5-6	G 2	≤ 0.19	180	16	20.6	2186289	C	2,445.-
Stratos MAXO-D 30/0,5-10	G 2	≤ 0.19	180	16	21.2	2186290	C	2,869.-

The benchmark for the most efficient circulators is EEI ≤ 0.20

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG17

Ordering information with flange connection PN16


Type	Pump connection	Energy efficiency index (EEI)	Port-to-port length	Max. operating pressure	Gross weight, approx.	Art. no.		EUR
			<i>l</i> mm	<i>p</i> bar	<i>m</i> kg			
Stratos MAXO-D 32/0,5-8	DN 32	≤ 0.19	220	16	24.9	2186291	C	2,771.-
Stratos MAXO-D 32/0,5-12	DN 32	≤ 0.19	220	16	25.5	2186292	C	3,996.-
Stratos MAXO-D 40/0,5-8	DN 40	≤ 0.18	220	16	27.6	2186293	C	4,202.-
Stratos MAXO-D 40/0,5-12	DN 40	≤ 0.17	250	16	38.8	2186294	C	4,869.-
Stratos MAXO-D 40/0,5-16	DN 40	≤ 0.17	250	16	38.8	2186295	C	6,475.-
Stratos MAXO-D 50/0,5-6	DN 50	≤ 0.18	240	16	30.5	2186296	C	4,659.-
Stratos MAXO-D 50/0,5-8	DN 50	≤ 0.17	240	16	41.1	2186297	C	5,273.-
Stratos MAXO-D 50/0,5-9	DN 50	≤ 0.17	280	16	41.1	2186298	C	5,881.-
Stratos MAXO-D 50/0,5-12	DN 50	≤ 0.17	280	16	41.1	2186299	C	6,237.-
Stratos MAXO-D 50/0,5-16	DN 50	≤ 0.17	340	16	66.8	2186300	C	8,260.-
Stratos MAXO-D 65/0,5-6	DN 65	≤ 0.17	280	16	44.9	2186301	C	5,611.-
Stratos MAXO-D 65/0,5-12	DN 65	≤ 0.17	340	16	66.6	2186302	C	7,093.-
Stratos MAXO-D 65/0,5-16	DN 65	≤ 0.17	340	16	66.8	2186303	C	8,486.-
Stratos MAXO-D 80/0,5-6	DN 80	≤ 0.18	360	16	68.3	2186304	C	7,792.-
Stratos MAXO-D 80/0,5-12	DN 80	≤ 0.17	360	16	70.5	2186305	C	9,646.-
Stratos MAXO-D 80/0,5-16	DN 80	≤ 0.17	360	16	70.5	2186306	C	11,362.-

The benchmark for the most efficient circulators is EEI ≤ 0.20

Accessories

Type	Description	Art. no.		Price group	EUR
Immersion temperature sensor Pt 1000 AA	Pt 1000 AA immersion temperature sensor for installation in immersion sleeve. Connection to Wilo-Stratos MAXO.	2193422	L	PG14	27.-
Temperature sensor Pt 1000 B	Pt 1000 B temperature sensor to connect to piping. Connection to Wilo-Stratos MAXO-Z.	2193421	L	PG14	27.-
G ½ immersion sleeve, 100 mm	Immersion sleeve with 100 mm port-to-port length incl. screw-in thread G 1/2" to attach the Pt 1000 AA immersion temperature sensor.	2193424	L	PG14	24.-
G ½ immersion sleeve, 45 mm	Immersion sleeve with 45 mm port-to-port length incl. screw-in thread G 1/2" to attach the Pt 1000 AA immersion temperature sensor.	2193423	L	PG14	22.-
Wilo-Smart Gateway	REG device to establish communication between Wilo products with Wilo Net and the Wilo-Smart Cloud, as well as over the Internet. Enables remote monitoring and control of connected products using the Wilo-Smart Connect function in the Wilo Assistant app.	2197100	L	PG14	490.-

🚚 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
 Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

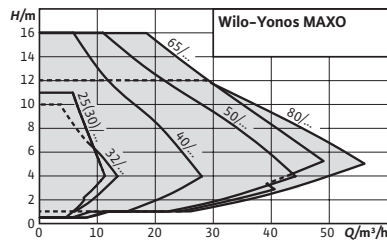

Accessories	Page
Pipe installation/ screwed connection	179
Pipe installation/counter flange	180
Pipe installation/ adapter fitting	181
Thermal insulation	198

Select 4 online

All information at www.wilo-select.com

Wilo-Yonos MAXO



Construction

Glandless circulator with threaded connection or flange connection, EC motor with automatic power adjustment.

Application

Hot-water heating systems of all kinds, air-conditioning systems, closed cooling circuits, industrial circulation systems.

Scope of delivery

- Pump
- Including gaskets for threaded connection
- Incl. washers for flange screws (for nominal connection diameters DN 32 - DN 65)
- Including installation and operating instructions

Your advantages

- LED display provides complete transparency of set delivery head, speed stage or possible errors
- Simple adjustment over three speed stages when replacing an uncontrolled standard pump
- Easier electrical connection using the Wilo plug
- System availability ensured via collective fault signal
- Compact design and proven ease of use

Price group: PG2

Ordering information with screwed connection									
Type	Pump connection	Energy efficiency index (EEI)	Port-to-port length	Max. operating pressure	Mains connection	Gross weight, approx.	Art. no.		
			<i>l</i> mm	<i>p</i> bar		<i>m</i> kg			EUR
Yonos MAXO 25/0,5-7	G 1½	≤ 0.20	180	10	1~230 V, 50/60 Hz	5.8	2120639	L	923.-
Yonos MAXO 25/0,5-10	G 1½	≤ 0.20	180	10	1~230 V, 50/60 Hz	5.8	2120640	L	1,011.-
Yonos MAXO 25/0,5-12	G 1½	≤ 0.20	180	10	1~230 V, 50/60 Hz	6.9	2120641	L	1,247.-
Yonos MAXO 30/0,5-7	G 2	≤ 0.20	180	10	1~230 V, 50/60 Hz	5.9	2120642	L	1,001.-
Yonos MAXO 30/0,5-10	G 2	≤ 0.20	180	10	1~230 V, 50/60 Hz	5.9	2120643	L	1,092.-
Yonos MAXO 30/0,5-12	G 2	≤ 0.20	180	10	1~230 V, 50/60 Hz	7	2120644	L	1,414.-

The benchmark for the most efficient circulators is EEI ≤ 0.20

= ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG2

Ordering information with flange connection


Type	Pump connection	Energy efficiency index (EEI)	Port-to-port length	Max. operating pressure	Mains connection	Gross weight, approx.	Art. no.		
			<i>l</i> mm	<i>p</i> bar		<i>m</i> kg			EUR
Yonos MAXO 32/0,5-10 PN6/10	DN 32	≤ 0.20	220	10	1~230 V, 50/60 Hz	9.4	2210113	A	☒
Yonos MAXO 32/0,5-11 PN6/10	DN 32	≤ 0.20	220	10	1~230 V, 50/60 Hz	10.5	2210114	A	☒
Yonos MAXO 40/0,5-4 PN6/10	DN 40	≤ 0.20	220	10	1~230 V, 50/60 Hz	10.2	2120645	L	1,078.-
Yonos MAXO 40/0,5-8 PN6/10	DN 40	≤ 0.20	220	10	1~230 V, 50/60 Hz	10.8	2120646	L	1,657.-
Yonos MAXO 40/0,5-12 PN6/10	DN 40	≤ 0.20	250	10	1~230 V, 50/60 Hz	14.9	2120647	L	1,961.-
Yonos MAXO 40/0,5-16 PN6/10	DN 40	≤ 0.20	250	10	1~230 V, 50/60 Hz	24.5	2120648	L	2,695.-
Yonos MAXO 50/0,5-8 PN6/10	DN 50	≤ 0.20	240	10	1~230 V, 50/60 Hz	12.1	2120649	L	2,147.-
Yonos MAXO 50/0,5-9 PN6/10	DN 50	≤ 0.20	280	10	1~230 V, 50/60 Hz	16.1	2120650	L	2,423.-
Yonos MAXO 50/0,5-12 PN6/10	DN 50	≤ 0.20	280	10	1~230 V, 50/60 Hz	16.1	2120651	L	2,586.-
Yonos MAXO 50/0,5-16 PN6/10	DN 50	≤ 0.20	340	10	1~230 V, 50/60 Hz	28.5	2120652	L	3,509.-
Yonos MAXO 65/0,5-9 PN6/10	DN 65	≤ 0.20	280	10	1~230 V, 50/60 Hz	18	2120653	L	2,624.-
Yonos MAXO 65/0,5-12 PN6/10	DN 65	≤ 0.20	340	10	1~230 V, 50/60 Hz	29.3	2120654	L	2,950.-
Yonos MAXO 65/0,5-16	DN 65	≤ 0.20	340	10	1~230 V, 50/60 Hz	31	2120655	L	3,586.-
Yonos MAXO 80/0,5-6 PN6	DN 80	≤ 0.20	360	6	1~230 V, 50/60 Hz	32.5	2120656	L	3,072.-
Yonos MAXO 80/0,5-6 PN10	DN 80	≤ 0.20	360	10	1~230 V, 50/60 Hz	32.5	2120657	L	3,270.-
Yonos MAXO 80/0,5-12 PN6	DN 80	≤ 0.20	360	6	1~230 V, 50/60 Hz	33.9	2120658	L	3,917.-
Yonos MAXO 80/0,5-12 PN10	DN 80	≤ 0.20	360	10	1~230 V, 50/60 Hz	33.9	2120659	L	4,116.-
Yonos MAXO 100/0,5-12 PN6	DN 100	≤ 0.20	360	6	1~230 V, 50/60 Hz	36.9	2120660	L	4,734.-
Yonos MAXO 100/0,5-12 PN10	DN 100	≤ 0.20	360	10	1~230 V, 50/60 Hz	36.9	2120661	L	4,932.-

The benchmark for the most efficient circulators is EEI ≤ 0.20

Type	Description	Art. no.	Price group	
Wilo-Connect Module Yonos MAXO	Wilo-Connect Module Yonos MAXO for single and twin-head pumps. Retrofittable plug-in module for Wilo-Yonos MAXO/Yonos MAXO-D/Yonos MAXO-Z pump types. The Connect Module Yonos MAXO is installed on the electronic module of the pump at the position of the Wilo plug. With SBM run signal, overriding Off control input (Ext. Off) and main/standby mode with runtime-dependent switchover from main to standby pump.	2210108	A PG14	☒

Note: Available from April 2020

☒ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☒ = please contact Wilo
 Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

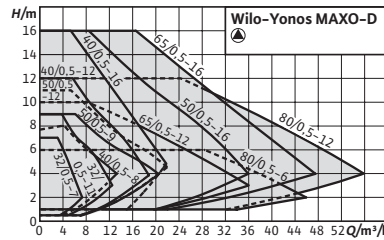

Accessories	Page
Pipe installation/ screwed connection	179
Pipe installation/counter flange	180
Pipe installation/ adapter fitting	181
Thermal insulation	198

Select 4 online

All information at www.wilo-select.com

Wilo-Yonos MAXO-D



Construction

Glandless circulator with flange connection, EC motor with automatic power adjustment

Application

Hot-water heating systems of all kinds, air-conditioning systems, closed cooling circuits, industrial circulation systems.

Scope of delivery

- Pump
- Incl. washers for flange screws (for nominal connection diameters DN 32 – DN 65)
- Including installation and operating instructions

Your advantages

- LED display provides complete transparency of set delivery head, speed stage or possible errors
- Simple adjustment over three speed stages when replacing an uncontrolled standard pump
- Easier electrical connection using the Wilo plug
- System availability ensured via collective fault signal
- Compact design and proven ease of use

Price group: PG2


Ordering information with flange connection

Type	Nominal flange diameter	Energy efficiency index (EEI)	Port-to-port length	Max. operating pressure	Mains connection	Gross weight, approx.	Art. no.		
			<i>l</i> mm	<i>p</i> bar		<i>m</i> kg			EUR
Yonos MAXO-D 32/0,5-7	DN 32	≤ 0.23	220	10	1~230 V, 50/60 Hz	12.2	2160585	L	1,895.-
Yonos MAXO-D 32/0,5-11	DN 32	≤ 0.23	220	10	1~230 V, 50/60 Hz	18.9	2120663	L	2,929.-
Yonos MAXO-D 40/0,5-8	DN 40	≤ 0.23	220	10	1~230 V, 50/60 Hz	19.3	2120664	L	3,066.-
Yonos MAXO-D 40/0,5-12	DN 40	≤ 0.23	250	10	1~230 V, 50/60 Hz	26.6	2120665	L	3,627.-
Yonos MAXO-D 40/0,5-16	DN 40	≤ 0.23	250	10	1~230 V, 50/60 Hz	46.8	2120666	L	4,986.-


The benchmark for the most efficient circulators is EEI ≤ 0.20

= ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, = please contact Wilo
 Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.


Price group: PG2

Ordering information with flange connection									
Type	Nominal flange diameter	Energy efficiency index (EEI)	Port-to-port length	Max. operating pressure	Mains connection	Gross weight, approx.	Art. no.		
			<i>l</i> mm	<i>p</i> bar		<i>m</i> kg			EUR
Yonos MAXO-D 50/0,5-9	DN 50	≤ 0.23	280	10	1~230 V, 50/60 Hz	28.9	2120667	L	4,484.-
Yonos MAXO-D 50/0,5-12	DN 50	≤ 0.23	280	10	1~230 V, 50/60 Hz	28.5	2120668	L	4,784.-
Yonos MAXO-D 50/0,5-16	DN 50	≤ 0.23	340	10	1~230 V, 50/60 Hz	51.2	2120669	L	6,491.-
Yonos MAXO-D 65/0,5-12	DN 65	≤ 0.23	340	10	1~230 V, 50/60 Hz	54.7	2120670	L	5,459.-
Yonos MAXO-D 65/0,5-16	DN 65	≤ 0.23	340	10	1~230 V, 50/60 Hz	54.2	2120671	L	6,635.-
Yonos MAXO-D 80/0,5-6	DN 80	≤ 0.23	360	6	1~230 V, 50/60 Hz	60.6	2163260	L	5,683.-
Yonos MAXO-D 80/0,5-6	DN 80	≤ 0.23	360	10	1~230 V, 50/60 Hz	60.6	2163261	L	6,051.-
Yonos MAXO-D 80/0,5-12	DN 80	≤ 0.23	360	6	1~230 V, 50/60 Hz	60.6	2120672	L	7,247.-
Yonos MAXO-D 80/0,5-12	DN 80	≤ 0.23	360	10	1~230 V, 50/60 Hz	60.6	2120673	L	7,614.-

The benchmark for the most efficient circulators is EEI ≤ 0.20

Accessories					
Type	Description	Art. no.		Price group	
Wilo-Connect Module Yonos MAXO	Wilo-Connect Module Yonos MAXO for single and twin-head pumps. Retrofittable plug-in module for Wilo-Yonos MAXO/Yonos MAXO-D/Yonos MAXO-Z pump types. The Connect Module Yonos MAXO is installed on the electronic module of the pump at the position of the Wilo plug. With SBM run signal, overriding Off control input (Ext. Off) and main/standby mode with runtime-dependent switchover from main to standby pump.	2210108		A	PG14

Note: Available from April 2020

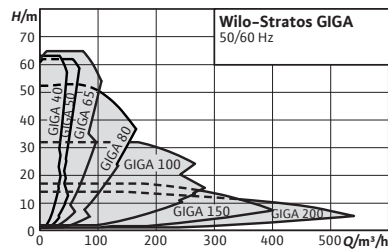

Accessories	Page
IR-Monitor/IR-Stick	243
Wall fixation/installation on a base	185
Differential pressure detection	223
Pump control/Interface module	219
Pump control CCe-HVAC	204
Pump control SCe-HVAC	209

Series extension



Select 4 online

All information at www.wilo-select.com

Wilo-Stratos GIGA



Construction

High-efficiency in line pump with EC motor and electronic power adjustment in glanded pump design. Version as single-stage low-pressure centrifugal pump with flange connection and mechanical seal.

Application

The pumping of heating water (in accordance with VDI 2035), cold water and water-glycol mixtures without abrasive substances in heating, cold water and cooling systems.

Scope of delivery

- Pump
- Installation and operating instructions

Options

- Variant ...-R1 without differential pressure sensor
- ...-S1 variant with special mechanical seal (at additional charge)

Your advantages

- Innovative high-efficiency pump for maximum overall efficiency levels
- High-efficiency EC motor with efficiency class IE5 according to IEC 60034-30-2
- Optional interfaces for connection to building automation using insertable IF modules

General notes - ErP (Ecodesign) Directive


For detailed information on the MEI values of the individual pump types, see: Wilo Online Catalogue, available at www.wilo.com



Price group: PG3


Ordering information with differential pressure sensor								
Type	Nominal flange diameter	Port-to-port length	Rated power	Net weight, approx.	Art. no.	GRD group		
		l_0 mm	P_2 kW	m kg			EUR	
Stratos GIGA 40/1-25/1,6	DN 40	280	1.60	39	2170114	L	4,166.-	11
Stratos GIGA 40/1-32/2,2	DN 40	280	2.20	39	2170113	L	4,724.-	11
Stratos GIGA 40/1-39/3,0	DN 40	280	3.00	39	2170112	L	5,132.-	11
Stratos GIGA 40/1-45/3,8	DN 40	280	3.80	41	2170111	L	5,719.-	11
Stratos GIGA 40/1-51/4,2	DN 40	280	4.20	41	2170110	L	6,151.-	11

= ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG3

Ordering information with differential pressure sensor							
Type	Nominal flange diameter	Port-to-port length	Rated power	Net weight, approx.	Art. no.		GRD group
		l_0 mm	P_2 kW	m kg		 EUR	
Stratos GIGA 40/4-63/11	DN 40	440	11.00	140	2191913	C	8,497.- 5
Stratos GIGA 50/1-14/0,8	DN 50	280	0.80	40	2170118	L	3,259.- 11
Stratos GIGA 50/1-20/1,3	DN 50	280	1.30	40	2170117	L	3,875.- 11
Stratos GIGA 50/1-26/1,9	DN 50	280	1.90	40	2170116	L	4,571.- 11
Stratos GIGA 50/1-33/2,6	DN 50	280	2.60	40	2170115	L	4,990.- 11
Stratos GIGA 50/1-38/2,8	DN 50	280	2.80	40	2170121	L	5,138.- 11
Stratos GIGA 50/1-44/3,2	DN 50	280	3.20	42	2170120	L	5,895.- 11
Stratos GIGA 50/1-50/4,2	DN 50	280	4.20	42	2170119	L	6,220.- 11
Stratos GIGA 50/4-53/11	DN 50	440	11.00	142	2191914	C	8,666.- 5
Stratos GIGA 50/4-62/15	DN 50	440	15.00	152	2191915	C	10,018.- 5
Stratos GIGA 65/1-8/0,6	DN 65	340	0.60	45	2170124	L	3,445.- 11
Stratos GIGA 65/1-12/1,1	DN 65	340	1.10	45	2170123	L	4,046.- 11
Stratos GIGA 65/1-17/1,7	DN 65	340	1.70	45	2170122	L	4,455.- 11
Stratos GIGA 65/1-21/2,3	DN 65	340	2.30	44	2170126	L	5,001.- 11
Stratos GIGA 65/1-27/3,0	DN 65	340	3.00	44	2170125	L	5,694.- 11
Stratos GIGA 65/1-34/3,1	DN 65	340	3.10	44	2170129	L	5,784.- 11
Stratos GIGA 65/1-38/3,8	DN 65	340	3.80	45	2170128	L	6,135.- 11
Stratos GIGA 65/1-42/4,8	DN 65	340	4.80	53	2170127	L	6,388.- 11
Stratos GIGA 65/3-40/11	DN 65	430	11.00	134	2191916	C	8,704.- 5
Stratos GIGA 65/3-49/15	DN 65	475	15.00	159	2191917	C	10,105.- 6
Stratos GIGA 65/4-57/18,5	DN 65	475	18.50	163	2191918	C	11,767.- 6
Stratos GIGA 65/5-65/22	DN 65	475	22.00	170	2191919	C	13,452.- 6
Stratos GIGA 80/1-16/2,3	DN 80	360	2.30	49	2170131	L	5,184.- 11
Stratos GIGA 80/1-21/3,5	DN 80	360	3.50	49	2170130	L	5,898.- 11
Stratos GIGA 80/1-32/4,1	DN 80	360	4.10	61	2170133	L	6,175.- 11
Stratos GIGA 80/1-37/5,3	DN 80	360	5.30	61	2170132	L	6,397.- 11
Stratos GIGA 80/2-31/11	DN 80	440	11.00	142	2191920	C	8,904.- 5
Stratos GIGA 80/3-40/15	DN 80	440	15.00	152	2191921	C	10,153.- 5
Stratos GIGA 80/3-48/18,5	DN 80	500	18.50	170	2191922	C	11,881.- 6
Stratos GIGA 80/4-53/22	DN 80	500	22.00	176	2191923	C	13,578.- 6
Stratos GIGA 100/1-13/2,3	DN 100	450	2.30	67	2170135	L	5,566.- 11
Stratos GIGA 100/1-17/3,7	DN 100	450	3.70	67	2170134	L	6,185.- 11
Stratos GIGA 100/1-27/4,8	DN 100	450	4.80	69	2170137	L	6,384.- 11
Stratos GIGA 100/1-33/6,0	DN 100	450	6.00	74	2170136	L	6,896.- 11
Stratos GIGA 100/2-22/11	DN 100	500	11.00	155	2191924	C	8,936.- 6
Stratos GIGA 100/2-24/11	DN 100	550	11.00	232	2191928	C	9,854.- 6
Stratos GIGA 100/2-26/15	DN 100	500	15.00	165	2191925	C	10,190.- 6
Stratos GIGA 100/2-29/18,5	DN 100	500	18.50	169	2191926	C	11,943.- 6
Stratos GIGA 100/3-33/22	DN 100	500	22.00	176	2191927	C	13,655.- 6
Stratos GIGA 150/1-14/11	DN 150	700	11.00	265	2191929	C	11,029.- 6
Stratos GIGA 150/2-17/15	DN 150	700	15.00	329	2191930	C	12,301.- 6
Stratos GIGA 200/1-14/15	DN 200	800	15.00	386	2191933	C	13,596.- 6

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
 Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.


Ordering information without differential pressure sensor								
Type	Nominal flange diameter	Port-to-port length	Rated power	Net weight, approx.	Art. no.		GRD group	
		<i>l</i> mm	<i>P</i> ₂ kW	<i>m</i> kg			EUR	
Stratos GIGA 40/1-25/1,6-R1	DN 40	280	1.60	39	2170170	L	3,720.-	11
Stratos GIGA 40/1-32/2,2-R1	DN 40	280	2.20	39	2170169	L	4,279.-	11
Stratos GIGA 40/1-39/3,0-R1	DN 40	280	3.00	39	2170168	L	4,686.-	11
Stratos GIGA 40/1-45/3,8-R1	DN 40	280	3.80	41	2170167	L	5,274.-	11
Stratos GIGA 40/1-51/4,2-R1	DN 40	280	4.20	41	2170166	L	5,705.-	11
Stratos GIGA 40/4-63/11-R1	DN 40	440	11.00	140	2191959	C	8,052.-	5
Stratos GIGA 50/1-14/0,8-R1	DN 50	280	0.80	40	2170174	L	2,813.-	11
Stratos GIGA 50/1-20/1,3-R1	DN 50	280	1.30	40	2170173	L	3,429.-	11
Stratos GIGA 50/1-26/1,9-R1	DN 50	280	1.90	40	2170172	L	4,125.-	11
Stratos GIGA 50/1-33/2,6-R1	DN 50	280	2.60	40	2170171	L	4,544.-	1
Stratos GIGA 50/1-38/2,8-R1	DN 50	280	2.80	40	2170177	L	4,693.-	11
Stratos GIGA 50/1-44/3,2-R1	DN 50	280	3.20	42	2170176	L	5,449.-	11
Stratos GIGA 50/1-50/4,2-R1	DN 50	280	4.20	42	2170175	L	5,774.-	11
Stratos GIGA 50/4-53/11-R1	DN 50	440	11.00	142	2191960	C	8,220.-	5
Stratos GIGA 50/4-62/15-R1	DN 50	440	15.00	152	2191961	C	9,572.-	5
Stratos GIGA 65/1-8/0,6-R1	DN 65	340	0.60	45	2170180	L	2,999.-	11
Stratos GIGA 65/1-12/1,1-R1	DN 65	340	1.10	45	2170179	L	3,601.-	11
Stratos GIGA 65/1-17/1,7-R1	DN 65	340	1.70	45	2170178	L	4,009.-	11
Stratos GIGA 65/1-21/2,3-R1	DN 65	340	2.30	44	2170182	L	4,555.-	11
Stratos GIGA 65/1-27/3,0-R1	DN 65	340	3.00	44	2170181	L	5,248.-	11
Stratos GIGA 65/1-34/3,1-R1	DN 65	340	3.10	44	2170185	L	5,339.-	11
Stratos GIGA 65/1-38/3,8-R1	DN 65	340	3.80	45	2170184	L	5,689.-	11
Stratos GIGA 65/1-42/4,8-R1	DN 65	340	4.80	53	2170183	L	5,942.-	11
Stratos GIGA 65/3-40/11-R1	DN 65	430	11.00	134	2191962	C	8,258.-	5
Stratos GIGA 65/3-49/15-R1	DN 65	475	15.00	159	2191963	C	9,660.-	6
Stratos GIGA 65/4-57/18,5-R1	DN 65	475	18.50	163	2191964	C	11,321.-	6
Stratos GIGA 65/5-65/22-R1	DN 65	475	22.00	170	2191965	C	13,006.-	6
Stratos GIGA 80/1-16/2,3-R1	DN 80	360	2.30	49	2170187	L	4,738.-	11
Stratos GIGA 80/1-21/3,5-R1	DN 80	360	3.50	49	2170186	L	5,452.-	11
Stratos GIGA 80/1-32/4,1-R1	DN 80	360	4.10	61	2170189	L	5,730.-	11
Stratos GIGA 80/1-37/5,3-R1	DN 80	360	5.30	61	2170188	L	5,952.-	11
Stratos GIGA 80/2-31/11-R1	DN 80	440	11.00	142	2191966	C	8,458.-	5
Stratos GIGA 80/3-40/15-R1	DN 80	440	11.00	152	2191967	C	9,707.-	5
Stratos GIGA 80/3-48/18,5-R1	DN 80	500	18.50	170	2191968	C	11,436.-	6
Stratos GIGA 80/4-53/22-R1	DN 80	500	22.00	176	2191969	C	13,132.-	6
Stratos GIGA 100/1-13/2,3-R1	DN 100	450	2.30	67	2170191	L	5,120.-	11
Stratos GIGA 100/1-17/3,7-R1	DN 100	450	3.70	67	2170190	L	5,739.-	11
Stratos GIGA 100/1-27/4,8-R1	DN 100	450	4.80	69	2170193	L	5,938.-	11
Stratos GIGA 100/1-33/6,0-R1	DN 100	450	6.00	74	2170192	L	6,450.-	11
Stratos GIGA 100/2-22/11-R1	DN 100	500	11.00	155	2191970	C	8,490.-	6
Stratos GIGA 100/2-24/11-R1	DN 100	550	11.00	232	2191974	C	9,408.-	-
Stratos GIGA 100/2-26/15-R1	DN 100	500	15.00	165	2191971	C	9,744.-	6
Stratos GIGA 100/2-29/18,5-R1	DN 100	500	18.50	169	2191972	C	11,498.-	6
Stratos GIGA 100/3-33/22-R1	DN 100	500	22.00	176	2191973	C	13,210.-	6


 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG3

Ordering information without differential pressure sensor

Type	Nominal flange diameter	Port-to-port length	Rated power	Net weight, approx.	Art. no.		GRD group
		<i>l</i> mm	<i>P</i> ₂ kW	<i>m</i> kg		 EUR	
Stratos GIGA 150/1-14/11-R1	DN 150	700	11.00	265	2191975	C	10,583.- -
Stratos GIGA 150/2-17/15-R1	DN 150	700	15.00	329	2191976	C	11,856.- -
Stratos GIGA 200/1-14/15-R1	DN 200	800	15.00	386	2191979	C	13,150.- -

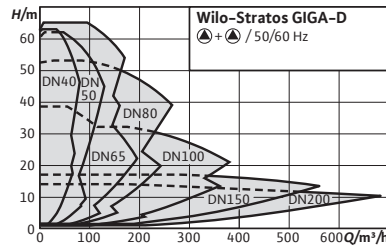

Accessories	Page
IR-Monitor/IR-Stick	243
Wall fixation/installation on a base	185
Differential pressure detection	223
Pump control/Interface module	219
Pump control C Ce-HVAC	204
Pump control S Ce-HVAC	209

Series extension



Select 4 online

All information at www.wilo-select.com

Wilo-Stratos GIGA-D



Construction

High-efficiency in-line twin-head pump with EC motor and electronic power adjustment in glanded pump construction. Version as single-stage low-pressure centrifugal pump with flange connection and mechanical seal.

Application

The pumping of heating water (in accordance with VDI 2035), cold water and water-glycol mixtures without abrasive substances in heating, cold water and cooling systems.

Scope of delivery

- Pump
- Installation and operating instructions

Options

- Variant ...-R1 without differential pressure sensor
- ...-S1 variant with special mechanical seal (at additional charge)

Your advantages

- Innovative high-efficiency pump for maximum overall efficiency levels
- High-efficiency EC motor with efficiency class IE5 according to IEC 60034-30-2
- Highest possible operational reliability thanks to standby pump
- Optional interfaces for connection to building automation using insertable IF modules

General notes - ErP (Ecodesign) Directive

For detailed information on the MEI values of the individual pump types, see: Wilo Online Catalogue, available at www.wilo.com


Price group: PG3



Ordering information with differential pressure sensor


Stratos GIGA-D	Nominal flange diameter	Port-to-port length	Rated power	Net weight, approx.	Art. no.	GRD group	Blind flange
		<i>l</i> ₀ mm	<i>P</i> ₂ kW	<i>m</i> kg		EUR	
40/1-25/1,6	DN 40	280	1.60	81	2170226	8,083.-	I
40/1-32/2,2	DN 40	280	2.20	81	2170225	9,165.-	I
40/1-39/3,0	DN 40	280	3.00	81	2170224	9,956.-	I
40/1-45/3,8	DN 40	280	3.80	84	2170223	11,095.-	I
40/1-51/4,2	DN 40	280	4.20	84	2170222	11,932.-	I



☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☞ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG3


Ordering information with differential pressure sensor									
Stratos GIGA-D	Nominal flange diameter	Port-to-port length	Rated power	Net weight, approx.	Art. no.		GRD group	Blind flange	
		l_0 mm	P_2 kW	m kg			EUR		
40/4-63/11	DN 40	440	11.00	275	2192005	C	16,570.-	5	C
50/1-14/0,8	DN 50	280	0.80	84	2170230	C	6,323.-	11	I
50/1-20/1,3	DN 50	280	1.30	84	2170229	C	7,517.-	11	I
50/1-26/1,9	DN 50	280	1.90	84	2170228	C	8,867.-	11	I
50/1-33/2,6	DN 50	280	2.60	84	2170227	C	9,680.-	11	I
50/1-38/2,8	DN 50	280	2.80	82	2170233	C	10,020.-	11	I
50/1-44/3,2	DN 50	280	3.80	85	2170232	C	11,494.-	11	I
50/1-50/4,2	DN 50	280	4.50	85	2170231	C	12,129.-	11	I
50/4-53/11	DN 50	440	11.00	278	2192006	C	16,901.-	5	C
50/4-62/15	DN 50	440	15.00	298	2192007	C	19,532.-	5	C
65/1-8/0,6	DN 65	340	0.60	93	2170236	C	6,683.-	11	I
65/1-12/1,1	DN 65	340	1.10	93	2170235	C	7,850.-	12	I
65/1-17/1,7	DN 65	340	1.70	93	2170234	C	8,642.-	11	I
65/1-21/2,3	DN 65	340	2.30	89	2170238	C	9,252.-	11	I
65/1-27/3,0	DN 65	340	3.00	89	2170237	C	10,533.-	11	I
65/1-34/3,1	DN 65	340	3.10	88	2170241	C	11,106.-	11	I
65/1-38/3,8	DN 65	340	3.80	92	2170240	C	11,779.-	11	I
65/1-42/4,8	DN 65	340	4.80	108	2170239	C	12,265.-	11	I
65/3-40/11	DN 65	430	11.00	271	2192008	C	16,974.-	5	B
65/3-49/15	DN 65	475	15.00	311	2192009	C	19,709.-	6	C
65/4-57/18,5	DN 65	475	18.50	320	2192010	C	23,532.-	6	C
65/5-65/22	DN 65	475	22.00	332	2192011	C	26,903.-	6	C
80/1-16/2,3	DN 80	360	1.90	98	2170243	C	9,953.-	11	J
80/1-21/3,5	DN 80	360	3.00	98	2170242	C	11,324.-	11	J
80/1-32/4,1	DN 80	360	3.80	126	2170245	C	11,857.-	11	K
80/1-37/5,3	DN 80	360	5.00	126	2170244	C	12,283.-	11	K
80/2-31/11	DN 80	440	11.00	282	2192012	C	17,808.-	5	B
80/3-40/15	DN 80	440	15.00	302	2192013	C	19,796.-	5	B
80/3-48/18,5	DN 80	500	18.50	335	2192014	C	23,764.-	6	C
80/4-53/22	DN 80	500	22.00	345	2192015	C	27,158.-	6	C
100/1-13/2,3	DN 100	450	2.30	133	2170247	C	10,797.-	11	L
100/1-17/3,7	DN 100	450	3.70	133	2170246	C	11,997.-	11	L
100/1-27/4,8	DN 100	450	4.80	138	2170249	C	12,385.-	11	K
100/1-33/6,0	DN 100	450	6.00	147	2170248	C	13,379.-	11	K
100/2-22/11	DN 100	500	11.00	317	2192016	C	17,424.-	6	B
100/2-24/11	DN 100	550	11.00	463	2192020	C	19,216.-	6	B
100/2-26/15	DN 100	500	15.00	337	2192017	C	20,377.-	6	B
100/2-29/18,5	DN 100	500	18.50	346	2192018	C	23,286.-	6	B
100/3-33/22	DN 100	500	22.00	358	2192019	C	26,630.-	6	B
150/1-14/11	DN 150	700	11.00	530	2192021	C	21,504.-	-	-
150/2-17/15	DN 150	700	15.00	642	2192022	C	23,988.-	-	-
200/1-14/15	DN 200	800	15.00	770	2192025	C	27,189.-	-	-



 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
 Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.


Ordering information without differential pressure sensor									
Stratos GIGA-D	Nominal flange diameter	Port-to-port length	Rated power	Net weight, approx.	Art. no.		GRD group	Blind flange	
		<i>l</i> mm	<i>P</i> ₂ kW	<i>m</i> kg		 EUR			
40/1-25/1,6-R1	DN 40	280	1.60	81	2170282	C	7,637.-	11	I
40/1-32/2,2-R1	DN 40	280	2.20	81	2170281	C	8,719.-	11	I
40/1-39/3,0-R1	DN 40	280	3.00	81	2170280	C	9,510.-	11	I
40/1-45/3,8-R1	DN 40	280	3.80	84	2170279	C	10,649.-	11	I
40/1-51/4,2-R1	DN 40	280	4.20	84	2170278	C	11,486.-	11	I
40/4-63/11-R1	DN 40	440	11.00	275	2192051	C	16,124.-	5	C
50/1-14/0,8-R1	DN 50	280	0.80	84	2170286	C	5,877.-	11	I
50/1-20/1,3-R1	DN 50	280	1.30	84	2170285	C	7,071.-	11	I
50/1-26/1,9-R1	DN 50	280	1.90	84	2170284	C	8,421.-	11	I
50/1-33/2,6-R1	DN 50	280	2.60	84	2170283	C	9,234.-	11	I
50/1-38/2,8-R1	DN 50	280	2.80	82	2170289	C	9,574.-	11	I
50/1-44/3,2-R1	DN 50	280	3.80	85	2170288	C	11,049.-	11	I
50/1-50/4,2-R1	DN 50	280	4.50	85	2170287	C	11,683.-	11	I
50/4-53/11-R1	DN 50	440	11.00	278	2192052	C	16,455.-	5	C
50/4-62/15-R1	DN 50	440	15.00	298	2192053	C	19,086.-	5	C
65/1-8/0,6-R1	DN 65	340	0.60	93	2170292	C	6,237.-	11	I
65/1-12/1,1-R1	DN 65	340	1.10	93	2170291	C	7,405.-	11	I
65/1-17/1,7-R1	DN 65	340	1.70	93	2170290	C	8,196.-	11	I
65/1-21/2,3-R1	DN 65	340	2.30	89	2170294	C	8,806.-	11	I
65/1-27/3,0-R1	DN 65	340	3.00	89	2170293	C	10,087.-	11	I
65/1-34/3,1-R1	DN 65	340	3.10	88	2170297	C	10,661.-	11	I
65/1-38/3,8-R1	DN 65	340	3.80	92	2170296	C	11,333.-	11	I
65/1-42/4,8-R1	DN 65	340	4.80	108	2170295	C	11,819.-	11	I
65/3-40/11-R1	DN 65	430	11.00	271	2192054	C	16,529.-	5	B
65/3-49/15-R1	DN 65	475	15.00	311	2192055	C	19,263.-	6	C
65/4-57/18,5-R1	DN 65	475	18.50	320	2192056	C	23,086.-	6	C
65/5-65/22-R1	DN 65	475	22.00	332	2192057	C	26,457.-	6	C
80/1-16/2,3-R1	DN 80	360	1.90	98	2170299	C	9,507.-	11	J
80/1-21/3,5-R1	DN 80	360	3.00	98	2170298	C	10,878.-	11	J
80/1-32/4,1-R1	DN 80	360	3.80	126	2170301	C	11,411.-	11	K
80/1-37/5,3-R1	DN 80	360	5.00	126	2170300	C	11,837.-	11	K
80/2-31/11-R1	DN 80	440	11.00	282	2192058	C	17,362.-	5	B
80/3-40/15-R1	DN 80	440	15.00	302	2192059	C	19,350.-	5	B
80/3-48/18,5-R1	DN 80	500	18.50	335	2192060	C	23,318.-	6	C
80/4-53/22-R1	DN 80	500	22.00	345	2192061	C	26,712.-	6	C
100/1-13/2,3-R1	DN 100	450	2.30	133	2170303	C	10,351.-	11	L
100/1-17/3,7-R1	DN 100	450	3.70	133	2170302	C	11,551.-	11	L
100/1-27/4,8-R1	DN 100	450	4.80	138	2170305	C	11,939.-	11	K
100/1-33/6,0-R1	DN 100	450	6.00	147	2170304	C	12,933.-	11	K
100/2-22/11-R1	DN 100	500	11.00	317	2192062	C	16,978.-	6	B
100/2-24/11-R1	DN 100	550	11.00	463	2192066	C	18,770.-	6	B
100/2-26/15-R1	DN 100	500	15.00	337	2192063	C	19,931.-	6	B
100/2-29/18,5-R1	DN 100	500	18.50	346	2192064	C	22,840.-	6	B
100/3-33/22-R1	DN 100	500	22.00	358	2192065	C	26,184.-	6	B

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
 Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG3

Ordering information without differential pressure sensor									
Stratos GIGA-D	Nominal flange diameter	Port-to-port length	Rated power	Net weight, approx.	Art. no.		GRD group	Blind flange	
		<i>l</i> mm	<i>P</i> ₂ kW	<i>m</i> kg			EUR		
150/1-14/11-R1	DN 150	700	11.00	530	2192067	C	21,058.-	-	-
150/2-17/15-R1	DN 150	700	15.00	642	2192068	C	23,542.-	-	-
200/1-14/15-R1	DN 200	800	15.00	770	2192071	C	26,743.-	-	-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

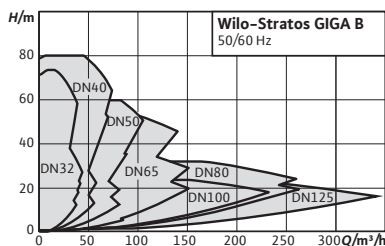

Accessories	Page
IR-Monitor/IR-Stick	243
Differential pressure detection	223
Pump control/Interface module	219
Pump control C Ce-HVAC	204
Pump control S Ce-HVAC	209
Supporting blocks	186

Series extension



Select 4 online

All information at www.wilo-select.com



Wilo-Stratos GIGA B

Construction

High-efficiency monobloc pump with EC motor and electronic power adjustment in glanded pump design Version as single-stage low-pressure centrifugal pump with flange connection and mechanical seal.

Application

The pumping of heating water (in accordance with VDI 2035), cold water and water-glycol mixtures without abrasive substances in heating, cold water and cooling systems.

Scope of delivery

- Pump
- Installation and operating instructions

Options

- Variant ...-R1 without differential pressure sensor

Your advantages

- Innovative, high-efficiency pump for maximum overall efficiency with principal dimensions in accordance with EN 733
- High-efficiency EC motor with efficiency class IE5 according to IEC 60034-30-2
- Optional interfaces for bus communication using plug-in IF modules

- ...-S1 variant with special mechanical seal (at additional charge)

General notes - ErP (Ecodesign) Directive

The minimum efficiency index, MEI, of the pump series is ≥ 0.7 . For detailed information on the MEI values of the individual pump types, see: Wilo Online Catalogue, available at www.wilo.com


Price group: PG3

Ordering information with differential pressure sensor

Type	Suction side		Pressure side		Rated power	Net weight, approx.	Art. no.	GRD group	
	RPS	RPD	P_2 kW	m kg				EUR	
Stratos GIGA B 32/1-13/0,8	DN 50	DN 32	0.80	38	2189106	C	3,970.-	11	
Stratos GIGA B 32/1-19/1,2	DN 50	DN 32	1.20	38	2189105	C	4,429.-	11	
Stratos GIGA B 32/1-25/1,6	DN 50	DN 32	1.60	39	2189102	C	4,793.-	11	
Stratos GIGA B 32/1-25/1,9	DN 50	DN 32	1.90	38	2189104	C	4,964.-	11	
Stratos GIGA B 32/1-32/2,3	DN 50	DN 32	2.30	39	2189101	C	5,200.-	11	


☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.


Price group: PG3



Ordering information with differential pressure sensor								
Type	Suction side	Pressure side	Rated power	Net weight, approx.	Art. no.		GRD group	
	RPS	RPD	P_2 kW	m kg			EUR	
Stratos GIGA B 32/1-32/2,6	DN 50	DN 32	2.60	38	2189103	C	5,442.-	11
Stratos GIGA B 32/1-35/3,0	DN 50	DN 32	3.00	39	2189109	C	5,997.-	11
Stratos GIGA B 32/1-38/3,0	DN 50	DN 32	3.00	39	2189100	C	5,892.-	11
Stratos GIGA B 32/1-41/3,8	DN 50	DN 32	3.80	40	2189108	C	6,961.-	11
Stratos GIGA B 32/1-45/3,8	DN 50	DN 32	3.80	40	2189099	C	6,804.-	11
Stratos GIGA B 32/1-48/4,5	DN 50	DN 32	4.50	40	2189107	C	7,936.-	11
Stratos GIGA B 32/1-51/4,5	DN 50	DN 32	4.50	40	2189098	C	7,308.-	11
Stratos GIGA B 32/5-74/11	DN 50	DN 32	11.00	133	2196173	K	9,182.-	5
Stratos GIGA B 40/1-33/3,0	DN 65	DN 40	3.00	41	2189117	C	6,088.-	11
Stratos GIGA B 40/1-38/3,8	DN 65	DN 40	3.80	42	2189116	C	7,008.-	11
Stratos GIGA B 40/1-44/4,5	DN 65	DN 40	4.50	51	2189115	C	7,959.-	11
Stratos GIGA B 40/4-51/11	DN 65	DN 40	11.00	136	2196174	K	9,487.-	5
Stratos GIGA B 40/4-58/15	DN 65	DN 40	15.00	147	2196175	K	11,503.-	5
Stratos GIGA B 40/5-70/18,5	DN 65	DN 50	18.50	163	2196176	K	13,946.-	6
Stratos GIGA B 40/6-80/22	DN 65	DN 50	22.00	170	2196177	K	15,829.-	6
Stratos GIGA B 50/1-8/0,6	DN 65	DN 50	0.60	41	2189112	C	4,227.-	11
Stratos GIGA B 50/1-12/1,2	DN 65	DN 50	1.20	41	2189111	C	4,559.-	11
Stratos GIGA B 50/1-17/1,9	DN 65	DN 50	1.90	41	2189110	C	5,120.-	11
Stratos GIGA B 50/1-21/2,3	DN 65	DN 50	2.30	43	2189114	C	5,740.-	11
Stratos GIGA B 50/1-27/3,0	DN 65	DN 50	3.00	43	2189113	C	6,299.-	11
Stratos GIGA B 50/1-32/3,8	DN 65	DN 50	3.80	56	2189121	C	7,071.-	11
Stratos GIGA B 50/1-37/5,0	DN 65	DN 50	5.00	56	2189120	C	7,992.-	11
Stratos GIGA B 50/3-42/11	DN 65	DN 50	11.00	121	2196178	K	9,730.-	5
Stratos GIGA B 50/4-49/15	DN 65	DN 50	15.00	148	2196179	K	11,830.-	6
Stratos GIGA B 50/4-55/18,5	DN 65	DN 50	18.50	153	2196180	K	14,073.-	6
Stratos GIGA B 50/4-60/22	DN 65	DN 50	22.00	159	2196181	K	16,074.-	6
Stratos GIGA B 65/1-18/1,9	DN 80	DN 65	1.90	50	2189119	C	5,938.-	11

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo


Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Ordering information with differential pressure sensor								
Type	Suction side	Pressure side	Rated power	Net weight, approx.	Art. no.			GRD group
	RPS	RPD	P_2 kW	m kg			EUR	
Stratos GIGA B 65/1-22/3,0	DN 80	DN 65	3.00	50	2189118	C	7,192.-	11
Stratos GIGA B 65/2-30/11	DN 80	DN 65	11.00	127	2196182	K	10,287.-	5
Stratos GIGA B 65/3-38/15	DN 80	DN 65	15.00	137	2196183	K	11,931.-	5
Stratos GIGA B 65/4-50/18,5	DN 80	DN 65	18.50	159	2196184	K	14,147.-	6
Stratos GIGA B 65/4-56/22	DN 80	DN 65	22.00	168	2196185	K	16,199.-	6
Stratos GIGA B 80/1-13/1,9	DN 100	DN 80	1.90	62	2189123	C	6,963.-	11
Stratos GIGA B 80/1-18/3,2	DN 100	DN 80	3.20	62	2189122	C	7,876.-	11
Stratos GIGA B 80/1-27/4,5	DN 100	DN 80	4.50	66	2189125	C	8,572.-	11
Stratos GIGA B 80/1-32/5,6	DN 100	DN 80	5.60	70	2189124	C	9,622.-	11
Stratos GIGA B 80/2-23/11	DN 100	DN 80	11.00	142	2196186	K	10,516.-	6
Stratos GIGA B 80/2-25/11	DN 100	DN 80	11.00	212	2196190	K	11,671.-	6
Stratos GIGA B 80/2-27/15	DN 100	DN 80	15.00	152	2196187	K	12,116.-	6
Stratos GIGA B 80/2-29/18,5	DN 100	DN 80	18.50	157	2196188	K	14,175.-	6
Stratos GIGA B 80/3-32/22	DN 100	DN 80	22.00	163	2196189	K	16,344.-	6
Stratos GIGA B 100/2-20/11	DN 125	DN 100	11.00	226	2196191	K	11,738.-	6
Stratos GIGA B 100/2-24/15	DN 125	DN 100	15.00	234	2196192	K	13,658.-	6
Stratos GIGA B 125/1-15/11	DN 150	DN 125	11.00	241	2196195	K	11,523.-	6
Stratos GIGA B 125/2-18/15	DN 150	DN 125	15.00	278	2196196	K	13,843.-	7

Ordering information without differential pressure sensor								
Type	Suction side	Pressure side	Rated power	Net weight, approx.	Art. no.			GRD group
	RPS	RPD	P_2 kW	m kg			EUR	
Stratos GIGA B 32/1-13/0,8-R1	DN 50	DN 32	0.80	38	2189134	C	3,524.-	11
Stratos GIGA B 32/1-19/1,2-R1	DN 50	DN 32	1.20	38	2189133	C	3,984.-	11
Stratos GIGA B 32/1-25/1,6-R1	DN 50	DN 32	1.60	39	2189130	C	4,347.-	11
Stratos GIGA B 32/1-25/1,9-R1	DN 50	DN 32	1.90	38	2189132	C	4,518.-	11
Stratos GIGA B 32/1-32/2,3-R1	DN 50	DN 32	2.30	39	2189129	C	4,754.-	11


 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.


Price group: PG3


Ordering information without differential pressure sensor							
Type	Suction side	Pressure side	Rated power	Net weight, approx.	Art. no.		GRD group
	RPS	RPD	P_2 kW	m kg		 EUR	
Stratos GIGA B 32/1-32/2,6-R1	DN 50	DN 32	2.60	38	2189131	C	4,996.- 11
Stratos GIGA B 32/1-35/3,0-R1	DN 50	DN 32	3.00	39	2189137	C	5,551.- 11
Stratos GIGA B 32/1-38/3,0-R1	DN 50	DN 32	3.00	39	2189128	C	5,446.- 11
Stratos GIGA B 32/1-41/3,8-R1	DN 50	DN 32	3.80	40	2189136	C	6,515.- 11
Stratos GIGA B 32/1-45/3,8-R1	DN 50	DN 32	3.80	40	2189127	C	6,358.- 11
Stratos GIGA B 32/1-48/4,5-R1	DN 50	DN 32	4.50	40	2189135	C	7,490.- 11
Stratos GIGA B 32/1-51/4,5-R1	DN 50	DN 32	4.50	40	2189126	C	6,862.- 11
Stratos GIGA B 32/5-74/11-R1	DN 50	DN 32	11.00	133	2196199	K	8,736.- 5
Stratos GIGA B 40/1-33/3,0-R1	DN 65	DN 40	3.00	41	2189145	C	5,642.- 11
Stratos GIGA B 40/1-38/3,8-R1	DN 65	DN 40	3.80	42	2189144	C	6,562.- 11
Stratos GIGA B 40/1-44/4,5-R1	DN 65	DN 40	4.50	51	2189143	C	7,513.- 11
Stratos GIGA B 40/4-51/11-R1	DN 65	DN 40	11.00	136	2196200	K	9,041.- 5
Stratos GIGA B 40/4-58/15-R1	DN 65	DN 40	15.00	147	2196201	K	11,056.- 5
Stratos GIGA B 40/5-70/18,5-R1	DN 65	DN 50	18.50	163	2196202	K	13,500.- 6
Stratos GIGA B 40/6-80/22-R1	DN 65	DN 50	22.00	170	2196203	K	15,383.- 6
Stratos GIGA B 50/1-8/0,6-R1	DN 65	DN 50	0.60	41	2189140	C	3,781.- 11
Stratos GIGA B 50/1-12/1,2-R1	DN 65	DN 50	1.20	41	2189139	C	4,114.- 11
Stratos GIGA B 50/1-17/1,9-R1	DN 65	DN 50	1.90	41	2189138	C	4,674.- 11
Stratos GIGA B 50/1-21/2,3-R1	DN 65	DN 50	2.30	43	2189142	C	5,294.- 11
Stratos GIGA B 50/1-27/3,0-R1	DN 65	DN 50	3.00	43	2189141	C	5,854.- 11
Stratos GIGA B 50/1-32/3,8-R1	DN 65	DN 50	3.80	56	2189149	C	6,625.- 11
Stratos GIGA B 50/1-37/5,0-R1	DN 65	DN 50	5.00	56	2189148	C	7,546.- 11
Stratos GIGA B 50/3-42/11-R1	DN 65	DN 50	11.00	121	2196204	K	9,284.- 5
Stratos GIGA B 50/4-49/15-R1	DN 65	DN 50	15.00	148	2196205	K	11,384.- 6
Stratos GIGA B 50/4-55/18,5-R1	DN 65	DN 50	18.50	153	2196206	K	13,628.- 6
Stratos GIGA B 50/4-60/22-R1	DN 65	DN 50	22.00	159	2196207	K	15,629.- 6
Stratos GIGA B 65/1-18/1,9-R1	DN 80	DN 65	1.90	50	2189147	C	5,492.- 11

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Ordering information without differential pressure sensor								
Type	Suction side	Pressure side	Rated power	Net weight, approx.	Art. no.		GRD group	
	RPS	RPD	P_2 kW	m kg			EUR	
Stratos GIGA B 65/1-22/3,0-R1	DN 80	DN 65	3.00	50	2189146	C	6,746.-	11
Stratos GIGA B 65/2-30/11-R1	DN 80	DN 65	11.00	127	2196208	K	9,841.-	5
Stratos GIGA B 65/3-38/15-R1	DN 80	DN 65	15.00	137	2196209	K	11,485.-	5
Stratos GIGA B 65/4-50/18,5-R1	DN 80	DN 65	18.50	159	2196210	K	13,701.-	6
Stratos GIGA B 65/4-56/22-R1	DN 80	DN 65	22.00	168	2196211	K	15,754.-	6
Stratos GIGA B 80/1-13/1,9-R1	DN 100	DN 80	1.90	62	2189151	C	6,517.-	11
Stratos GIGA B 80/1-18/3,2-R1	DN 100	DN 80	3.20	62	2189150	C	7,430.-	11
Stratos GIGA B 80/1-27/4,5-R1	DN 100	DN 80	4.50	66	2189153	C	8,126.-	11
Stratos GIGA B 80/1-32/5,6-R1	DN 100	DN 80	5.60	70	2189152	C	9,177.-	11
Stratos GIGA B 80/2-23/11-R1	DN 100	DN 80	11.00	142	2196212	K	10,070.-	6
Stratos GIGA B 80/2-25/11-R1	DN 100	DN 80	11.00	212	2203282	K	11,225.-	6
Stratos GIGA B 80/2-27/15-R1	DN 100	DN 80	15.00	152	2196213	K	11,670.-	6
Stratos GIGA B 80/2-29/18,5-R1	DN 100	DN 80	18.50	157	2196214	K	13,729.-	6
Stratos GIGA B 80/3-32/22-R1	DN 100	DN 80	22.00	163	2196215	K	15,898.-	6
Stratos GIGA B 100/2-20/11-R1	DN 125	DN 100	11.00	226	2203283	K	11,292.-	6
Stratos GIGA B 100/2-24/15-R1	DN 125	DN 100	15.00	234	2203284	K	13,212.-	6
Stratos GIGA B 100/2-29/18,5-R1	-	-	18.50	-	2203285	A	☎	-
Stratos GIGA B 100/3-33/22-R1	-	-	22.00	-	2203286	A	☎	-
Stratos GIGA B 125/1-15/11-R1	DN 150	DN 125	11.00	241	2203287	K	11,077.-	6
Stratos GIGA B 125/2-18/15-R1	DN 150	DN 125	15.00	278	2203288	K	13,397.-	7
Stratos GIGA B 125/2-22/18,5-R1	-	-	18.50	-	2203289	A	☎	-
Stratos GIGA B 125/2-25/22-R1	-	-	22.00	-	2203290	A	☎	-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

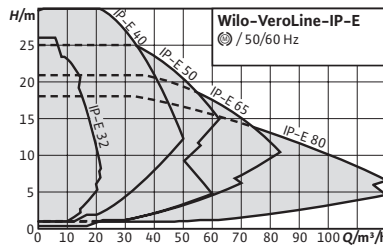

Accessories	Page
IR-Monitor/IR-Stick	243
Wall fixation/installation on a base	185
Differential pressure detection	223
Pump control/Interface module	219
Pump control CCE-HVAC	204
Pump control SCE-HVAC	209

IE4 Select 4 online
All information at www.wilo-select.com

Wilo-VeroLine-IP-E



Construction

Electronically controlled glanded single pump in in-line design with flange connection and automatic power adjustment

Application

Pumping of heating water (acc. to VDI 2035), cold water and water/glycol mixtures without abrasive substances in heating, cold water and cooling systems.

Scope of delivery

- Pump
- Installation and operating instructions

Options

- Variant ...-R1 without differential pressure sensor
- ...-H5 variant with PN16 housing (at additional charge)
- ...-S1/-S2 variant with special mechanical seal (at additional charge)

Your advantages

- Energy savings due to integrated electronic power adjustment
- Optional interfaces for bus communication using plug-in IF-Modules
- Simple operation with Green Button Technology and display
- Integrated dual pump management
- Integrated full motor protection (PTC thermistor sensor) with trip electronics

Notice

Motors with energy efficiency class IE4

General notes - ErP (Ecodesign) Directive



The minimum efficiency index, MEI, of the pump series is ≥ 0.4 . For detailed information on the MEI values of the individual pump types, see: Wilo Online Catalogue, available at www.wilo.com

Price group: PG3



Ordering information with differential pressure sensor							Additional charge			
Type	Nominal flange diameter	Port-to-port length	Rated power	Net weight, approx.	Art. no.		PN 16 housing (H5 version)	GRD group		
		10 mm	P_2 kW	m kg						
						EUR	EUR			
VeroLine-IP-E 32/95-0,55/2	DN 32	260	0.55	25	2158810	L	2,619.-	K	381.-	3
VeroLine-IP-E 32/105-0,75/2	DN 32	260	0.75	28	2158811	L	2,692.-	K	381.-	3
VeroLine-IP-E 32/125-1,1/2	DN 32	260	1.10	30	2158812	L	2,721.-	K	381.-	3

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG3

Ordering information with differential pressure sensor							Additional charge			
Type	Nominal flange diameter	Port-to-port length	Rated power	Net weight, approx.	Art. no.		PN 16 housing (H5 version)	GRD group		
		l_0 mm	P_2 kW	m kg		 EUR	 EUR			
VeroLine-IP-E 32/135-1,1/2	DN 32	260	1.10	30	2158813	L	2,770.-	K	381.-	3
VeroLine-IP-E 32/135-1,5/2	DN 32	260	1.50	33	2158814	L	3,220.-	A	381.-	3
VeroLine-IP-E 40/115-0,55/2	DN 40	250	0.55	25	2158815	L	2,710.-	K	388.-	3
VeroLine-IP-E 40/120-1,5/2	DN 40	320	1.50	36	2158816	L	3,714.-	A	388.-	3
VeroLine-IP-E 40/130-2,2/2	DN 40	320	2.20	37	2158817	L	4,074.-	A	388.-	3
VeroLine-IP-E 40/150-3/2	DN 40	320	3.00	44	2158818	L	4,494.-	A	388.-	3
VeroLine-IP-E 40/160-4/2	DN 40	320	4.00	52	2158819	L	4,925.-	A	388.-	3
VeroLine-IP-E 50/105-0,75/2	DN 50	280	0.75	30	2158820	L	2,872.-	K	410.-	3
VeroLine-IP-E 50/130-2,2/2	DN 50	340	2.20	40	2158821	L	4,103.-	A	410.-	3
VeroLine-IP-E 50/140-3/2	DN 50	340	3.00	48	2158822	L	4,405.-	A	410.-	3
VeroLine-IP-E 50/150-4/2	DN 50	340	4.00	55	2158823	L	5,295.-	A	410.-	3
VeroLine-IP-E 65/110-2,2/2	DN 65	340	2.20	41	2158825	L	4,157.-	A	429.-	3
VeroLine-IP-E 65/115-1,5/2	DN 65	340	1.50	40	2158824	L	3,708.-	A	429.-	3
VeroLine-IP-E 65/120-3/2	DN 65	340	3.00	50	2158826	L	4,569.-	A	429.-	3
VeroLine-IP-E 65/130-4/2	DN 65	340	4.00	58	2158827	L	5,246.-	A	429.-	3
VeroLine-IP-E 80/105-3/2	DN 80	360	3.00	54	2158829	L	4,593.-	A	447.-	3
VeroLine-IP-E 80/110-4/2	DN 80	360	4.00	62	2158830	L	5,090.-	A	447.-	3
VeroLine-IP-E 80/115-2,2/2	DN 80	360	2.20	47	2158828	L	4,405.-	A	447.-	3



Price group: PG3


Ordering information without differential pressure sensor							Additional charge			
Type	Nominal flange diameter	Port-to-port length	Rated power	Net weight, approx.	Art. no.		PN 16 housing (H5 version)	GRD group		
		l_0 mm	P_2 kW	m kg		 EUR	 EUR			
VeroLine-IP-E 32/95-0,55/2-R1	DN 32	260	0.55	25	2158873	L	2,173.-	K	381.-	3
VeroLine-IP-E 32/105-0,75/2-R1	DN 32	260	0.75	28	2158874	L	2,247.-	K	381.-	3
VeroLine-IP-E 32/125-1,1/2-R1	DN 32	260	1.10	30	2158875	L	2,276.-	K	381.-	3
VeroLine-IP-E 32/135-1,1/2-R1	DN 32	260	1.10	30	2158876	L	2,324.-	K	381.-	3
VeroLine-IP-E 32/135-1,5/2-R1	DN 32	260	1.50	33	2158877	L	2,774.-	A	381.-	3

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG3

Ordering information without differential pressure sensor							Additional charge			
Type	Nominal flange diameter	Port-to-port length	Rated power	Net weight, approx.	Art. no.		PN 16 housing (H5 version)	GRD group		
		l_0 mm	P_2 kW	m kg			EUR		EUR	
VeroLine-IP-E 40/115-0,55/2-R1	DN 40	250	0.55	25	2158878	L	2,264.-	K	388.-	3
VeroLine-IP-E 40/120-1,5/2-R1	DN 40	320	1.50	36	2158879	L	3,268.-	A	388.-	3
VeroLine-IP-E 40/130-2,2/2-R1	DN 40	320	2.20	37	2158880	L	3,629.-	A	388.-	3
VeroLine-IP-E 40/150-3/2-R1	DN 40	320	3.00	45	2158881	L	4,049.-	A	388.-	3
VeroLine-IP-E 40/160-4/2-R1	DN 40	320	4.00	52	2158882	L	4,479.-	A	388.-	3
VeroLine-IP-E 50/105-0,75/2-R1	DN 50	280	0.75	30	2158883	L	2,426.-	K	410.-	3
VeroLine-IP-E 50/130-2,2/2-R1	DN 50	340	2.20	40	2158884	L	3,657.-	A	410.-	3
VeroLine-IP-E 50/140-3/2-R1	DN 50	340	3.00	48	2158885	L	3,959.-	A	410.-	3
VeroLine-IP-E 50/150-4/2-R1	DN 50	340	4.00	55	2158886	L	4,849.-	A	410.-	3
VeroLine-IP-E 65/110-2,2/2-R1	DN 65	340	2.20	41	2158888	L	3,711.-	A	429.-	3
VeroLine-IP-E 65/115-1,5/2-R1	DN 65	340	1.50	40	2158887	L	3,262.-	A	429.-	3
VeroLine-IP-E 65/120-3/2-R1	DN 65	340	3.00	50	2158889	L	4,123.-	A	429.-	3
VeroLine-IP-E 65/130-4/2-R1	DN 65	340	4.00	58	2158890	L	4,800.-	A	429.-	3
VeroLine-IP-E 80/105-3/2-R1	DN 80	360	3.00	54	2158892	L	4,148.-	A	447.-	3
VeroLine-IP-E 80/110-4/2-R1	DN 80	360	4.00	62	2158893	L	4,644.-	A	447.-	3
VeroLine-IP-E 80/115-2,2/2-R1	DN 80	360	2.20	47	2158891	L	3,959.-	A	447.-	3

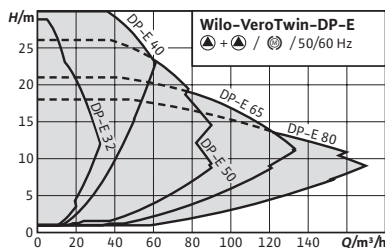

Accessories	Page
IR-Monitor/IR-Stick	243
Wall fixation/installation on a base	185
Differential pressure detection	223
Pump control/Interface module	219
Pump control C Ce-HVAC	204
Pump control S Ce-HVAC	209

IE4 Select 4 online
All information at www.wilo-select.com

Wilo-VeroTwin-DP-E



Construction

Electronically controlled glanded twin-head pump in in-line design with flange connection and automatic power adjustment

Application

Pumping of heating water (acc. to VDI 2035), cold water and water/glycol mixtures without abrasive substances in heating, cold water and cooling systems.

Scope of delivery

- Pump
- Installation and operating instructions

Options

- Variant ...-R1 without differential pressure sensor
- ...-H5 variant with PN16 housing (at additional charge)
- ...-S1/-S2 variant with special mechanical seals (at additional charge)

Your advantages

- Energy savings due to integrated electronic power adjustment
- Optional interfaces for bus communication using plug-in IF-Modules
- Simple operation with Green Button Technology and display
- Integrated dual pump management
- Integrated full motor protection (PTC thermistor sensor) with trip electronics

Notice

Motors with energy efficiency class IE4

General notes - ErP (Ecodesign) Directive



The minimum efficiency index, MEI, of the pump series is ≥0.4. For detailed information on the MEI values of the individual pump types, see: Wilo Online Catalogue, available at www.wilo.com

Price group: PG3



Ordering information with differential pressure sensor							Additional charge			
Type	Nominal flange diameter	Port-to-port length	Rated power	Net weight, approx.	Art. no.			PN 16 housing (H5 version)	GRD group	Blind flange
		<i>l₀</i> mm	<i>P₂</i> kW	<i>m</i> kg						
							EUR		EUR	
VeroTwin-DP-E 32/95-0,55/2	DN 32	260	0.55	47	2158936	L	5,009.-	K	381.-	3 F
VeroTwin-DP-E 32/105-0,75/2	DN 32	260	0.75	53	2158937	L	5,153.-	K	381.-	3 F
VeroTwin-DP-E 32/125-1,1/2	DN 32	260	1.10	56	2158938	L	5,195.-	K	381.-	3 F

= ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG3



Ordering information with differential pressure sensor						Additional charge					
Type	Nominal flange diameter	Port-to-port length	Rated power	Net weight, approx.	Art. no.			PN 16 housing (H5 version)	GRD group	Blind flange	
		l_0 mm	P_2 kW	m kg			EUR		EUR		
VeroTwin-DP-E 32/135-1,1/2	DN 32	260	1.10	56	2158939	L	5,294.-	K	381.-	3	F
VeroTwin-DP-E 32/135-1,5/2	DN 32	260	1.50	62	2158940	L	6,160.-	K	381.-	3	F
VeroTwin-DP-E 40/115-0,55/2	DN 40	250	0.55	50	2158941	L	5,175.-	K	388.-	3	G
VeroTwin-DP-E 40/120-1,5/2	DN 40	320	1.50	71	2158942	L	7,107.-	K	388.-	3	F
VeroTwin-DP-E 40/130-2,2/2	DN 40	320	2.20	72	2158943	L	7,796.-	K	388.-	3	F
VeroTwin-DP-E 40/150-3/2	DN 40	320	3.00	88	2158944	L	8,597.-	K	388.-	3	F
VeroTwin-DP-E 40/160-4/2	DN 40	320	4.00	103	2158945	L	9,419.-	K	388.-	3	F
VeroTwin-DP-E 50/105-0,75/2	DN 50	280	0.75	56	2158946	L	5,495.-	K	410.-	3	G
VeroTwin-DP-E 50/130-2,2/2	DN 50	340	2.20	74	2158947	L	7,849.-	K	410.-	3	F
VeroTwin-DP-E 50/140-3/2	DN 50	340	3.00	89	2158948	L	8,428.-	K	410.-	3	F
VeroTwin-DP-E 50/150-4/2	DN 50	340	4.00	105	2158949	L	10,129.-	K	410.-	3	F
VeroTwin-DP-E 65/110-2,2/2	DN 65	340	2.20	81	2158951	L	7,937.-	K	429.-	3	F
VeroTwin-DP-E 65/115-1,5/2	DN 65	340	1.50	78	2158950	L	7,094.-	K	429.-	3	H
VeroTwin-DP-E 65/120-3/2	DN 65	340	3.00	101	2158952	L	8,740.-	K	429.-	3	F
VeroTwin-DP-E 65/130-4/2	DN 65	340	4.00	112	2158953	L	10,036.-	K	429.-	3	F
VeroTwin-DP-E 80/105-3/2	DN 80	360	3.00	100	2158955	L	8,783.-	K	447.-	3	F
VeroTwin-DP-E 80/110-4/2	DN 80	360	4.00	116	2158956	L	9,739.-	K	447.-	3	F
VeroTwin-DP-E 80/115-2,2/2	DN 80	360	2.20	81	2158954	L	8,428.-	K	447.-	3	H



Price group: PG3


Ordering information without differential pressure sensor						Additional charge					
Type	Nominal flange diameter	Port-to-port length	Rated power	Net weight, approx.	Art. no.			PN 16 housing (H5 version)	GRD group	Blind flange	
		l_0 mm	P_2 kW	m kg			EUR		EUR		
VeroTwin-DP-E 32/95-0,55/2-R1	DN 32	260	0.55	47	2158999	C	4,564.-	K	381.-	3	F
VeroTwin-DP-E 32/105-0,75/2-R1	DN 32	260	0.75	53	2159000	C	4,707.-	K	381.-	3	F
VeroTwin-DP-E 32/125-1,1/2-R1	DN 32	260	1.10	56	2159001	C	4,749.-	K	381.-	3	F
VeroTwin-DP-E 32/135-1,1/2-R1	DN 32	260	1.10	56	2159002	C	4,848.-	K	381.-	3	F
VeroTwin-DP-E 32/135-1,5/2-R1	DN 32	260	1.50	62	2159003	C	5,714.-	K	381.-	3	F

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Ordering information without differential pressure sensor								Additional charge			
Type	Nominal flange diameter	Port-to-port length	Rated power	Net weight, approx.	Art. no.		EUR	PN 16 housing (H5 version)	GRD group	Blind flange	
		l_0 mm	P_2 kW	m kg			EUR		EUR		
VeroTwin-DP-E 40/115-0,55/2-R1	DN 40	250	0.55	50	2159004	C	4,730.-	K	388.-	3	G
VeroTwin-DP-E 40/120-1,5/2-R1	DN 40	320	1.50	71	2159005	C	6,662.-	K	388.-	3	F
VeroTwin-DP-E 40/130-2,2/2-R1	DN 40	320	2.20	72	2159006	C	7,350.-	K	388.-	3	F
VeroTwin-DP-E 40/150-3/2-R1	DN 40	320	3.00	88	2159007	C	8,151.-	K	388.-	3	F
VeroTwin-DP-E 40/160-4/2-R1	DN 40	320	4.00	103	2159008	C	8,973.-	K	388.-	3	F
VeroTwin-DP-E 50/105-0,75/2-R1	DN 50	280	0.75	56	2159009	C	5,050.-	K	410.-	3	G
VeroTwin-DP-E 50/130-2,2/2-R1	DN 50	340	2.20	74	2159010	C	7,404.-	K	410.-	3	F
VeroTwin-DP-E 50/140-3/2-R1	DN 50	340	3.00	89	2159011	C	7,983.-	K	410.-	3	F
VeroTwin-DP-E 50/150-4/2-R1	DN 50	340	4.00	105	2159012	C	9,683.-	K	410.-	3	F
VeroTwin-DP-E 65/110-2,2/2-R1	DN 65	340	2.20	81	2159014	C	7,491.-	K	429.-	3	F
VeroTwin-DP-E 65/115-1,5/2-R1	DN 65	340	1.50	78	2159013	C	6,648.-	K	429.-	3	H
VeroTwin-DP-E 65/120-3/2-R1	DN 65	340	3.00	101	2159015	C	8,294.-	K	429.-	3	F
VeroTwin-DP-E 65/130-4/2-R1	DN 65	340	4.00	112	2159016	C	9,590.-	K	429.-	3	F
VeroTwin-DP-E 80/105-3/2-R1	DN 80	360	3.00	100	2159018	C	8,338.-	K	447.-	3	F
VeroTwin-DP-E 80/110-4/2-R1	DN 80	360	4.00	116	2159019	C	9,293.-	K	447.-	3	F
VeroTwin-DP-E 80/115-2,2/2-R1	DN 80	360	2.20	81	2159017	C	7,983.-	K	447.-	3	H

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
 Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

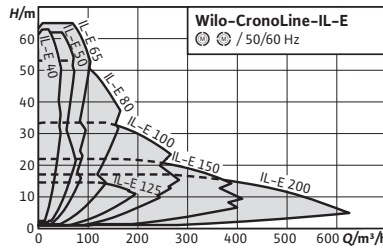

Accessories	Page
IR-Monitor/IR-Stick	243
Wall fixation/installation on a base	185
Differential pressure detection	223
Pump control/Interface module	219
Pump control CCe-HVAC	204
Pump control SCe-HVAC	209

Series modification

IE4 **Select 4 online**
All information at www.wilo-select.com

Wilo-CronoLine-IL-E



Construction

Electronically controlled glanded single pump in in-line design with flange connection and automatic power adjustment

Application

Pumping of heating water (acc. to VDI 2035), cold water and water/glycol mixtures without abrasive substances in heating, cold water and cooling systems.

Scope of delivery

- Pump
- Installation and operating instructions

Options

- Variant ...-R1 without differential pressure sensor
- Variant ...-L1 with bronze impeller (at additional charge)
- Variant ...-H1 with housing made of spheroidal cast iron (at additional charge)

Your advantages

- Energy savings due to integrated electronic power adjustment
- Optional interfaces for bus communication using plug-in IF-Modules
- Simple operation with Green Button Technology and display
- Integrated dual pump management
- Integrated full motor protection (PTC thermistor sensor) with trip electronics

Notice

Motors with energy efficiency class IE4





General notes - ErP (Ecodesign) Directive



The minimum efficiency index, MEI, of the pump series is ≥ 0.4 . For detailed information on the MEI values of the individual pump types, see: Wilo Online Catalogue, available at www.wilo.com

Price group: PG3

Ordering information (2-pole types) with differential pressure sensor						Additional charge						
Type	Nominal flange diameter	Port-to-port length	Rated power	Net weight, approx.	Art. no.	Red brass impeller (L1 version)	Spheroidal cast iron housing (H1 version)	GRD group				
		<i>l</i> mm	<i>P₂</i> kW	<i>m</i> kg								
						EUR	EUR	EUR				
CronoLine-IL-E 40/170-5,5/2	DN 40	340	5.50	95	2159314	L	5,094.-	A	349.-	A	557.-	4
CronoLine-IL-E 40/200-7,5/2	DN 40	440	7.50	110	2159315	L	5,722.-	A	381.-	A	557.-	5

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Ordering information (2-pole types) with differential pressure sensor							Additional charge					
Type	Nominal flange diameter	Port-to-port length	Rated power	Net weight, approx.	Art. no.		Red brass impeller (L1 version)		Spheroidal cast iron housing (H1 version)		GRD group	
		l_0 mm	P_2 kW	m kg								
						 EUR	 EUR	 EUR	 EUR			
CronoLine-IL-E 40/220-11/2	DN 40	440	11.00	196	2153668	L	7,725.-	K	381.-	K	557.-	5
CronoLine-IL-E 50/160-5,5/2	DN 50	340	5.50	99	2159316	L	5,415.-	A	388.-	A	737.-	5
CronoLine-IL-E 50/170-7,5/2	DN 50	340	7.50	101	2159317	L	5,978.-	A	388.-	A	737.-	5
CronoLine-IL-E 50/180-7,5/2	DN 50	440	7.50	114	2159318	C	5,978.-	A	425.-	A	737.-	5
CronoLine-IL-E 50/210-11/2	DN 50	440	11.00	200	2153669	L	7,877.-	K	425.-	K	988.-	5
CronoLine-IL-E 50/220-15/2	DN 50	440	15.00	208	2153670	C	9,107.-	K	425.-	K	988.-	5
CronoLine-IL-E 65/150-5,5/2	DN 65	430	5.50	105	2159319	L	5,353.-	A	619.-	A	712.-	5
CronoLine-IL-E 65/160-7,5/2	DN 65	430	7.50	107	2159320	L	5,962.-	A	619.-	A	712.-	5
CronoLine-IL-E 65/170-11/2	DN 65	430	11.00	186	2153671	L	7,912.-	K	619.-	K	712.-	5
CronoLine-IL-E 65/200-15/2	DN 65	475	15.00	214	2153672	L	9,187.-	K	668.-	K	831.-	6
CronoLine-IL-E 65/210-18,5/2	DN 65	475	18.50	258	2153673	L	10,697.-	K	668.-	K	831.-	6
CronoLine-IL-E 65/220-22/2	DN 65	475	22.00	267	2153674	C	12,229.-	K	668.-	K	831.-	6
CronoLine-IL-E 80/130-5,5/2	DN 80	400	5.50	104	2159321	L	5,653.-	A	619.-	A	576.-	5
CronoLine-IL-E 80/140-7,5/2	DN 80	400	7.50	106	2159322	L	6,258.-	A	619.-	A	576.-	5
CronoLine-IL-E 80/150-7,5/2	DN 80	440	7.50	114	2159323	L	6,258.-	A	640.-	A	779.-	5
CronoLine-IL-E 80/160-11/2	DN 80	440	11.00	194	2153675	L	8,095.-	K	640.-	K	779.-	5
CronoLine-IL-E 80/170-15/2	DN 80	440	15.00	202	2153676	L	9,229.-	K	640.-	K	779.-	5
CronoLine-IL-E 80/190-18,5/2	DN 80	500	18.50	263	2153677	L	10,802.-	K	701.-	K	1,368.-	6
CronoLine-IL-E 80/200-22/2	DN 80	500	22.00	273	2153678	L	12,344.-	K	701.-	K	1,368.-	6
CronoLine-IL-E 100/145-11/2	DN 100	500	11.00	212	2153679	L	8,124.-	K	721.-	K	1,138.-	6
CronoLine-IL-E 100/150-15/2	DN 100	500	15.00	220	2153680	L	9,263.-	K	721.-	K	1,138.-	6
CronoLine-IL-E 100/160-18,5/2	DN 100	500	18.50	262	2153681	L	10,858.-	K	721.-	K	1,138.-	6
CronoLine-IL-E 100/165-22/2	DN 100	500	22.00	272	2153682	L	12,414.-	K	721.-	K	1,138.-	6

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG3

Ordering information (2-pole types) without differential pressure sensor							Additional charge					
Type	Nominal flange diameter	Port-to-port length	Rated power	Net weight, approx.	Art. no.		Red brass impeller (L1 version)		Spheroidal cast iron housing (H1 version)		GRD group	
		<i>l</i> mm	<i>P</i> ₂ kW	<i>m</i> kg		🚚	EUR	🚚	EUR	🚚	EUR	
CronoLine-IL-E 40/170-5,5/2-R1	DN 40	340	5.50	95	2159362	L	4,648.-	A	349.-	A	557.-	4
CronoLine-IL-E 40/200-7,5/2-R1	DN 40	440	7.50	110	2159363	C	5,277.-	A	381.-	A	557.-	5
CronoLine-IL-E 40/220-11/2-R1	DN 40	440	11.00	197	2153737	C	7,279.-	K	381.-	K	557.-	5
CronoLine-IL-E 50/160-5,5/2-R1	DN 50	340	5.50	99	2159364	L	4,969.-	A	388.-	A	737.-	5
CronoLine-IL-E 50/170-7,5/2-R1	DN 50	340	7.50	101	2159365	C	5,533.-	A	388.-	A	737.-	5
CronoLine-IL-E 50/180-7,5/2-R1	DN 50	440	7.50	114	2159366	C	5,533.-	A	425.-	A	737.-	5
CronoLine-IL-E 50/210-11/2-R1	DN 50	440	11.00	209	2153738	C	7,431.-	K	425.-	K	988.-	5
CronoLine-IL-E 50/220-15/2-R1	DN 50	440	15.00	209	2153739	C	8,662.-	K	425.-	K	988.-	5
CronoLine-IL-E 65/150-5,5/2-R1	DN 65	430	5.50	105	2159367	L	4,907.-	A	619.-	A	712.-	5
CronoLine-IL-E 65/160-7,5/2-R1	DN 65	430	7.50	107	2159368	L	5,516.-	A	619.-	A	712.-	5
CronoLine-IL-E 65/170-11/2-R1	DN 65	430	11.00	187	2153740	C	7,467.-	K	619.-	K	712.-	5
CronoLine-IL-E 65/200-15/2-R1	DN 65	475	15.00	215	2153741	C	8,741.-	K	668.-	K	831.-	6
CronoLine-IL-E 65/210-18,5/2-R1	DN 65	475	18.50	258	2153742	C	10,251.-	K	668.-	K	831.-	6
CronoLine-IL-E 65/220-22/2-R1	DN 65	475	22.00	267	2153743	C	11,783.-	K	668.-	K	831.-	6
CronoLine-IL-E 80/130-5,5/2-R1	DN 80	400	5.50	104	2159369	L	5,207.-	A	619.-	A	576.-	5
CronoLine-IL-E 80/140-7,5/2-R1	DN 80	400	7.50	106	2159370	L	5,812.-	A	619.-	A	576.-	5
CronoLine-IL-E 80/150-7,5/2-R1	DN 80	440	7.50	114	2159371	C	5,812.-	A	640.-	A	779.-	5
CronoLine-IL-E 80/160-11/2-R1	DN 80	440	11.00	194	2153744	L	7,649.-	K	640.-	K	779.-	5
CronoLine-IL-E 80/170-15/2-R1	DN 80	440	15.00	202	2153745	C	8,783.-	K	640.-	K	779.-	5
CronoLine-IL-E 80/190-18,5/2-R1	DN 80	500	18.50	263	2153746	C	10,356.-	K	701.-	K	1,368.-	6
CronoLine-IL-E 80/200-22/2-R1	DN 80	500	22.00	273	2153747	C	11,898.-	K	701.-	K	1,368.-	6
CronoLine-IL-E 100/145-11/2-R1	DN 100	500	11.00	220	2153748	L	7,678.-	K	721.-	K	1,138.-	6
CronoLine-IL-E 100/150-15/2-R1	DN 100	500	15.00	262	2153749	L	8,817.-	K	721.-	K	1,138.-	6
CronoLine-IL-E 100/160-18,5/2-R1	DN 100	500	18.50	272	2153750	C	10,412.-	K	721.-	K	1,138.-	6
CronoLine-IL-E 100/165-22/2-R1	DN 100	500	22.00	276	2153751	L	11,968.-	K	721.-	K	1,138.-	6

🚚 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, 📞 = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG3

































Ordering information (4-pole types) with differential pressure sensor							Additional charge					
Type	Nominal flange diameter	Port-to-port length	Rated power	Net weight, approx.	Art. no.		Red brass impeller (L1 version)		Spheroidal cast iron housing (H1 version)	GRD group		
		l_0 mm	P_2 kW	m kg		EUR	EUR	EUR	EUR			
CronoLine-IL-E 100/220-5,5/4	DN 100	550	5.50	159	2159324	L	6,022.-	K	795.-	K	1,354.-	5
CronoLine-IL-E 100/250-7,5/4	DN 100	550	7.50	179	2159325	L	7,083.-	K	817.-	A	☺	5
CronoLine-IL-E 100/270-11/4	DN 100	550	11.00	276	2153683	L	8,958.-	K	817.-	A	☺	6
CronoLine-IL-E 125/210-5,5/4	DN 125	620	5.50	173	2159326	L	6,564.-	K	805.-	A	☺	5
CronoLine-IL-E 125/220-7,5/4	DN 125	620	7.50	183	2159327	L	7,631.-	K	805.-	A	☺	5
CronoLine-IL-E 150/190-5,5/4	DN 150	700	5.50	205	2159328	L	7,102.-	K	879.-	A	☺	5
CronoLine-IL-E 150/200-7,5/4	DN 150	700	7.50	213	2159329	L	8,189.-	K	879.-	A	☺	5
CronoLine-IL-E 150/220-11/4	DN 150	700	11.00	309	2153684	L	10,026.-	K	879.-	A	☺	6
CronoLine-IL-E 150/250-15/4	DN 150	700	15.00	383	2153685	L	11,183.-	K	961.-	A	☺	7
CronoLine-IL-E 150/260-18,5/4	DN 150	700	18.50	438	2153686	L	12,701.-	K	961.-	A	☺	7
CronoLine-IL-E 150/270-22/4	DN 150	700	22.00	452	2153687	L	14,244.-	K	961.-	A	☺	7
CronoLine-IL-E 200/240-15/4	DN 200	800	15.00	440	2153688	C	12,359.-	K	1,058.-	A	☺	7
CronoLine-IL-E 200/250-18,5/4	DN 200	800	18.50	500	2153689	K	13,838.-	K	1,058.-	A	☺	7
CronoLine-IL-E 200/260-22/4	DN 200	800	22.00	514	2153690	C	15,455.-	K	1,058.-	A	☺	7


Price group: PG3

Ordering information (4-pole types) without differential pressure sensor							Additional charge					
Type	Nominal flange diameter	Port-to-port length	Rated power	Net weight, approx.	Art. no.		Red brass impeller (L1 version)		Spheroidal cast iron housing (H1 version)	GRD group		
		l_0 mm	P_2 kW	m kg		EUR	EUR	EUR	EUR			
CronoLine-IL-E 100/220-5,5/4-R1	DN 100	550	5.50	159	2159372	C	5,576.-	K	795.-	K	1,354.-	5
CronoLine-IL-E 100/250-7,5/4-R1	DN 100	550	7.50	179	2159373	C	6,637.-	K	817.-	A	☺	5
CronoLine-IL-E 100/270-11/4-R1	DN 100	550	11.00	212	2153752	C	8,512.-	K	817.-	A	☺	6
CronoLine-IL-E 125/210-5,5/4-R1	DN 125	620	5.50	173	2159374	C	6,118.-	K	805.-	A	☺	5
CronoLine-IL-E 125/220-7,5/4-R1	DN 125	620	7.50	183	2159375	C	7,185.-	K	805.-	A	☺	5
CronoLine-IL-E 150/190-5,5/4-R1	DN 150	700	5.50	205	2159376	C	6,656.-	K	879.-	A	☺	5
CronoLine-IL-E 150/200-7,5/4-R1	DN 150	700	7.50	213	2159377	C	7,743.-	A	879.-	A	☺	5

☺ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☺ = please contact Wilo
 Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG3

Ordering information (4-pole types) without differential pressure sensor							Additional charge					
Type	Nomi- nal flange diam- eter	Port- to- port length	Rated power	Net weight, ap- prox.	Art. no.		Red brass impeller (L1 version)		Spheroidal cast iron housing (H1 version)		GRD group	
		l_0 mm	P_2 kW	m kg		 EUR	 EUR	 EUR	 EUR			
CronoLine-IL-E 150/220-11/4-R1	DN 150	700	11.00	309	2153753	 C 9,580.-	 K 879.-	 A		6		
CronoLine-IL-E 150/250-15/4-R1	DN 150	700	15.00	383	2153754	 C 10,737.-	 K 961.-	 A		7		
CronoLine-IL-E 150/260-18,5/4-R1	DN 150	700	18.50	438	2153755	 C 12,255.-	 K 961.-	 A		7		
CronoLine-IL-E 150/270-22/4-R1	DN 150	700	22.00	452	2153756	 C 13,798.-	 K 961.-	 A		7		
CronoLine-IL-E 200/240-15/4-R1	DN 200	800	15.00	440	2153757	 C 11,913.-	 K 1,058.-	 A		7		
CronoLine-IL-E 200/250-18,5/4-R1	DN 200	800	18.50	500	2153758	 K 13,392.-	 K 1,058.-	 A		7		
CronoLine-IL-E 200/260-22/4-R1	DN 200	800	22.00	514	2153759	 C 15,009.-	 K 1,058.-	 A		7		

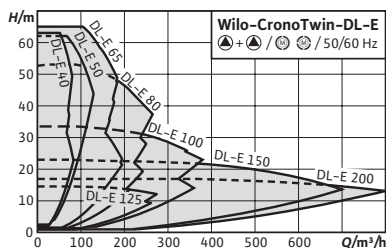

Accessories	Page
IR-Monitor/IR-Stick	243
Wall fixation/installation on a base	185
Differential pressure detection	223
Pump control/Interface module	219
Pump control CCe-HVAC	204
Pump control SCe-HVAC	209

Series modification

IE4 Select 4 online
All information at www.wilo-select.com

Wilo-CronoTwin-DL-E



Construction

Electronically controlled glanded twin-head pump in in-line design with flange connection and automatic power adjustment

Application

Pumping of heating water (acc. to VDI 2035), cold water and water/glycol mixtures without abrasive substances in heating, cold water and cooling systems.

Scope of delivery

- Pump
- Installation and operating instructions

Options

- Variant ...-R1 without differential pressure sensor
- ...-L1 variant with bronze impeller (at additional charge)
- ...-H1 variant with housing made of spheroidal cast iron (at additional charge)
- ...-S1/-S2 variant with special mechanical seal (at additional charge)

Your advantages

- Energy savings due to integrated electronic power adjustment
- Simple operation with Green Button Technology and display
- Various operating modes: main/standby operation and parallel operation
- Configurable fault response tailored to HVAC applications
- Integrated full motor protection (PTC thermistor sensor) with trip electronics

Notice

Motors with energy efficiency class IE4

General notes - ErP (Ecodesign) Directive

The minimum efficiency index, MEI, of the pump series is ≥0.4. For detailed information on the MEI values of the individual pump types, see: Wilo Online Catalogue, available at www.wilo.com



Ordering information (2-pole types) with differential pressure sensor								Price group: PG3				
Type	Nominal flange diameter	Port-to-port length	Rated power	Net weight, approx.	Art. no.			Red brass impeller (L1 version)	GRD group	Blind flange		
		<i>l</i> mm	<i>P</i> ₂ kW	<i>m</i> kg								
							EUR		EUR			
CronoTwin-DL-E 40/170-5,5/2	DN 40	340	5.50	189	2159410	L	10,003.-	A	698.-	4 B		
CronoTwin-DL-E 40/200-7,5/2	DN 40	440	7.50	216	2159411	C	11,230.-	A	762.-	5 C		

= ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG3

Ordering information (2-pole types) with differential pressure sensor						Additional charge					
Type	Nominal flange diameter	Port-to-port length	Rated power	Net weight, approx.	Art. no.		EUR		EUR	GRD group	Blind flange
		l_0 mm	P_2 kW	m kg							
CronoTwin-DL-E 40/220-11/2	DN 40	440	11.00	388	2153806	C	15,063.-	K	762.-	5	C
CronoTwin-DL-E 50/160-5,5/2	DN 50	340	5.50	193	2159412	L	10,903.-	A	776.-	5	B
CronoTwin-DL-E 50/170-7,5/2	DN 50	340	7.50	197	2159413	L	11,739.-	A	776.-	5	B
CronoTwin-DL-E 50/180-7,5/2	DN 50	440	7.50	225	2159414	C	11,731.-	A	850.-	5	C
CronoTwin-DL-E 50/210-11/2	DN 50	440	11.00	392	2153807	C	15,364.-	K	850.-	5	C
CronoTwin-DL-E 50/220-15/2	DN 50	440	15.00	410	2153808	C	17,756.-	K	850.-	5	C
CronoTwin-DL-E 65/150-5,5/2	DN 65	430	5.50	211	2159415	L	10,516.-	A	1,238.-	5	B
CronoTwin-DL-E 65/160-7,5/2	DN 65	430	7.50	215	2159416	L	11,701.-	A	1,238.-	5	B
CronoTwin-DL-E 65/170-11/2	DN 65	430	11.00	376	2153809	C	15,431.-	K	1,238.-	5	B
CronoTwin-DL-E 65/200-15/2	DN 65	475	15.00	422	2153810	C	17,918.-	K	1,335.-	6	C
CronoTwin-DL-E 65/210-18,5/2	DN 65	475	18.50	507	2153811	C	21,392.-	K	1,335.-	6	C
CronoTwin-DL-E 65/220-22/2	DN 65	475	22.00	527	2153812	C	24,457.-	K	1,335.-	6	C
CronoTwin-DL-E 80/130-5,5/2	DN 80	400	5.50	205	2159417	L	11,101.-	A	1,238.-	5	A
CronoTwin-DL-E 80/140-7,5/2	DN 80	400	7.50	210	2159418	L	12,291.-	A	1,238.-	5	A
CronoTwin-DL-E 80/150-7,5/2	DN 80	440	7.50	227	2159419	C	12,600.-	A	1,280.-	5	B
CronoTwin-DL-E 80/160-11/2	DN 80	440	11.00	386	2153813	L	16,189.-	K	1,280.-	5	B
CronoTwin-DL-E 80/170-15/2	DN 80	440	15.00	402	2153814	C	17,996.-	K	1,280.-	5	B
CronoTwin-DL-E 80/190-18,5/2	DN 80	500	18.50	522	2153815	C	21,604.-	K	1,401.-	6	C
CronoTwin-DL-E 80/200-22/2	DN 80	500	22.00	548	2153816	C	24,689.-	K	1,401.-	6	C
CronoTwin-DL-E 100/145-11/2	DN 100	500	11.00	428	2153817	L	15,840.-	K	1,443.-	6	B
CronoTwin-DL-E 100/150-15/2	DN 100	500	15.00	444	2153818	L	18,524.-	K	1,443.-	6	B
CronoTwin-DL-E 100/160-18,5/2	DN 100	500	18.50	530	2153819	C	21,169.-	K	1,443.-	6	B
CronoTwin-DL-E 100/165-22/2	DN 100	500	22.00	549	2153820	C	24,209.-	K	1,443.-	6	B

= ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, = please contact Wilo
 Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Ordering information (2-pole types) without differential pressure sensor								Additional charge			
Type	Nominal flange diameter	Port-to-port length	Rated power	Net weight, approx.	Art. no.		EUR	Red brass impeller (L1 version)	EUR	GRD group	Blind flange
		<i>l</i> mm	<i>P</i> ₂ kW	<i>m</i> kg							
CronoTwin-DL-E 40/170-5,5/2-R1	DN 40	340	5.50	189	2159458	C	9,557.-	A	698.-	4	B
CronoTwin-DL-E 40/200-7,5/2-R1	DN 40	440	7.50	216	2159459	C	10,784.-	A	762.-	5	C
CronoTwin-DL-E 40/220-11/2-R1	DN 40	440	11.00	388	2153875	C	14,617.-	K	762.-	5	C
CronoTwin-DL-E 50/160-5,5/2-R1	DN 50	340	5.50	193	2159460	C	10,457.-	A	776.-	5	B
CronoTwin-DL-E 50/170-7,5/2-R1	DN 50	340	7.50	197	2159461	C	11,293.-	A	776.-	5	B
CronoTwin-DL-E 50/180-7,5/2-R1	DN 50	440	7.50	225	2159462	C	11,285.-	A	850.-	5	C
CronoTwin-DL-E 50/210-11/2-R1	DN 50	440	11.00	393	2153876	C	14,919.-	K	850.-	5	C
CronoTwin-DL-E 50/220-15/2-R1	DN 50	440	15.00	410	2153877	C	17,310.-	K	850.-	5	C
CronoTwin-DL-E 65/150-5,5/2-R1	DN 65	430	5.50	211	2159463	C	10,070.-	A	1,238.-	5	B
CronoTwin-DL-E 65/160-7,5/2-R1	DN 65	430	7.50	215	2159464	C	11,255.-	A	1,238.-	5	B
CronoTwin-DL-E 65/170-11/2-R1	DN 65	430	11.00	377	2153878	C	14,986.-	K	1,238.-	5	B
CronoTwin-DL-E 65/200-15/2-R1	DN 65	475	15.00	422	2153879	C	17,472.-	K	1,335.-	6	C
CronoTwin-DL-E 65/210-18,5/2-R1	DN 65	475	18.50	507	2153880	C	20,947.-	K	1,335.-	6	C
CronoTwin-DL-E 65/220-22/2-R1	DN 65	475	22.00	527	2153881	C	24,012.-	K	1,335.-	6	C
CronoTwin-DL-E 80/130-5,5/2-R1	DN 80	400	5.50	205	2159465	C	10,655.-	A	1,238.-	5	A
CronoTwin-DL-E 80/140-7,5/2-R1	DN 80	400	7.50	210	2159466	C	11,845.-	A	1,238.-	5	A
CronoTwin-DL-E 80/150-7,5/2-R1	DN 80	440	7.50	227	2159467	C	12,154.-	A	1,280.-	5	B
CronoTwin-DL-E 80/160-11/2-R1	DN 80	440	11.00	386	2153882	C	15,743.-	K	1,280.-	5	B
CronoTwin-DL-E 80/170-15/2-R1	DN 80	440	15.00	402	2153883	C	17,550.-	K	1,280.-	5	B
CronoTwin-DL-E 80/190-18,5/2-R1	DN 80	500	18.50	522	2153884	C	21,158.-	K	1,401.-	6	C
CronoTwin-DL-E 80/200-22/2-R1	DN 80	500	22.00	548	2153885	C	24,243.-	K	1,401.-	6	C
CronoTwin-DL-E 100/145-11/2-R1	DN 100	500	11.00	429	2153886	C	15,394.-	K	1,443.-	6	B
CronoTwin-DL-E 100/150-15/2-R1	DN 100	500	15.00	445	2153887	C	18,079.-	K	1,443.-	6	B
CronoTwin-DL-E 100/160-18,5/2-R1	DN 100	500	18.50	530	2153888	C	20,724.-	K	1,443.-	6	B
CronoTwin-DL-E 100/165-22/2-R1	DN 100	500	22.00	549	2153889	C	23,763.-	K	1,443.-	6	B

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG3

Ordering information (4-pole types) with differential pressure sensor							Additional charge				
Type	Nominal flange diameter	Port-to-port length	Rated power	Net weight, approx.	Art. no.		EUR		EUR	GRD group	Blind flange
		l_0 mm	P_2 kW	m kg							
CronoTwin-DL-E 100/220-5,5/4	DN 100	550	5.50	313	2159420	L	12,044.-	A	1,589.-	5	C
CronoTwin-DL-E 100/250-7,5/4	DN 100	550	7.50	357	2159421	L	14,261.-	K	1,635.-	5	D
CronoTwin-DL-E 100/270-11/4	DN 100	550	11.00	550	2153821	C	17,469.-	K	1,635.-	6	D
CronoTwin-DL-E 125/210-5,5/4	DN 125	620	5.50	334	2159422	C	13,131.-	A	1,610.-	5	C
CronoTwin-DL-E 125/220-7,5/4	DN 125	620	7.50	350	2159423	C	15,363.-	K	1,610.-	5	C
CronoTwin-DL-E 150/190-5,5/4	DN 150	700	5.50	410	2159424	L	14,202.-	A	1,759.-	5	C
CronoTwin-DL-E 150/200-7,5/4	DN 150	700	7.50	426	2159425	C	16,489.-	K	1,759.-	5	C
CronoTwin-DL-E 150/220-11/4	DN 150	700	11.00	617	2153822	C	19,549.-	K	1,759.-	6	C
CronoTwin-DL-E 150/250-15/4	DN 150	700	15.00	738	2153823	C	21,807.-	K	1,922.-	7	D
CronoTwin-DL-E 150/260-18,5/4	DN 150	700	18.50	858	2153824	C	24,764.-	K	1,922.-	7	D
CronoTwin-DL-E 150/270-22/4	DN 150	700	22.00	886	2153825	C	28,486.-	K	1,922.-	7	D
CronoTwin-DL-E 200/240-15/4	DN 200	800	15.00	878	2153826	A	24,717.-	K	2,116.-	7	D
CronoTwin-DL-E 200/250-18,5/4	DN 200	800	18.50	996	2153827	C	27,676.-	K	2,116.-	7	D
CronoTwin-DL-E 200/260-22/4	DN 200	800	22.00	1024	2153828	C	30,139.-	K	2,116.-	7	D



Price group: PG3



Ordering information (4-pole types) without differential pressure sensor							Additional charge				
Type	Nominal flange diameter	Port-to-port length	Rated power	Net weight, approx.	Art. no.		EUR		EUR	GRD group	Blind flange
		l_0 mm	P_2 kW	m kg							
CronoTwin-DL-E 100/220-5,5/4-R1	DN 100	550	5.50	313	2159468	C	11,599.-	A	1,589.-	5	C
CronoTwin-DL-E 100/250-7,5/4-R1	DN 100	550	7.50	357	2159469	C	13,815.-	K	1,635.-	5	D
CronoTwin-DL-E 100/270-11/4-R1	DN 100	550	11.00	550	2153890	C	17,023.-	K	1,635.-	6	D
CronoTwin-DL-E 125/210-5,5/4-R1	DN 125	620	5.50	334	2159470	C	12,685.-	A	1,610.-	5	C
CronoTwin-DL-E 125/220-7,5/4-R1	DN 125	620	7.50	350	2159471	C	14,918.-	K	1,610.-	5	C
CronoTwin-DL-E 150/190-5,5/4-R1	DN 150	700	5.50	410	2159472	C	13,757.-	A	1,759.-	5	C
CronoTwin-DL-E 150/200-7,5/4-R1	DN 150	700	7.50	426	2159473	C	16,043.-	K	1,759.-	5	C
CronoTwin-DL-E 150/220-11/4-R1	DN 150	700	11.00	617	2153891	C	19,103.-	K	1,759.-	6	C
CronoTwin-DL-E 150/250-15/4-R1	DN 150	700	15.00	739	2153892	C	21,361.-	K	1,922.-	7	D


= ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, = please contact Wilo

 Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG3

Ordering information (4-pole types) without differential pressure sensor								Additional charge			
Type	Nominal flange diameter	Port-to-port length	Rated power	Net weight, approx.	Art. no.			Red brass impeller (L1 version)	GRD group	Blind flange	
		l_0 mm	P_2 kW	m kg			EUR		EUR		
CronoTwin-DL-E 150/260-18,5/4-R1	DN 150	700	18.50	859	2153893	C	24,318.-	K	1,922.-	7	D
CronoTwin-DL-E 150/270-22/4-R1	DN 150	700	22.00	887	2153894	C	28,040.-	K	1,922.-	7	D
CronoTwin-DL-E 200/240-15/4-R1	DN 200	800	15.00	879	2153895	C	24,272.-	K	2,116.-	7	D
CronoTwin-DL-E 200/250-18,5/4-R1	DN 200	800	18.50	996	2153896	C	27,230.-	K	2,116.-	7	D
CronoTwin-DL-E 200/260-22/4-R1	DN 200	800	22.00	1024	2153897	C	29,693.-	K	2,116.-	7	D

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
 Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

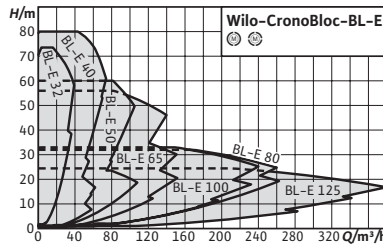

Accessories	Page
IR-Monitor/IR-Stick	243
Differential pressure detection	223
Pump control/Interface module	219
Pump control CCE-HVAC	204
Pump control SCE-HVAC	209
Supporting blocks	186

Series extension

IE4 **Select 4 online**
All information at www.wilo-select.com



Wilo-CronoBloc-BL-E

Construction

Electronically controlled glanded single pump in monobloc design with flange connection and automatic power adjustment.

Application

The pumping of heating water (in accordance with VDI 2035), cold water and water-glycol mixtures without abrasive substances in heating, cold water and cooling systems.

Scope of delivery

- Pump
- Installation and operating instructions

Options

- Variant ...-R1 without differential pressure sensor
- ...-L1 variant with bronze impeller (at additional charge)
- ...-H1 variant with housing made of spheroidal cast iron (at additional charge)
- ...-S1/-S2 variant with special mechanical seal (at additional charge)

Your advantages

- Energy savings due to integrated electronic power adjustment
- Optional interfaces for bus communication using plug-in IF-Modules
- Simple operation due to tried-and-tested Green Button Technology and display
- Integrated full motor protection (PTC thermistor sensor) with trip electronics
- Meets user requirements thanks to performance and main dimensions in accordance with EN 733 (for standard pumps)

Notice

Motors with energy efficiency class IE4

General notes - ErP (Ecodesign) Directive

The minimum efficiency index, MEI, of the pump series is ≥ 0.4 . For detailed information on the MEI values of the individual pump types, see: Wilo Online Catalogue, available at www.wilo.com

Price group: PG3

Ordering information (2-pole types) without differential pressure sensor						Additional charge					
Type	Suction side	Pressure side	Rated power	Net weight, approx.	Art. no.			Red brass impeller (L1 version)	Spheroidal cast iron housing (H1 version)	GRD group	
	RPS	RPD	P_2 kW	m kg			EUR		EUR		EUR
CronoBloc-BL-E 32/140-2,2/2-R1	DN 50	DN 32	2.20	54	2191425	C	3,681.-	A	349.-	A	441.- 4

= ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Ordering information (2-pole types) without differential pressure sensor							Additional charge				
Type	Suction side	Pressure side	Rated power	Net weight, approx.	Art. no.		Red brass impeller (L1 version)	Spheroidal cast iron housing (H1 version)	GRD group		
	RPS	RPD	P ₂ kW	m kg		EUR	EUR	EUR			
CronoBloc-BL-E 32/150-3/2-R1	DN 50	DN 32	3.00	64	2191426	C	4,158.-	349.-	A	454.-	4
CronoBloc-BL-E 32/160-4/2-R1	DN 50	DN 32	4.00	72	2191427	C	4,728.-	349.-	A	454.-	4
CronoBloc-BL-E 32/170-5,5/2-R1	DN 50	DN 32	5.50	94	2191428	C	5,541.-	349.-	A	560.-	4
CronoBloc-BL-E 32/210-7,5/2-R1	DN 50	DN 32	7.50	104	2191429	C	6,182.-	381.-	A	560.-	5
CronoBloc-BL-E 32/220-11/2-R1	DN 50	DN 32	11.00	192	2189978	C	7,901.-	381.-	A	560.-	5
CronoBloc-BL-E 40/110-1,5/2-R1	DN 65	DN 40	1.50	48	2191430	C	3,239.-	349.-	A	460.-	4
CronoBloc-BL-E 40/120-2,2/2-R1	DN 65	DN 40	2.20	50	2191431	C	3,706.-	349.-	A	460.-	4
CronoBloc-BL-E 40/130-3/2-R1	DN 65	DN 40	3.00	58	2191432	C	4,347.-	349.-	A	460.-	4
CronoBloc-BL-E 40/140-4/2-R1	DN 65	DN 40	4.00	68	2191433	C	4,823.-	349.-	A	460.-	4
CronoBloc-BL-E 40/160-5,5/2-R1	DN 65	DN 40	5.50	96	2191434	C	5,736.-	388.-	A	613.-	5
CronoBloc-BL-E 40/170-7,5/2-R1	DN 65	DN 40	7.50	98	2191435	C	6,267.-	388.-	A	613.-	5
CronoBloc-BL-E 40/180-7,5/2-R1	DN 65	DN 40	7.50	108	2191436	C	6,513.-	425.-	A	778.-	5
CronoBloc-BL-E 40/210-11/2-R1	DN 65	DN 40	11.00	194	2189979	C	8,179.-	425.-	A	778.-	5
CronoBloc-BL-E 40/220-15/2-R1	DN 65	DN 40	15.00	204	2189980	C	10,010.-	425.-	A	778.-	5
CronoBloc-BL-E 40/230-18,5/2-R1	DN 65	DN 50	18.50	260	2189981	C	12,232.-	639.-	A	⌚	6
CronoBloc-BL-E 40/240-22/2-R1	DN 65	DN 50	22.00	269	2189982	C	13,943.-	639.-	A	⌚	6
CronoBloc-BL-E 50/110-3/2-R1	DN 65	DN 50	3.00	64	2191437	C	4,619.-	388.-	A	404.-	4
CronoBloc-BL-E 50/120-4/2-R1	DN 65	DN 50	4.00	72	2191438	C	5,044.-	388.-	A	404.-	4
CronoBloc-BL-E 50/130-5,5/2-R1	DN 65	DN 50	5.50	90	2191439	C	5,926.-	388.-	A	404.-	5
CronoBloc-BL-E 50/140-7,5/2-R1	DN 65	DN 50	7.50	94	2191440	C	6,633.-	388.-	A	404.-	5
CronoBloc-BL-E 50/150-7,5/2-R1	DN 65	DN 50	7.50	102	2191441	C	6,998.-	619.-	A	648.-	5
CronoBloc-BL-E 50/170-11/2-R1	DN 65	DN 50	11.00	180	2189983	C	8,399.-	619.-	A	648.-	5
CronoBloc-BL-E 50/200-15/2-R1	DN 65	DN 50	15.00	204	2189984	C	10,309.-	668.-	A	830.-	6
CronoBloc-BL-E 50/210-18,5/2-R1	DN 65	DN 50	18.50	248	2189985	C	12,349.-	668.-	A	830.-	6
CronoBloc-BL-E 50/220-22/2-R1	DN 65	DN 50	22.00	258	2189986	C	14,167.-	668.-	A	830.-	6
CronoBloc-BL-E 65/160-11/2-R1	DN 80	DN 65	11.00	186	2189987	C	8,906.-	640.-	A	678.-	5

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ⌚ = please contact Wilo
 Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG3

Ordering information (2-pole types) without differential pressure sensor							Additional charge					
Type	Suction side	Pressure side	Rated power	Net weight, approx.	Art. no.		Red brass impeller (L1 version)	Spheroidal cast iron housing (H1 version)	GRD group			
	RPS	RPD	P_2 kW	m kg		🚚	🚚	🚚	🚚	🚚	🚚	🚚
						EUR	EUR	EUR	EUR	EUR	EUR	EUR
CronoBloc-BL-E 65/170-15/2-R1	DN 80	DN 65	15.00	194	2189988	C	10,400.-	A	640.-	A	678.-	5
CronoBloc-BL-E 65/190-18,5/2-R1	DN 80	DN 65	18.50	254	2189989	C	12,415.-	A	701.-	A	678.-	6
CronoBloc-BL-E 65/210-22/2-R1	DN 80	DN 65	22.00	267	2189990	C	14,281.-	A	701.-	A	678.-	6
CronoBloc-BL-E 80/145-11/2-R1	DN 100	DN 80	11.00	200	2189991	C	9,115.-	A	721.-	A	853.-	6
CronoBloc-BL-E 80/150-15/2-R1	DN 100	DN 80	15.00	208	2189992	C	10,569.-	A	721.-	A	853.-	6
CronoBloc-BL-E 80/160-18,5/2-R1	DN 100	DN 80	18.50	252	2189993	C	12,441.-	A	721.-	A	853.-	6
CronoBloc-BL-E 80/165-22/2-R1	DN 100	DN 80	22.00	262	2189994	C	14,412.-	A	721.-	A	853.-	6

Price group: PG3

Ordering information (2-pole types) with differential pressure sensor							Additional charge					
Type	Suction side	Pressure side	Rated power	Net weight, approx.	Art. no.		Red brass impeller (L1 version)	Spheroidal cast iron housing (H1 version)	GRD group			
	RPS	RPD	P_2 kW	m kg		🚚	🚚	🚚	🚚	🚚	🚚	🚚
						EUR	EUR	EUR	EUR	EUR	EUR	EUR
CronoBloc-BL-E 32/140-2,2/2	DN 50	DN 32	2.20	54	2191367	C	4,127.-	A	349.-	A	441.-	4
CronoBloc-BL-E 32/150-3/2	DN 50	DN 32	3.00	64	2191368	C	4,604.-	A	349.-	A	454.-	4
CronoBloc-BL-E 32/160-4/2	DN 50	DN 32	4.00	72	2191369	C	5,173.-	A	349.-	A	454.-	4
CronoBloc-BL-E 32/170-5,5/2	DN 50	DN 32	5.50	94	2191370	C	5,987.-	A	349.-	A	560.-	4
CronoBloc-BL-E 32/210-7,5/2	DN 50	DN 32	7.50	104	2191371	C	6,628.-	A	381.-	A	560.-	5
CronoBloc-BL-E 32/220-11/2	DN 50	DN 32	11.00	192	2189952	C	8,347.-	A	381.-	A	560.-	5
CronoBloc-BL-E 40/110-1,5/2	DN 65	DN 40	1.50	48	2191372	C	3,684.-	A	349.-	A	460.-	4
CronoBloc-BL-E 40/120-2,2/2	DN 65	DN 40	2.20	50	2191373	C	4,153.-	A	349.-	A	460.-	4
CronoBloc-BL-E 40/130-3/2	DN 65	DN 40	3.00	58	2191374	C	4,793.-	A	349.-	A	460.-	4
CronoBloc-BL-E 40/140-4/2	DN 65	DN 40	4.00	68	2191375	C	5,268.-	A	349.-	A	460.-	4
CronoBloc-BL-E 40/160-5,5/2	DN 65	DN 40	5.50	96	2191376	C	6,182.-	A	388.-	A	613.-	5
CronoBloc-BL-E 40/170-7,5/2	DN 65	DN 40	7.50	98	2191377	C	6,712.-	A	388.-	A	613.-	5
CronoBloc-BL-E 40/180-7,5/2	DN 65	DN 40	7.50	108	2191378	C	6,959.-	A	425.-	A	778.-	5
CronoBloc-BL-E 40/210-11/2	DN 65	DN 40	11.00	194	2189953	C	8,624.-	A	425.-	A	778.-	5
CronoBloc-BL-E 40/220-15/2	DN 65	DN 40	15.00	204	2189954	C	10,456.-	A	425.-	A	778.-	5

🚚 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG3

Ordering information (2-pole types) with differential pressure sensor							Additional charge				
Type	Suction side	Pressure side	Rated power	Net weight, approx.	Art. no.		Red brass impeller (L1 version)	Spheroidal cast iron housing (H1 version)	GRD group		
	RPS	RPD	P_2 kW	m kg		EUR	EUR	EUR			
CronoBloc-BL-E 40/230-18,5/2	DN 65	DN 50	18.50	260	2189955	C	12,678.-	639.-	6		
CronoBloc-BL-E 40/240-22/2	DN 65	DN 50	22.00	269	2189956	C	14,389.-	639.-	6		
CronoBloc-BL-E 50/110-3/2	DN 65	DN 50	3.00	64	2191379	C	5,065.-	388.-	404.-		
CronoBloc-BL-E 50/120-4/2	DN 65	DN 50	4.00	72	2191380	C	5,490.-	388.-	404.-		
CronoBloc-BL-E 50/130-5,5/2	DN 65	DN 50	5.50	90	2191381	C	6,372.-	388.-	404.-		
CronoBloc-BL-E 50/140-7,5/2	DN 65	DN 50	7.50	94	2191382	C	7,078.-	388.-	404.-		
CronoBloc-BL-E 50/150-7,5/2	DN 65	DN 50	7.50	102	2191383	C	7,444.-	619.-	648.-		
CronoBloc-BL-E 50/170-11/2	DN 65	DN 50	11.00	180	2189957	C	8,845.-	619.-	648.-		
CronoBloc-BL-E 50/200-15/2	DN 65	DN 50	15.00	204	2189958	C	10,754.-	668.-	830.-		
CronoBloc-BL-E 50/210-18,5/2	DN 65	DN 50	18.50	248	2189959	C	12,795.-	668.-	830.-		
CronoBloc-BL-E 50/220-22/2	DN 65	DN 50	22.00	258	2189960	C	14,613.-	668.-	830.-		
CronoBloc-BL-E 65/160-11/2	DN 80	DN 65	11.00	186	2189961	C	9,352.-	640.-	678.-		
CronoBloc-BL-E 65/170-15/2	DN 80	DN 65	15.00	194	2189962	C	10,846.-	640.-	678.-		
CronoBloc-BL-E 65/190-18,5/2	DN 80	DN 65	18.50	254	2189963	C	12,861.-	701.-	6		
CronoBloc-BL-E 65/210-22/2	DN 80	DN 65	22.00	267	2189964	C	14,727.-	701.-	6		
CronoBloc-BL-E 80/145-11/2	DN 100	DN 80	11.00	200	2189965	C	9,560.-	721.-	853.-		
CronoBloc-BL-E 80/150-15/2	DN 100	DN 80	15.00	208	2189966	C	11,015.-	721.-	853.-		
CronoBloc-BL-E 80/160-18,5/2	DN 100	DN 80	18.50	252	2189967	C	12,887.-	721.-	853.-		
CronoBloc-BL-E 80/165-22/2	DN 100	DN 80	22.00	262	2189968	C	14,858.-	721.-	853.-		

Price group: PG3

Ordering information (4-pole types) without differential pressure sensor							Additional charge				
Type	Suction side	Pressure side	Rated power	Net weight, approx.	Art. no.		Red brass impeller (L1 version)	Spheroidal cast iron housing (H1 version)	GRD group		
	RPS	RPD	P_2 kW	m kg		EUR	EUR	EUR			
CronoBloc-BL-E 50/270-5,5/4-R1	DN 65	DN 50	5.50	136	2191442	C	5,854.-	681.-	5		
CronoBloc-BL-E 65/120-4/2-R1	DN 80	DN 65	4.00	76	2191443	C	5,131.-	619.-	460.-		
CronoBloc-BL-E 65/130-5,5/2-R1	DN 80	DN 65	5.50	96	2191444	C	6,117.-	619.-	460.-		

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG3

Ordering information (4-pole types) without differential pressure sensor							Additional charge					
Type	Suction side	Pressure side	Rated power	Net weight, approx.	Art. no.		Red brass impeller (L1 version)		Spheroidal cast iron housing (H1 version)		GRD group	
	RPS	RPD	P_2 kW	m kg		EUR	EUR	EUR	EUR			
CronoBloc-BL-E 65/140-7,5/2-R1	DN 80	DN 65	7.50	98	2191445	C	7,063.-	A	619.-	A	460.-	5
CronoBloc-BL-E 65/240-5,5/4-R1	DN 80	DN 65	5.50	152	2191446	C	6,893.-	A	757.-	A	460.-	5
CronoBloc-BL-E 65/265-7,5/4-R1	DN 80	DN 65	7.50	160	2191447	C	7,890.-	A	757.-	A	460.-	5
CronoBloc-BL-E 80/220-5,5/4-R1	DN 100	DN 80	5.50	144	2191448	C	6,667.-	A	795.-	A	750.-	5
CronoBloc-BL-E 80/250-7,5/4-R1	DN 100	DN 80	7.50	162	2191449	C	7,759.-	A	817.-	A	460.-	5
CronoBloc-BL-E 80/270-11/4-R1	DN 100	DN 80	11.00	261	2189995	C	10,504.-	A	817.-	A	460.-	6
CronoBloc-BL-E 100/200-5,5/4-R1	DN 125	DN 100	5.50	150	2191450	C	6,898.-	A	805.-	A	460.-	5
CronoBloc-BL-E 100/220-7,5/4-R1	DN 125	DN 100	7.50	158	2191451	C	7,697.-	A	805.-	A	460.-	5
CronoBloc-BL-E 100/250-11/4-R1	DN 125	DN 100	11.00	275	2189996	C	10,567.-	A	849.-	A	460.-	6
CronoBloc-BL-E 100/270-15/4-R1	DN 125	DN 100	15.00	292	2189997	C	12,369.-	A	849.-	A	460.-	6
CronoBloc-BL-E 100/305-18,5/4-R1	DN 125	DN 100	18.50	396	2189998	C	13,319.-	A	1,103.-	A	460.-	7
CronoBloc-BL-E 100/315-22/4-R1	DN 125	DN 100	22.00	410	2189999	C	16,884.-	A	1,103.-	A	460.-	7
CronoBloc-BL-E 125/185-5,5/4-R1	DN 150	DN 125	5.50	184	2191452	C	7,428.-	A	879.-	A	460.-	5
CronoBloc-BL-E 125/210-7,5/4-R1	DN 125	DN 100	7.50	192	2191453	C	8,315.-	A	879.-	A	460.-	5
CronoBloc-BL-E 125/225-11/4-R1	DN 150	DN 125	11.00	290	2190000	C	10,364.-	A	879.-	A	460.-	6
CronoBloc-BL-E 125/245-15/4-R1	DN 150	DN 125	15.00	336	2190001	C	12,542.-	A	961.-	A	460.-	7
CronoBloc-BL-E 125/265-18,5/4-R1	DN 150	DN 125	18.50	392	2190002	C	14,798.-	A	961.-	A	460.-	7
CronoBloc-BL-E 125/275-22/4-R1	DN 150	DN 125	22.00	406	2190003	C	17,364.-	A	961.-	A	460.-	7

Price group: PG3


Ordering information (4-pole types) with differential pressure sensor							Additional charge					
Type	Suction side	Pressure side	Rated power	Net weight, approx.	Art. no.		Red brass impeller (L1 version)		Spheroidal cast iron housing (H1 version)		GRD group	
	RPS	RPD	P_2 kW	m kg		EUR	EUR	EUR	EUR			
CronoBloc-BL-E 50/270-5,5/4	DN 65	DN 50	5.50	136	2191384	C	6,299.-	A	681.-	A	460.-	5
CronoBloc-BL-E 65/120-4/2	DN 80	DN 65	4.00	76	2191385	C	5,577.-	A	619.-	A	460.-	4
CronoBloc-BL-E 65/130-5,5/2	DN 80	DN 65	5.50	96	2191386	C	6,562.-	A	619.-	A	460.-	5
CronoBloc-BL-E 65/140-7,5/2	DN 80	DN 65	7.50	98	2191387	C	7,509.-	A	619.-	A	460.-	5

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☞ = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Ordering information (4-pole types) with differential pressure sensor							Additional charge				
Type	Suction side	Pressure side	Rated power	Net weight, approx.	Art. no.		Red brass impeller (L1 version)	Spheroidal cast iron housing (H1 version)	GRD group		
	RPS	RPD	P_2 kW	m kg		EUR	EUR	EUR			
CronoBloc-BL-E 65/240-5,5/4	DN 80	DN 65	5.50	152	2191388	C	7,340.-	757.-	5		
CronoBloc-BL-E 65/265-7,5/4	DN 80	DN 65	7.50	160	2191389	C	8,335.-	757.-	5		
CronoBloc-BL-E 80/220-5,5/4	DN 100	DN 80	5.50	144	2191390	C	7,114.-	795.-	5	750.-	
CronoBloc-BL-E 80/250-7,5/4	DN 100	DN 80	7.50	162	2191391	C	8,204.-	817.-	5		
CronoBloc-BL-E 80/270-11/4	DN 100	DN 80	11.00	261	2189969	C	10,950.-	817.-	6		
CronoBloc-BL-E 100/200-5,5/4	DN 125	DN 100	5.50	150	2191392	C	7,344.-	805.-	5		
CronoBloc-BL-E 100/220-7,5/4	DN 125	DN 100	7.50	158	2191393	C	8,142.-	805.-	5		
CronoBloc-BL-E 100/250-11/4	DN 125	DN 100	11.00	275	2189970	C	11,012.-	849.-	6		
CronoBloc-BL-E 100/270-15/4	DN 125	DN 100	15.00	292	2189971	C	12,814.-	849.-	6		
CronoBloc-BL-E 100/305-18,5/4	DN 125	DN 100	18.50	396	2189972	C	13,765.-	1,103.-	7		
CronoBloc-BL-E 100/315-22/4	DN 125	DN 100	22.00	410	2189973	C	17,329.-	1,103.-	7		
CronoBloc-BL-E 125/185-5,5/4	DN 150	DN 125	5.50	184	2191394	C	7,874.-	879.-	5		
CronoBloc-BL-E 125/210-7,5/4	DN 150	DN 125	7.50	192	2191395	C	8,761.-	879.-	5		
CronoBloc-BL-E 125/225-11/4	DN 150	DN 125	11.00	290	2189974	C	10,810.-	879.-	6		
CronoBloc-BL-E 125/245-15/4	DN 150	DN 125	15.00	336	2189975	C	12,988.-	961.-	7		
CronoBloc-BL-E 125/265-18,5/4	DN 150	DN 125	18.50	392	2189976	C	15,244.-	961.-	7		
CronoBloc-BL-E 125/275-22/4	DN 150	DN 125	22.00	406	2189977	C	17,810.-	961.-	7		

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
 Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

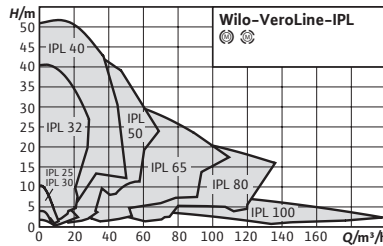

Accessories	Page
Wall fixation/installation on a base	185
Motor protection	231
Pump control CC-HVAC	201
Pump control SC/FC-HVAC	211

Series modification

Select 4 online

All information at www.wilo-select.com

Wilo-VeroLine-IPL



Construction

Glanded pump in in-line design with screwed connection or flange connection

Application

Pumping of heating water (acc. to VDI 2035), cold water and water/glycol mixtures without abrasive substances in heating, cold water and cooling systems.

Scope of delivery

- Pump
- Installation and operating instructions

Options

- ...-H4 variant with PN6/10 flanges (at additional charge)
- ...-H5 variant with PN16 housing (at additional charge)
- Other voltages and frequencies as well as ATEX approval on request

Your advantages

- High standard of corrosion protection thanks to cathaphoretic coating
- Standard condensate drainage holes in the motor housings and lanterns
- Series design: motor with one-piece shaft
- Version N: Standard motor V1 with stainless steel plug shaft
- Bidirectional, force-flushed mechanical seal

Notice

- Motors with an energy efficiency class of IE3 for motors ≥ 0.75 kW

General notes - ErP (Ecodesign) Directive

The minimum efficiency index, MEI, of the pump series is ≥ 0.4 . For detailed information on the MEI values of the individual pump types, see: Wilo Online Catalogue, available at www.wilo.com

Price group: PG3

Ordering information (2-pole types)								Additional charge							
Type	Three-phase standard motor	Motor efficiency class	Nominal flange diameter	Port-to-port length	Rated power	Net weight, approx.	Art. no.	PN 6/10 flange (H4 version)	PN 16 housing (H5 version)	GRD group					
					l_0	P_2	m								
					mm	kW	kg								
VeroLine-IPL 25/70-0,12/2	-	IE2	G 1½	180	0.12	7	2089569	L	421.-	A	☎	K	381.-	10	
VeroLine-IPL 25/80-0,12/2	-	IE2	G 1½	180	0.12	7	2089570	L	421.-	A	☎	K	381.-	10	

☎ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Ordering information (2-pole types)								Additional charge						
Type	Three-phase standard motor	Motor efficiency class	Nominal flange diameter	Port-to-port length	Rated power	Net weight, approx.	Art. no.			PN 6/10 flange (H4 version)	PN 16 housing (H5 version)		GRD group	
				l ₀ mm	P ₂ kW	m kg			EUR	EUR	EUR	EUR		
VeroLine-IPL 25/85-0,18/2	-	IE2	G 1½	180	0.18	9	2089571	L	474.-	A	☞	K	381.- 10	
VeroLine-IPL 25/90-0,25/2	-	IE2	G 1½	180	0.25	9	2089572	L	577.-	A	☞	K	381.- 10	
VeroLine-IPL 30/70-0,12/2	-	IE2	G 2	180	0.12	7	2089573	L	465.-	A	☞	K	381.- 10	
VeroLine-IPL 30/80-0,12/2	-	IE2	G 2	180	0.12	7	2089574	L	465.-	A	☞	K	381.- 10	
VeroLine-IPL 30/85-0,18/2	-	IE2	G 2	180	0.18	9	2089575	L	504.-	A	☞	K	381.- 10	
VeroLine-IPL 30/90-0,25/2	-	IE2	G 2	180	0.25	9	2089576	L	660.-	A	☞	K	381.- 10	
VeroLine-IPL 32/85-0,37/2	yes	IE2	DN 32	260	0.37	19	2150335	L	750.-	A	☞	K	381.- 3	
VeroLine-IPL 32/95-0,55/2	yes	IE2	DN 32	260	0.55	22	2150336	L	803.-	A	☞	K	381.- 3	
VeroLine-IPL 32/105-0,75/2	yes	IE3	DN 32	260	0.75	21	2152928	L	888.-	A	☞	K	381.- 3	
VeroLine-IPL 32/125-1,1/2	yes	IE3	DN 32	260	1.10	25	2152929	L	1,000.-	A	☞	K	381.- 3	
VeroLine-IPL 32/135-1,1/2	yes	IE3	DN 32	260	1.10	25	2152930	L	1,017.-	A	☞	K	381.- 3	
VeroLine-IPL 32/135-1,5/2	yes	IE3	DN 32	260	1.50	30	2152931	L	1,076.-	A	☞	K	381.- 3	
VeroLine-IPL 32/165-3/2	-	IE3	DN 32	320	3.00	50	2121199	L	1,406.-	A	☞	A	☞ 4	
VeroLine-IPL 32/175-4/2	-	IE3	DN 32	320	4.00	57	2121200	L	1,711.-	A	☞	A	☞ 4	
VeroLine-IPL 40/75-0,12/2	-	IE2	DN 40	250	0.12	18	2155494	L	637.-	K	84.-	K	388.- 3	
VeroLine-IPL 40/90-0,37/2	yes	IE2	DN 40	250	0.37	19	2089584	L	865.-	K	90.-	K	388.- 3	
VeroLine-IPL 40/115-0,55/2	yes	IE2	DN 40	250	0.55	20	2089585	L	959.-	K	90.-	K	388.- 3	
VeroLine-IPL 40/120-1,5/2	yes	IE3	DN 40	320	1.50	32	2121201	L	1,032.-	K	96.-	K	388.- 3	
VeroLine-IPL 40/130-2,2/2	yes	IE3	DN 40	320	2.20	34	2121202	L	1,153.-	K	96.-	K	388.- 3	
VeroLine-IPL 40/150-3/2	yes	IE3	DN 40	320	3.00	39	2121203	L	1,380.-	K	96.-	K	388.- 3	
VeroLine-IPL 40/160-4/2	yes	IE3	DN 40	320	4.00	46	2121204	L	1,471.-	K	96.-	K	388.- 3	
VeroLine-IPL 40/165-4/2	-	IE3	DN 40	340	4.00	61	2121205	L	1,649.-	A	☞	A	☞ 4	
VeroLine-IPL 40/175-5,5/2	-	IE3	DN 40	340	5.50	75	2121206	L	2,133.-	A	☞	A	☞ 4	
VeroLine-IPL 40/195-7,5/2	-	IE3	DN 40	440	7.50	89	2121207	L	2,178.-	A	☞	A	☞ 5	
VeroLine-IPL 50/95-0,55/2	yes	IE2	DN 50	280	0.55	22	2152442	L	1,075.-	K	111.-	K	410.- 3	
VeroLine-IPL 50/105-0,75/2	yes	IE3	DN 50	280	0.75	23	2152934	L	1,143.-	K	111.-	K	410.- 3	

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☞ = please contact Wilo
 Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.


Price group: PG3

Ordering information (2-pole types)								Additional charge				
Type	Three-phase standard motor	Motor efficiency class	Nominal flange diameter	Port-to-port length	Rated power	Net weight, approx.	Art. no.	PN 6/10 flange (H4 version)	PN 16 housing (H5 version)	GRD group		
				l_0 mm	P_2 kW	m kg		EUR	EUR	EUR		
VeroLine-IPL 50/120-1,5/2	yes	IE3	DN 50	340	1.50	36	2121209	1,175.-	111.-	410.-		
VeroLine-IPL 50/130-2,2/2	yes	IE3	DN 50	340	2.20	36	2121210	1,248.-	111.-	410.-		
VeroLine-IPL 50/140-3/2	yes	IE3	DN 50	340	3.00	42	2121211	1,399.-	111.-	410.-		
VeroLine-IPL 50/150-4/2	yes	IE3	DN 50	340	4.00	48	2121212	1,487.-	111.-	410.-		
VeroLine-IPL 50/155-4/2	-	IE3	DN 50	340	4.00	66	2121213	1,672.-	☹	☹		
VeroLine-IPL 50/165-5,5/2	-	IE3	DN 50	340	5.50	77	2121214	2,092.-	☹	☹		
VeroLine-IPL 50/175-5,5/2	-	IE3	DN 50	340	5.50	77	2121215	2,092.-	☹	☹		
VeroLine-IPL 50/175-7,5/2	-	IE3	DN 50	340	7.50	84	2121216	2,190.-	☹	☹		
VeroLine-IPL 50/185-7,5/2	-	IE3	DN 50	440	7.50	91	2121217	2,190.-	☹	☹		
VeroLine-IPL 65/110-2,2/2	yes	IE3	DN 65	340	2.20	39	2121219	1,452.-	129.-	429.-		
VeroLine-IPL 65/115-1,5/2	yes	IE3	DN 65	340	1.50	37	2121218	1,395.-	129.-	429.-		
VeroLine-IPL 65/120-3/2	yes	IE3	DN 65	340	3.00	44	2121220	1,577.-	129.-	429.-		
VeroLine-IPL 65/130-4/2	yes	IE3	DN 65	340	4.00	51	2121221	1,662.-	129.-	429.-		
VeroLine-IPL 65/145-5,5/2	-	IE3	DN 65	340	5.50	78	2121222	1,954.-	☹	☹		
VeroLine-IPL 65/155-5,5/2	-	IE3	DN 65	340	5.50	78	2121223	1,954.-	☹	☹		
VeroLine-IPL 65/155-7,5/2	-	IE3	DN 65	340	7.50	87	2121224	2,055.-	☹	☹		
VeroLine-IPL 65/165-5,5/2	-	IE3	DN 65	430	5.50	81	2121225	2,222.-	☹	☹		
VeroLine-IPL 65/175-5,5/2	-	IE3	DN 65	430	5.50	82	2121226	2,222.-	☹	☹		
VeroLine-IPL 65/175-7,5/2	-	IE3	DN 65	430	7.50	89	2121227	2,326.-	☹	☹		
VeroLine-IPL 80/105-3/2	yes	IE3	DN 80	360	3.00	50	2121229	1,657.-	☹	447.-		
VeroLine-IPL 80/110-4/2	yes	IE3	DN 80	360	4.00	56	2121189	1,739.-	☹	447.-		
VeroLine-IPL 80/115-2,2/2	yes	IE3	DN 80	360	2.20	43	2121228	1,616.-	☹	447.-		
VeroLine-IPL 80/120-4/2	yes	IE3	DN 80	360	4.00	56	2121230	1,739.-	☹	447.-		
VeroLine-IPL 80/145-5,5/2	-	IE3	DN 80	400	5.50	85	2121231	2,213.-	☹	☹		
VeroLine-IPL 80/155-7,5/2	-	IE3	DN 80	400	7.50	94	2121232	2,263.-	☹	☹		

☺ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☹ = please contact Wilo
 Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Ordering information (4-pole types)								Additional charge						
Type	Three-phase standard motor	Motor efficiency class	Nominal flange diameter	Port-to-port length	Rated power	Net weight, approx.	Art. no.	PN 6/10 flange (H4 version)		PN 16 housing (H5 version)		GRD group		
				<i>l</i> mm	<i>P</i> ₂ kW	<i>m</i> kg								
VeroLine-IPL 32/105-0,12/4	yes	IE2	DN 32	260	0.12	18	2150342	L	703.-	A	☞	K	381.- 3	
VeroLine-IPL 32/135-0,25/4	yes	IE2	DN 32	260	0.25	18	2150343	L	799.-	A	☞	K	381.- 3	
VeroLine-IPL 40/80-0,09/4	-	IE2	DN 40	250	0.09	14	2089695	C	578.-	K	89.-	K	388.- 3	
VeroLine-IPL 40/110-0,12/4	yes	IE2	DN 40	250	0.12	18	2089553	L	611.-	K	89.-	K	388.- 3	
VeroLine-IPL 40/130-0,25/4	yes	IE2	DN 40	320	0.25	21	2089554	L	817.-	K	93.-	K	388.- 3	
VeroLine-IPL 40/160-0,37/4	yes	IE2	DN 40	320	0.37	22	2089555	L	977.-	K	93.-	K	388.- 3	
VeroLine-IPL 50/105-0,12/4	yes	IE2	DN 50	280	0.12	20	2150344	L	805.-	K	104.-	K	410.- 3	
VeroLine-IPL 50/120-0,25/4	yes	IE2	DN 50	340	0.25	24	2112395	L	912.-	K	104.-	K	410.- 3	
VeroLine-IPL 50/130-0,37/4	yes	IE2	DN 50	340	0.37	25	2089557	L	1,002.-	K	104.-	K	410.- 3	
VeroLine-IPL 50/160-0,55/4	yes	IE2	DN 50	340	0.55	29	2089558	L	1,124.-	K	104.-	K	410.- 3	
VeroLine-IPL 65/110-0,25/4	yes	IE2	DN 65	340	0.25	26	2129203	L	1,071.-	K	111.-	K	429.- 3	
VeroLine-IPL 65/120-0,37/4	yes	IE2	DN 65	340	0.37	27	2129204	L	1,124.-	K	111.-	K	429.- 3	
VeroLine-IPL 65/130-0,55/4	yes	IE2	DN 65	340	0.55	31	2129205	L	1,149.-	K	111.-	K	429.- 3	
VeroLine-IPL 80/120-0,55/4	yes	IE2	DN 80	360	0.55	37	2129206	L	1,260.-	A	☞	K	491.- 3	
VeroLine-IPL 80/125-0,75/4	-	IE3	DN 80	360	0.75	41	2121190	L	1,374.-	A	☞	K	491.- 3	
VeroLine-IPL 80/140-1,1/4	-	IE3	DN 80	360	1.10	42	2121191	L	1,442.-	A	☞	K	491.- 3	
VeroLine-IPL 100/135-1,1/4	-	IE3	DN 100	500	1.10	69	2121192	L	1,721.-	A	☞	A	☞ 5	
VeroLine-IPL 100/145-1,5/4	-	IE3	DN 100	500	1.50	74	2121193	L	2,464.-	A	☞	A	☞ 5	
VeroLine-IPL 100/165-2,2/4	-	IE3	DN 100	500	2.20	89	2121194	L	2,634.-	A	☞	A	☞ 5	
VeroLine-IPL 100/175-3/4	-	IE3	DN 100	500	3.00	90	2121195	L	2,665.-	A	☞	A	☞ 5	

= ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☞ = please contact Wilo
 Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

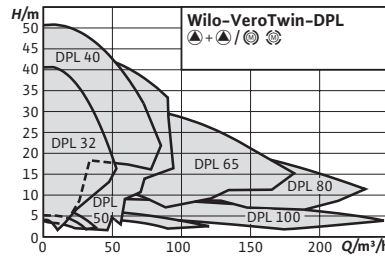

Accessories	Page
Wall fixation/installation on a base	185
Motor protection	231
Pump control CC-HVAC	201
Pump control SC/FC-HVAC	211

Series modification

Select 4 online

All information at www.wilo-select.com

Wilo-VeroTwin-DPL



Construction

Glanded twin-head pump in in-line design with flange connection

Application

Pumping of heating water (acc. to VDI 2035), cold water and water/glycol mixtures without abrasive substances in heating, cold water and cooling systems.

Scope of delivery

- Pump
- Installation and operating instructions

Options

- ...-H5 variant with PN16 housing (at additional charge)
- Other voltages and frequencies as well as ATEX approval on request

Notice

- Motors with an energy efficiency class of IE3 for motors ≥ 0.75 kW

Your advantages

- Reduction of space required and installation costs due to twin-head pump design
- Main/standby mode or peak-load operation (by means of external auxiliary device)
- High standard of corrosion protection thanks to cataphoretic coating
- Series design: motor with one-piece shaft
- Version N: standard motor B5 or V1 with stainless steel plug shaft

General notes – ErP (Ecodesign) Directive



The minimum efficiency index, MEI, of the pump series is ≥ 0.4 . For detailed information on the MEI values of the individual pump types, see: Wilo Online Catalogue, available at www.wilo.com


Price group: PG3

Ordering information (2-pole types)								Additional charge						
Type	Three-phase standard motor	Motor efficiency class	Nominal flange diameter	Port-to-port length	Rated power	Net weight, approx.	Art. no.	PN 16 housing (H5 version)	GRD group	Blind flange				
				l_0 mm	P_2 kW	m kg								
VeroTwin-DPL 32/85-0,37/2	yes	IE2	DN 32	260	0.37	36	2150365	L	EUR	K	EUR	381.-	3	F
VeroTwin-DPL 32/95-0,55/2	yes	IE2	DN 32	260	0.55	41	2150366	L	EUR	K	EUR	381.-	3	F

= ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, = please contact Wilo
 Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG3

Ordering information (2-pole types)								Additional charge					
Type	Three-phase standard motor	Motor efficiency class	Nominal flange diameter	Port-to-port length	Rated power	Net weight, approx.	Art. no.		PN 16 housing (H5 version)	GRD group	Blind flange		
				<i>l</i> mm	<i>P</i> ₂ kW	<i>m</i> kg			EUR		EUR		
VeroTwin-DPL 32/105-0,75/2	yes	IE3	DN 32	260	0.75	45	2121239	C	1,679.-	K	381.-	3	F
VeroTwin-DPL 32/125-1,1/2	yes	IE3	DN 32	260	1.10	52	2121240	L	1,893.-	K	381.-	3	F
VeroTwin-DPL 32/135-1,1/2	yes	IE3	DN 32	260	1.10	52	2121241	C	1,920.-	K	381.-	3	F
VeroTwin-DPL 32/135-1,5/2	yes	IE3	DN 32	260	1.50	63	2155462	C	2,035.-	K	381.-	3	F
VeroTwin-DPL 32/165-3/2	-	IE3	DN 32	320	3.00	99	2121242	C	2,657.-	A	☹	4	B
VeroTwin-DPL 32/175-4/2	-	IE3	DN 32	320	4.00	114	2121243	C	3,231.-	A	☹	4	B
VeroTwin-DPL 40/75-0,12/2	-	IE2	DN 40	250	0.12	37	2157302	C	1,203.-	K	388.-	3	G
VeroTwin-DPL 40/90-0,37/2	yes	IE2	DN 40	250	0.37	39	2089642	L	1,637.-	K	388.-	3	G
VeroTwin-DPL 40/115-0,55/2	yes	IE2	DN 40	250	0.55	41	2089643	L	1,806.-	K	388.-	3	G
VeroTwin-DPL 40/120-1,5/2	yes	IE3	DN 40	320	1.50	64	2121244	L	1,950.-	K	388.-	3	F
VeroTwin-DPL 40/130-2,2/2	yes	IE3	DN 40	320	2.20	66	2121245	L	2,181.-	K	388.-	3	F
VeroTwin-DPL 40/150-3/2	yes	IE3	DN 40	320	3.00	78	2121246	C	2,611.-	K	388.-	3	F
VeroTwin-DPL 40/160-4/2	yes	IE3	DN 40	320	4.00	90	2121247	C	2,780.-	K	388.-	3	F
VeroTwin-DPL 40/165-4/2	-	IE3	DN 40	340	4.00	118	2121248	C	3,426.-	K	388.-	4	B
VeroTwin-DPL 40/175-5,5/2	-	IE3	DN 40	340	5.50	146	2121249	C	4,035.-	A	☹	4	B
VeroTwin-DPL 40/195-7,5/2	-	IE3	DN 40	440	7.50	185	2121250	C	4,117.-	A	☹	5	C
VeroTwin-DPL 50/95-0,55/2	yes	IE2	DN 50	280	0.55	41	2152445	C	2,033.-	K	410.-	3	G
VeroTwin-DPL 50/105-0,75/2	yes	IE3	DN 50	280	0.75	43	2155465	L	2,163.-	K	410.-	3	G
VeroTwin-DPL 50/120-1,5/2	yes	IE3	DN 50	340	1.50	66	2121252	L	2,223.-	A	☹	3	F
VeroTwin-DPL 50/130-2,2/2	yes	IE3	DN 50	340	2.20	68	2121253	C	2,354.-	A	☹	3	F
VeroTwin-DPL 50/140-3/2	yes	IE3	DN 50	340	3.00	79	2121254	C	2,652.-	A	☹	3	F
VeroTwin-DPL 50/150-4/2	yes	IE3	DN 50	340	4.00	92	2121255	C	2,804.-	A	☹	3	F
VeroTwin-DPL 50/155-4/2	-	IE3	DN 50	340	4.00	113	2121256	C	3,161.-	A	☹	4	A
VeroTwin-DPL 50/165-5,5/2	-	IE3	DN 50	340	5.50	150	2121257	C	3,953.-	A	☹	5	B
VeroTwin-DPL 50/175-5,5/2	-	IE3	DN 50	340	5.50	150	2121258	C	3,953.-	A	☹	5	B
VeroTwin-DPL 50/175-7,5/2	-	IE3	DN 50	340	7.50	165	2121259	C	4,138.-	A	☹	5	B

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☹ = please contact Wilo
 Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG3



Ordering information (2-pole types)								Additional charge					
Type	Three-phase standard motor	Motor efficiency class	Nominal flange diameter	Port-to-port length	Rated power	Net weight, approx.	Art. no.		PN 16 housing (H5 version)	GRD group	Blind flange		
				<i>l</i> mm	<i>P</i> ₂ kW	<i>m</i> kg							
									EUR		EUR		
VeroTwin-DPL 50/185-7,5/2	-	IE3	DN 50	440	7.50	172	2121260	C	4,138.-	A	☞	5	C
VeroTwin-DPL 65/110-2,2/2	yes	IE3	DN 65	340	2.20	76	2121262	L	2,743.-	A	☞	3	F
VeroTwin-DPL 65/115-1,5/2	yes	IE3	DN 65	340	1.50	72	2121261	L	2,637.-	K	429.-	3	H
VeroTwin-DPL 65/120-3/2	yes	IE3	DN 65	340	3.00	87	2121263	L	2,979.-	A	☞	3	F
VeroTwin-DPL 65/130-4/2	yes	IE3	DN 65	340	4.00	100	2121264	L	3,139.-	A	☞	3	F
VeroTwin-DPL 65/145-5,5/2	-	IE3	DN 65	340	5.50	153	2121265	C	3,696.-	A	☞	5	A
VeroTwin-DPL 65/155-5,5/2	-	IE3	DN 65	340	5.50	154	2121266	C	3,696.-	A	☞	5	A
VeroTwin-DPL 65/155-7,5/2	-	IE3	DN 65	340	7.50	170	2121267	C	3,891.-	A	☞	5	A
VeroTwin-DPL 65/165-5,5/2	-	IE3	DN 65	430	5.50	171	2121268	C	4,201.-	A	☞	5	B
VeroTwin-DPL 65/175-5,5/2	-	IE3	DN 65	430	5.50	171	2121269	C	4,201.-	A	☞	5	B
VeroTwin-DPL 65/175-7,5/2	-	IE3	DN 65	430	7.50	186	2121270	C	4,394.-	A	☞	5	B
VeroTwin-DPL 80/105-3/2	yes	IE3	DN 80	360	3.00	90	2121272	C	3,135.-	A	☞	3	F
VeroTwin-DPL 80/110-4/2	yes	IE3	DN 80	360	4.00	103	2121273	C	3,290.-	A	☞	3	F
VeroTwin-DPL 80/115-2,2/2	yes	IE3	DN 80	360	2.20	80	2121271	L	3,055.-	K	447.-	3	H
VeroTwin-DPL 80/120-4/2	yes	IE3	DN 80	360	4.00	103	2155463	C	3,290.-	A	☞	3	F
VeroTwin-DPL 80/120-5,5/2	-	IE3	DN 80	360	5.50	109	2155464	C	3,843.-	A	☞	3	F
VeroTwin-DPL 80/145-5,5/2	-	IE3	DN 80	400	5.50	168	2121274	C	4,181.-	A	☞	5	A
VeroTwin-DPL 80/155-7,5/2	-	IE3	DN 80	400	7.50	185	2121275	L	4,278.-	A	☞	5	A


Price group: PG3


Ordering information (4-pole types)								Additional charge					
Type	Three-phase standard motor	Motor efficiency class	Nominal flange diameter	Port-to-port length	Rated power	Net weight, approx.	Art. no.		PN 16 housing (H5 version)	GRD group	Blind flange		
				<i>l</i> mm	<i>P</i> ₂ kW	<i>m</i> kg							
									EUR		EUR		
VeroTwin-DPL 32/105-0,12/4	yes	IE2	DN 32	260	0.12	34	2150372	C	1,408.-	K	381.-	3	F
VeroTwin-DPL 32/135-0,25/4	yes	IE2	DN 32	260	0.25	35	2150373	L	1,594.-	K	381.-	3	F
VeroTwin-DPL 40/130-0,25/4	yes	IE2	DN 40	320	0.25	42	2089620	L	1,637.-	K	388.-	3	F

= ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☞ = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Ordering information (4-pole types)								Additional charge					
Type	Three-phase standard motor	Motor efficiency class	Nominal flange diameter	Port-to-port length	Rated power	Net weight, approx.	Art. no.		PN 16 housing (H5 version)	GRD group	Blind flange		
				<i>l</i> mm	<i>P</i> ₂ kW	<i>m</i> kg			EUR		EUR		
VeroTwin-DPL 40/160-0.37/4	yes	IE2	DN 40	320	0.37	44	2089621	L	1,958.-	K	388.-	3	F
VeroTwin-DPL 50/105-0.12/4	yes	IE2	DN 50	280	0.12	37	2150374	C	1,769.-	K	410.-	3	G
VeroTwin-DPL 50/130-0.37/4	yes	IE2	DN 50	340	0.37	46	2089623	L	2,006.-	A	☎	3	F
VeroTwin-DPL 50/160-0.55/4	yes	IE2	DN 50	340	0.55	53	2089624	L	2,249.-	A	☎	3	F
VeroTwin-DPL 65/110-0.25/4	yes	IE2	DN 65	340	0.25	51	2133205	C	2,140.-	A	☎	3	F
VeroTwin-DPL 65/120-0.37/4	yes	IE2	DN 65	340	0.37	53	2133206	L	2,245.-	A	☎	3	F
VeroTwin-DPL 65/130-0.55/4	yes	IE2	DN 65	340	0.55	61	2133207	L	2,291.-	A	☎	3	F
VeroTwin-DPL 80/120-0.55/4	yes	IE2	DN 80	360	0.55	64	2133208	C	2,518.-	A	☎	3	F
VeroTwin-DPL 80/125-0.75/4	yes	IE3	DN 80	360	0.75	59	2121233	C	2,746.-	A	☎	3	F
VeroTwin-DPL 80/140-1.1/4	yes	IE3	DN 80	360	1.10	75	2121234	L	2,878.-	A	☎	3	F
VeroTwin-DPL 100/135-1.1/4	-	IE3	DN 100	500	1.10	135	2121235	C	3,441.-	A	☎	5	B
VeroTwin-DPL 100/145-1.5/4	-	IE3	DN 100	500	1.50	145	2121236	C	4,930.-	A	☎	5	B
VeroTwin-DPL 100/165-2.2/4	-	IE3	DN 100	500	2.20	173	2121237	L	5,270.-	A	☎	5	B
VeroTwin-DPL 100/175-3/4	-	IE3	DN 100	500	3.00	176	2121238	C	5,329.-	A	☎	5	B

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
 Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

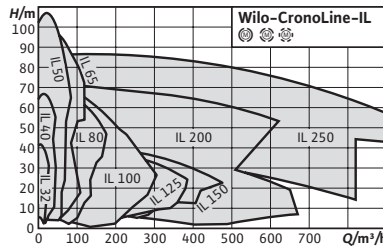

Accessories	Page
Wall fixation/installation on a base	185
Motor protection	231
Pump control CC-HVAC	201
Pump control SC/FC-HVAC	211

Series extension

IE4 **Select 4 online**
All information at www.wilo-select.com

Wilo-CronoLine-IL



Construction

Glanded pump in in-line design with flange connection

Application

Pumping of heating water (acc. to VDI 2035), cold water and water/glycol mixtures without abrasive substances in heating, cold water and cooling systems.

Scope of delivery

- Pump
- Installation and operating instructions

Options

- ...-L1 variant with bronze impeller (at additional charge)
- ...-H1 variant with housing made of spheroidal cast iron (at additional charge)
- ...-P4 variant for maximum operating pressure of 25 bar (see Wilo price list)
- Other voltages and frequencies as well as ATEX approval on request

Notice

- Motors with an energy efficiency class of IE3 for motors ≥ 0.75 kW

Your advantages

- Reduced life cycle costs thanks to optimized efficiency
- Standard condensate drainage holes in the motor housings
- Can be used flexibly in air-conditioning and cooling systems, with application benefits due to direct draining of condensate via optimised lantern design (patented)
- High standard of corrosion protection thanks to cathophoretic coating
- High worldwide availability of standard motors (according to Wilo specifications) and standard mechanical seals

General notes – ErP (Ecodesign) Directive

The minimum efficiency index, MEI, of the pump series is ≥ 0.4 . For detailed information on the MEI values of the individual pump types, see: Wilo Online Catalogue, available at www.wilo.com

Price group: PG3

Ordering information (2-pole types)							Additional charge						
Type	Motor efficiency class	Nominal flange diameter	Port-to-port length	Rated power	Net weight, approx.	Art. no.	Red brass impeller (L1 version)		Spheroidal cast iron housing (H1 version)		GRD group		
			l_0 mm	P_2 kW	m kg			EUR		EUR		EUR	
CronoLine-IL 32/140-1,5/2	IE3	DN 32	320	1.50	53	2120862	L	1,303.-	K	318.-	K	388.-	4

= ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Ordering information (2-pole types)							Additional charge						
Type	Motor efficiency class	Nominal flange diameter	Port-to-port length	Rated power	Net weight, approx.	Art. no.			Red brass impeller (L1 version)		Spheroidal cast iron housing (H1 version)	GRD group	
			<i>l</i> mm	<i>P</i> ₂ kW	<i>m</i> kg			EUR		EUR		EUR	
CronoLine-IL 32/150-2,2/2	IE3	DN 32	320	2.20	56	2120863	L	1,396.-	K	318.-	K	388.-	4
CronoLine-IL 32/160-2,2/2	IE3	DN 32	320	2.20	56	2120864	L	1,396.-	K	318.-	K	388.-	4
CronoLine-IL 32/160-3/2	IE3	DN 32	320	3.00	59	2120865	L	1,466.-	K	318.-	K	433.-	4
CronoLine-IL 32/170-3/2	IE3	DN 32	320	3.00	59	2120866	L	1,466.-	K	318.-	K	433.-	4
CronoLine-IL 32/170-4/2	IE3	DN 32	320	4.00	67	2120867	L	1,499.-	K	318.-	K	433.-	4
CronoLine-IL 40/140-2,2/2	IE3	DN 40	340	2.20	56	2120868	L	1,412.-	K	349.-	K	450.-	4
CronoLine-IL 40/150-3/2	IE3	DN 40	340	3.00	61	2120869	L	1,475.-	K	349.-	K	450.-	4
CronoLine-IL 40/160-4/2	IE3	DN 40	340	4.00	66	2120870	L	1,718.-	K	349.-	K	450.-	4
CronoLine-IL 40/170-5,5/2	IE3	DN 40	340	5.50	86	2120871	L	2,265.-	K	349.-	K	557.-	4
CronoLine-IL 40/200-7,5/2	IE3	DN 40	440	7.50	106	2120872	L	2,312.-	K	381.-	K	557.-	5
CronoLine-IL 40/220-11/2	IE3	DN 40	440	11.00	154	2120873	C	2,969.-	K	381.-	K	557.-	5
CronoLine-IL 50/110-1,5/2	IE3	DN 50	340	1.50	52	2120874	L	1,335.-	K	349.-	K	515.-	4
CronoLine-IL 50/120-2,2/2	IE3	DN 50	340	2.20	54	2120875	L	1,419.-	K	349.-	K	515.-	4
CronoLine-IL 50/130-3/2	IE3	DN 50	340	3.00	59	2120876	L	1,494.-	K	349.-	K	515.-	4
CronoLine-IL 50/140-3/2	IE3	DN 50	340	3.00	59	2120877	L	1,494.-	K	349.-	K	515.-	4
CronoLine-IL 50/140-4/2	IE3	DN 50	340	4.00	67	2120878	L	1,745.-	K	349.-	K	515.-	4
CronoLine-IL 50/160-5,5/2	IE3	DN 50	340	5.50	90	2120879	L	2,303.-	K	388.-	K	737.-	5
CronoLine-IL 50/170-5,5/2	IE3	DN 50	340	5.50	90	2120880	C	2,303.-	K	388.-	K	737.-	5
CronoLine-IL 50/170-7,5/2	IE3	DN 50	340	7.50	97	2120881	L	2,323.-	K	388.-	K	737.-	5
CronoLine-IL 50/180-7,5/2	IE3	DN 50	440	7.50	106	2120882	L	2,323.-	K	425.-	K	737.-	5
CronoLine-IL 50/210-11/2	IE3	DN 50	440	11.00	157	2120883	L	3,225.-	K	425.-	K	988.-	5
CronoLine-IL 50/220-11/2	IE3	DN 50	440	11.00	157	2120884	C	3,225.-	K	425.-	K	988.-	5
CronoLine-IL 50/220-15/2	IE3	DN 50	440	15.00	176	2120885	C	3,496.-	K	425.-	K	988.-	5
CronoLine-IL 50/250-18,5/2	IE3	DN 50	440	18.50	201	2120886	C	4,493.-	K	639.-	A	-	6
CronoLine-IL 50/250-22/2	IE3	DN 50	440	22.00	283	2120887	C	5,184.-	K	639.-	A	-	6
CronoLine-IL 50/270-22/2	IE3	DN 50	440	22.00	283	2120888	C	5,184.-	K	639.-	A	-	6
CronoLine-IL 50/270-30/2	IE3	DN 50	440	30.00	344	2120889	C	5,535.-	K	639.-	A	-	6

= ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, = please contact Wilo
 Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG3

Ordering information (2-pole types)							Additional charge						
Type	Motor efficiency class	Nominal flange diameter	Port-to-port length	Rated power	Net weight, approx.	Art. no.		Red brass impeller (L1 version)		Spheroidal cast iron housing (H1 version)		GRD group	
			l_0 mm	P_2 kW	m kg		🚚	🚚	🚚	🚚	🚚		
							EUR	EUR	EUR	EUR			
CronoLine-IL 65/110-3/2	IE3	DN 65	340	3.00	62	2120890	L	1,583.-	K	388.-	K	573.- 4	
CronoLine-IL 65/120-3/2	IE3	DN 65	340	3.00	62	2120891	L	1,583.-	K	388.-	K	573.- 4	
CronoLine-IL 65/120-4/2	IE3	DN 65	340	4.00	70	2120892	L	1,757.-	K	388.-	K	573.- 4	
CronoLine-IL 65/130-4/2	IE3	DN 65	340	4.00	70	2120893	L	1,757.-	K	388.-	K	573.- 4	
CronoLine-IL 65/130-5,5/2	IE3	DN 65	340	5.50	87	2120894	L	2,360.-	K	388.-	K	573.- 5	
CronoLine-IL 65/140-5,5/2	IE3	DN 65	340	5.50	87	2120895	L	2,360.-	K	388.-	K	573.- 5	
CronoLine-IL 65/140-7,5/2	IE3	DN 65	340	7.50	94	2120896	L	2,464.-	K	388.-	K	573.- 5	
CronoLine-IL 65/150-5,5/2	IE3	DN 65	430	5.50	96	2120897	L	2,360.-	K	619.-	K	712.- 5	
CronoLine-IL 65/160-5,5/2	IE3	DN 65	430	5.50	96	2120898	L	2,360.-	K	619.-	K	712.- 5	
CronoLine-IL 65/160-7,5/2	IE3	DN 65	430	7.50	103	2120899	L	2,464.-	K	619.-	K	712.- 5	
CronoLine-IL 65/170-11/2	IE3	DN 65	430	11.00	144	2120900	L	3,247.-	K	619.-	K	712.- 5	
CronoLine-IL 65/200-11/2	IE3	DN 65	475	11.00	164	2120901	C	3,247.-	K	668.-	K	831.- 6	
CronoLine-IL 65/200-15/2	IE3	DN 65	475	15.00	182	2120902	L	3,922.-	K	668.-	K	831.- 6	
CronoLine-IL 65/210-15/2	IE3	DN 65	475	15.00	182	2120903	C	3,922.-	K	668.-	K	831.- 6	
CronoLine-IL 65/210-18,5/2	IE3	DN 65	475	18.50	199	2120904	C	4,669.-	K	668.-	K	831.- 6	
CronoLine-IL 65/220-18,5/2	IE3	DN 65	475	18.50	198	2120905	C	4,669.-	K	668.-	K	831.- 6	
CronoLine-IL 65/220-22/2	IE3	DN 65	475	22.00	281	2120906	C	5,261.-	K	668.-	K	831.- 6	
CronoLine-IL 65/240-30/2	IE3	DN 65	475	30.00	348	2120907	C	6,176.-	K	675.-	A	- 6	
CronoLine-IL 65/260-30/2	IE3	DN 65	475	30.00	348	2120908	C	6,176.-	K	675.-	A	- 6	
CronoLine-IL 65/260-37/2	IE3	DN 65	475	37.00	367	2120909	C	7,321.-	K	675.-	A	- 6	
CronoLine-IL 80/110-3/2	IE3	DN 80	400	3.00	70	2120910	L	1,752.-	K	619.-	K	576.- 4	
CronoLine-IL 80/120-4/2	IE3	DN 80	400	4.00	78	2120911	L	1,924.-	K	619.-	K	576.- 4	
CronoLine-IL 80/130-5,5/2	IE3	DN 80	400	5.50	95	2120912	L	2,389.-	K	619.-	K	576.- 5	
CronoLine-IL 80/140-7,5/2	IE3	DN 80	400	7.50	102	2120913	L	2,525.-	K	619.-	K	576.- 5	
CronoLine-IL 80/150-7,5/2	IE3	DN 80	440	7.50	110	2120914	L	2,525.-	K	640.-	K	779.- 5	
CronoLine-IL 80/160-11/2	IE3	DN 80	440	11.00	151	2120915	L	3,315.-	K	640.-	K	779.- 5	
CronoLine-IL 80/170-11/2	IE3	DN 80	440	11.00	151	2120916	C	3,315.-	K	640.-	K	779.- 5	

🚚 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, 📞 = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Ordering information (2-pole types)							Additional charge						
Type	Motor efficiency class	Nominal flange diameter	Port-to-port length	Rated power	Net weight, approx.	Art. no.			Red brass impeller (L1 version)		Spheroidal cast iron housing (H1 version)	GRD group	
			<i>l</i> mm	<i>P</i> ₂ kW	<i>m</i> kg			EUR		EUR		EUR	
CronoLine-IL 80/170-15/2	IE3	DN 80	440	15.00	169	2120917	L	3,943.-	K	640.-	K	779.-	5
CronoLine-IL 80/190-15/2	IE3	DN 80	500	15.00	188	2120918	C	3,943.-	K	701.-	K	1,368.-	6
CronoLine-IL 80/190-18,5/2	IE3	DN 80	500	18.50	204	2120919	L	4,787.-	K	701.-	K	1,368.-	6
CronoLine-IL 80/200-18,5/2	IE3	DN 80	500	18.50	204	2120920	C	4,787.-	K	701.-	K	1,368.-	6
CronoLine-IL 80/200-22/2	IE3	DN 80	500	22.00	287	2120921	L	5,346.-	K	701.-	K	1,368.-	6
CronoLine-IL 80/210-30/2	IE3	DN 80	500	30.00	341	2120922	C	6,306.-	K	701.-	K	1,368.-	6
CronoLine-IL 80/220-22/2	IE3	DN 80	500	22.00	290	2120923	C	5,346.-	K	701.-	K	1,368.-	6
CronoLine-IL 80/220-30/2	IE3	DN 80	500	30.00	341	2120924	C	6,306.-	K	701.-	K	1,368.-	6
CronoLine-IL 100/145-11/2	IE3	DN 100	500	11.00	169	2120925	L	3,374.-	K	721.-	K	1,138.-	6
CronoLine-IL 100/150-15/2	IE3	DN 100	500	15.00	187	2120926	L	4,313.-	K	721.-	K	1,138.-	6
CronoLine-IL 100/160-15/2	IE3	DN 100	500	15.00	187	2120927	L	4,313.-	K	721.-	K	1,138.-	6
CronoLine-IL 100/160-18,5/2	IE3	DN 100	500	18.50	203	2120928	L	5,034.-	K	721.-	K	1,138.-	6
CronoLine-IL 100/165-22/2	IE3	DN 100	500	22.00	286	2120929	L	5,670.-	K	721.-	K	1,138.-	6
CronoLine-IL 100/170-22/2	IE3	DN 100	500	22.00	286	2120930	C	5,670.-	K	721.-	K	1,138.-	6
CronoLine-IL 100/170-30/2	IE3	DN 100	500	30.00	337	2120931	L	6,927.-	K	721.-	K	1,138.-	6
CronoLine-IL 100/190-30/2	IE3	DN 100	550	30.00	355	2120932	L	6,927.-	K	766.-	K	1,471.-	6
CronoLine-IL 100/210-30/2	IE3	DN 100	550	30.00	355	2120933	C	6,927.-	K	766.-	K	1,471.-	6
CronoLine-IL 100/210-37/2	IE3	DN 100	550	37.00	374	2120934	C	8,821.-	K	766.-	K	1,471.-	6
CronoLine-IL 125/145-15/2	IE3	DN 125	620	15.00	209	2120935	L	5,917.-	K	805.-	A	-	6
CronoLine-IL 125/150-18,5/2	IE3	DN 125	620	18.50	225	2120936	L	6,465.-	K	805.-	A	-	6
CronoLine-IL 125/160-22/2	IE3	DN 125	620	22.00	307	2120937	L	7,174.-	K	805.-	A	-	6
CronoLine-IL 125/165-30/2	IE3	DN 125	620	30.00	359	2120938	L	8,650.-	K	805.-	A	-	6
CronoLine-IL 125/170-37/2	IE3	DN 125	620	37.00	378	2120939	C	9,207.-	K	805.-	A	-	6

= ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, = please contact Wilo
 Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG3

Ordering information (4-pole types)							Additional charge						
Type	Motor efficiency class	Nominal flange diameter	Port-to-port length	Rated power	Net weight, approx.	Art. no.			Red brass impeller (L1 version)	Spheroidal cast iron housing (H1 version)	GRD group		
			l0 mm	P ₂ kW	m kg		🚚	🚚	🚚				
CronoLine-IL 32/140-0,25/4	IE2	DN 32	320	0.25	36	2063574	L	1,084.-	K	318.-	K	388.-	4
CronoLine-IL 32/150-0,37/4	IE2	DN 32	320	0.37	36	2088307	L	1,096.-	K	318.-	K	388.-	4
CronoLine-IL 32/170-0,55/4	IE2	DN 32	320	0.55	40	2088306	L	1,230.-	K	318.-	K	388.-	4
CronoLine-IL 40/140-0,25/4	IE2	DN 40	340	0.25	38	2088320	L	1,114.-	K	349.-	K	404.-	4
CronoLine-IL 40/150-0,37/4	IE2	DN 40	340	0.37	38	2088318	L	1,124.-	K	349.-	K	404.-	4
CronoLine-IL 40/160-0,55/4	IE2	DN 40	340	0.55	42	2088316	L	1,237.-	K	349.-	K	404.-	4
CronoLine-IL 40/170-0,75/4	IE3	DN 40	340	0.75	44	2120750	L	1,396.-	K	349.-	K	404.-	4
CronoLine-IL 40/210-1,1/4	IE3	DN 40	440	1.10	62	2120751	L	1,520.-	K	381.-	K	849.-	4
CronoLine-IL 40/220-1,5/4	IE3	DN 40	440	1.50	64	2120752	L	1,545.-	K	381.-	K	849.-	4
CronoLine-IL 50/150-0,55/4	IE2	DN 50	340	0.55	47	2088339	L	1,246.-	K	388.-	K	587.-	4
CronoLine-IL 50/160-0,75/4	IE3	DN 50	340	0.75	50	2120753	L	1,408.-	K	388.-	K	587.-	4
CronoLine-IL 50/170-1,1/4	IE3	DN 50	340	1.10	58	2120754	L	1,514.-	K	388.-	K	587.-	4
CronoLine-IL 50/200-1,5/4	IE3	DN 50	440	1.50	70	2120755	L	1,563.-	K	425.-	K	890.-	4
CronoLine-IL 50/220-2,2/4	IE3	DN 50	440	2.20	79	2120756	L	1,713.-	K	425.-	K	890.-	4
CronoLine-IL 50/260-3/4	IE3	DN 50	440	3.00	94	2120757	L	1,755.-	K	639.-	A	-	5
CronoLine-IL 50/270-3/4	IE3	DN 50	440	3.00	94	2120758	C	1,755.-	K	639.-	A	-	5
CronoLine-IL 50/270-4/4	IE3	DN 50	440	4.00	101	2120759	C	1,980.-	K	639.-	A	-	5
CronoLine-IL 65/120-0,55/4	IE2	DN 65	340	0.55	42	2139459	L	1,353.-	K	388.-	K	572.-	4
CronoLine-IL 65/130-0,75/4	IE3	DN 65	340	0.75	46	2142041	L	1,521.-	K	388.-	K	572.-	4
CronoLine-IL 65/140-1,1/4	IE3	DN 65	340	1.10	54	2142042	L	1,571.-	K	388.-	K	572.-	4
CronoLine-IL 65/150-0,75/4	IE3	DN 65	430	0.75	54	2120760	L	1,521.-	K	619.-	K	562.-	4
CronoLine-IL 65/160-1,1/4	IE3	DN 65	430	1.10	62	2120761	L	1,571.-	K	619.-	K	562.-	4
CronoLine-IL 65/170-1,1/4	IE3	DN 65	430	1.10	62	2120762	L	1,571.-	K	619.-	K	562.-	4
CronoLine-IL 65/170-1,5/4	IE3	DN 65	430	1.50	65	2120763	L	1,583.-	K	619.-	K	562.-	4
CronoLine-IL 65/210-2,2/4	IE3	DN 65	475	2.20	83	2120764	L	1,853.-	K	668.-	K	755.-	5
CronoLine-IL 65/220-2,2/4	IE3	DN 65	475	2.20	83	2120765	C	1,853.-	K	668.-	K	755.-	5

🚚 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, 📞 = please contact Wilo
 Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Ordering information (4-pole types)							Additional charge						
Type	Motor efficiency class	Nominal flange diameter	Port-to-port length	Rated power	Net weight, approx.	Art. no.			Red brass impeller (L1 version)	Spheroidal cast iron housing (H1 version)	GRD group		
			l ₀ mm	P ₂ kW	m kg								
CronoLine-IL 65/220-3/4	IE3	DN 65	475	3.00	91	2120766	L	1,973.-	K	668.-	K	755.-	5
CronoLine-IL 65/250-3/4	IE3	DN 65	475	3.00	97	2120767	C	1,973.-	K	681.-	A	-	5
CronoLine-IL 65/250-4/4	IE3	DN 65	475	4.00	104	2120768	L	2,251.-	K	681.-	A	-	5
CronoLine-IL 65/270-4/4	IE3	DN 65	475	4.00	104	2120769	C	2,251.-	K	681.-	A	-	5
CronoLine-IL 65/270-5,5/4	IE3	DN 65	475	5.50	141	2120770	L	2,370.-	K	681.-	A	-	5
CronoLine-IL 80/145-1,1/4	IE3	DN 80	440	1.10	70	2120771	L	1,657.-	K	640.-	K	632.-	4
CronoLine-IL 80/150-1,1/4	IE3	DN 80	440	1.10	70	2120772	L	1,657.-	K	640.-	K	632.-	4
CronoLine-IL 80/160-1,5/4	IE3	DN 80	440	1.50	73	2120773	L	1,710.-	K	640.-	K	632.-	4
CronoLine-IL 80/170-2,2/4	IE3	DN 80	440	2.20	83	2120774	L	1,918.-	K	640.-	K	632.-	4
CronoLine-IL 80/210-3/4	IE3	DN 80	500	3.00	98	2120775	L	2,113.-	K	701.-	K	1,287.-	5
CronoLine-IL 80/220-4/4	IE3	DN 80	500	4.00	105	2120776	L	2,692.-	K	701.-	K	1,287.-	5
CronoLine-IL 80/270-5,5/4	IE3	DN 80	500	5.50	110	2120777	L	2,898.-	K	757.-	A	-	5
CronoLine-IL 80/285-5,5/4	IE3	DN 80	620	5.50	203	2157053	C	2,949.-	K	873.-	A	-	13
CronoLine-IL 80/295-5,5/4	IE3	DN 80	620	5.50	203	2157052	C	2,949.-	K	873.-	A	-	13
CronoLine-IL 80/295-7,5/4	IE3	DN 80	620	7.50	213	2169789	C	3,399.-	K	873.-	A	-	13
CronoLine-IL 80/305-7,5/4	IE3	DN 80	620	7.50	213	2157051	C	3,399.-	K	873.-	A	-	13
CronoLine-IL 80/305-11/4	IE3	DN 80	620	11.00	233	2157049	C	4,293.-	K	873.-	A	-	13
CronoLine-IL 80/315-11/4	IE3	DN 80	620	11.00	233	2157050	C	4,293.-	K	873.-	A	-	13
CronoLine-IL 80/315-15/4	IE3	DN 80	620	15.00	255	2157048	C	5,335.-	K	873.-	A	-	13
CronoLine-IL 100/145-1,1/4	IE3	DN 100	500	1.10	84	2120778	L	1,898.-	K	721.-	K	1,036.-	5
CronoLine-IL 100/150-1,5/4	IE3	DN 100	500	1.50	86	2120779	L	2,721.-	K	721.-	K	1,036.-	5
CronoLine-IL 100/160-2,2/4	IE3	DN 100	500	2.20	93	2120780	L	2,906.-	K	721.-	K	1,036.-	5
CronoLine-IL 100/170-2,2/4	IE3	DN 100	500	2.20	93	2120781	C	2,906.-	K	721.-	K	1,036.-	5
CronoLine-IL 100/170-3/4	IE3	DN 100	500	3.00	104	2120782	L	2,939.-	K	721.-	K	1,036.-	5
CronoLine-IL 100/200-3/4	IE3	DN 100	550	3.00	111	2120783	C	2,939.-	K	795.-	K	1,354.-	5
CronoLine-IL 100/200-4/4	IE3	DN 100	550	4.00	118	2120784	L	3,505.-	K	795.-	K	1,354.-	5
CronoLine-IL 100/220-4/4	IE3	DN 100	550	4.00	118	2120785	C	3,505.-	K	795.-	K	1,354.-	5

= ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, = please contact Wilo
 Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG3

Ordering information (4-pole types)							Additional charge						
Type	Motor efficiency class	Nominal flange diameter	Port-to-port length	Rated power	Net weight, approx.	Art. no.			Red brass impeller (L1 version)		Spheroidal cast iron housing (H1 version)	GRD group	
			l mm	P ₂ kW	m kg		🚚		🚚		🚚		
CronoLine-IL 100/220-5,5/4	IE3	DN 100	550	5.50	156	2120786	L	4,031.-	K	795.-	K	1,354.-	5
CronoLine-IL 100/250-5,5/4	IE3	DN 100	550	5.50	168	2120787	L	4,031.-	K	817.-	A	-	5
CronoLine-IL 100/250-7,5/4	IE3	DN 100	550	7.50	178	2120788	L	4,532.-	K	817.-	A	-	5
CronoLine-IL 100/260-7,5/4	IE3	DN 100	550	7.50	178	2120789	L	4,532.-	K	817.-	A	-	6
CronoLine-IL 100/260-11/4	IE3	DN 100	550	11.00	205	2120790	L	5,426.-	K	817.-	A	-	6
CronoLine-IL 100/265-5,5/4	IE3	DN 100	700	5.50	217	2160652	C	4,031.-	K	942.-	A	-	13
CronoLine-IL 100/270-11/4	IE3	DN 100	550	11.00	205	2120791	L	5,426.-	K	817.-	A	-	6
CronoLine-IL 100/275-7,5/4	IE3	DN 100	700	7.50	227	2160651	C	4,532.-	K	942.-	A	-	13
CronoLine-IL 100/285-11/4	IE3	DN 100	700	11.00	246	2160650	C	5,564.-	K	942.-	A	-	13
CronoLine-IL 100/295-11/4	IE3	DN 100	700	11.00	246	2169793	C	5,564.-	K	942.-	A	-	13
CronoLine-IL 100/295-15/4	IE3	DN 100	700	15.00	268	2160649	C	6,262.-	K	942.-	A	-	13
CronoLine-IL 100/305-15/4	IE3	DN 100	700	15.00	268	2169792	C	6,262.-	K	942.-	A	-	13
CronoLine-IL 100/305-18,5/4	IE3	DN 100	700	18.50	299	2160648	C	6,624.-	K	942.-	A	-	13
CronoLine-IL 100/315-18,5/4	IE3	DN 100	700	18.50	299	2169791	C	6,624.-	K	942.-	A	-	13
CronoLine-IL 100/315-22/4	IE3	DN 100	700	22.00	350	2160647	C	6,911.-	K	942.-	A	-	13
CronoLine-IL 100/350-11/4	IE3	DN 100	760	11.00	351	2160880	C	5,981.-	K	1,207.-	A	-	14
CronoLine-IL 100/350-15/4	IE3	DN 100	760	15.00	373	2151501	C	6,468.-	K	1,207.-	A	-	14
CronoLine-IL 100/360-15/4	IE3	DN 100	760	15.00	373	2160879	C	6,468.-	K	1,207.-	A	-	14
CronoLine-IL 100/360-18,5/4	IE3	DN 100	760	18.50	403	2151500	C	6,624.-	K	1,207.-	A	-	14
CronoLine-IL 100/370-18,5/4	IE3	DN 100	760	18.50	403	2160878	C	6,624.-	K	1,207.-	A	-	14
CronoLine-IL 100/370-22/4	IE3	DN 100	760	22.00	454	2151499	C	6,911.-	K	1,207.-	A	-	14
CronoLine-IL 100/380-22/4	IE3	DN 100	760	22.00	454	2160877	C	6,911.-	K	1,207.-	A	-	14
CronoLine-IL 100/380-30/4	IE3	DN 100	760	30.00	516	2151498	C	7,517.-	K	1,207.-	A	-	14
CronoLine-IL 100/390-30/4	IE3	DN 100	760	30.00	516	2160876	C	7,517.-	K	1,207.-	A	-	14
CronoLine-IL 100/390-37/4	IE3	DN 100	760	37.00	585	2151497	C	10,972.-	K	1,207.-	A	-	15
CronoLine-IL 100/400-37/4	IE3	DN 100	760	37.00	585	2160875	C	10,972.-	K	1,207.-	A	-	15
CronoLine-IL 100/400-45/4	IE3	DN 100	760	45.00	620	2151496	C	11,445.-	K	1,207.-	A	-	15

🚚 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, 📞 = please contact Wilo
 Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Ordering information (4-pole types)							Additional charge						
Type	Motor efficiency class	Nominal flange diameter	Port-to-port length	Rated power	Net weight, approx.	Art. no.			Red brass impeller (L1 version)	Spheroidal cast iron housing (H1 version)	GRD group		
			l ₀ mm	P ₂ kW	m kg								
CronoLine-IL 125/145-1,5/4	IE3	DN 125	620	1.50	107	2120792	L	2,261.-	K	805.-	A	-	5
CronoLine-IL 125/150-2,2/4	IE3	DN 125	620	2.20	117	2120793	L	2,392.-	K	805.-	A	-	5
CronoLine-IL 125/160-3/4	IE3	DN 125	620	3.00	125	2120794	L	2,806.-	K	805.-	A	-	5
CronoLine-IL 125/170-4/4	IE3	DN 125	620	4.00	132	2120795	L	3,588.-	K	805.-	A	-	5
CronoLine-IL 125/190-4/4	IE3	DN 125	620	4.00	132	2120796	L	3,588.-	K	805.-	A	-	5
CronoLine-IL 125/210-5,5/4	IE3	DN 125	620	5.50	170	2120797	L	4,116.-	K	805.-	A	-	5
CronoLine-IL 125/220-5,5/4	IE3	DN 125	620	5.50	170	2120798	C	4,116.-	K	805.-	A	-	5
CronoLine-IL 125/220-7,5/4	IE3	DN 125	620	7.50	182	2120799	L	4,856.-	K	805.-	A	-	5
CronoLine-IL 125/250-11/4	IE3	DN 125	620	11.00	230	2120800	L	5,552.-	K	849.-	A	-	6
CronoLine-IL 125/270-11/4	IE3	DN 125	620	11.00	230	2120801	C	5,552.-	K	849.-	A	-	6
CronoLine-IL 125/270-15/4	IE3	DN 125	620	15.00	252	2120802	L	6,479.-	K	849.-	A	-	6
CronoLine-IL 125/300-15/4	IE3	DN 125	700	15.00	284	2120803	C	6,479.-	K	1,103.-	A	-	7
CronoLine-IL 125/300-18,5/4	IE3	DN 125	700	18.50	314	2120804	C	6,906.-	K	1,103.-	A	-	7
CronoLine-IL 125/320-18,5/4	IE3	DN 125	700	18.50	315	2120805	C	6,906.-	K	1,103.-	A	-	7
CronoLine-IL 125/320-22/4	IE3	DN 125	700	22.00	366	2120806	C	7,447.-	K	1,103.-	A	-	7
CronoLine-IL 125/340-22/4	IE3	DN 125	700	22.00	366	2120807	C	7,447.-	K	1,103.-	A	-	7
CronoLine-IL 125/340-30/4	IE3	DN 125	700	30.00	429	2120808	C	7,931.-	K	1,103.-	A	-	7
CronoLine-IL 125/380-30/4	IE3	DN 125	860	30.00	507	2169767	K	7,931.-	K	1,397.-	A	-	14
CronoLine-IL 125/380-37/4	IE3	DN 125	860	37.00	575	2160655	K	10,875.-	K	1,397.-	A	-	15
CronoLine-IL 125/390-37/4	IE3	DN 125	860	37.00	575	2169766	K	10,875.-	K	1,397.-	A	-	15
CronoLine-IL 125/390-45/4	IE3	DN 125	860	45.00	610	2160654	K	12,692.-	K	1,397.-	A	-	15
CronoLine-IL 125/400-45/4	IE3	DN 125	860	45.00	610	2169765	K	12,692.-	K	1,397.-	A	-	15
CronoLine-IL 125/400-55/4	IE3	DN 125	860	55.00	858	2160653	K	14,968.-	K	1,397.-	A	-	15
CronoLine-IL 150/190-5,5/4	IE3	DN 150	700	5.50	202	2120809	L	4,144.-	K	879.-	A	-	5
CronoLine-IL 150/200-7,5/4	IE3	DN 150	700	7.50	212	2120810	L	5,453.-	K	879.-	A	-	5
CronoLine-IL 150/220-11/4	IE3	DN 150	700	11.00	238	2120811	L	5,726.-	K	879.-	A	-	6
CronoLine-IL 150/250-15/4	IE3	DN 150	700	15.00	313	2120812	L	6,520.-	K	961.-	A	-	7

= ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, = please contact Wilo
 Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG3

Ordering information (4-pole types)							Additional charge					
Type	Motor efficiency class	Nominal flange diameter	Port-to-port length	Rated power	Net weight, approx.	Art. no.			Red brass impeller (L1 version)	Spheroidal cast iron housing (H1 version)	GRD group	
			l ₀ mm	P ₂ kW	m kg							
CronoLine-IL 150/260-15/4	IE3	DN 150	700	15.00	313	2120813	C	6,520.-	K	961.-	A	- 7
CronoLine-IL 150/260-18,5/4	IE3	DN 150	700	18.50	343	2120814	L	7,528.-	K	961.-	A	- 7
CronoLine-IL 150/270-18,5/4	IE3	DN 150	700	18.50	343	2120815	C	7,528.-	K	961.-	A	- 7
CronoLine-IL 150/270-22/4	IE3	DN 150	700	22.00	394	2120816	C	8,172.-	K	961.-	A	- 7
CronoLine-IL 150/305-30/4	IE3	DN 150	770	30.00	482	2142043	C	10,539.-	K	1,260.-	A	- 7
CronoLine-IL 150/325-30/4	IE3	DN 150	770	30.00	482	2142044	K	10,539.-	K	1,260.-	A	- 7
CronoLine-IL 150/325-37/4	IE3	DN 150	770	37.00	520	2142045	K	11,131.-	K	1,260.-	A	- 8
CronoLine-IL 150/335-37/4	IE3	DN 150	770	37.00	520	2142046	K	11,131.-	K	1,260.-	A	- 8
CronoLine-IL 150/335-45/4	IE3	DN 150	770	45.00	555	2142047	K	13,073.-	K	1,260.-	A	- 8
CronoLine-IL 150/360-30/4	IE3	DN 150	940	30.00	519	2169772	K	10,539.-	A	1,435.-	A	- 14
CronoLine-IL 150/360-37/4	IE3	DN 150	940	37.00	587	2160663	K	11,131.-	A	1,435.-	A	- 15
CronoLine-IL 150/370-37/4	IE3	DN 150	940	37.00	587	2169771	K	11,131.-	A	1,435.-	A	- 15
CronoLine-IL 150/370-45/4	IE3	DN 150	940	45.00	622	2160662	K	13,073.-	A	1,435.-	A	- 15
CronoLine-IL 150/380-45/4	IE3	DN 150	940	45.00	622	2169770	K	13,073.-	A	1,435.-	A	- 15
CronoLine-IL 150/380-55/4	IE3	DN 150	940	55.00	881	2160661	K	15,738.-	K	1,435.-	A	- 15
CronoLine-IL 150/390-55/4	IE3	DN 150	940	55.00	881	2169769	K	15,738.-	A	1,435.-	A	- 15
CronoLine-IL 150/390-75/4	IE3	DN 150	940	75.00	977	2160660	K	17,832.-	A	1,435.-	A	- 15
CronoLine-IL 150/400-75/4	IE3	DN 150	940	75.00	977	2169768	K	17,832.-	A	1,435.-	A	- 15
CronoLine-IL 150/400-90/4	IE3	DN 150	940	90.00	1005	2160659	K	21,280.-	A	1,435.-	A	- 15
CronoLine-IL 200/180-7,5/4	IE3	DN 200	800	7.50	258	2169709	C	6,049.-	K	774.-	A	- 14
CronoLine-IL 200/190-11/4	IE3	DN 200	800	11.00	279	2169708	C	8,132.-	K	774.-	A	- 14
CronoLine-IL 200/200-15/4	IE3	DN 200	800	15.00	301	2169707	C	8,146.-	K	774.-	A	- 14
CronoLine-IL 200/230-11/4	IE3	DN 200	800	11.00	352	2120827	C	8,338.-	K	1,058.-	A	- 7
CronoLine-IL 200/240-15/4	IE3	DN 200	800	15.00	374	2120828	C	8,353.-	K	1,058.-	A	- 7
CronoLine-IL 200/250-18,5/4	IE3	DN 200	800	18.50	405	2120829	C	8,887.-	K	1,058.-	A	- 7
CronoLine-IL 200/260-22/4	IE3	DN 200	800	22.00	456	2120830	C	9,559.-	K	1,058.-	A	- 7
CronoLine-IL 200/265-22/4	IE3	DN 200	800	22.00	456	2120831	C	9,559.-	K	1,058.-	A	- 7

= ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, = please contact Wilo
 Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Heating, air conditioning, cooling

Ordering information (4-pole types)							Additional charge						
Type	Motor efficiency class	Nominal flange diameter	Port-to-port length	Rated power	Net weight, approx.	Art. no.			Red brass impeller (L1 version)	Spheroidal cast iron housing (H1 version)	GRD group		
			<i>l</i> mm	<i>P₂</i> kW	<i>m</i> kg								
CronoLine-IL 200/265-30/4	IE3	DN 200	800	30.00	518	2120832	C	11,615.-	K	1,058.-	A	-	7
CronoLine-IL 200/270-30/4	IE3	DN 200	800	30.00	518	2120833	A	11,615.-	K	1,058.-	A	-	7
CronoLine-IL 200/300-37/4	IE3	DN 200	820	37.00	595	2142048	K	12,333.-	K	1,288.-	A	-	8
CronoLine-IL 200/315-37/4	IE3	DN 200	820	37.00	595	2142049	K	12,333.-	K	1,288.-	A	-	8
CronoLine-IL 200/335-37/4	IE3	DN 200	820	37.00	595	2142050	K	12,333.-	K	1,288.-	A	-	8
CronoLine-IL 200/335-45/4	IE3	DN 200	820	45.00	630	2142051	K	14,161.-	K	1,288.-	A	-	8
CronoLine-IL 200/345-45/4	IE3	DN 200	820	45.00	630	2142052	K	14,161.-	K	1,288.-	A	-	8
CronoLine-IL 200/345-55/4	IE3	DN 200	820	55.00	886	2142053	K	14,792.-	K	1,288.-	A	-	8
CronoLine-IL 200/360-37/4	IE3	DN 200	1100	37.00	693	2155280	K	13,471.-	A	1,609.-	A	-	15
CronoLine-IL 200/360-45/4	IE3	DN 200	1100	45.00	728	2145051	K	15,244.-	A	1,609.-	A	-	15
CronoLine-IL 200/370-45/4	IE3	DN 200	1100	45.00	728	2155279	K	15,244.-	A	1,609.-	A	-	15
CronoLine-IL 200/370-55/4	IE3	DN 200	1100	55.00	987	2145052	K	16,220.-	A	1,609.-	A	-	15
CronoLine-IL 200/380-55/4	IE3	DN 200	1100	55.00	987	2155278	K	16,220.-	A	1,609.-	A	-	15
CronoLine-IL 200/380-75/4	IE3	DN 200	1100	75.00	1083	2145053	K	18,009.-	A	1,609.-	A	-	15
CronoLine-IL 200/390-75/4	IE3	DN 200	1100	75.00	1083	2155277	K	18,009.-	A	1,609.-	A	-	15
CronoLine-IL 200/390-90/4	IE3	DN 200	1100	90.00	1111	2145054	K	21,738.-	K	1,609.-	A	-	15
CronoLine-IL 200/400-90/4	IE3	DN 200	1100	90.00	1111	2155276	K	21,738.-	A	1,609.-	A	-	15
CronoLine-IL 200/400-110/4	IE3	DN 200	1100	110.00	1391	2145055	K	29,108.-	A	1,609.-	A	-	15
CronoLine-IL 250/365-75/4	IE3	DN 250	1150	75.00	480	2151795	A	29,573.-	A	-	A	-	9
CronoLine-IL 250/375-75/4	IE3	DN 250	1150	75.00	480	2151794	A	29,573.-	A	-	A	-	9
CronoLine-IL 250/385-75/4	IE3	DN 250	1150	75.00	480	2151793	A	29,573.-	A	-	A	-	9
CronoLine-IL 250/385-90/4	IE3	DN 250	1150	90.00	480	2151792	A	32,315.-	A	-	A	-	9
CronoLine-IL 250/395-90/4	IE3	DN 250	1150	90.00	480	2151791	A	32,315.-	A	-	A	-	9
CronoLine-IL 250/395-110/4	IE3	DN 250	1150	110.00	613	2151790	A	35,801.-	A	-	A	-	9
CronoLine-IL 250/405-90/4	IE3	DN 250	1150	90.00	480	2151789	A	32,315.-	A	-	A	-	9
CronoLine-IL 250/405-110/4	IE3	DN 250	1150	110.00	613	2151788	A	35,801.-	A	-	A	-	9
CronoLine-IL 250/415-110/4	IE3	DN 250	1150	110.00	613	2151787	A	35,801.-	A	-	A	-	9

= ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, = please contact Wilo
 Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG3

Ordering information (4-pole types)							Additional charge				
Type	Motor efficiency class	Nominal flange diameter	Port-to-port length	Rated power	Net weight, approx.	Art. no.		Red brass impeller (L1 version)	Spheroidal cast iron housing (H1 version)	GRD group	
			l_0 mm	P_2 kW	m kg						
CronoLine-IL 250/415-132/4	IE3	DN 250	1150	132.00	613	2151786	A	40,568.-	A	-	9
CronoLine-IL 250/425-110/4	IE3	DN 250	1150	110.00	613	2151785	A	35,801.-	A	-	9
CronoLine-IL 250/425-132/4	IE3	DN 250	1150	132.00	613	2151784	A	40,568.-	A	-	9
CronoLine-IL 250/435-132/4	IE3	DN 250	1150	132.00	613	2151783	A	40,568.-	A	-	9
CronoLine-IL 250/435-160/4	IE3	DN 250	1150	160.00	613	2151782	A	43,818.-	A	-	9
CronoLine-IL 250/445-132/4	IE3	DN 250	1150	132.00	613	2151781	A	40,568.-	A	-	9
CronoLine-IL 250/445-160/4	IE3	DN 250	1150	160.00	613	2151780	A	43,818.-	A	-	9
CronoLine-IL 250/460-132/4	IE3	DN 250	1200	132.00	613	2120856	A	40,568.-	A	-	9
CronoLine-IL 250/460-160/4	IE3	DN 250	1200	160.00	613	2120857	A	43,818.-	A	-	9
CronoLine-IL 250/470-160/4	IE3	DN 250	1200	160.00	613	2120858	A	43,818.-	A	-	9
CronoLine-IL 250/470-200/4	IE3	DN 250	1200	200.00	613	2120859	A	55,097.-	A	-	9
CronoLine-IL 250/480-160/4	IE3	DN 250	1200	160.00	613	2120860	A	43,818.-	A	-	9
CronoLine-IL 250/480-200/4	IE3	DN 250	1200	200.00	613	2120861	A	55,097.-	A	-	9





Price group: PG3



Ordering information (6-pole types)							Additional charge				
Type	Motor efficiency class	Nominal flange diameter	Port-to-port length	Rated power	Net weight, approx.	Art. no.		Red brass impeller (L1 version)	Spheroidal cast iron housing (H1 version)	GRD group	
			l_0 mm	P_2 kW	m kg						
CronoLine-IL 200/240-7,5/6	IE3	DN 200	800	7.50	360	2120940	A	6,771.-	A	1,058.-	7
CronoLine-IL 200/260-7,5/6	IE3	DN 200	800	7.50	360	2120941	A	6,771.-	A	1,058.-	7
CronoLine-IL 200/270-11/6	IE3	DN 200	800	11.00	375	2120942	A	7,004.-	A	1,058.-	7

Price group: PG3

Ordering information (2-pole types) PN25 versions										
Type	-S7		-S8		-S11		-S12			
CronoLine-IL 32/140-1,5/2	A	1,912.-	A	1,922.-	A	2,865.-	A	2,909.-		
CronoLine-IL 32/150-2,2/2	A	2,005.-	A	2,014.-	A	2,958.-	A	3,002.-		
CronoLine-IL 32/160-2,2/2	A	2,005.-	A	2,014.-	A	2,958.-	A	3,002.-		





= ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, = please contact Wilo
 Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Ordering information (2-pole types) PN25 versions								
Type	-S7		-S8		-S11		-S12	
		EUR		EUR		EUR		EUR
CronoLine-IL 32/160-3/2	A	2,075.-	A	2,085.-	A	3,028.-	A	3,072.-
CronoLine-IL 32/170-3/2	A	2,075.-	A	2,085.-	A	3,028.-	A	3,072.-
CronoLine-IL 32/170-4/2	A	2,108.-	A	2,118.-	A	3,061.-	A	3,105.-
CronoLine-IL 40/140-2,2/2	A	2,089.-	A	2,097.-	A	3,146.-	A	3,195.-
CronoLine-IL 40/150-3/2	A	2,152.-	A	2,160.-	A	3,208.-	A	3,258.-
CronoLine-IL 40/160-4/2	A	2,395.-	A	2,404.-	A	3,452.-	A	3,502.-
CronoLine-IL 40/170-5,5/2	A	3,026.-	A	3,047.-	A	4,085.-	A	4,134.-
CronoLine-IL 40/200-7,5/2	A	3,109.-	A	3,119.-	A	4,187.-	A	4,238.-
CronoLine-IL 40/220-11/2	A	3,766.-	A	3,776.-	A	4,844.-	A	4,895.-
CronoLine-IL 50/110-1,5/2	A	2,054.-	A	2,068.-	A	3,139.-	A	3,191.-
CronoLine-IL 50/120-2,2/2	A	2,137.-	A	2,152.-	A	3,223.-	A	3,275.-
CronoLine-IL 50/130-3/2	A	2,213.-	A	2,227.-	A	3,298.-	A	3,350.-
CronoLine-IL 50/140-3/2	A	2,213.-	A	2,227.-	A	3,298.-	A	3,350.-
CronoLine-IL 50/140-4/2	A	2,463.-	A	2,478.-	A	3,549.-	A	3,601.-
CronoLine-IL 50/160-5,5/2	A	3,177.-	A	3,186.-	A	4,257.-	A	4,307.-
CronoLine-IL 50/170-5,5/2	A	3,177.-	A	3,186.-	A	4,257.-	A	4,307.-
CronoLine-IL 50/170-7,5/2	A	3,197.-	A	3,206.-	A	4,277.-	A	4,327.-
CronoLine-IL 50/180-7,5/2	A	3,338.-	A	3,363.-	A	4,432.-	A	4,448.-
CronoLine-IL 50/210-11/2	A	4,240.-	A	4,265.-	A	5,334.-	A	5,350.-
CronoLine-IL 50/220-11/2	A	4,240.-	A	4,265.-	A	5,334.-	A	5,350.-
CronoLine-IL 50/220-15/2	A	4,511.-	A	4,536.-	A	5,605.-	A	5,621.-
CronoLine-IL 65/110-3/2	A	2,203.-	A	2,211.-	A	3,259.-	A	3,309.-
CronoLine-IL 65/120-3/2	A	2,203.-	A	2,211.-	A	3,259.-	A	3,309.-
CronoLine-IL 65/120-4/2	A	2,378.-	A	2,385.-	A	3,433.-	A	3,483.-
CronoLine-IL 65/130-4/2	A	2,378.-	A	2,385.-	A	3,433.-	A	3,483.-
CronoLine-IL 65/130-5,5/2	A	3,005.-	A	3,017.-	A	4,088.-	A	4,137.-
CronoLine-IL 65/140-5,5/2	A	3,005.-	A	3,017.-	A	4,088.-	A	4,137.-
CronoLine-IL 65/140-7,5/2	A	3,109.-	A	3,121.-	A	4,192.-	A	4,241.-
CronoLine-IL 65/150-5,5/2	A	3,236.-	A	3,246.-	A	4,319.-	A	4,370.-
CronoLine-IL 65/160-5,5/2	A	3,236.-	A	3,246.-	A	4,319.-	A	4,370.-
CronoLine-IL 65/160-7,5/2	A	3,340.-	A	3,350.-	A	4,423.-	A	4,474.-
CronoLine-IL 65/170-11/2	A	4,123.-	A	4,133.-	A	5,206.-	A	5,257.-
CronoLine-IL 65/200-11/2	A	4,318.-	A	4,366.-	A	5,550.-	A	5,610.-
CronoLine-IL 65/200-15/2	A	4,993.-	A	5,041.-	A	6,225.-	A	6,285.-
CronoLine-IL 65/210-15/2	A	4,993.-	A	5,041.-	A	6,225.-	A	6,285.-
CronoLine-IL 65/210-18,5/2	A	5,740.-	A	5,788.-	A	6,972.-	A	7,032.-
CronoLine-IL 65/220-18,5/2	A	5,740.-	A	5,788.-	A	6,972.-	A	7,032.-
CronoLine-IL 65/220-22/2	A	6,332.-	A	6,380.-	A	7,564.-	A	7,624.-
CronoLine-IL 80/140-7,5/2	K	3,228.-	K	3,239.-	K	4,308.-	K	4,358.-
CronoLine-IL 80/150-7,5/2	K	3,411.-	K	3,423.-	K	4,491.-	K	4,544.-
CronoLine-IL 80/160-11/2	K	4,201.-	K	4,213.-	K	5,281.-	K	5,334.-
CronoLine-IL 80/170-11/2	K	4,201.-	K	4,213.-	K	5,281.-	K	5,334.-
CronoLine-IL 80/170-15/2	K	4,829.-	K	4,841.-	K	5,909.-	K	5,962.-
CronoLine-IL 80/190-15/2	K	4,960.-	K	4,989.-	K	6,172.-	K	6,229.-
CronoLine-IL 80/190-18,5/2	K	5,804.-	K	5,833.-	K	7,016.-	K	7,073.-
CronoLine-IL 80/200-18,5/2	K	5,804.-	K	5,833.-	K	7,016.-	K	7,073.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.





Price group: PG3

Ordering information (2-pole types) PN25 versions

Type	-S7		-S8		-S11		-S12	
		EUR		EUR		EUR		EUR
CronoLine-IL 80/200-22/2	K	6,363.-	K	6,392.-	K	7,575.-	K	7,632.-
CronoLine-IL 80/210-30/2	K	7,323.-	K	7,352.-	K	8,535.-	K	8,592.-
CronoLine-IL 80/220-22/2	A	6,363.-	A	6,392.-	A	7,575.-	A	7,632.-
CronoLine-IL 80/220-30/2	A	7,323.-	A	7,352.-	A	8,535.-	A	8,592.-

Price group: PG3





Ordering information (4-pole types) PN25 versions

Type	-S7		-S8		-S11		-S12	
		EUR		EUR		EUR		EUR
CronoLine-IL 32/140-0,25/4	A	1,706.-	A	1,713.-	A	2,686.-	A	2,728.-
CronoLine-IL 32/150-0,37/4	A	1,718.-	A	1,726.-	A	2,699.-	A	2,740.-
CronoLine-IL 32/170-0,55/4	A	1,852.-	A	1,860.-	A	2,833.-	A	2,874.-
CronoLine-IL 40/150-0,37/4	A	1,816.-	A	1,824.-	A	2,904.-	A	2,953.-
CronoLine-IL 40/160-0,55/4	A	1,930.-	A	1,937.-	A	3,018.-	A	3,066.-
CronoLine-IL 40/170-0,75/4	A	2,089.-	A	2,096.-	A	3,176.-	A	3,225.-
CronoLine-IL 40/210-1,1/4	A	2,535.-	A	2,544.-	A	3,622.-	A	3,671.-
CronoLine-IL 40/220-1,5/4	A	2,559.-	A	2,569.-	A	3,647.-	A	3,696.-
CronoLine-IL 50/150-0,55/4	A	1,991.-	A	2,000.-	A	3,078.-	A	3,127.-
CronoLine-IL 50/160-0,75/4	A	2,153.-	A	2,162.-	A	3,240.-	A	3,289.-
CronoLine-IL 50/170-1,1/4	A	2,259.-	A	2,268.-	A	3,347.-	A	3,395.-
CronoLine-IL 50/200-1,5/4	A	2,758.-	A	2,766.-	A	3,842.-	A	3,893.-
CronoLine-IL 50/220-2,2/4	A	2,907.-	A	2,915.-	A	3,992.-	A	4,042.-
CronoLine-IL 65/120-0,55/4	A	2,018.-	A	2,026.-	A	3,049.-	A	3,097.-
CronoLine-IL 65/130-0,75/4	A	2,186.-	A	2,194.-	A	3,217.-	A	3,265.-
CronoLine-IL 65/140-1,1/4	A	2,235.-	A	2,244.-	A	3,266.-	A	3,315.-
CronoLine-IL 80/145-1,1/4	K	2,466.-	K	2,477.-	K	3,554.-	K	3,604.-
CronoLine-IL 80/150-1,1/4	K	2,466.-	K	2,477.-	K	3,554.-	K	3,604.-
CronoLine-IL 80/160-1,5/4	K	2,519.-	K	2,529.-	K	3,607.-	K	3,656.-
CronoLine-IL 80/170-2,2/4	K	2,728.-	K	2,738.-	K	3,815.-	K	3,865.-
CronoLine-IL 80/210-3/4	K	3,143.-	K	3,153.-	K	4,254.-	K	4,308.-
CronoLine-IL 80/220-4/4	A	3,723.-	A	3,733.-	A	4,834.-	A	4,888.-
CronoLine-IL 150/360-37/4	A	-	A	-	A	13,774.-	A	13,843.-
CronoLine-IL 150/370-37/4	A	-	A	-	A	13,774.-	A	13,843.-
CronoLine-IL 150/370-45/4	A	-	A	-	A	16,158.-	A	16,238.-
CronoLine-IL 150/380-45/4	A	-	A	-	A	16,158.-	A	16,238.-
CronoLine-IL 150/390-75/4	A	-	A	-	A	21,578.-	A	21,675.-
CronoLine-IL 150/400-75/4	A	-	A	-	A	21,578.-	A	21,675.-
CronoLine-IL 150/400-90/4	A	-	A	-	A	25,026.-	A	25,123.-
CronoLine-IL 200/360-37/4	A	-	A	-	A	16,178.-	A	16,248.-
CronoLine-IL 200/360-45/4	A	-	A	-	A	17,951.-	A	18,021.-
CronoLine-IL 200/370-45/4	A	-	A	-	A	17,951.-	A	18,021.-
CronoLine-IL 200/370-55/4	A	-	A	-	A	19,344.-	A	19,425.-
CronoLine-IL 200/380-55/4	A	-	A	-	A	19,344.-	A	19,425.-
CronoLine-IL 200/380-75/4	A	-	A	-	A	21,133.-	A	21,215.-
CronoLine-IL 200/390-75/4	A	-	A	-	A	21,133.-	A	21,215.-





 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo


Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.


Price group: PG3

Ordering information (4-pole types) PN25 versions								
Type	-S7		-S8		-S11		-S12	
		EUR		EUR		EUR		EUR
CronoLine-IL 200/390-90/4	A	-	A	-	K	25,591.-	K	25,691.-
CronoLine-IL 200/400-90/4	A	-	A	-	A	25,591.-	A	25,691.-
CronoLine-IL 200/400-110/4	A	-	A	-	A	32,960.-	A	33,060.-

Price group: PG3

Ordering information (6-pole types) PN25 versions								
Type	-S7		-S8		-S11		-S12	
								
CronoLine-IL 200/240-7,5/6	A	☞	A	☞	A	☞	A	☞
CronoLine-IL 200/260-7,5/6	A	☞	A	☞	A	☞	A	☞
CronoLine-IL 200/270-11/6	A	☞	A	☞	A	☞	A	☞

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☞ = please contact Wilo
 Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

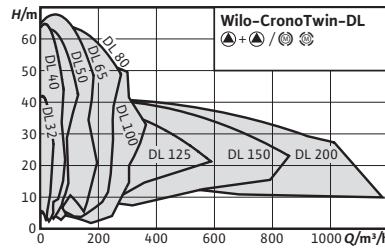

Accessories	Page
Wall fixation/installation on a base	185
Motor protection	231
Pump control CC-HVAC	201
Pump control SC/FC-HVAC	211

Select 4online

All information at www.wilo-select.com

Wilo-CronoTwin-DL



Construction

Glanded twin-head pump in in-line design with flange connection

Application

Pumping of heating water (acc. to VDI 2035), cold water and water/glycol mixtures without abrasive substances in heating, cold water and cooling systems.

Scope of delivery

- Pump
- Installation and operating instructions

Options

- ...-L1 variant with bronze impeller (at additional charge)
- Other voltages and frequencies as well as ATEX approval on request

Notice

- Motors with energy efficiency class IE3 for rated motor powers ≥ 0.75 kW

Your advantages

- Reduced life cycle costs through optimised efficiency
- Can be used flexibly in air-conditioning and cooling systems, with application benefits due to direct draining of condensate via optimised lantern design (patented)
- High standard of corrosion protection thanks to cathodic coating
- Main/standby mode or peak-load operation (by means of external auxiliary device)

General notes - ErP (Ecodesign) Directive

The minimum efficiency index, MEI, of the pump series is ≥ 0.4 . For detailed information on the MEI values of the individual pump types, see: Wilo Online Catalogue, available at www.wilo.com

Price group: PG3

Ordering information (2-pole types)							Additional charge			
Type	Motor efficiency class	Nominal flange diameter	Port-to-port length	Rated power	Net weight, approx.	Art. no.	Red brass impeller (L1 version)	GRD group	Blind flange	
			<i>l</i> mm	<i>P</i> ₂ kW	<i>m</i> kg		EUR	EUR		
CronoTwin-DL 32/140-1,5/2	IE3	DN 32	320	1.50	106	2121010	2,327.-	636.-	4	B
CronoTwin-DL 32/150-2,2/2	IE3	DN 32	320	2.20	111	2121011	2,810.-	636.-	4	B

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
 Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Ordering information (2-pole types)							Additional charge					
Type	Motor efficiency class	Nominal flange diameter	Port-to-port length	Rated power	Net weight, approx.	Art. no.			Red brass impeller (L1 version)	GRD group	Blind flange	
			<i>l</i> mm	<i>P</i> ₂ kW	<i>m</i> kg			EUR		EUR		
CronoTwin-DL 32/160-2,2/2	IE3	DN 32	320	2.20	111	2121012	C	2,810.-	K	636.-	4	B
CronoTwin-DL 32/160-3/2	IE3	DN 32	320	3.00	119	2121013	C	2,949.-	K	636.-	4	B
CronoTwin-DL 32/170-3/2	IE3	DN 32	320	3.00	119	2121014	C	2,949.-	K	636.-	4	B
CronoTwin-DL 32/170-4/2	IE3	DN 32	320	4.00	135	2121015	C	3,019.-	K	636.-	4	B
CronoTwin-DL 40/140-2,2/2	IE3	DN 40	340	2.20	113	2121016	L	2,844.-	K	698.-	4	B
CronoTwin-DL 40/150-3/2	IE3	DN 40	340	3.00	121	2121017	C	2,963.-	K	698.-	4	B
CronoTwin-DL 40/160-4/2	IE3	DN 40	340	4.00	136	2121018	C	3,464.-	K	698.-	4	B
CronoTwin-DL 40/170-5,5/2	IE3	DN 40	340	5.50	171	2121019	C	4,524.-	K	698.-	4	B
CronoTwin-DL 40/200-7,5/2	IE3	DN 40	440	7.50	208	2121020	C	4,616.-	K	762.-	5	C
CronoTwin-DL 40/220-11/2	IE3	DN 40	440	11.00	303	2121021	C	5,896.-	K	762.-	5	C
CronoTwin-DL 50/110-1,5/2	IE3	DN 50	340	1.50	102	2121022	C	2,507.-	K	698.-	4	A
CronoTwin-DL 50/120-2,2/2	IE3	DN 50	340	2.20	105	2121023	L	2,853.-	K	698.-	4	A
CronoTwin-DL 50/130-3/2	IE3	DN 50	340	3.00	117	2121024	L	3,009.-	K	698.-	4	A
CronoTwin-DL 50/140-3/2	IE3	DN 50	340	3.00	115	2121025	C	3,009.-	K	698.-	4	A
CronoTwin-DL 50/140-4/2	IE3	DN 50	340	4.00	130	2121026	C	3,515.-	K	698.-	4	A
CronoTwin-DL 50/160-5,5/2	IE3	DN 50	340	5.50	175	2121027	C	4,432.-	K	776.-	5	B
CronoTwin-DL 50/170-5,5/2	IE3	DN 50	340	5.50	175	2121028	C	4,432.-	K	776.-	5	B
CronoTwin-DL 50/170-7,5/2	IE3	DN 50	340	7.50	189	2121029	C	4,641.-	K	776.-	5	B
CronoTwin-DL 50/180-7,5/2	IE3	DN 50	440	7.50	217	2121030	C	4,641.-	K	850.-	5	C
CronoTwin-DL 50/210-11/2	IE3	DN 50	440	11.00	308	2121031	C	6,776.-	K	850.-	5	C
CronoTwin-DL 50/220-11/2	IE3	DN 50	440	11.00	308	2121032	C	6,776.-	K	850.-	5	C
CronoTwin-DL 50/220-15/2	IE3	DN 50	440	15.00	345	2121033	C	6,964.-	K	850.-	5	C
CronoTwin-DL 65/110-3/2	IE3	DN 65	340	3.00	122	2121034	L	3,196.-	K	776.-	4	A
CronoTwin-DL 65/120-3/2	IE3	DN 65	340	3.00	122	2121035	C	3,196.-	K	776.-	4	A
CronoTwin-DL 65/120-4/2	IE3	DN 65	340	4.00	138	2121036	L	3,542.-	K	776.-	4	A
CronoTwin-DL 65/130-5,5/2	IE3	DN 65	340	5.50	172	2121037	C	4,185.-	K	776.-	5	A

= ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG3

Ordering information (2-pole types)							Additional charge					
Type	Motor efficiency class	Nominal flange diameter	Port-to-port length	Rated power	Net weight, approx.	Art. no.		Red brass impeller (L1 version)	GRD group	Blind flange		
			l ₀ mm	P ₂ kW	m kg		🚚	EUR	🚚	EUR		
CronoTwin-DL 65/140-5,5/2	IE3	DN 65	340	5.50	172	2121038	C	4,185.-	K	776.-	5	A
CronoTwin-DL 65/140-7,5/2	IE3	DN 65	340	7.50	186	2121039	C	4,454.-	K	776.-	5	A
CronoTwin-DL 65/150-5,5/2	IE3	DN 65	430	5.50	193	2121040	C	4,709.-	K	1,238.-	5	B
CronoTwin-DL 65/160-5,5/2	IE3	DN 65	430	5.50	193	2121041	C	4,709.-	K	1,238.-	5	B
CronoTwin-DL 65/160-7,5/2	IE3	DN 65	430	7.50	207	2121042	L	4,917.-	K	1,238.-	5	B
CronoTwin-DL 65/170-11/2	IE3	DN 65	430	11.00	292	2121043	L	6,457.-	K	1,238.-	5	B
CronoTwin-DL 65/200-11/2	IE3	DN 65	475	11.00	321	2121044	C	6,457.-	K	1,335.-	6	C
CronoTwin-DL 65/200-15/2	IE3	DN 65	475	15.00	357	2121045	C	7,810.-	K	1,335.-	6	C
CronoTwin-DL 65/210-15/2	IE3	DN 65	475	15.00	357	2121046	C	7,810.-	K	1,335.-	6	C
CronoTwin-DL 65/210-18,5/2	IE3	DN 65	475	18.50	389	2121047	C	9,316.-	K	1,335.-	6	C
CronoTwin-DL 65/220-18,5/2	IE3	DN 65	475	18.50	389	2121048	C	9,316.-	K	1,335.-	6	C
CronoTwin-DL 65/220-22/2	IE3	DN 65	475	22.00	555	2121049	C	10,448.-	K	1,335.-	6	C
CronoTwin-DL 80/120-4/2	IE3	DN 80	400	4.00	153	2121050	L	3,876.-	K	1,238.-	4	A
CronoTwin-DL 80/130-5,5/2	IE3	DN 80	400	5.50	188	2121051	L	4,685.-	K	1,238.-	5	A
CronoTwin-DL 80/140-7,5/2	IE3	DN 80	400	7.50	202	2121052	L	4,795.-	K	1,238.-	5	A
CronoTwin-DL 80/150-7,5/2	IE3	DN 80	440	7.50	219	2121053	L	4,796.-	K	1,280.-	5	B
CronoTwin-DL 80/160-11/2	IE3	DN 80	440	11.00	301	2121054	L	6,589.-	K	1,280.-	5	B
CronoTwin-DL 80/170-11/2	IE3	DN 80	440	11.00	301	2121055	C	6,589.-	K	1,280.-	5	B
CronoTwin-DL 80/170-15/2	IE3	DN 80	440	15.00	337	2121056	L	7,103.-	K	1,280.-	5	B
CronoTwin-DL 80/190-15/2	IE3	DN 80	500	15.00	372	2121057	C	7,103.-	K	1,401.-	6	C
CronoTwin-DL 80/190-18,5/2	IE3	DN 80	500	18.50	404	2121058	C	8,637.-	K	1,401.-	6	C
CronoTwin-DL 80/200-18,5/2	IE3	DN 80	500	18.50	404	2121059	C	8,637.-	K	1,401.-	6	C
CronoTwin-DL 80/200-22/2	IE3	DN 80	500	22.00	576	2121060	C	9,985.-	K	1,401.-	6	C
CronoTwin-DL 80/220-30/2	IE3	DN 80	500	30.00	678	2121061	C	11,888.-	K	1,401.-	6	C
CronoTwin-DL 100/145-11/2	IE3	DN 100	500	11.00	344	2121062	L	6,715.-	K	1,443.-	6	B
CronoTwin-DL 100/150-15/2	IE3	DN 100	500	15.00	380	2121063	L	8,020.-	K	1,443.-	6	B

🚚 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, 📞 = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG3

Ordering information (2-pole types)								Additional charge				
Type	Motor efficiency class	Nominal flange diameter	Port-to-port length	Rated power	Net weight, approx.	Art. no.		EUR	EUR	EUR	GRD group	Blind flange
			l_0 mm	P_2 kW	m kg							
CronoTwin-DL 100/160-15/2	IE3	DN 100	500	15.00	380	2121064	C	8,020.-	K	1,443.-	6	B
CronoTwin-DL 100/160-18,5/2	IE3	DN 100	500	18.50	412	2121065	L	8,407.-	K	1,443.-	6	B
CronoTwin-DL 100/165-22/2	IE3	DN 100	500	22.00	577	2121066	C	11,281.-	K	1,443.-	6	B
CronoTwin-DL 100/170-30/2	IE3	DN 100	500	30.00	678	2121067	C	13,294.-	K	1,443.-	6	B
CronoTwin-DL 100/190-30/2	IE3	DN 100	550	30.00	707	2121068	C	13,803.-	K	1,531.-	6	C
CronoTwin-DL 100/210-30/2	IE3	DN 100	550	30.00	707	2121069	C	13,803.-	K	1,531.-	6	C
CronoTwin-DL 100/210-37/2	IE3	DN 100	550	37.00	745	2121070	K	17,621.-	K	1,531.-	6	C

Price group: PG3

Ordering information (4-pole types)								Additional charge				
Type	Motor efficiency class	Nominal flange diameter	Port-to-port length	Rated power	Net weight, approx.	Art. no.		EUR	EUR	EUR	GRD group	Blind flange
			l_0 mm	P_2 kW	m kg							
CronoTwin-DL 32/140-0,25/4	IE2	DN 32	320	0.25	72	2089227	K	2,181.-	K	636.-	4	B
CronoTwin-DL 32/150-0,37/4	IE2	DN 32	320	0.37	73	2089226	L	2,204.-	K	636.-	4	B
CronoTwin-DL 32/170-0,55/4	IE2	DN 32	320	0.55	80	2063734	L	2,477.-	K	636.-	4	B
CronoTwin-DL 40/140-0,25/4	IE2	DN 40	340	0.25	73	2089239	C	2,230.-	K	698.-	4	B
CronoTwin-DL 40/150-0,37/4	IE2	DN 40	340	0.37	74	2089238	C	2,266.-	K	698.-	4	B
CronoTwin-DL 40/160-0,55/4	IE2	DN 40	340	0.55	82	2089237	C	2,293.-	K	698.-	4	B
CronoTwin-DL 40/170-0,75/4	IE3	DN 40	340	0.75	88	2120943	C	2,810.-	K	698.-	4	B
CronoTwin-DL 40/210-1,1/4	IE3	DN 40	440	1.10	118	2120944	L	3,058.-	K	762.-	4	C
CronoTwin-DL 40/220-1,5/4	IE3	DN 40	440	1.50	123	2120945	L	3,278.-	K	762.-	4	C
CronoTwin-DL 50/150-0,55/4	IE2	DN 50	340	0.55	86	2089253	C	2,502.-	K	776.-	4	B
CronoTwin-DL 50/160-0,75/4	IE3	DN 50	340	0.75	93	2120946	L	2,836.-	K	776.-	4	B
CronoTwin-DL 50/170-1,1/4	IE3	DN 50	340	1.10	109	2120947	L	3,050.-	K	776.-	4	B
CronoTwin-DL 50/200-1,5/4	IE3	DN 50	440	1.50	134	2120948	L	3,145.-	K	850.-	4	C
CronoTwin-DL 50/220-2,2/4	IE3	DN 50	440	2.20	152	2120949	L	3,449.-	K	850.-	4	C

= ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, = please contact Wilo



Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG3

Ordering information (4-pole types)							Additional charge					
Type	Motor efficiency class	Nominal flange diameter	Port-to-port length	Rated power	Net weight, approx.	Art. no.		Red brass impeller (L1 version)	GRD group	Blind flange		
			l_0 mm	P_2 kW	m kg		🚚	EUR	🚚	EUR		
CronoTwin-DL 50/260-3/4	IE3	DN 50	440	3.00	185	2120950	L	3,539.-	K	1,278.-	5	D
CronoTwin-DL 50/270-3/4	IE3	DN 50	440	3.00	185	2120951	C	3,539.-	K	1,278.-	5	D
CronoTwin-DL 50/270-4/4	IE3	DN 50	440	4.00	199	2120952	C	4,137.-	K	1,278.-	5	D
CronoTwin-DL 65/120-0,55/4	IE2	DN 65	340	0.55	82	2139468	C	2,722.-	K	776.-	4	A
CronoTwin-DL 65/130-0,75/4	IE3	DN 65	340	0.75	89	2142054	C	2,834.-	K	776.-	4	A
CronoTwin-DL 65/140-1,1/4	IE3	DN 65	340	1.10	105	2142055	C	3,139.-	K	776.-	4	A
CronoTwin-DL 65/150-0,75/4	IE3	DN 65	430	0.75	111	2120953	L	2,865.-	K	1,238.-	4	B
CronoTwin-DL 65/160-1,1/4	IE3	DN 65	430	1.10	127	2120954	C	3,162.-	K	1,238.-	4	B
CronoTwin-DL 65/170-1,1/4	IE3	DN 65	430	1.10	127	2120955	C	3,162.-	K	1,238.-	4	B
CronoTwin-DL 65/170-1,5/4	IE3	DN 65	430	1.50	135	2120956	L	3,196.-	K	1,238.-	4	B
CronoTwin-DL 65/210-2,2/4	IE3	DN 65	475	2.20	160	2120957	L	3,733.-	K	1,335.-	5	C
CronoTwin-DL 65/220-2,2/4	IE3	DN 65	475	2.20	160	2120958	C	3,733.-	K	1,335.-	5	C
CronoTwin-DL 65/220-3/4	IE3	DN 65	475	3.00	176	2120959	C	3,971.-	K	1,335.-	5	C
CronoTwin-DL 65/250-3/4	IE3	DN 65	475	3.00	192	2120960	C	3,971.-	K	1,362.-	5	D
CronoTwin-DL 65/250-4/4	IE3	DN 65	475	4.00	206	2120961	L	4,529.-	K	1,362.-	5	D
CronoTwin-DL 65/270-5,5/4	IE3	DN 65	475	5.50	281	2120962	C	5,054.-	K	1,362.-	5	D
CronoTwin-DL 80/150-1,1/4	IE3	DN 80	440	1.10	139	2120963	C	3,333.-	K	1,280.-	4	B
CronoTwin-DL 80/160-1,5/4	IE3	DN 80	440	1.50	144	2120964	L	3,439.-	K	1,280.-	4	B
CronoTwin-DL 80/170-2,2/4	IE3	DN 80	440	2.20	167	2120965	L	3,864.-	K	1,280.-	4	B
CronoTwin-DL 80/210-3/4	IE3	DN 80	500	3.00	191	2120966	L	4,026.-	K	1,401.-	5	C
CronoTwin-DL 80/220-4/4	IE3	DN 80	500	4.00	206	2120967	L	5,596.-	K	1,401.-	5	C
CronoTwin-DL 80/270-5,5/4	IE3	DN 80	500	5.50	306	2120968	L	5,795.-	K	1,515.-	5	D
CronoTwin-DL 100/145-1,1/4	IE3	DN 100	500	1.10	173	2120969	C	3,823.-	K	1,443.-	5	B
CronoTwin-DL 100/150-1,5/4	IE3	DN 100	500	1.50	178	2120970	C	5,480.-	K	1,443.-	5	B
CronoTwin-DL 100/160-2,2/4	IE3	DN 100	500	2.20	194	2120971	L	5,856.-	K	1,443.-	5	B
CronoTwin-DL 100/170-3/4	IE3	DN 100	500	3.00	214	2120972	L	5,919.-	K	1,443.-	5	B

🚚 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, 📞 = please contact Wilo



Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Ordering information (4-pole types)							Additional charge					
Type	Motor efficiency class	Nominal flange diameter	Port-to-port length	Rated power	Net weight, approx.	Art. no.		EUR	Red brass impeller (L1 version)	EUR	GRD group	Blind flange
			l ₀ mm	P ₂ kW	m kg			EUR		EUR		
CronoTwin-DL 100/200-3/4	IE3	DN 100	550	3.00	219	2120973	C	6,309.-	K	1,589.-	5	C
CronoTwin-DL 100/200-4/4	IE3	DN 100	550	4.00	233	2120974	L	6,479.-	K	1,589.-	5	C
CronoTwin-DL 100/220-5,5/4	IE3	DN 100	550	5.50	308	2120975	L	7,299.-	K	1,589.-	5	C
CronoTwin-DL 100/250-5,5/4	IE3	DN 100	550	5.50	333	2120976	C	8,210.-	K	1,635.-	5	D
CronoTwin-DL 100/250-7,5/4	IE3	DN 100	550	7.50	356	2120977	L	9,090.-	K	1,635.-	5	D
CronoTwin-DL 100/260-11/4	IE3	DN 100	550	11.00	409	2120978	L	9,361.-	K	1,635.-	6	D
CronoTwin-DL 100/270-11/4	IE3	DN 100	550	11.00	409	2120979	L	10,848.-	K	1,635.-	6	D
CronoTwin-DL 125/190-4/4	IE3	DN 125	620	4.00	254	2120980	C	7,218.-	K	1,610.-	5	C
CronoTwin-DL 125/210-5,5/4	IE3	DN 125	620	5.50	329	2120981	L	8,403.-	K	1,610.-	5	C
CronoTwin-DL 125/220-5,5/4	IE3	DN 125	620	5.50	329	2120982	C	8,772.-	K	1,610.-	5	C
CronoTwin-DL 125/220-7,5/4	IE3	DN 125	620	7.50	349	2120983	C	9,737.-	K	1,610.-	5	C
CronoTwin-DL 125/250-11/4	IE3	DN 125	620	11.00	455	2120984	K	11,305.-	K	1,699.-	6	D
CronoTwin-DL 125/270-11/4	IE3	DN 125	620	11.00	455	2120985	K	11,624.-	K	1,699.-	6	D
CronoTwin-DL 125/270-15/4	IE3	DN 125	620	15.00	499	2120986	K	13,688.-	K	1,699.-	6	D
CronoTwin-DL 125/300-18,5/4	IE3	DN 125	700	18.50	608	2120987	K	13,822.-	K	2,206.-	7	E
CronoTwin-DL 125/320-18,5/4	IE3	DN 125	700	18.50	608	2120988	K	13,822.-	K	2,206.-	7	E
CronoTwin-DL 125/320-22/4	IE3	DN 125	700	22.00	710	2120989	K	14,851.-	K	2,206.-	7	E
CronoTwin-DL 125/340-30/4	IE3	DN 125	700	30.00	837	2120990	K	15,826.-	K	2,206.-	7	E
CronoTwin-DL 150/190-5,5/4	IE3	DN 150	700	5.50	405	2120991	C	9,724.-	K	1,759.-	5	C
CronoTwin-DL 150/200-7,5/4	IE3	DN 150	700	7.50	425	2120992	C	10,934.-	K	1,759.-	5	C
CronoTwin-DL 150/220-11/4	IE3	DN 150	700	11.00	476	2120993	C	11,454.-	K	1,759.-	6	C
CronoTwin-DL 150/250-15/4	IE3	DN 150	700	15.00	599	2120994	K	13,295.-	K	1,922.-	7	D
CronoTwin-DL 150/260-15/4	IE3	DN 150	700	15.00	609	2120995	K	14,088.-	K	1,922.-	7	D
CronoTwin-DL 150/260-18,5/4	IE3	DN 150	700	18.50	670	2120996	K	15,361.-	K	1,922.-	7	D
CronoTwin-DL 150/270-18,5/4	IE3	DN 150	700	18.50	670	2120997	K	15,361.-	K	1,922.-	7	D
CronoTwin-DL 150/270-22/4	IE3	DN 150	700	22.00	772	2120998	K	16,309.-	K	1,922.-	7	D

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo


Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG3

Ordering information (4-pole types)							Additional charge					
Type	Motor efficiency class	Nominal flange diameter	Port-to-port length	Rated power	Net weight, approx.	Art. no.		Red brass impeller (L1 version)	GRD group	Blind flange		
			l_0 mm	P_2 kW	m kg			EUR		EUR		
CronoTwin-DL 150/305-30/4	IE3	DN 150	770	30.00	959	2151765	K	21,077.-	K	2,520.-	7 E	
CronoTwin-DL 150/325-30/4	IE3	DN 150	770	30.00	959	2151764	K	21,077.-	K	2,520.-	7 E	
CronoTwin-DL 150/325-37/4	IE3	DN 150	770	37.00	1042	2151763	K	22,268.-	K	2,520.-	8 E	
CronoTwin-DL 150/335-37/4	IE3	DN 150	770	37.00	1042	2151762	K	22,268.-	K	2,520.-	8 E	
CronoTwin-DL 150/335-45/4	IE3	DN 150	770	45.00	1112	2151761	A	26,165.-	K	2,520.-	8 E	
CronoTwin-DL 200/240-15/4	IE3	DN 200	800	15.00	746	2121003	A	18,577.-	K	2,116.-	7 D	
CronoTwin-DL 200/250-18,5/4	IE3	DN 200	800	18.50	807	2121004	K	19,483.-	K	2,116.-	7 D	
CronoTwin-DL 200/260-22/4	IE3	DN 200	800	22.00	909	2121005	K	21,001.-	K	2,116.-	7 D	
CronoTwin-DL 200/270-30/4	IE3	DN 200	800	30.00	1034	2121006	K	22,522.-	K	2,116.-	7 D	
CronoTwin-DL 200/300-37/4	IE3	DN 200	820	37.00	1161	2142056	K	24,062.-	K	2,576.-	8 E	
CronoTwin-DL 200/315-37/4	IE3	DN 200	820	37.00	1161	2142057	K	24,062.-	K	2,576.-	8 E	
CronoTwin-DL 200/335-37/4	IE3	DN 200	820	37.00	1161	2142058	K	24,062.-	K	2,576.-	8 E	
CronoTwin-DL 200/335-45/4	IE3	DN 200	820	45.00	1231	2142059	A	26,791.-	K	2,576.-	8 E	
CronoTwin-DL 200/345-45/4	IE3	DN 200	820	45.00	1231	2142060	A	26,791.-	K	2,576.-	8 E	
CronoTwin-DL 200/345-55/4	IE3	DN 200	820	55.00	1745	2142061	K	30,948.-	K	2,576.-	8 E	

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

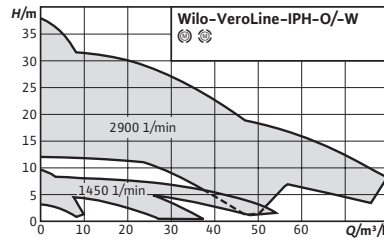

Accessories
Motor protection

Page
231

Select 4 online

All information at www.wilo-select.com

Wilo-VeroLine-IPH-W



Construction

Glanded pump in in-line design with flange connection

Application

For pumping hot water without abrasive matter in closed industrial circulation systems, district heating, closed heating systems, etc.

Scope of delivery

- Pump
- Installation and operating instructions
- Prewelding counter flanges
- Flange seals

Your advantages

- Self-cooled mechanical seal, independent of direction of rotation
- Great variety of applications due to a wide fluid temperature range without additional wearing parts

Notice

- Motors with energy efficiency class IE3 for rated motor powers ≥ 0.75 kW


Price group: PG3

Ordering information (2-pole types)


Type	Motor efficiency class	Nominal flange diameter	Rated power	Net weight, approx.	Art. no.	EUR
			P_2 kW	m kg		
VeroLine-IPH-W 20/160-1,1/2	IE3	DN 20	1.10	33	2121281	3,245.-
VeroLine-IPH-W 32/125-0,75/2	IE3	DN 32	0.75	26	2121282	3,343.-
VeroLine-IPH-W 32/170-2,2/2	IE3	DN 32	2.20	42	2121283	3,541.-
VeroLine-IPH-W 65/110-2,2/2	IE3	DN 65	2.20	54	2121284	4,140.-
VeroLine-IPH-W 65/125-2,2/2	IE3	DN 65	2.20	54	2121285	4,140.-
VeroLine-IPH-W 65/140-4/2	IE3	DN 65	4.00	72	2121286	4,975.-
VeroLine-IPH-W 65/160-4/2	IE3	DN 65	4.00	72	2121287	4,975.-
VeroLine-IPH-W 80/110-2,2/2	IE3	DN 80	2.20	56	2121288	4,418.-


☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG3

Ordering information (2-pole types)							
Type	Motor efficiency class	Nominal flange diameter	Rated power	Net weight, approx.	Art. no.		
			P_2 kW	m kg			EUR
VeroLine-IPH-W 80/140-4/2	IE3	DN 80	4.00	80	2121289	C	5,456.-

Price group: PG3

Ordering information (4-pole types)							
Type	Motor efficiency class	Nominal flange diameter	Port-to-port length	Rated power	Net weight, approx.	Art. no.	
			l_0 mm	P_2 kW	m kg		
							EUR
VeroLine-IPH-W 20/160-0.37/4	IE2	DN 20	290	0.37	28	4089415	C 3,137.-
VeroLine-IPH-W 32/125-0.18/4	IE2	DN 32	260	0.18	23	4089416	C 2,837.-
VeroLine-IPH-W 32/170-0.37/4	IE2	DN 32	260	0.37	30	4089417	C 3,372.-
VeroLine-IPH-W 65/125-1,1/4	IE3	DN 65	370	1.10	44	2121276	C 3,949.-
VeroLine-IPH-W 65/140-1,1/4	IE3	DN 65	400	1.10	44	2121277	C 4,022.-
VeroLine-IPH-W 65/160-1,1/4	IE3	DN 65	400	1.10	44	2121278	C 4,091.-
VeroLine-IPH-W 80/140-1,1/4	IE3	DN 80	430	1.10	46	2121279	C 4,427.-
VeroLine-IPH-W 80/160-1,1/4	IE3	DN 80	430	1.10	59	2121280	C 4,597.-

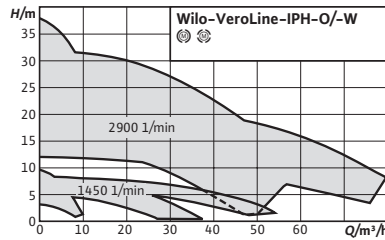

Accessories
Motor protection

Page
231

Select 4 online

All information at www.wilo-select.com

Wilo-VeroLine-IPH-O



Construction

Glanded pump in in-line design with flange connection

Application

For pumping heat transfer oil in closed industrial circulation systems

Scope of delivery

- Pump
- Installation and operating instructions
- Prewelding counter flanges
- Flange seals

Your advantages

- Self-cooled mechanical seal, independent of direction of rotation
- Great variety of applications due to a wide fluid temperature range without additional wearing parts

Notice

- Motors with energy efficiency class IE3 for rated motor powers ≥ 0.75 kW


Price group: PG3

Ordering information (2-pole types)							
Type	Motor efficiency class	Nominal flange diameter	Rated power	Net weight, approx.	Art. no.		
			P_2 kW	m kg			EUR
VeroLine-IPH-O 20/160-1,1/2	IE3	DN 20	1.10	33	2121295	C	3,320.-
VeroLine-IPH-O 32/125-0,75/2	IE3	DN 32	0.75	26	2121296	C	3,414.-
VeroLine-IPH-O 32/170-2,2/2	IE3	DN 32	2.20	42	2121297	C	3,653.-
VeroLine-IPH-O 65/110-2,2/2	IE3	DN 65	2.20	54	2121298	C	4,229.-
VeroLine-IPH-O 65/125-2,2/2	IE3	DN 65	2.20	54	2121299	C	4,229.-
VeroLine-IPH-O 65/140-4/2	IE3	DN 65	4.00	72	2121300	C	5,083.-
VeroLine-IPH-O 65/160-4/2	IE3	DN 65	4.00	72	2121301	C	5,083.-
VeroLine-IPH-O 80/110-2,2/2	IE3	DN 80	2.20	56	2121302	C	4,514.-
VeroLine-IPH-O 80/140-4/2	IE3	DN 80	4.00	80	2121303	C	5,572.-

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG3

Ordering information (4-pole types)							
Type	Motor efficiency class	Nominal flange diameter	Rated power	Net weight, approx.	Art. no.		
			P_2 kW	m kg			EUR
VeroLine-IPH-O 20/160-0.37/4	IE2	DN 20	0.37	28	4089398	C	3,206.-
VeroLine-IPH-O 32/125-0.18/4	IE2	DN 32	0.18	23	4089399	C	2,898.-
VeroLine-IPH-O 32/170-0.37/4	IE2	DN 32	0.37	30	4089400	C	3,450.-
VeroLine-IPH-O 65/125-1,1/4	IE3	DN 65	1.10	44	2121290	C	4,039.-
VeroLine-IPH-O 65/140-1,1/4	IE3	DN 65	1.10	44	2121291	C	4,116.-
VeroLine-IPH-O 65/160-1,1/4	IE3	DN 65	1.10	44	2121292	C	4,181.-
VeroLine-IPH-O 80/140-1,1/4	IE3	DN 80	1.10	46	2121293	C	4,529.-
VeroLine-IPH-O 80/160-1,1/4	IE3	DN 80	1.10	59	2121294	C	4,700.-

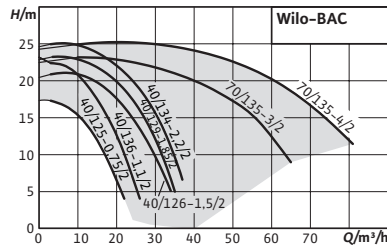

IE3 Select 4 online
All information at www.wilo-select.com

Wilo-BAC



Construction

Glanded pump in block design with screwed connection or Victaulic connection.

Application

For pumping of cooling water, cold water, water-glycol mixtures and other fluids without abrasive substances.

Scope of delivery

- Pump
- Installation and operating instructions

Your advantages

- Reduced life-cycle costs through optimised efficiency levels
- Pump housing in plastic design
- Version with Victaulic or threaded connection (BAC 70/135... with Victaulic connection only)

General notes - ErP (Ecodesign) Directive


The minimum efficiency index, MEI, of the pump series is ≥ 0.4 . For detailed information on the MEI values of the individual pump types, see: Wilo Online Catalogue, available at www.wilo.com


Price group: PG3

Ordering information with screwed connection

Type	Rated power P_2 kW	Net weight, approx. m kg	Art. no.		EUR
BAC 40-125/0.75/2-DM/S-2	0.75	13	4213186	C	668.-
BAC 40-126/1.5/2-DM/S-2	1.50	14	4213188	C	749.-
BAC 40-134/2.2/2-DM/S-2	2.20	21	4213190	C	794.-
BAC 40-136/1.1/2-DM/S-2	1.10	14	4213187	C	688.-

Price group: PG3

Ordering information with Victaulic connection						
Type	Rated power	Net weight, approx.	Art. no.			
	P_2 kW	m kg				EUR
BAC 40-125/0.75/2-DM/R-2	0.75	13	4213181	C		648.-
BAC 40-126/1.5/2-DM/R-2	1.50	14	4213183	C		730.-
BAC 40-134/2.2/2-DM/R-2	2.20	21	4213185	C		773.-
BAC 40-136/1.1/2-DM/R-2	1.10	14	4213182	C		670.-
BAC 70-135/3/2-DM/R-2-EC	3.00	32	4213201	C		1,066.-
BAC 70-135/4/2-DM/R-2-EC	4.00	38	4213202	C		1,131.-

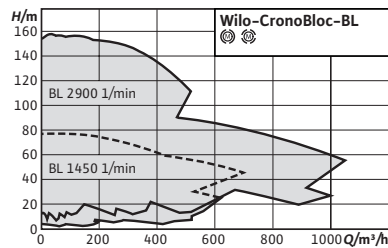

Accessories	Page
Wall fixation/installation on a base	185
Motor protection	231
Pump control CC-HVAC	201
Pump control SC/FC-HVAC	211

Series extension

Select 4 online
All information at www.wilo-select.com



Wilo-CronoBloc-BL

Construction

Glanded pump in block design with flange connection

Application

For pumping heating water (in accordance with VDI 2035), water-glycol mixtures, cooling water and cold water without abrasive substances in heating, cold water and cooling water systems.

Scope of delivery

- Pump
- Installation and operating instructions

Options

- ...-L1 variant with bronze impeller (at additional charge)
- ...-L4 variant with stainless steel impeller (at additional charge)
- ...-H1 variant with housing made of spheroidal cast iron (at additional charge)
- Variant ...-P6 with „back pull-out“ design and cartridge mechanical seal (subject to surcharge)
- Other voltages and frequencies as well as ATEX approval on request

Your advantages

- Energy-efficient due to state-of-the-art pump hydraulics and the use of IE3 motors
- Cathaphoretic coating of all cast iron components ensures high resistance to corrosion and long service life
- Universal use in diverse applications thanks to different impeller materials, several motor options as well as different mechanical seals
- Easy installation due to standard pump support feet and optional supporting blocks
- Easy maintenance and user-friendly design with optional „back pull-out“ design and cartridge mechanical seal for large pump types

Notice

Motors with efficiency class IE3 for motors ≥ 0.75 kW.

General notes – ErP (Ecodesign) Directive

The minimum efficiency index, MEI, of the pump series is ≥ 0.4 . For detailed information on the MEI values of the individual pump types, see: Wilo Online Catalogue, available at www.wilo.com

Price group: PG3

Ordering information (2-pole types)						Additional charge					
Type	Motor efficiency class	Rated power	Net weight, approx.	Art. no.		Red brass impeller (L1 version)		Spheroidal cast iron housing (H1 version)		GRD group	
		P_2 kW	m kg		🚚	EUR	🚚	EUR	🚚	EUR	
CronoBloc-BL 32/85-1,1/2	IE3	1.10	45	9126730	C	1,583.-	A	321.-	A	- 12	
CronoBloc-BL 32/85.1-0,75/2	IE3	0.75	41	9139949	K	1,657.-	A	315.-	A	- 12	
CronoBloc-BL 32/95-1,5/2	IE3	1.50	53	9126729	C	1,726.-	A	321.-	A	- 12	
CronoBloc-BL 32/95.1-1,1/2	IE3	1.10	44	9139948	K	1,739.-	A	315.-	A	- 12	
CronoBloc-BL 32/105-2,2/2	IE3	2.20	56	9126728	C	1,821.-	A	321.-	A	- 12	
CronoBloc-BL 32/105.1-1,5/2	IE3	1.50	53	9139947	K	1,809.-	A	315.-	A	- 12	
CronoBloc-BL 32/115-3/2	IE3	3.00	60	9126727	C	1,966.-	A	321.-	A	- 12	
CronoBloc-BL 32/115.1-2,2/2	IE3	2.20	55	9139946	K	1,881.-	A	315.-	A	- 12	
CronoBloc-BL 32/125-4/2	IE3	4.00	67	9126726	C	2,166.-	A	321.-	A	- 12	
CronoBloc-BL 32/125.1-3/2	IE3	3.00	59	9139945	K	1,957.-	A	315.-	A	- 12	
CronoBloc-BL 32/130.1-1,5/2	IE3	1.50	60	9139960	K	1,749.-	A	321.-	A	- 12	
CronoBloc-BL 32/140-2,2/2	IE3	2.20	56	2121125	C	1,713.-	A	349.-	A	441.- 4	
CronoBloc-BL 32/140.1-2,2/2	IE3	2.20	63	9139959	K	1,853.-	A	321.-	A	- 12	
CronoBloc-BL 32/150-3/2	IE3	3.00	60	2121126	C	1,745.-	A	349.-	A	454.- 4	
CronoBloc-BL 32/150.1-3/2	IE3	3.00	66	9139958	K	1,965.-	A	321.-	A	- 12	
CronoBloc-BL 32/160-4/2	IE3	4.00	68	2121127	C	2,009.-	A	349.-	A	454.- 4	
CronoBloc-BL 32/160.1-4/2	IE3	4.00	74	9139957	K	2,083.-	A	321.-	A	- 12	
CronoBloc-BL 32/170-5,5/2	IE3	5.50	89	2121128	C	2,538.-	A	349.-	A	560.- 4	
CronoBloc-BL 32/210-7,5/2	IE3	7.50	100	2121129	C	3,037.-	A	381.-	A	560.- 5	
CronoBloc-BL 32/220-11/2	IE3	11.00	149	2121130	C	3,503.-	A	381.-	A	560.- 5	
CronoBloc-BL 32/225-7,5/2	IE3	7.50	121	9140066	K	3,245.-	A	516.-	A	- 12	
CronoBloc-BL 32/230-11/2	IE3	11.00	165	9140065	K	3,474.-	A	516.-	A	- 12	
CronoBloc-BL 32/230.1-5,5/2	IE3	5.50	118	9126724	A	2,567.-	A	499.-	A	- 12	
CronoBloc-BL 32/240-15/2	IE3	15.00	184	9140064	K	3,749.-	A	516.-	A	- 12	
CronoBloc-BL 32/240.1-7,5/2	IE3	7.50	121	9126723	A	3,122.-	A	499.-	A	- 12	
CronoBloc-BL 32/250-18,5/2	IE3	18.50	201	9140063	K	4,131.-	A	516.-	A	- 12	

🚚 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, 📞 = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Ordering information (2-pole types)						Additional charge					
Type	Motor efficiency class	Rated power	Net weight, approx.	Art. no.		Red brass impeller (L1 version)		Spheroidal cast iron housing (H1 version)		GRD group	
		P_2 kW	m kg		🚚	EUR	🚚	EUR	🚚	EUR	
CronoBloc-BL 32/250.1-11/2	IE3	11.00	165	9126721	C	3,540.-	A	499.-	A	- 12	
CronoBloc-BL 40/110-1,5/2	IE3	1.50	50	2121131	C	1,691.-	A	349.-	A	460.- 4	
CronoBloc-BL 40/120-2,2/2	IE3	2.20	52	2121132	C	1,713.-	A	349.-	A	460.- 4	
CronoBloc-BL 40/130-3/2	IE3	3.00	54	2121133	C	1,978.-	A	349.-	A	460.- 4	
CronoBloc-BL 40/140-3/2	IE3	3.00	57	2121134	C	1,978.-	A	349.-	A	460.- 4	
CronoBloc-BL 40/140-4/2	IE3	4.00	65	2121135	C	2,114.-	A	349.-	A	460.- 4	
CronoBloc-BL 40/160-5,5/2	IE3	5.50	91	2121136	C	2,574.-	A	388.-	A	613.- 5	
CronoBloc-BL 40/170-5,5/2	IE3	5.50	91	2121137	C	2,574.-	A	388.-	A	613.- 5	
CronoBloc-BL 40/170-7,5/2	IE3	7.50	94	2121138	C	2,865.-	A	388.-	A	613.- 5	
CronoBloc-BL 40/180-7,5/2	IE3	7.50	104	2121139	C	3,448.-	A	425.-	A	778.- 5	
CronoBloc-BL 40/210-11/2	IE3	11.00	152	2121140	C	3,642.-	A	425.-	A	778.- 5	
CronoBloc-BL 40/220-11/2	IE3	11.00	152	2121141	C	3,642.-	A	425.-	A	778.- 5	
CronoBloc-BL 40/220-15/2	IE3	15.00	172	2121142	C	4,085.-	A	425.-	A	778.- 5	
CronoBloc-BL 40/230-15/2	IE3	15.00	184	2142015	C	4,201.-	A	639.-	A	- 6	
CronoBloc-BL 40/230-18,5/2	IE3	18.50	201	2142016	C	4,473.-	A	639.-	A	- 6	
CronoBloc-BL 40/240-18,5/2	IE3	18.50	201	2142017	C	4,473.-	A	639.-	A	- 6	
CronoBloc-BL 40/240-22/2	IE3	22.00	288	2142018	C	5,495.-	A	639.-	A	- 6	
CronoBloc-BL 40/245-22/2	IE3	22.00	288	2142019	C	5,495.-	A	639.-	A	- 6	
CronoBloc-BL 40/245-30/2	IE3	30.00	343	2142020	C	7,435.-	A	639.-	A	- 6	
CronoBloc-BL 40/260-22/2	IE3	22.00	288	2142021	C	5,495.-	A	639.-	A	- 6	
CronoBloc-BL 40/260-30/2	IE3	30.00	343	2142022	C	7,435.-	A	639.-	A	- 6	
CronoBloc-BL 40/285-30/2	IE3	30.00	379	9140213	K	7,624.-	A	799.-	A	- 13	
CronoBloc-BL 40/305-45/2	IE3	45.00	450	9140211	K	10,979.-	A	799.-	A	- 13	
CronoBloc-BL 40/315-55/2	IE3	55.00	503	9140210	K	13,175.-	A	799.-	A	- 13	
CronoBloc-BL 40/395-37/2	IE3	37.00	409	9140212	K	9,150.-	A	799.-	A	- 13	
CronoBloc-BL 50/110-3/2	IE3	3.00	60	2121146	C	1,997.-	A	388.-	A	404.- 4	
CronoBloc-BL 50/120-3/2	IE3	3.00	60	2121147	C	1,997.-	A	388.-	A	404.- 4	

🚚 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ⚡ = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG3

Ordering information (2-pole types)						Additional charge					
Type	Motor efficiency class	Rated power	Net weight, approx.	Art. no.		Red brass impeller (L1 version)		Spheroidal cast iron housing (H1 version)		GRD group	
		P_2 kW	m kg		🚚	EUR	🚚	EUR	🚚	EUR	
CronoBloc-BL 50/120-4/2	IE3	4.00	68	2121148	C	2,157.-	A	388.-	A	404.-	4
CronoBloc-BL 50/130-5,5/2	IE3	5.50	86	2121149	C	2,538.-	A	388.-	A	404.-	5
CronoBloc-BL 50/140-5,5/2	IE3	5.50	86	2121150	C	2,538.-	A	388.-	A	404.-	5
CronoBloc-BL 50/140-7,5/2	IE3	7.50	89	2121151	C	2,909.-	A	388.-	A	404.-	5
CronoBloc-BL 50/150-5,5/2	IE3	5.50	94	2121152	C	2,585.-	A	619.-	A	648.-	5
CronoBloc-BL 50/150-7,5/2	IE3	7.50	97	2121153	C	3,016.-	A	619.-	A	648.-	5
CronoBloc-BL 50/170-11/2	IE3	11.00	137	2121154	C	3,448.-	A	619.-	A	648.-	5
CronoBloc-BL 50/200-11/2	IE3	11.00	154	2121155	C	3,740.-	A	668.-	A	830.-	6
CronoBloc-BL 50/200-15/2	IE3	15.00	173	2121156	C	4,201.-	A	668.-	A	830.-	6
CronoBloc-BL 50/210-15/2	IE3	15.00	173	2121157	C	4,201.-	A	668.-	A	830.-	6
CronoBloc-BL 50/210-18,5/2	IE3	18.50	190	2121158	C	4,687.-	A	668.-	A	830.-	6
CronoBloc-BL 50/220-18,5/2	IE3	18.50	190	2121159	C	4,687.-	A	668.-	A	830.-	6
CronoBloc-BL 50/220-22/2	IE3	22.00	278	2121160	C	5,495.-	A	668.-	A	830.-	6
CronoBloc-BL 50/240-30/2	IE3	30.00	342	2121161	C	8,618.-	A	675.-	A	-	6
CronoBloc-BL 50/260-30/2	IE3	30.00	342	2121162	C	8,618.-	A	675.-	A	-	6
CronoBloc-BL 50/260-37/2	IE3	37.00	372	2121163	C	8,834.-	A	675.-	A	-	6
CronoBloc-BL 50/285-37/2	IE3	37.00	413	9140225	K	9,276.-	A	864.-	A	-	13
CronoBloc-BL 50/295-45/2	IE3	45.00	452	9140224	K	11,131.-	A	864.-	A	-	13
CronoBloc-BL 50/305-55/2	IE3	55.00	504	9140223	K	13,357.-	A	864.-	A	-	13
CronoBloc-BL 50/315-75/2	IE3	75.00	653	9140222	K	16,028.-	A	864.-	A	-	13
CronoBloc-BL 65/120-4/2	IE3	4.00	73	2121164	C	2,326.-	A	619.-	A	460.-	4
CronoBloc-BL 65/130-5,5/2	IE3	5.50	91	2121165	C	2,747.-	A	619.-	A	460.-	5
CronoBloc-BL 65/140-7,5/2	IE3	7.50	94	2121166	C	3,125.-	A	619.-	A	460.-	5
CronoBloc-BL 65/160-11/2	IE3	11.00	143	2121167	C	3,987.-	A	640.-	A	678.-	5
CronoBloc-BL 65/170-11/2	IE3	11.00	143	2121168	C	3,987.-	A	640.-	A	678.-	5
CronoBloc-BL 65/170-15/2	IE3	15.00	162	2121169	C	4,257.-	A	640.-	A	678.-	5
CronoBloc-BL 65/190-15/2	IE3	15.00	179	2121170	C	4,278.-	A	701.-	A	795.-	6

🚚 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, 📞 = please contact Wilo
 Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Ordering information (2-pole types)						Additional charge					
Type	Motor efficiency class	Rated power	Net weight, approx.	Art. no.		Red brass impeller (L1 version)		Spheroidal cast iron housing (H1 version)		GRD group	
		P_2 kW	m kg		🚚	EUR	🚚	EUR	🚚	EUR	
CronoBloc-BL 65/190-18,5/2	IE3	18.50	196	2121171	C	4,740.-	A	701.-	A	795.-	6
CronoBloc-BL 65/210-18,5/2	IE3	18.50	196	2121172	C	4,740.-	A	701.-	A	795.-	6
CronoBloc-BL 65/210-22/2	IE3	22.00	287	2121173	C	5,550.-	A	701.-	A	795.-	6
CronoBloc-BL 65/215-22/2	IE3	22.00	309	9140197	K	5,515.-	A	598.-	A	-	13
CronoBloc-BL 65/220-30/2	IE3	30.00	332	2121174	C	7,325.-	A	701.-	A	795.-	6
CronoBloc-BL 65/225-30/2	IE3	30.00	359	9140196	K	6,847.-	A	598.-	A	-	13
CronoBloc-BL 65/230-37/2	IE3	37.00	385	9140195	K	8,815.-	A	598.-	A	-	13
CronoBloc-BL 65/240-45/2	IE3	45.00	431	9140194	K	10,231.-	A	598.-	A	-	13
CronoBloc-BL 65/250-55/2	IE3	55.00	484	9140192	K	12,025.-	A	598.-	A	-	13
CronoBloc-BL 65/295-75/2	IE3	75.00	660	9140047	K	15,582.-	A	873.-	A	-	13
CronoBloc-BL 65/305-90/2	IE3	90.00	660	9140046	K	17,745.-	A	873.-	A	-	13
CronoBloc-BL 65/315-110/2	IE3	110.00	1115	9140045	K	20,469.-	A	873.-	A	-	13
CronoBloc-BL 80/145-11/2	IE3	11.00	158	2121175	C	4,740.-	A	721.-	A	853.-	6
CronoBloc-BL 80/150-15/2	IE3	15.00	177	2121176	C	5,227.-	A	721.-	A	853.-	6
CronoBloc-BL 80/160-15/2	IE3	15.00	177	2121177	C	5,227.-	A	721.-	A	853.-	6
CronoBloc-BL 80/160-18,5/2	IE3	18.50	194	2121178	C	6,250.-	A	721.-	A	853.-	6
CronoBloc-BL 80/165-22/2	IE3	22.00	282	2121179	C	7,218.-	A	721.-	A	853.-	6
CronoBloc-BL 80/170-30/2	IE3	30.00	327	2121180	C	7,758.-	A	721.-	A	853.-	6
CronoBloc-BL 80/200-30/2	IE3	30.00	345	2121181	C	7,864.-	A	766.-	A	926.-	6
CronoBloc-BL 80/210-30/2	IE3	30.00	345	2121182	C	7,864.-	A	766.-	A	926.-	6
CronoBloc-BL 80/210-37/2	IE3	37.00	375	2121183	C	8,405.-	A	766.-	A	926.-	6
CronoBloc-BL 80/215-37/2	IE3	37.00	389	9140202	K	9,162.-	A	664.-	A	-	13
CronoBloc-BL 80/220-45/2	IE3	45.00	435	9140201	K	10,569.-	A	664.-	A	-	13
CronoBloc-BL 80/230-55/2	IE3	55.00	490	9140200	K	12,407.-	A	664.-	A	-	13
CronoBloc-BL 80/240-75/2	IE3	75.00	640	9140199	K	14,634.-	A	664.-	A	-	13
CronoBloc-BL 80/250-90/2	IE3	90.00	644	9140198	K	16,922.-	A	664.-	A	-	13
CronoBloc-BL 80/275-75/2	IE3	75.00	660	2160700	K	14,634.-	A	942.-	A	-	13

🚚 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ⚡ = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.



Price group: PG3

Ordering information (2-pole types)						Additional charge				
Type	Motor efficiency class	Rated power	Net weight, approx.	Art. no.		Red brass impeller (L1 version)		Spheroidal cast iron housing (H1 version)		GRD group
		P_2 kW	m kg		🚚	EUR	🚚	EUR	🚚	EUR
CronoBloc-BL 80/285-90/2	IE3	90.00	660	2160699	K	17,561.-	A	942.-	A	- 13
CronoBloc-BL 80/295-110/2	IE3	110.00	1115	2160698	K	21,072.-	A	942.-	A	- 13
CronoBloc-BL 80/305-132/2	IE3	132.00	1166	2160697	K	25,287.-	A	942.-	A	- 13
CronoBloc-BL 80/315-160/2	IE3	160.00	1196	2160696	K	27,792.-	A	942.-	A	- 14
CronoBloc-BL 100/145-15/2	IE3	15.00	185	2121184	C	5,333.-	A	805.-	A	- 6
CronoBloc-BL 100/150-18,5/2	IE3	18.50	202	2121185	C	6,357.-	A	805.-	A	- 6
CronoBloc-BL 100/160-22/2	IE3	22.00	290	2121186	C	7,325.-	A	805.-	A	- 6
CronoBloc-BL 100/160-30/2	IE3	30.00	357	9139904	C	7,892.-	A	599.-	A	- 13
CronoBloc-BL 100/165-30/2	IE3	30.00	335	2121187	C	7,973.-	A	805.-	A	- 6
CronoBloc-BL 100/170-37/2	IE3	37.00	365	2121188	C	9,697.-	A	805.-	A	- 6
CronoBloc-BL 100/175-37/2	IE3	37.00	385	9139903	C	9,593.-	A	599.-	A	- 13
CronoBloc-BL 100/180-45/2	IE3	45.00	429	9139902	C	10,199.-	A	599.-	A	- 13
CronoBloc-BL 100/190-55/2	IE3	55.00	483	9139901	A	11,881.-	A	599.-	A	- 13
CronoBloc-BL 100/200-75/2	IE3	75.00	633	9139900	A	14,287.-	A	599.-	A	- 13
CronoBloc-BL 100/210-55/2	IE3	55.00	527	9139910	A	12,096.-	A	726.-	A	- 13
CronoBloc-BL 100/220-75/2	IE3	75.00	675	9139909	A	14,653.-	A	726.-	A	- 13
CronoBloc-BL 100/230-90/2	IE3	90.00	650	9139908	A	16,485.-	A	726.-	A	- 13
CronoBloc-BL 100/240-110/2	IE3	110.00	1080	9139907	A	20,126.-	A	726.-	A	- 13
CronoBloc-BL 100/250-132/2	IE3	132.00	1131	9139906	A	23,580.-	A	726.-	A	- 13
CronoBloc-BL 100/295-132/2	IE3	132.00	1183	9140054	K	23,170.-	A	999.-	A	- 13
CronoBloc-BL 100/305-160/2	IE3	160.00	1205	9140053	K	28,304.-	A	999.-	A	- 14
CronoBloc-BL 100/315-200/2	IE3	200.00	1498	9140052	K	33,809.-	A	999.-	A	- 14
CronoBloc-BL 125/170-45/2	IE3	45.00	449	9139914	A	9,931.-	A	596.-	A	- 13
CronoBloc-BL 125/180-55/2	IE3	55.00	501	9139913	A	12,276.-	A	596.-	A	- 13
CronoBloc-BL 125/190-75/2	IE3	75.00	651	9139912	A	14,156.-	A	596.-	A	- 13
CronoBloc-BL 125/200-90/2	IE3	90.00	651	9139911	A	15,875.-	A	596.-	A	- 13
CronoBloc-BL 125/210-75/2	IE3	75.00	692	2160705	A	14,273.-	A	748.-	A	- 13




🚚 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, 📞 = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG3

Ordering information (2-pole types)						Additional charge				
Type	Motor efficiency class	Rated power	Net weight, approx.	Art. no.		Red brass impeller (L1 version)	Spheroidal cast iron housing (H1 version)	GRD group		
		P_2 kW	m kg		 EUR	 EUR	 EUR			
CronoBloc-BL 125/220-90/2	IE3	90.00	690	2160704	A	16,172.-	A	748.-	A	- 13
CronoBloc-BL 125/230-110/2	IE3	110.00	1095	2160703	A	19,803.-	A	748.-	A	- 14
CronoBloc-BL 125/240-132/2	IE3	132.00	1145	2160702	A	23,074.-	A	748.-	A	- 14
CronoBloc-BL 125/250-160/2	IE3	160.00	1193	2160701	A	28,259.-	A	748.-	A	- 14
CronoBloc-BL 150/180-75/2	IE3	75.00	680	9139923	A	16,544.-	A	774.-	A	- 13
CronoBloc-BL 150/190-90/2	IE3	90.00	680	9139922	A	18,364.-	A	774.-	A	- 13
CronoBloc-BL 150/200-110/2	IE3	110.00	1134	9139921	A	21,890.-	A	774.-	A	- 13
CronoBloc-BL 150/210-90/2	IE3	90.00	699	2151513	A	23,832.-	A	1,026.-	A	- 14
CronoBloc-BL 150/220-110/2	IE3	110.00	1151	2151512	A	25,417.-	A	1,026.-	A	- 14
CronoBloc-BL 150/230-132/2	IE3	132.00	1202	2151511	A	30,992.-	A	1,026.-	A	- 14
CronoBloc-BL 150/240-160/2	IE3	160.00	1224	2151510	A	33,811.-	A	1,026.-	A	- 14
CronoBloc-BL 150/250-200/2	IE3	200.00	1499	2151509	A	35,229.-	A	1,026.-	A	- 14
































Price group: PG3



Ordering information (4-pole types)						Additional charge				
Type	Motor efficiency class	Rated power	Net weight, approx.	Art. no.		Red brass impeller (L1 version)	Spheroidal cast iron housing (H1 version)	GRD group		
		P_2 kW	m kg		 EUR	 EUR	 EUR			
CronoBloc-BL 32/105-0,25/4	IE2 / IE3	0.25	36	9126708	C	1,217.-	A	321.-	A	- 12
CronoBloc-BL 32/115-0,37/4	IE2 / IE3	0.37	36	9126707	C	1,217.-	A	321.-	A	- 12
CronoBloc-BL 32/115.1-0,25/4	IE2 / IE3	0.25	35	9139941	K	1,181.-	A	315.-	A	- 12
CronoBloc-BL 32/125-0,55/4	IE2 / IE3	0.55	40	9126706	C	1,424.-	A	321.-	A	- 12
CronoBloc-BL 32/125.1-0,37/4	IE2 / IE3	0.37	36	9139940	K	1,204.-	A	315.-	A	- 12
CronoBloc-BL 32/140.1-0,25/4	IE2 / IE3	0.25	43	9139953	K	1,239.-	A	321.-	A	- 12
CronoBloc-BL 32/150.1-0,37/4	IE2 / IE3	0.37	43	9139952	K	1,288.-	A	321.-	A	- 12
CronoBloc-BL 32/160.1-0,55/4	IE2 / IE3	0.55	47	9139951	K	1,433.-	A	321.-	A	- 12
CronoBloc-BL 32/170-0,75/4	IE3	0.75	44	2121071	C	1,627.-	A	349.-	A	410.- 4
CronoBloc-BL 32/170.1-0,25/4	IE2 / IE3	0.25	50	9139965	K	1,319.-	A	340.-	A	- 12

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG3

Ordering information (4-pole types)						Additional charge					
Type	Motor efficiency class	Rated power	Net weight, approx.	Art. no.		Red brass impeller (L1 version)		Spheroidal cast iron housing (H1 version)		GRD group	
		P_2 kW	m kg		 EUR	 EUR	 EUR	 EUR			
CronoBloc-BL 32/180.1-0,37/4	IE3	0.37	49	9139964	 K 1,432.-	A 340.-	A 340.-	A -	12		
CronoBloc-BL 32/190.1-0,55/4	IE2 / IE3	0.55	55	9139963	 K 1,524.-	A 340.-	A 340.-	A -	12		
CronoBloc-BL 32/200.1-0,75/4	IE3	0.75	59	9139962	 K 1,565.-	A 340.-	A 340.-	A -	12		
CronoBloc-BL 32/210-1,1/4	IE3	1.10	56	2121072	 C 1,688.-	A 381.-	A 381.-	A 743.-	4		
CronoBloc-BL 32/220-1,5/4	IE3	1.50	60	2121073	 C 1,776.-	A 381.-	A 381.-	A 743.-	4		
CronoBloc-BL 32/220.1-0,55/4	IE2 / IE3	0.55	67	9126704	 A 1,538.-	A 499.-	A 499.-	A -	12		
CronoBloc-BL 32/230-1,5/4	IE3	1.50	81	9140058	 K 1,870.-	A 516.-	A 516.-	A -	12		
CronoBloc-BL 32/230.1-0,75/4	IE3	0.75	71	9126703	 C 1,658.-	A 499.-	A 499.-	A -	12		
CronoBloc-BL 32/240-2,2/4	IE3	2.20	93	9140057	 K 1,985.-	A 516.-	A 516.-	A -	12		
CronoBloc-BL 32/240.1-1,1/4	IE3	1.10	78	9126702	 C 1,793.-	A 499.-	A 499.-	A -	12		
CronoBloc-BL 32/250-3/4	IE3	3.00	101	9140060	 K 2,067.-	A 516.-	A 516.-	A -	12		
CronoBloc-BL 32/250.1-1,5/4	IE3	1.50	80	9126701	 C 1,859.-	A 499.-	A 499.-	A -	12		
CronoBloc-BL 40/95-0,25/4	IE2 / IE3	0.25	38	9126714	 C 1,568.-	A 321.-	A 321.-	A -	12		
CronoBloc-BL 40/105-0,37/4	IE2 / IE3	0.37	39	9126713	 C 1,649.-	A 321.-	A 321.-	A -	12		
CronoBloc-BL 40/115-0,55/4	IE2 / IE3	0.55	43	9126712	 C 1,665.-	A 321.-	A 321.-	A -	12		
CronoBloc-BL 40/125-0,75/4	IE3	0.75	46	9126711	 C 1,705.-	A 321.-	A 321.-	A -	12		
CronoBloc-BL 40/160-0,75/4	IE3	0.75	46	2121074	 C 1,702.-	A 388.-	A 388.-	A 465.-	4		
CronoBloc-BL 40/170-1,1/4	IE3	1.10	54	2121075	 C 1,754.-	A 388.-	A 388.-	A 465.-	4		
CronoBloc-BL 40/210-1,5/4	IE3	1.50	67	2121076	 C 1,786.-	A 425.-	A 425.-	A 926.-	4		
CronoBloc-BL 40/220-2,2/4	IE3	2.20	76	2121077	 C 2,063.-	A 425.-	A 425.-	A 926.-	4		
CronoBloc-BL 40/225-2,2/4	IE3	2.20	86	2142010	 C 2,084.-	A 639.-	A 639.-	A -	5		
CronoBloc-BL 40/240-2,2/4	IE3	2.20	86	2142011	 C 2,084.-	A 639.-	A 639.-	A -	5		
CronoBloc-BL 40/240-3/4	IE3	3.00	94	2142012	 C 2,179.-	A 639.-	A 639.-	A -	5		
CronoBloc-BL 40/265-3/4	IE3	3.00	94	2142013	 C 2,179.-	A 639.-	A 639.-	A -	5		
CronoBloc-BL 40/265-4/4	IE3	4.00	101	2142014	 C 2,326.-	A 639.-	A 639.-	A -	5		
CronoBloc-BL 40/295-4/4	IE3	4.00	148	9140207	 K 2,454.-	A 799.-	A 799.-	A -	13		
CronoBloc-BL 40/305-5,5/4	IE3	5.50	189	9140205	 K 2,492.-	A 799.-	A 799.-	A -	13		

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
 Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Ordering information (4-pole types)						Additional charge					
Type	Motor efficiency class	Rated power	Net weight, approx.	Art. no.		Red brass impeller (L1 version)		Spheroidal cast iron housing (H1 version)		GRD group	
		P_2 kW	m kg		🚚	EUR	🚚	EUR	🚚	EUR	
CronoBloc-BL 40/315-7,5/4	IE3	7.50	198	9140204	K	2,602.-	A	799.-	A	- 13	
CronoBloc-BL 50/95-0,37/4	IE2 / IE3	0.37	41	9126719	C	1,538.-	A	339.-	A	- 12	
CronoBloc-BL 50/105-0,55/4	IE2 / IE3	0.55	45	9126718	C	1,669.-	A	339.-	A	- 12	
CronoBloc-BL 50/115-0,75/4	IE3	0.75	48	9126717	C	1,713.-	A	339.-	A	- 12	
CronoBloc-BL 50/125-1,1/4	IE3	1.10	56	9126716	C	1,731.-	A	339.-	A	- 12	
CronoBloc-BL 50/160-1,1/4	IE3	1.10	58	2121081	C	1,767.-	A	619.-	A	502.- 4	
CronoBloc-BL 50/170-1,1/4	IE3	1.10	58	2121082	C	1,767.-	A	619.-	A	502.- 4	
CronoBloc-BL 50/170-1,5/4	IE3	1.50	60	2121083	C	1,797.-	A	619.-	A	502.- 4	
CronoBloc-BL 50/200-2,2/4	IE3	2.20	75	2121084	C	1,837.-	A	668.-	A	755.- 5	
CronoBloc-BL 50/220-2,2/4	IE3	2.20	75	2121085	C	1,894.-	A	668.-	A	755.- 5	
CronoBloc-BL 50/220-3/4	IE3	3.00	83	2121086	C	2,199.-	A	668.-	A	755.- 5	
CronoBloc-BL 50/250-3/4	IE3	3.00	89	2121087	C	2,221.-	A	681.-	A	- 5	
CronoBloc-BL 50/250-4/4	IE3	4.00	96	2121088	C	2,464.-	A	681.-	A	- 5	
CronoBloc-BL 50/270-5,5/4	IE3	5.50	137	2121089	C	3,278.-	A	681.-	A	- 5	
CronoBloc-BL 50/295-5,5/4	IE3	5.50	193	9140219	K	3,404.-	A	864.-	A	- 13	
CronoBloc-BL 50/305-7,5/4	IE3	7.50	199	9140217	K	3,521.-	A	864.-	A	- 13	
CronoBloc-BL 50/315-11/4	IE3	11.00	219	9140216	K	3,703.-	A	864.-	A	- 13	
CronoBloc-BL 65/105-0,55/4	IE2 / IE3	0.55	50	9132649	C	1,615.-	A	317.-	A	- 12	
CronoBloc-BL 65/115-0,75/4	IE3	0.75	53	9132648	C	1,694.-	A	317.-	A	- 12	
CronoBloc-BL 65/125-1,1/4	IE3	1.10	61	9132647	C	1,782.-	A	317.-	A	- 12	
CronoBloc-BL 65/150-1,1/4	IE3	1.10	64	2121090	C	1,776.-	A	640.-	A	530.- 4	
CronoBloc-BL 65/160-1,5/4	IE3	1.50	66	2121091	C	1,830.-	A	640.-	A	530.- 4	
CronoBloc-BL 65/170-2,2/4	IE3	2.20	76	2121092	C	1,894.-	A	640.-	A	530.- 4	
CronoBloc-BL 65/210-3/4	IE3	3.00	89	2121093	C	2,747.-	A	701.-	A	719.- 5	
CronoBloc-BL 65/220-4/4	IE3	4.00	96	2121094	C	2,844.-	A	701.-	A	719.- 5	
CronoBloc-BL 65/240-5,5/4	IE3	5.50	152	2142023	C	3,405.-	A	757.-	A	- 5	
CronoBloc-BL 65/265-5,5/4	IE3	5.50	152	2142024	C	3,469.-	A	757.-	A	- 5	

🚚 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ⚡ = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG3

Ordering information (4-pole types)					Additional charge					
Type	Motor efficiency class	Rated power	Net weight, approx.	Art. no.		Red brass impeller (L1 version)		Spheroidal cast iron housing (H1 version)		GRD group
		P_2 kW	m kg		🚚	EUR	🚚	EUR	🚚	EUR
CronoBloc-BL 65/265-7,5/4	IE3	7.50	161	2142025	C	3,642.-	A	757.-	A	- 5
CronoBloc-BL 65/295-7,5/4	IE3	7.50	201	2157063	K	3,751.-	A	873.-	A	- 13
CronoBloc-BL 65/305-11/4	IE3	11.00	220	2157061	K	3,901.-	A	873.-	A	- 13
CronoBloc-BL 65/315-15/4	IE3	15.00	243	2157060	K	4,057.-	A	873.-	A	- 13
CronoBloc-BL 80/150-1,5/4	IE3	1.50	77	2121096	C	2,230.-	A	721.-	A	696.- 5
CronoBloc-BL 80/160-2,2/4	IE3	2.20	85	2121097	C	2,379.-	A	721.-	A	696.- 5
CronoBloc-BL 80/170-3/4	IE3	3.00	95	2121098	C	2,747.-	A	721.-	A	696.- 5
CronoBloc-BL 80/200-3/4	IE3	3.00	99	2121099	C	2,785.-	A	795.-	A	750.- 5
CronoBloc-BL 80/200-4/4	IE3	4.00	106	2121100	C	2,929.-	A	795.-	A	750.- 5
CronoBloc-BL 80/220-5,5/4	IE3	5.50	144	2121101	C	3,343.-	A	795.-	A	750.- 5
CronoBloc-BL 80/250-5,5/4	IE3	5.50	155	2121102	C	3,532.-	A	817.-	A	- 5
CronoBloc-BL 80/250-7,5/4	IE3	7.50	164	2121103	C	3,652.-	A	817.-	A	- 5
CronoBloc-BL 80/270-11/4	IE3	11.00	191	2121104	C	3,685.-	A	817.-	A	- 6
CronoBloc-BL 80/285-11/4	IE3	11.00	222	9139898	K	4,054.-	A	942.-	A	- 13
CronoBloc-BL 80/295-15/4	IE3	15.00	245	9139897	K	4,581.-	A	942.-	A	- 13
CronoBloc-BL 80/305-18,5/4	IE3	18.50	307	9139896	K	5,177.-	A	942.-	A	- 13
CronoBloc-BL 80/315-22/4	IE3	22.00	330	9139895	K	5,849.-	A	942.-	A	- 13
CronoBloc-BL 80/370-18,5/4	IE3	18.50	375	2160884	K	6,025.-	A	1,207.-	A	- 14
CronoBloc-BL 80/370-22/4	IE3	22.00	398	2151493	K	6,808.-	A	1,207.-	A	- 14
CronoBloc-BL 80/380-22/4	IE3	22.00	398	2160883	K	6,808.-	A	1,207.-	A	- 14
CronoBloc-BL 80/380-30/4	IE3	30.00	460	2151492	K	7,693.-	A	1,207.-	A	- 14
CronoBloc-BL 80/390-30/4	IE3	30.00	460	2160882	K	7,693.-	A	1,207.-	A	- 14
CronoBloc-BL 80/390-37/4	IE3	37.00	563	2151491	K	8,693.-	A	1,207.-	A	- 14
CronoBloc-BL 80/390-37/4-P6	IE3	37.00	596	9143358	A	📞	A	📞	A	📞 15
CronoBloc-BL 80/400-37/4	IE3	37.00	563	2160881	K	8,693.-	A	1,207.-	A	- 14
CronoBloc-BL 80/400-37/4-P6	IE3	37.00	596	9143357	A	📞	A	📞	A	📞 15
CronoBloc-BL 80/400-45/4	IE3	45.00	543	2151490	K	9,824.-	A	1,207.-	A	- 14

🚚 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, 📞 = please contact Wilo
 Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Ordering information (4-pole types)					Additional charge						
Type	Motor efficiency class	Rated power	Net weight, approx.	Art. no.		Red brass impeller (L1 version)	Spheroidal cast iron housing (H1 version)	GRD group			
		P_2 kW	m kg		🚚	EUR	🚚	EUR	🚚	EUR	
CronoBloc-BL 80/400-45/4-P6	IE3	45.00	577	9143356	A	☞	A	☞	A	☞	15
CronoBloc-BL 100/145-1,5/4	IE3	1.50	85	2121105	C	2,357.-	A	805.-	A	-	5
CronoBloc-BL 100/150-2,2/4	IE3	2.20	95	2121106	C	2,633.-	A	805.-	A	-	5
CronoBloc-BL 100/160-3/4	IE3	3.00	103	2121107	C	2,781.-	A	805.-	A	-	5
CronoBloc-BL 100/170-4/4	IE3	4.00	110	2121108	C	3,013.-	A	805.-	A	-	5
CronoBloc-BL 100/180-4/4	IE3	4.00	110	2121109	C	3,086.-	A	805.-	A	-	5
CronoBloc-BL 100/200-5,5/4	IE3	5.50	150	2121110	C	3,701.-	A	805.-	A	-	5
CronoBloc-BL 100/220-5,5/4	IE3	5.50	150	2121111	C	3,701.-	A	805.-	A	-	5
CronoBloc-BL 100/220-7,5/4	IE3	7.50	159	2121112	C	3,965.-	A	805.-	A	-	5
CronoBloc-BL 100/250-11/4	IE3	11.00	205	2121113	C	4,956.-	A	849.-	A	-	6
CronoBloc-BL 100/270-15/4	IE3	15.00	228	2121114	C	6,313.-	A	849.-	A	-	6
CronoBloc-BL 100/305-18,5/4	IE3	18.50	332	2142026	C	6,550.-	A	1,103.-	A	-	7
CronoBloc-BL 100/315-18,5/4	IE3	18.50	332	2142027	C	6,550.-	A	1,103.-	A	-	7
CronoBloc-BL 100/315-22/4	IE3	22.00	355	2142028	C	6,895.-	A	1,103.-	A	-	7
CronoBloc-BL 100/330-22/4	IE3	22.00	355	2142029	C	6,895.-	A	1,103.-	A	-	7
CronoBloc-BL 100/330-30/4	IE3	30.00	421	2142030	C	7,325.-	A	1,103.-	A	-	7
CronoBloc-BL 100/345-22/4	IE3	22.00	355	2142031	C	6,895.-	A	1,103.-	A	-	7
CronoBloc-BL 100/345-30/4	IE3	30.00	421	2142032	C	7,325.-	A	1,103.-	A	-	7
CronoBloc-BL 100/380-37/4	IE3	37.00	572	2160673	K	9,522.-	A	1,397.-	A	-	14
CronoBloc-BL 100/380-37/4-P6	IE3	37.00	605	9143361	A	☞	A	☞	A	☞	15
CronoBloc-BL 100/390-45/4	IE3	45.00	553	2160672	K	10,766.-	A	1,397.-	A	-	14
CronoBloc-BL 100/390-45/4-P6	IE3	45.00	586	9143360	A	☞	A	☞	A	☞	15
CronoBloc-BL 100/400-55/4	IE3	55.00	711	2160671	K	12,159.-	A	1,397.-	A	-	14
CronoBloc-BL 100/400-55/4-P6	IE3	55.00	748	9143359	A	☞	A	☞	A	☞	15
CronoBloc-BL 125/185-5,5/4	IE3	5.50	185	2142033	C	3,933.-	A	879.-	A	-	5
CronoBloc-BL 125/210-7,5/4	IE3	7.50	194	2142034	C	4,374.-	A	879.-	A	-	5
CronoBloc-BL 125/225-11/4	IE3	11.00	221	2142035	C	5,290.-	A	879.-	A	-	6

🚚 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☞ = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG3

Ordering information (4-pole types)						Additional charge				
Type	Motor efficiency class	Rated power	Net weight, approx.	Art. no.		Red brass impeller (L1 version)		Spheroidal cast iron housing (H1 version)		GRD group
		P_2 kW	m kg		🚚	EUR	🚚	EUR	🚚	EUR
CronoBloc-BL 125/245-15/4	IE3	15.00	267	2142036	C	5,829.-	A	961.-	A	- 7
CronoBloc-BL 125/265-15/4	IE3	15.00	267	2142037	C	5,829.-	A	961.-	A	- 7
CronoBloc-BL 125/265-18,5/4	IE3	18.50	328	2142038	C	6,497.-	A	961.-	A	- 7
CronoBloc-BL 125/272-18,5/4	IE3	18.50	351	2160681	C	7,373.-	A	748.-	A	- 14
CronoBloc-BL 125/275-18,5/4	IE3	18.50	328	2142039	C	6,497.-	A	961.-	A	- 7
CronoBloc-BL 125/275-22/4	IE3	22.00	351	2142040	C	8,244.-	A	961.-	A	- 7
CronoBloc-BL 125/285-22/4	IE3	22.00	374	2160680	C	9,159.-	A	748.-	A	- 14
CronoBloc-BL 125/295-30/4	IE3	30.00	433	2160679	C	10,603.-	A	748.-	A	- 14
CronoBloc-BL 125/305-37/4	IE3	37.00	537	9135340	C	11,324.-	A	748.-	A	- 14
CronoBloc-BL 125/315-45/4	IE3	45.00	518	9135339	C	12,885.-	A	748.-	A	- 14
CronoBloc-BL 125/360-37/4	IE3	37.00	598	9135345	C	11,856.-	A	748.-	A	- 14
CronoBloc-BL 125/370-45/4	IE3	45.00	579	9135343	A	13,440.-	A	748.-	A	- 14
CronoBloc-BL 125/380-55/4	IE3	55.00	748	9135341	A	15,648.-	A	748.-	A	- 14
CronoBloc-BL 125/390-75/4	IE3	75.00	778	9135344	A	17,801.-	A	748.-	A	- 14
CronoBloc-BL 125/400-90/4	IE3	90.00	818	9135342	A	19,346.-	A	748.-	A	- 14
CronoBloc-BL 150/180-7,5/4	IE3	7.50	222	9132653	A	6,673.-	A	774.-	A	- 13
CronoBloc-BL 150/190-11/4	IE3	11.00	244	9132652	A	6,912.-	A	774.-	A	- 13
CronoBloc-BL 150/200-15/4	IE3	15.00	267	9132651	A	7,610.-	A	774.-	A	- 13
CronoBloc-BL 150/210-11/4	IE3	11.00	259	2151506	A	6,992.-	A	1,026.-	A	- 14
CronoBloc-BL 150/220-15/4	IE3	15.00	282	2151505	A	7,809.-	A	1,026.-	A	- 14
CronoBloc-BL 150/230-18,5/4	IE3	18.50	344	2151504	A	7,980.-	A	1,026.-	A	- 14
CronoBloc-BL 150/240-22/4	IE3	22.00	367	2151503	A	8,712.-	A	1,026.-	A	- 14
CronoBloc-BL 150/250-30/4	IE3	30.00	428	2151502	A	10,120.-	A	1,026.-	A	- 14
CronoBloc-BL 150/275-22/4	IE3	22.00	397	2160693	A	9,937.-	A	1,222.-	A	- 14
CronoBloc-BL 150/285-30/4	IE3	30.00	457	2160692	A	11,783.-	A	1,222.-	A	- 14
CronoBloc-BL 150/295-37/4	IE3	37.00	561	9135348	A	12,877.-	A	1,222.-	A	- 14
CronoBloc-BL 150/305-45/4	IE3	45.00	542	9135347	A	14,026.-	A	1,222.-	A	- 14

🚚 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, 📞 = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Heating, air conditioning, cooling

Price group: PG3

Ordering information (4-pole types)					Additional charge								
Type	Motor efficiency class	Rated power	Net weight, approx.	Art. no.	Red brass impeller (L1 version)		Spheroidal cast iron housing (H1 version)		GRD group				
		P_2 kW	m kg			EUR		EUR		EUR			
CronoBloc-BL 150/315-55/4	IE3	55.00	713	9135346		A	16,306.-		A	1,222.-	A	-	14
CronoBloc-BL 150/370-55/4	IE3	55.00	759	9139936		K	18,049.-		A	1,609.-	A	-	14
CronoBloc-BL 150/380-55/4	IE3	55.00	759	9139935		K	18,049.-		A	1,609.-	A	-	14
CronoBloc-BL 150/380-75/4	IE3	75.00	790	9139934		K	18,822.-		A	1,609.-	A	-	14
CronoBloc-BL 150/390-75/4	IE3	75.00	790	9139933		K	18,822.-		A	1,609.-	A	-	14
CronoBloc-BL 150/390-90/4	IE3	90.00	830	9139932		K	21,014.-		A	1,609.-	A	-	14
CronoBloc-BL 150/400-110/4	IE3	110.00	1255	9139931		K	26,389.-		A	1,609.-	A	-	14

Price group: PG3





Ordering information (2-pole types) PN25 versions												
Type	-S7		-S8		-S11		-S12					
		EUR		EUR		EUR		EUR				
CronoBloc-BL 32/140-2,2/2		A	2,389.-		A	2,396.-		A	3,444.-		A	3,493.-
CronoBloc-BL 32/150-3/2		A	2,421.-		A	2,428.-		A	3,476.-		A	3,525.-
CronoBloc-BL 32/160-4/2		A	2,685.-		A	2,692.-		A	3,740.-		A	3,790.-
CronoBloc-BL 32/170-5,5/2		A	3,296.-		A	3,318.-		A	4,355.-		A	4,404.-
CronoBloc-BL 32/210-7,5/2		A	3,833.-		A	3,842.-		A	4,908.-		A	4,960.-
CronoBloc-BL 32/220-11/2		A	4,298.-		A	4,308.-		A	5,374.-		A	5,425.-
CronoBloc-BL 40/110-1,5/2		A	2,409.-		A	2,423.-		A	3,491.-		A	3,542.-
CronoBloc-BL 40/120-2,2/2		A	2,430.-		A	2,445.-		A	3,513.-		A	3,563.-
CronoBloc-BL 40/130-3/2		A	2,696.-		A	2,710.-		A	3,778.-		A	3,829.-
CronoBloc-BL 40/140-3/2		A	2,696.-		A	2,710.-		A	3,778.-		A	3,829.-
CronoBloc-BL 40/140-4/2		A	2,831.-		A	2,845.-		A	3,913.-		A	3,964.-
CronoBloc-BL 40/160-5,5/2		A	3,446.-		A	3,456.-		A	4,521.-		A	4,573.-
CronoBloc-BL 40/170-5,5/2		A	3,446.-		A	3,456.-		A	4,521.-		A	4,573.-
CronoBloc-BL 40/170-7,5/2		A	3,737.-		A	3,747.-		A	4,812.-		A	4,864.-
CronoBloc-BL 40/180-7,5/2		A	4,461.-		A	4,485.-		A	5,552.-		A	5,605.-

= ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG3

Ordering information (2-pole types) PN25 versions





Type	-S7		-S8		-S11		-S12	
		EUR		EUR		EUR		EUR
CronoBloc-BL 40/210-11/2	A	4,655.-	A	4,679.-	A	5,746.-	A	5,763.-
CronoBloc-BL 40/220-11/2	A	4,655.-	A	4,679.-	A	5,746.-	A	5,763.-
CronoBloc-BL 40/220-15/2	A	5,098.-	A	5,122.-	A	6,189.-	A	6,205.-
CronoBloc-BL 50/110-3/2	A	2,616.-	A	2,623.-	A	3,670.-	A	3,718.-
CronoBloc-BL 50/120-3/2	A	2,616.-	A	2,623.-	A	3,670.-	A	3,718.-
CronoBloc-BL 50/120-4/2	A	2,776.-	A	2,783.-	A	3,830.-	A	3,878.-
CronoBloc-BL 50/130-5,5/2	A	3,182.-	A	3,194.-	A	4,262.-	A	4,312.-
CronoBloc-BL 50/140-5,5/2	A	3,182.-	A	3,194.-	A	4,262.-	A	4,312.-
CronoBloc-BL 50/140-7,5/2	A	3,553.-	A	3,566.-	A	4,634.-	A	4,683.-
CronoBloc-BL 50/150-5,5/2	A	3,458.-	A	3,471.-	A	4,540.-	A	4,591.-
CronoBloc-BL 50/150-7,5/2	A	3,889.-	A	3,901.-	A	4,970.-	A	5,022.-
CronoBloc-BL 50/170-11/2	A	4,321.-	A	4,333.-	A	5,403.-	A	5,454.-
CronoBloc-BL 50/200-11/2	A	4,809.-	A	4,857.-	A	6,039.-	A	6,096.-
CronoBloc-BL 50/200-15/2	A	5,270.-	A	5,318.-	A	6,501.-	A	6,557.-
CronoBloc-BL 50/210-15/2	A	5,270.-	A	5,318.-	A	6,501.-	A	6,557.-
CronoBloc-BL 50/210-18,5/2	A	5,756.-	A	5,804.-	A	6,987.-	A	7,043.-
CronoBloc-BL 50/220-18,5/2	A	5,756.-	A	5,804.-	A	6,987.-	A	7,043.-
CronoBloc-BL 50/220-22/2	A	6,565.-	A	6,612.-	A	7,795.-	A	7,851.-
CronoBloc-BL 65/120-4/2	A	2,999.-	A	3,008.-	A	4,055.-	A	4,102.-
CronoBloc-BL 65/130-5,5/2	A	3,448.-	A	3,460.-	A	4,527.-	A	4,577.-
CronoBloc-BL 65/140-7,5/2	A	3,826.-	A	3,838.-	A	4,905.-	A	4,955.-
CronoBloc-BL 65/160-11/2	A	4,872.-	A	4,883.-	A	5,948.-	A	6,001.-
CronoBloc-BL 65/170-11/2	A	4,872.-	A	4,883.-	A	5,948.-	A	6,001.-
CronoBloc-BL 65/170-15/2	A	5,142.-	A	5,154.-	A	6,219.-	A	6,271.-
CronoBloc-BL 65/190-15/2	A	5,292.-	A	5,321.-	A	6,503.-	A	6,559.-
CronoBloc-BL 65/190-18,5/2	A	5,754.-	A	5,783.-	A	6,965.-	A	7,022.-
CronoBloc-BL 65/210-18,5/2	A	5,754.-	A	5,783.-	A	6,965.-	A	7,022.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.





Price group: PG3

Ordering information (2-pole types) PN25 versions

Type	-S7		-S8		-S11		-S12	
		EUR		EUR		EUR		EUR
CronoBloc-BL 65/210-22/2	A	6,565.-	A	6,593.-	A	7,775.-	A	7,832.-
CronoBloc-BL 65/220-30/2	A	8,340.-	A	8,368.-	A	9,550.-	A	9,607.-


Price group: PG3

Ordering information (4-pole types) PN25 versions

Type	-S7		-S8		-S11		-S12	
		EUR		EUR		EUR		EUR
CronoBloc-BL 32/170-0,75/4	A	2,320.-	A	2,327.-	A	3,408.-	A	3,456.-
CronoBloc-BL 32/210-1,1/4	A	2,702.-	A	2,712.-	A	3,790.-	A	3,839.-
CronoBloc-BL 32/220-1,5/4	A	2,791.-	A	2,800.-	A	3,878.-	A	3,927.-
CronoBloc-BL 40/160-0,75/4	A	2,447.-	A	2,456.-	A	3,535.-	A	3,583.-
CronoBloc-BL 40/170-1,1/4	A	2,500.-	A	2,509.-	A	3,587.-	A	3,636.-
CronoBloc-BL 40/210-1,5/4	A	2,980.-	A	2,989.-	A	4,065.-	A	4,116.-
CronoBloc-BL 40/220-2,2/4	A	3,257.-	A	3,265.-	A	4,342.-	A	4,392.-
CronoBloc-BL 50/160-1,1/4	A	2,545.-	A	2,557.-	A	3,635.-	A	3,684.-
CronoBloc-BL 50/170-1,1/4	A	2,545.-	A	2,557.-	A	3,635.-	A	3,684.-
CronoBloc-BL 50/170-1,5/4	A	2,575.-	A	2,587.-	A	3,665.-	A	3,714.-
CronoBloc-BL 50/200-2,2/4	A	2,902.-	A	2,912.-	A	4,012.-	A	4,064.-
CronoBloc-BL 50/220-2,2/4	A	2,959.-	A	2,969.-	A	4,069.-	A	4,121.-
CronoBloc-BL 50/220-3/4	A	3,264.-	A	3,275.-	A	4,375.-	A	4,426.-
CronoBloc-BL 65/150-1,1/4	A	2,585.-	A	2,595.-	A	3,673.-	A	3,722.-
CronoBloc-BL 65/160-1,5/4	A	2,639.-	A	2,649.-	A	3,727.-	A	3,776.-
CronoBloc-BL 65/170-2,2/4	A	2,703.-	A	2,713.-	A	3,791.-	A	3,840.-
CronoBloc-BL 65/210-3/4	A	3,778.-	A	3,787.-	A	4,889.-	A	4,942.-
CronoBloc-BL 65/220-4/4	A	3,875.-	A	3,884.-	A	4,986.-	A	5,039.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

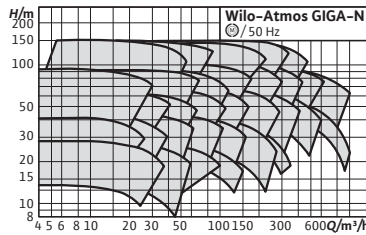

Accessories **Page**
Commissioning/maintenance 683

Select 4 online
All information at www.wilo-select.com

Wilo-Atmos GIGA-N



Construction

Single-stage, low-pressure centrifugal pump with axial suction, mounted on a baseplate.

Application

- The pumping of heating water (in accordance with VDI 2035), cold water and water-glycol mixtures without abrasive substances in heating, cold water and cooling systems.
- Applications for irrigation, building services, general industry, power stations, etc.

Scope of delivery

- Pump
- Installation and operating instructions
- Bare shaft pump **or**
- Pump on baseplate with coupling and coupling guard, without motor **or**
- Completely mounted pump on baseplate with electric motor

Options

- Variant ...-P5 without spacer coupling (at reduced price)

Your advantages

- Energy-saving thanks to increased overall efficiency through improved hydraulics and the use of IE3 motors
- Cataphoretic coating of all cast components for high corrosion resistance and long service life
- Universally usable thanks to standardised dimensions, a range of motor options and impellers made of different materials
- Easy maintenance thanks to user-friendly spacer coupling in back pull-out design
- High operational reliability thanks to improved impeller construction for pressure reduction

- Other materials and versions on request
- Other voltages and frequencies available on request.

General notes - ErP (Ecodesign) Directive

- The minimum efficiency index, MEI, of the pump series is ≥ 0.4 . For detailed information on the MEI values of the individual pump types, see: Wilo Online Catalogue, available at www.wilo.com.

Price group: PG4

Ordering information (2-pole) with spacer coupling					Price group: PG4					
Rated power	Motor efficiency class	Art. no.			Red brass impeller (L1 version)	Stainless steel impeller (L4 version)	-S1	GRD group		
P_2 kW					EUR	EUR	EUR		EUR	
Atmos GIGA-N 32/125-1,1/2	1.10	IE3	6086292	K	3,518.-	331.-	331.-	A	61.-	12

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☞ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Ordering information (2-pole) with spacer coupling					Price group: PG4							
	Rated power	Motor efficiency class	Art. no.			Red brass impeller (L1 version)		Stainless steel impeller (L4 version)		-S1		GRD group
	P_2 kW				EUR	EUR	EUR	EUR	EUR	EUR		
Atmos GIGA-N 32/125-1,5/2	1.50	IE3	6086293	K	3,554.-	A	331.-	A	331.-	A	61.-	12
Atmos GIGA-N 32/125-2,2/2	2.20	IE3	6086294	K	3,611.-	A	331.-	A	331.-	A	61.-	12
Atmos GIGA-N 32/125-3/2	3.00	IE3	6086295	K	3,792.-	A	331.-	A	331.-	A	61.-	12
Atmos GIGA-N 32/125-4/2	4.00	IE3	6086296	K	3,917.-	A	331.-	A	331.-	A	61.-	12
Atmos GIGA-N 32/160-2,2/2	2.20	IE3	6086579	K	3,750.-	A	340.-	A	340.-	A	61.-	12
Atmos GIGA-N 32/160-3/2	3.00	IE3	6086578	K	3,931.-	A	340.-	A	340.-	A	61.-	12
Atmos GIGA-N 32/160-4/2	4.00	IE3	6086577	K	4,057.-	A	340.-	A	340.-	A	61.-	12
Atmos GIGA-N 32/160-5,5/2	5.50	IE3	6086576	K	4,382.-	A	340.-	A	340.-	A	61.-	12
Atmos GIGA-N 32/160.1-1,5/2	1.50	IE3	6086598	K	3,639.-	A	331.-	A	331.-	A	61.-	12
Atmos GIGA-N 32/160.1-2,2/2	2.20	IE3	6086597	K	3,696.-	A	331.-	A	331.-	A	61.-	12
Atmos GIGA-N 32/160.1-3/2	3.00	IE3	6086596	K	3,876.-	A	331.-	A	331.-	A	61.-	12
Atmos GIGA-N 32/160.1-4/2	4.00	IE3	6086595	K	4,002.-	A	331.-	A	331.-	A	61.-	12
Atmos GIGA-N 32/200-3/2	3.00	IE3	6086570	K	3,953.-	A	372.-	A	372.-	A	61.-	12
Atmos GIGA-N 32/200-4/2	4.00	IE3	6086569	K	4,078.-	A	372.-	A	372.-	A	61.-	12
Atmos GIGA-N 32/200-5,5/2	5.50	IE3	6086568	K	4,404.-	A	372.-	A	372.-	A	61.-	12
Atmos GIGA-N 32/200-7,5/2	7.50	IE3	6086567	K	4,666.-	A	372.-	A	372.-	A	61.-	12
Atmos GIGA-N 32/250-5,5/2	5.50	IE3	6086559	K	5,086.-	A	533.-	A	533.-	A	61.-	12
Atmos GIGA-N 32/250-7,5/2	7.50	IE3	6086558	K	5,348.-	A	533.-	A	533.-	A	61.-	12
Atmos GIGA-N 32/250-11/2	11.00	IE3	6086557	K	6,177.-	A	533.-	A	533.-	A	61.-	12
Atmos GIGA-N 32/250-15/2	15.00	IE3	6086556	K	6,613.-	A	533.-	A	533.-	A	61.-	12
Atmos GIGA-N 32/250-18,5/2	18.50	IE3	6086555	K	6,935.-	A	533.-	A	533.-	A	61.-	12
Atmos GIGA-N 40/125-2,2/2	2.20	IE3	6086310	K	3,780.-	A	331.-	A	331.-	A	61.-	12
Atmos GIGA-N 40/125-3/2	3.00	IE3	6086311	K	3,961.-	A	331.-	A	331.-	A	61.-	12
Atmos GIGA-N 40/125-4/2	4.00	IE3	6086312	K	4,087.-	A	331.-	A	331.-	A	61.-	12
Atmos GIGA-N 40/125-5,5/2	5.50	IE3	6086313	K	4,412.-	A	331.-	A	331.-	A	61.-	12
Atmos GIGA-N 40/160-3/2	3.00	IE3	6086548	K	4,097.-	A	331.-	A	331.-	A	61.-	12

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☞ = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG4

Ordering information (2-pole) with spacer coupling												
	Rated power	Motor efficiency class	Art. no.			Red brass impeller (L1 version)		Stainless steel impeller (L4 version)		-S1		GRD group
	P_2 kW				EUR		EUR		EUR		EUR	
Atmos GIGA-N 40/160-4/2	4.00	IE3	6086547	K	4,224.-	A	331.-	A	331.-	A	61.-	12
Atmos GIGA-N 40/160-5,5/2	5.50	IE3	6086546	K	4,548.-	A	331.-	A	331.-	A	61.-	12
Atmos GIGA-N 40/160-7,5/2	7.50	IE3	6086545	K	4,810.-	A	331.-	A	331.-	A	61.-	12
Atmos GIGA-N 40/160-11/2	11.00	IE3	6086544	K	5,639.-	A	331.-	A	331.-	A	61.-	12
Atmos GIGA-N 40/200-5,5/2	5.50	IE3	6086299	K	4,617.-	A	393.-	A	393.-	A	61.-	12
Atmos GIGA-N 40/200-7,5/2	7.50	IE3	6086538	K	4,879.-	A	393.-	A	393.-	A	61.-	12
Atmos GIGA-N 40/200-11/2	11.00	IE3	6086537	K	5,708.-	A	393.-	A	393.-	A	61.-	12
Atmos GIGA-N 40/200-15/2	15.00	IE3	6086536	K	6,145.-	A	393.-	A	393.-	A	61.-	12
Atmos GIGA-N 40/250-11/2	11.00	IE3	6086527	K	6,026.-	A	423.-	A	423.-	A	61.-	12
Atmos GIGA-N 40/250-15/2	15.00	IE3	6086526	K	6,462.-	A	423.-	A	423.-	A	61.-	12
Atmos GIGA-N 40/250-18,5/2	18.50	IE3	6086525	K	6,785.-	A	423.-	A	423.-	A	61.-	12
Atmos GIGA-N 40/250-22/2	22.00	IE3	6086524	K	7,742.-	A	423.-	A	423.-	A	61.-	12
Atmos GIGA-N 40/250-30/2	30.00	IE3	6086523	K	9,557.-	A	423.-	A	423.-	A	61.-	12
Atmos GIGA-N 40/315-22/2	22.00	IE3	6086515	K	8,695.-	A	825.-	A	825.-	A	110.-	13
Atmos GIGA-N 40/315-30/2	30.00	IE3	6086514	K	10,511.-	A	825.-	A	825.-	A	110.-	13
Atmos GIGA-N 40/315-37/2	37.00	IE3	6086513	K	11,161.-	A	825.-	A	825.-	A	110.-	13
Atmos GIGA-N 40/315-45/2	45.00	IE3	6086512	K	13,010.-	A	825.-	A	825.-	A	110.-	13
Atmos GIGA-N 40/315-55/2	55.00	IE3	6086511	K	15,092.-	A	825.-	A	825.-	A	110.-	13
Atmos GIGA-N 50/125-3/2	3.00	IE3	6086318	K	4,249.-	A	350.-	A	350.-	A	61.-	12
Atmos GIGA-N 50/125-4/2	4.00	IE3	6086319	K	4,376.-	A	350.-	A	350.-	A	61.-	12
Atmos GIGA-N 50/125-5,5/2	5.50	IE3	6086320	K	4,700.-	A	350.-	A	350.-	A	61.-	12
Atmos GIGA-N 50/125-7,5/2	7.50	IE3	6086321	K	4,962.-	A	350.-	A	350.-	A	61.-	12
Atmos GIGA-N 50/160-4/2	4.00	IE3	6086329	K	4,268.-	A	388.-	A	388.-	A	61.-	12
Atmos GIGA-N 50/160-5,5/2	5.50	IE3	6086330	K	4,593.-	A	388.-	A	388.-	A	61.-	12
Atmos GIGA-N 50/160-7,5/2	7.50	IE3	6086331	K	4,855.-	A	388.-	A	388.-	A	61.-	12
Atmos GIGA-N 50/160-11/2	11.00	IE3	6086326	K	5,683.-	A	388.-	A	388.-	A	61.-	12

= ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Ordering information (2-pole) with spacer coupling					Price group: PG4							
	Rated power	Motor efficiency class	Art. no.			Red brass impeller (L1 version)		Stainless steel impeller (L4 version)		-S1		GRD group
	P_2 kW				EUR	EUR	EUR	EUR	EUR	EUR		
Atmos GIGA-N 50/200-7,5/2	7.50	IE3	6086505	K	5,011.-	A	376.-	A	376.-	A	61.-	12
Atmos GIGA-N 50/200-11/2	11.00	IE3	6086504	K	5,840.-	A	376.-	A	376.-	A	61.-	12
Atmos GIGA-N 50/200-15/2	15.00	IE3	6086503	K	6,277.-	A	376.-	A	376.-	A	61.-	12
Atmos GIGA-N 50/200-18,5/2	18.50	IE3	6086502	K	6,599.-	A	376.-	A	376.-	A	61.-	12
Atmos GIGA-N 50/200-22/2	22.00	IE3	6086501	K	7,555.-	A	376.-	A	376.-	A	61.-	12
Atmos GIGA-N 50/250-15/2	15.00	IE3	6086492	K	6,778.-	A	439.-	A	439.-	A	61.-	12
Atmos GIGA-N 50/250-18,5/2	18.50	IE3	6086491	K	7,101.-	A	439.-	A	439.-	A	61.-	12
Atmos GIGA-N 50/250-22/2	22.00	IE3	6086490	K	8,058.-	A	439.-	A	439.-	A	61.-	12
Atmos GIGA-N 50/250-30/2	30.00	IE3	6086489	K	9,873.-	A	439.-	A	439.-	A	61.-	12
Atmos GIGA-N 50/250-37/2	37.00	IE3	6086488	K	10,524.-	A	439.-	A	439.-	A	61.-	12
Atmos GIGA-N 50/315-30/2	30.00	IE3	6086482	K	10,695.-	A	892.-	A	892.-	A	110.-	13
Atmos GIGA-N 50/315-37/2	37.00	IE3	6086481	K	11,346.-	A	892.-	A	892.-	A	110.-	13
Atmos GIGA-N 50/315-45/2	45.00	IE3	6086480	K	13,195.-	A	892.-	A	892.-	A	110.-	13
Atmos GIGA-N 50/315-55/2	55.00	IE3	6086479	K	15,276.-	A	892.-	A	892.-	A	110.-	13
Atmos GIGA-N 50/315-75/2	75.00	IE3	6086478	K	19,441.-	A	892.-	A	892.-	A	110.-	13
Atmos GIGA-N 65/125-4/2	4.00	IE3	6086339	K	4,248.-	A	327.-	A	327.-	A	61.-	12
Atmos GIGA-N 65/125-5,5/2	5.50	IE3	6086340	K	4,573.-	A	327.-	A	327.-	A	61.-	12
Atmos GIGA-N 65/125-7,5/2	7.50	IE3	6086341	K	4,834.-	A	327.-	A	327.-	A	61.-	12
Atmos GIGA-N 65/125-11/2	11.00	IE3	6086336	K	5,663.-	A	327.-	A	327.-	A	61.-	12
Atmos GIGA-N 65/160-7,5/2	7.50	IE3	6086351	K	4,959.-	A	363.-	A	363.-	A	61.-	12
Atmos GIGA-N 65/160-11/2	11.00	IE3	6086346	K	5,787.-	A	363.-	A	363.-	A	61.-	12
Atmos GIGA-N 65/160-15/2	15.00	IE3	6086347	K	6,224.-	A	363.-	A	363.-	A	61.-	12
Atmos GIGA-N 65/160-18,5/2	18.50	IE3	6086348	K	6,546.-	A	363.-	A	363.-	A	61.-	12
Atmos GIGA-N 65/200-11/2	11.00	IE3	6086354	K	6,411.-	A	409.-	A	409.-	A	61.-	12
Atmos GIGA-N 65/200-15/2	15.00	IE3	6086355	K	6,847.-	A	409.-	A	409.-	A	61.-	12
Atmos GIGA-N 65/200-18,5/2	18.50	IE3	6086356	K	7,169.-	A	409.-	A	409.-	A	61.-	12

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG4

Ordering information (2-pole) with spacer coupling												
	Rated power	Motor efficiency class	Art. no.			Red brass impeller (L1 version)		Stain-less steel impeller (L4 version)		-S1		GRD group
	P_2 kW				EUR		EUR		EUR		EUR	
Atmos GIGA-N 65/200-22/2	22.00	IE3	6086358	K	8,126.-	A	409.-	A	409.-	A	61.-	12
Atmos GIGA-N 65/200-30/2	30.00	IE3	6086360	K	9,942.-	A	409.-	A	409.-	A	61.-	12
Atmos GIGA-N 65/200-37/2	37.00	IE3	6086361	K	10,592.-	A	409.-	A	409.-	A	61.-	12
Atmos GIGA-N 65/250-22/2	22.00	IE3	6086470	K	8,513.-	A	617.-	A	617.-	A	110.-	13
Atmos GIGA-N 65/250-30/2	30.00	IE3	6086469	K	10,328.-	A	617.-	A	617.-	A	110.-	13
Atmos GIGA-N 65/250-37/2	37.00	IE3	6086468	K	10,978.-	A	617.-	A	617.-	A	110.-	13
Atmos GIGA-N 65/250-45/2	45.00	IE3	6086467	K	12,829.-	A	617.-	A	617.-	A	110.-	13
Atmos GIGA-N 65/250-55/2	55.00	IE3	6086466	K	14,909.-	A	617.-	A	617.-	A	110.-	13
Atmos GIGA-N 65/315-45/2	45.00	IE3	6086458	K	13,672.-	A	901.-	A	901.-	A	110.-	13
Atmos GIGA-N 65/315-55/2	55.00	IE3	6086457	K	15,752.-	A	901.-	A	901.-	A	110.-	13
Atmos GIGA-N 65/315-75/2	75.00	IE3	6086456	K	19,918.-	A	901.-	A	901.-	A	110.-	13
Atmos GIGA-N 65/315-90/2	90.00	IE3	6086455	K	21,126.-	A	901.-	A	901.-	A	110.-	13
Atmos GIGA-N 65/315-110/2	110.00	IE3	6086454	K	27,149.-	A	901.-	A	901.-	A	110.-	13
Atmos GIGA-N 80/160-11/2	11.00	IE3	6086365	K	6,481.-	A	407.-	A	407.-	A	61.-	12
Atmos GIGA-N 80/160-15/2	15.00	IE3	6086366	K	6,917.-	A	407.-	A	407.-	A	61.-	12
Atmos GIGA-N 80/160-18,5/2	18.50	IE3	6086367	K	7,239.-	A	407.-	A	407.-	A	61.-	12
Atmos GIGA-N 80/160-22/2	22.00	IE3	6086369	K	8,196.-	A	407.-	A	407.-	A	61.-	12
Atmos GIGA-N 80/160-30/2	30.00	IE3	6086371	K	10,011.-	A	407.-	A	407.-	A	61.-	12
Atmos GIGA-N 80/200-18,5/2	18.50	IE3	6086373	K	7,574.-	A	560.-	A	560.-	A	110.-	13
Atmos GIGA-N 80/200-22/2	22.00	IE3	6086375	K	8,531.-	A	560.-	A	560.-	A	110.-	13
Atmos GIGA-N 80/200-30/2	30.00	IE3	6086377	K	10,346.-	A	560.-	A	560.-	A	110.-	13
Atmos GIGA-N 80/200-37/2	37.00	IE3	6086378	K	10,997.-	A	560.-	A	560.-	A	110.-	13
Atmos GIGA-N 80/200-45/2	45.00	IE3	6086380	K	12,846.-	A	560.-	A	560.-	A	110.-	13
Atmos GIGA-N 80/200-55/2	55.00	IE3	6086382	K	14,927.-	A	560.-	A	560.-	A	110.-	13
Atmos GIGA-N 80/250-37/2	37.00	IE3	6086446	K	11,821.-	A	685.-	A	685.-	A	110.-	13
Atmos GIGA-N 80/250-45/2	45.00	IE3	6086445	K	13,670.-	A	685.-	A	685.-	A	110.-	13





= ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, = please contact Wilo
 Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Ordering information (2-pole) with spacer coupling					Price group: PG4							
	Rated power	Motor efficiency class	Art. no.			Red brass impeller (L1 version)		Stainless steel impeller (L4 version)		-S1		GRD group
	P_2 kW				EUR	EUR	EUR	EUR	EUR	EUR		
Atmos GIGA-N 80/250-55/2	55.00	IE3	6086444	K	15,750.-	A	685.-	A	685.-	A	110.-	13
Atmos GIGA-N 80/250-75/2	75.00	IE3	6086443	K	19,917.-	A	685.-	A	685.-	A	110.-	13
Atmos GIGA-N 80/250-90/2	90.00	IE3	6086442	K	21,124.-	A	685.-	A	685.-	A	110.-	13
Atmos GIGA-N 80/315-75/2	75.00	IE3	6086398	K	20,395.-	A	972.-	A	972.-	A	110.-	13
Atmos GIGA-N 80/315-90/2	90.00	IE3	6086397	K	21,604.-	A	972.-	A	972.-	A	110.-	13
Atmos GIGA-N 80/315.1-90/2	90.00	IE3	6086406	K	21,968.-	A	1,376.-	A	1,376.-	A	232.-	14
Atmos GIGA-N 80/315.1-110/2	110.00	IE3	6086405	K	27,991.-	A	1,376.-	A	1,376.-	A	232.-	14
Atmos GIGA-N 80/315.1-132/2	132.00	IE3	6086404	K	31,361.-	A	1,376.-	A	1,376.-	A	232.-	14
Atmos GIGA-N 80/315.1-160/2	160.00	IE3	6086297	K	36,829.-	A	1,376.-	A	1,376.-	A	232.-	14
Atmos GIGA-N 100/160-18,5/2	18.50	IE3	6086205	K	6,460.-	A	530.-	A	530.-	A	110.-	13
Atmos GIGA-N 100/160-22/2	22.00	IE3	6086207	K	7,417.-	A	530.-	A	530.-	A	110.-	13
Atmos GIGA-N 100/160-30/2	30.00	IE3	6086209	K	9,232.-	A	530.-	A	530.-	A	110.-	13
Atmos GIGA-N 100/200-30/2	30.00	IE3	6086216	K	10,957.-	A	618.-	A	618.-	A	110.-	13
Atmos GIGA-N 100/200-37/2	37.00	IE3	6086217	K	11,608.-	A	618.-	A	618.-	A	110.-	13
Atmos GIGA-N 100/200-45/2	45.00	IE3	6086219	K	13,457.-	A	618.-	A	618.-	A	110.-	13
Atmos GIGA-N 100/200-55/2	55.00	IE3	6086221	K	15,538.-	A	618.-	A	618.-	A	110.-	13
Atmos GIGA-N 100/200-75/2	75.00	IE3	6086223	K	19,703.-	A	618.-	A	618.-	A	110.-	13
Atmos GIGA-N 100/250-55/2	55.00	IE3	6086227	K	16,000.-	A	749.-	A	749.-	A	110.-	13
Atmos GIGA-N 100/250-75/2	75.00	IE3	6086229	K	20,165.-	A	749.-	A	749.-	A	110.-	13
Atmos GIGA-N 100/250-90/2	90.00	IE3	6086230	K	21,374.-	A	749.-	A	749.-	A	110.-	13
Atmos GIGA-N 100/250.1-90/2	90.00	IE3	6086233	K	22,808.-	A	749.-	A	749.-	A	232.-	14
Atmos GIGA-N 100/250.1-110/2	110.00	IE3	6086231	K	28,831.-	A	749.-	A	749.-	A	232.-	13
Atmos GIGA-N 100/250.1-132/2	132.00	IE3	6086232	K	32,203.-	A	749.-	A	749.-	A	232.-	14
Atmos GIGA-N 100/315.1-90/2	90.00	IE3	6086417	K	23,820.-	A	1,031.-	A	1,031.-	A	232.-	14
Atmos GIGA-N 100/315.1-110/2	110.00	IE3	6086416	K	29,842.-	A	1,031.-	A	1,031.-	A	232.-	13
Atmos GIGA-N 100/315.1-132/2	132.00	IE3	6086415	K	33,213.-	A	1,031.-	A	1,031.-	A	232.-	14
Atmos GIGA-N 100/315.1-160/2	160.00	IE3	6086414	K	38,680.-	A	1,031.-	A	1,031.-	A	232.-	14

☛ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG4

Ordering information (2-pole) with spacer coupling												
	Rated power	Motor efficiency class	Art. no.			Red brass impeller (L1 version)		Stain-less steel impeller (L4 version)		-S1		GRD group
	P_2 kW				EUR		EUR		EUR		EUR	
Atmos GIGA-N 100/315.1-200/2	200.00	IE3	6086413	K	45,697.-	A	1,031.-	A	1,031.-	A	232.-	14
Atmos GIGA-N 125/200-45/2	45.00	IE3	6086237	K	13,829.-	A	615.-	A	615.-	A	110.-	13
Atmos GIGA-N 125/200-55/2	55.00	IE3	6086239	K	15,910.-	A	615.-	A	615.-	A	110.-	13
Atmos GIGA-N 125/200-75/2	75.00	IE3	6086241	K	20,075.-	A	615.-	A	615.-	A	110.-	13
Atmos GIGA-N 125/200-90/2	90.00	IE3	6086242	K	21,284.-	A	615.-	A	615.-	A	110.-	13
Atmos GIGA-N 125/250-75/2	75.00	IE3	6086252	K	20,766.-	A	772.-	A	772.-	A	110.-	13
Atmos GIGA-N 125/250-90/2	90.00	IE3	6086253	K	21,973.-	A	772.-	A	772.-	A	110.-	13
Atmos GIGA-N 125/250-110/2	110.00	IE3	6086581	K	29,795.-	A	772.-	A	772.-	A	232.-	13
Atmos GIGA-N 125/250-132/2	132.00	IE3	6086583	K	33,165.-	A	772.-	A	772.-	A	232.-	14
Atmos GIGA-N 125/250-160/2	160.00	IE3	6086213	K	38,633.-	A	772.-	A	772.-	A	232.-	14
Atmos GIGA-N 125/250.1-90/2	90.00	IE3	6086254	K	23,772.-	A	772.-	A	772.-	A	232.-	14
Atmos GIGA-N 150/200-75/2	75.00	IE3	6086271	K	22,264.-	A	799.-	A	799.-	A	110.-	13
Atmos GIGA-N 150/200-90/2	90.00	IE3	6086272	K	23,473.-	A	799.-	A	799.-	A	110.-	13
Atmos GIGA-N 150/200-110/2	110.00	IE3	6086268	K	29,495.-	A	799.-	A	799.-	A	110.-	13
Atmos GIGA-N 150/250-90/2	90.00	IE3	6086282	K	24,331.-	A	1,059.-	A	1,059.-	A	232.-	14
Atmos GIGA-N 150/250-110/2	110.00	IE3	6086274	K	30,353.-	A	1,059.-	A	1,059.-	A	232.-	14
Atmos GIGA-N 150/250-132/2	132.00	IE3	6086275	K	33,725.-	A	1,059.-	A	1,059.-	A	232.-	14
Atmos GIGA-N 150/250-160/2	160.00	IE3	6086277	K	39,191.-	A	1,059.-	A	1,059.-	A	232.-	14
Atmos GIGA-N 150/250-200/2	200.00	IE3	6086279	K	46,208.-	A	1,059.-	A	1,059.-	A	232.-	14

Ordering information (2-pole) without spacer coupling				Price group: PG4								
	Rated power	Motor efficiency class	Art. no.			Red brass impeller (L1 version)		Stainless steel impeller (L4 version)		-S1	GRD group	
	P_2 kW											
Atmos GIGA-N 125/250-160/2-P5	160.00	IE3	6086214	A	☞	A	☞	A	☞	A	☞	14
Atmos GIGA-N 80/315.1-160/2-P5	160.00	IE3	6086298	A	☞	A	☞	A	☞	A	☞	14
Atmos GIGA-N 40/200-5,5/2-P5	5.50	IE3	6086300	A	☞	A	☞	A	☞	A	☞	12
Atmos GIGA-N 125/250-110/2-P5	110.00	IE3	6086582	A	☞	A	☞	A	☞	A	☞	14
Atmos GIGA-N 125/250-132/2-P5	132.00	IE3	6086584	A	☞	A	☞	A	☞	A	☞	14
Atmos GIGA-N 100/160-18,5/2-P5	18.50	IE3	6086613	A	☞	A	☞	A	☞	A	☞	13
Atmos GIGA-N 100/160-22/2-P5	22.00	IE3	6086615	A	☞	A	☞	A	☞	A	☞	13
Atmos GIGA-N 100/160-30/2-P5	30.00	IE3	6086617	A	☞	A	☞	A	☞	A	☞	13
Atmos GIGA-N 100/200-30/2-P5	30.00	IE3	6086624	A	☞	A	☞	A	☞	A	☞	13
Atmos GIGA-N 100/200-37/2-P5	37.00	IE3	6086625	A	☞	A	☞	A	☞	A	☞	13
Atmos GIGA-N 100/200-45/2-P5	45.00	IE3	6086627	A	☞	A	☞	A	☞	A	☞	13
Atmos GIGA-N 100/200-55/2-P5	55.00	IE3	6086629	A	☞	A	☞	A	☞	A	☞	13
Atmos GIGA-N 100/200-75/2-P5	75.00	IE3	6086631	A	☞	A	☞	A	☞	A	☞	13
Atmos GIGA-N 100/250-55/2-P5	55.00	IE3	6086635	A	☞	A	☞	A	☞	A	☞	13
Atmos GIGA-N 100/250-75/2-P5	75.00	IE3	6086637	A	☞	A	☞	A	☞	A	☞	13
Atmos GIGA-N 100/250-90/2-P5	90.00	IE3	6086638	A	☞	A	☞	A	☞	A	☞	13
Atmos GIGA-N 100/250.1-110/2-P5	110.00	IE3	6086639	A	☞	A	☞	A	☞	A	☞	14
Atmos GIGA-N 100/250.1-132/2-P5	132.00	IE3	6086640	A	☞	A	☞	A	☞	A	☞	14
Atmos GIGA-N 100/250.1-90/2-P5	90.00	IE3	6086641	A	☞	A	☞	A	☞	A	☞	14
Atmos GIGA-N 125/200-45/2-P5	45.00	IE3	6086645	A	☞	A	☞	A	☞	A	☞	13
Atmos GIGA-N 125/200-55/2-P5	55.00	IE3	6086647	A	☞	A	☞	A	☞	A	☞	13
Atmos GIGA-N 125/200-75/2-P5	75.00	IE3	6086649	A	☞	A	☞	A	☞	A	☞	13
Atmos GIGA-N 125/200-90/2-P5	90.00	IE3	6086650	A	☞	A	☞	A	☞	A	☞	13
Atmos GIGA-N 125/250-75/2-P5	75.00	IE3	6086660	A	☞	A	☞	A	☞	A	☞	13
Atmos GIGA-N 125/250-90/2-P5	90.00	IE3	6086661	A	☞	A	☞	A	☞	A	☞	13

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☞ = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG4

Ordering information (2-pole) without spacer coupling											
	Rated power	Motor efficiency class	Art. no.	Red brass impeller (L1 version)		Stainless steel impeller (L4 version)		-S1	GRD group		
	P_2 kW										
Atmos GIGA-N 125/250.1-90/2-P5	90.00	IE3	6086662	A	☺	A	☺	A	☺	14	
Atmos GIGA-N 150/200-110/2-P5	110.00	IE3	6086676	A	☺	A	☺	A	☺	13	
Atmos GIGA-N 150/200-75/2-P5	75.00	IE3	6086679	A	☺	A	☺	A	☺	13	
Atmos GIGA-N 150/200-90/2-P5	90.00	IE3	6086680	A	☺	A	☺	A	☺	13	
Atmos GIGA-N 150/250-110/2-P5	110.00	IE3	6086682	A	☺	A	☺	A	☺	14	
Atmos GIGA-N 150/250-132/2-P5	132.00	IE3	6086683	A	☺	A	☺	A	☺	14	
Atmos GIGA-N 150/250-160/2-P5	160.00	IE3	6086685	A	☺	A	☺	A	☺	14	
Atmos GIGA-N 150/250-200/2-P5	200.00	IE3	6086687	A	☺	A	☺	A	☺	14	
Atmos GIGA-N 150/250-90/2-P5	90.00	IE3	6086690	A	☺	A	☺	A	☺	14	
Atmos GIGA-N 32/125-1,1/2-P5	1.10	IE3	6086700	A	☺	A	☺	A	☺	12	
Atmos GIGA-N 32/125-1,5/2-P5	1.50	IE3	6086701	A	☺	A	☺	A	☺	12	
Atmos GIGA-N 32/125-2,2/2-P5	2.20	IE3	6086702	A	☺	A	☺	A	☺	12	
Atmos GIGA-N 32/125-3/2-P5	3.00	IE3	6086703	A	☺	A	☺	A	☺	12	
Atmos GIGA-N 32/125-4/2-P5	4.00	IE3	6086704	A	☺	A	☺	A	☺	12	
Atmos GIGA-N 40/125-2,2/2-P5	2.20	IE3	6086718	A	☺	A	☺	A	☺	12	
Atmos GIGA-N 40/125-3/2-P5	3.00	IE3	6086719	A	☺	A	☺	A	☺	12	
Atmos GIGA-N 40/125-4/2-P5	4.00	IE3	6086720	A	☺	A	☺	A	☺	12	
Atmos GIGA-N 40/125-5,5/2-P5	5.50	IE3	6086721	A	☺	A	☺	A	☺	12	
Atmos GIGA-N 50/125-3/2-P5	3.00	IE3	6086726	A	☺	A	☺	A	☺	12	
Atmos GIGA-N 50/125-4/2-P5	4.00	IE3	6086727	A	☺	A	☺	A	☺	12	
Atmos GIGA-N 50/125-5,5/2-P5	5.50	IE3	6086728	A	☺	A	☺	A	☺	12	
Atmos GIGA-N 50/125-7,5/2-P5	7.50	IE3	6086729	A	☺	A	☺	A	☺	12	
Atmos GIGA-N 50/160-11/2-P5	11.00	IE3	6086734	A	☺	A	☺	A	☺	12	
Atmos GIGA-N 50/160-4/2-P5	4.00	IE3	6086737	A	☺	A	☺	A	☺	12	
Atmos GIGA-N 50/160-5,5/2-P5	5.50	IE3	6086738	A	☺	A	☺	A	☺	12	

= ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☺ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Ordering information (2-pole) without spacer coupling				Price group: PG4								
	Rated power	Motor efficiency class	Art. no.			Red brass impeller (L1 version)		Stainless steel impeller (L4 version)		-S1	GRD group	
	P_2 kW											
Atmos GIGA-N 50/160-7,5/2-P5	7.50	IE3	6086739	A	☺	A	☺	A	☺	A	☺	12
Atmos GIGA-N 65/125-11/2-P5	11.00	IE3	6086744	A	☺	A	☺	A	☺	A	☺	12
Atmos GIGA-N 65/125-4/2-P5	4.00	IE3	6086747	A	☺	A	☺	A	☺	A	☺	12
Atmos GIGA-N 65/125-5,5/2-P5	5.50	IE3	6086748	A	☺	A	☺	A	☺	A	☺	12
Atmos GIGA-N 65/125-7,5/2-P5	7.50	IE3	6086749	A	☺	A	☺	A	☺	A	☺	12
Atmos GIGA-N 65/160-11/2-P5	11.00	IE3	6086754	A	☺	A	☺	A	☺	A	☺	12
Atmos GIGA-N 65/160-15/2-P5	15.00	IE3	6086755	A	☺	A	☺	A	☺	A	☺	12
Atmos GIGA-N 65/160-18,5/2-P5	18.50	IE3	6086756	A	☺	A	☺	A	☺	A	☺	12
Atmos GIGA-N 65/160-7,5/2-P5	7.50	IE3	6086759	A	☺	A	☺	A	☺	A	☺	12
Atmos GIGA-N 65/200-11/2-P5	11.00	IE3	6086762	A	☺	A	☺	A	☺	A	☺	12
Atmos GIGA-N 65/200-15/2-P5	15.00	IE3	6086763	A	☺	A	☺	A	☺	A	☺	12
Atmos GIGA-N 65/200-18,5/2-P5	18.50	IE3	6086764	A	☺	A	☺	A	☺	A	☺	12
Atmos GIGA-N 65/200-22/2-P5	22.00	IE3	6086766	A	☺	A	☺	A	☺	A	☺	12
Atmos GIGA-N 65/200-30/2-P5	30.00	IE3	6086768	A	☺	A	☺	A	☺	A	☺	12
Atmos GIGA-N 65/200-37/2-P5	37.00	IE3	6086769	A	☺	A	☺	A	☺	A	☺	12
Atmos GIGA-N 80/160-11/2-P5	11.00	IE3	6086773	A	☺	A	☺	A	☺	A	☺	12
Atmos GIGA-N 80/160-15/2-P5	15.00	IE3	6086774	A	☺	A	☺	A	☺	A	☺	12
Atmos GIGA-N 80/160-18,5/2-P5	18.50	IE3	6086775	A	☺	A	☺	A	☺	A	☺	12
Atmos GIGA-N 80/160-22/2-P5	22.00	IE3	6086777	A	☺	A	☺	A	☺	A	☺	12
Atmos GIGA-N 80/160-30/2-P5	30.00	IE3	6086779	A	☺	A	☺	A	☺	A	☺	12
Atmos GIGA-N 80/200-18,5/2-P5	18.50	IE3	6086781	A	☺	A	☺	A	☺	A	☺	13
Atmos GIGA-N 80/200-22/2-P5	22.00	IE3	6086783	A	☺	A	☺	A	☺	A	☺	13
Atmos GIGA-N 80/200-30/2-P5	30.00	IE3	6086785	A	☺	A	☺	A	☺	A	☺	13
Atmos GIGA-N 80/200-37/2-P5	37.00	IE3	6086786	A	☺	A	☺	A	☺	A	☺	13
Atmos GIGA-N 80/200-45/2-P5	45.00	IE3	6086788	A	☺	A	☺	A	☺	A	☺	13
Atmos GIGA-N 80/200-55/2-P5	55.00	IE3	6086790	A	☺	A	☺	A	☺	A	☺	13

☺ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☺ = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG4

Ordering information (2-pole) without spacer coupling												
	Rated power	Motor efficiency class	Art. no.			Red brass impeller (L1 version)		Stain-less steel impeller (L4 version)		-S1	GRD group	
	P_2 kW											
Atmos GIGA-N 80/315-90/2-P5	90.00	IE3	6086805	A	☺	A	☺	A	☺	A	☺	13
Atmos GIGA-N 80/315-75/2-P5	75.00	IE3	6086806	A	☺	A	☺	A	☺	A	☺	13
Atmos GIGA-N 80/315.1-132/2-P5	132.00	IE3	6086812	A	☺	A	☺	A	☺	A	☺	14
Atmos GIGA-N 80/315.1-110/2-P5	110.00	IE3	6086813	A	☺	A	☺	A	☺	A	☺	14
Atmos GIGA-N 80/315.1-90/2-P5	90.00	IE3	6086814	A	☺	A	☺	A	☺	A	☺	14
Atmos GIGA-N 100/315.1-200/2-P5	200.00	IE3	6086821	A	☺	A	☺	A	☺	A	☺	14
Atmos GIGA-N 100/315.1-160/2-P5	160.00	IE3	6086822	A	☺	A	☺	A	☺	A	☺	14
Atmos GIGA-N 100/315.1-132/2-P5	132.00	IE3	6086823	A	☺	A	☺	A	☺	A	☺	14
Atmos GIGA-N 100/315.1-110/2-P5	110.00	IE3	6086824	A	☺	A	☺	A	☺	A	☺	14
Atmos GIGA-N 100/315.1-90/2-P5	90.00	IE3	6086825	A	☺	A	☺	A	☺	A	☺	14
Atmos GIGA-N 80/250-90/2-P5	90.00	IE3	6086850	A	☺	A	☺	A	☺	A	☺	13
Atmos GIGA-N 80/250-75/2-P5	75.00	IE3	6086851	A	☺	A	☺	A	☺	A	☺	13
Atmos GIGA-N 80/250-55/2-P5	55.00	IE3	6086852	A	☺	A	☺	A	☺	A	☺	13
Atmos GIGA-N 80/250-45/2-P5	45.00	IE3	6086853	A	☺	A	☺	A	☺	A	☺	13
Atmos GIGA-N 80/250-37/2-P5	37.00	IE3	6086854	A	☺	A	☺	A	☺	A	☺	13
Atmos GIGA-N 65/315-110/2-P5	110.00	IE3	6086862	A	☺	A	☺	A	☺	A	☺	13
Atmos GIGA-N 65/315-90/2-P5	90.00	IE3	6086863	A	☺	A	☺	A	☺	A	☺	13
Atmos GIGA-N 65/315-75/2-P5	75.00	IE3	6086864	A	☺	A	☺	A	☺	A	☺	13
Atmos GIGA-N 65/315-55/2-P5	55.00	IE3	6086865	A	☺	A	☺	A	☺	A	☺	13
Atmos GIGA-N 65/315-45/2-P5	45.00	IE3	6086866	A	☺	A	☺	A	☺	A	☺	13
Atmos GIGA-N 65/250-55/2-P5	55.00	IE3	6086874	A	☺	A	☺	A	☺	A	☺	13
Atmos GIGA-N 65/250-45/2-P5	45.00	IE3	6086875	A	☺	A	☺	A	☺	A	☺	13
Atmos GIGA-N 65/250-37/2-P5	37.00	IE3	6086876	A	☺	A	☺	A	☺	A	☺	13

= ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☺ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Ordering information (2-pole) without spacer coupling												
	Rated power	Motor efficiency class	Art. no.			Red brass impeller (L1 version)		Stainless steel impeller (L4 version)		-S1	GRD group	
	P_2 kW											
Atmos GIGA-N 65/250-30/2-P5	30.00	IE3	6086877	A	☞	A	☞	A	☞	A	☞	13
Atmos GIGA-N 65/250-22/2-P5	22.00	IE3	6086878	A	☞	A	☞	A	☞	A	☞	13
Atmos GIGA-N 50/315-75/2-P5	75.00	IE3	6086886	A	☞	A	☞	A	☞	A	☞	13
Atmos GIGA-N 50/315-55/2-P5	55.00	IE3	6086887	A	☞	A	☞	A	☞	A	☞	13
Atmos GIGA-N 50/315-45/2-P5	45.00	IE3	6086888	A	☞	A	☞	A	☞	A	☞	13
Atmos GIGA-N 50/315-37/2-P5	37.00	IE3	6086889	A	☞	A	☞	A	☞	A	☞	13
Atmos GIGA-N 50/315-30/2-P5	30.00	IE3	6086890	A	☞	A	☞	A	☞	A	☞	13
Atmos GIGA-N 50/250-37/2-P5	37.00	IE3	6086896	A	☞	A	☞	A	☞	A	☞	12
Atmos GIGA-N 50/250-30/2-P5	30.00	IE3	6086897	A	☞	A	☞	A	☞	A	☞	12
Atmos GIGA-N 50/250-22/2-P5	22.00	IE3	6086898	A	☞	A	☞	A	☞	A	☞	12
Atmos GIGA-N 50/250-18,5/2-P5	18.50	IE3	6086899	A	☞	A	☞	A	☞	A	☞	12
Atmos GIGA-N 50/250-15/2-P5	15.00	IE3	6086900	A	☞	A	☞	A	☞	A	☞	12
Atmos GIGA-N 50/200-22/2-P5	22.00	IE3	6086909	A	☞	A	☞	A	☞	A	☞	12
Atmos GIGA-N 50/200-18,5/2-P5	18.50	IE3	6086910	A	☞	A	☞	A	☞	A	☞	12
Atmos GIGA-N 50/200-15/2-P5	15.00	IE3	6086911	A	☞	A	☞	A	☞	A	☞	12
Atmos GIGA-N 50/200-11/2-P5	11.00	IE3	6086912	A	☞	A	☞	A	☞	A	☞	12
Atmos GIGA-N 50/200-7,5/2-P5	7.50	IE3	6086913	A	☞	A	☞	A	☞	A	☞	12
Atmos GIGA-N 40/315-55/2-P5	55.00	IE3	6086919	A	☞	A	☞	A	☞	A	☞	13
Atmos GIGA-N 40/315-45/2-P5	45.00	IE3	6086920	A	☞	A	☞	A	☞	A	☞	13
Atmos GIGA-N 40/315-37/2-P5	37.00	IE3	6086921	A	☞	A	☞	A	☞	A	☞	13
Atmos GIGA-N 40/315-30/2-P5	30.00	IE3	6086922	A	☞	A	☞	A	☞	A	☞	13
Atmos GIGA-N 40/315-22/2-P5	22.00	IE3	6086923	A	☞	A	☞	A	☞	A	☞	13
Atmos GIGA-N 40/250-30/2-P5	30.00	IE3	6086931	A	☞	A	☞	A	☞	A	☞	12
Atmos GIGA-N 40/250-22/2-P5	22.00	IE3	6086932	A	☞	A	☞	A	☞	A	☞	12
Atmos GIGA-N 40/250-18,5/2-P5	18.50	IE3	6086933	A	☞	A	☞	A	☞	A	☞	12
Atmos GIGA-N 40/250-15/2-P5	15.00	IE3	6086934	A	☞	A	☞	A	☞	A	☞	12

= ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☞ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG4

Ordering information (2-pole) without spacer coupling											
	Rated power	Motor efficiency class	Art. no.	Red brass impeller (L1 version)		Stainless steel impeller (L4 version)		-S1	GRD group		
	P_2 kW										
Atmos GIGA-N 40/250-11/2-P5	11.00	IE3	6086935	A	☺	A	☺	A	☺	12	
Atmos GIGA-N 40/200-15/2-P5	15.00	IE3	6086944	A	☺	A	☺	A	☺	12	
Atmos GIGA-N 40/200-11/2-P5	11.00	IE3	6086945	A	☺	A	☺	A	☺	12	
Atmos GIGA-N 40/200-7,5/2-P5	7.50	IE3	6086946	A	☺	A	☺	A	☺	12	
Atmos GIGA-N 40/160-11/2-P5	11.00	IE3	6086952	A	☺	A	☺	A	☺	12	
Atmos GIGA-N 40/160-7,5/2-P5	7.50	IE3	6086953	A	☺	A	☺	A	☺	12	
Atmos GIGA-N 40/160-5,5/2-P5	5.50	IE3	6086954	A	☺	A	☺	A	☺	12	
Atmos GIGA-N 40/160-4/2-P5	4.00	IE3	6086955	A	☺	A	☺	A	☺	12	
Atmos GIGA-N 40/160-3/2-P5	3.00	IE3	6086956	A	☺	A	☺	A	☺	12	
Atmos GIGA-N 32/250-18,5/2-P5	18.50	IE3	6086963	A	☺	A	☺	A	☺	12	
Atmos GIGA-N 32/250-15/2-P5	15.00	IE3	6086964	A	☺	A	☺	A	☺	12	
Atmos GIGA-N 32/250-11/2-P5	11.00	IE3	6086965	A	☺	A	☺	A	☺	12	
Atmos GIGA-N 32/250-7,5/2-P5	7.50	IE3	6086966	A	☺	A	☺	A	☺	12	
Atmos GIGA-N 32/250-5,5/2-P5	5.50	IE3	6086967	A	☺	A	☺	A	☺	12	
Atmos GIGA-N 32/200-7,5/2-P5	7.50	IE3	6086975	A	☺	A	☺	A	☺	12	
Atmos GIGA-N 32/200-5,5/2-P5	5.50	IE3	6086976	A	☺	A	☺	A	☺	12	
Atmos GIGA-N 32/200-4/2-P5	4.00	IE3	6086977	A	☺	A	☺	A	☺	12	
Atmos GIGA-N 32/200-3/2-P5	3.00	IE3	6086978	A	☺	A	☺	A	☺	12	
Atmos GIGA-N 32/160-5,5/2-P5	5.50	IE3	6086984	A	☺	A	☺	A	☺	12	
Atmos GIGA-N 32/160-4/2-P5	4.00	IE3	6086985	A	☺	A	☺	A	☺	12	
Atmos GIGA-N 32/160-3/2-P5	3.00	IE3	6086986	A	☺	A	☺	A	☺	12	
Atmos GIGA-N 32/160-2,2/2-P5	2.20	IE3	6086987	A	☺	A	☺	A	☺	12	
Atmos GIGA-N 32/160.1-4/2-P5	4.00	IE3	6087003	A	☺	A	☺	A	☺	12	
Atmos GIGA-N 32/160.1-3/2-P5	3.00	IE3	6087004	A	☺	A	☺	A	☺	12	
Atmos GIGA-N 32/160.1-2,2/2-P5	2.20	IE3	6087005	A	☺	A	☺	A	☺	12	
Atmos GIGA-N 32/160.1-1,5/2-P5	1.50	IE3	6087006	A	☺	A	☺	A	☺	12	





☺ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☺ = please contact Wilo
 Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.



Ordering information (4-pole) with spacer coupling					Price group: PG4							
	Rated power	Motor efficiency class	Art. no.			Red brass impeller (L1 version)		Stainless steel impeller (L4 version)		-S1		GRD group
	P_2 kW				EUR	EUR	EUR	EUR	EUR	EUR		
Atmos GIGA-N 100/200-3/4	3.00	IE3	6086215	K	5,799.-	A	618.-	A	618.-	A	110.-	13
Atmos GIGA-N 100/200-4/4	4.00	IE3	6086218	K	5,960.-	A	618.-	A	618.-	A	110.-	13
Atmos GIGA-N 100/200-5,5/4	5.50	IE3	6086220	K	6,312.-	A	618.-	A	618.-	A	110.-	13
Atmos GIGA-N 100/200-7,5/4	7.50	IE3	6086222	K	6,628.-	A	618.-	A	618.-	A	110.-	13
Atmos GIGA-N 100/250-11/4	11.00	IE3	6086224	K	7,804.-	A	749.-	A	749.-	A	110.-	14
Atmos GIGA-N 100/250-15/4	15.00	IE3	6086225	K	8,211.-	A	749.-	A	749.-	A	110.-	13
Atmos GIGA-N 100/250-5,5/4	5.50	IE3	6086226	K	6,774.-	A	749.-	A	749.-	A	110.-	13
Atmos GIGA-N 100/250-7,5/4	7.50	IE3	6086228	K	7,089.-	A	749.-	A	749.-	A	110.-	13
Atmos GIGA-N 125/200-11/4	11.00	IE3	6086234	K	7,714.-	A	615.-	A	615.-	A	110.-	14
Atmos GIGA-N 125/200-15/4	15.00	IE3	6086236	K	8,121.-	A	615.-	A	615.-	A	110.-	13
Atmos GIGA-N 125/200-5,5/4	5.50	IE3	6086238	K	6,684.-	A	615.-	A	615.-	A	110.-	13
Atmos GIGA-N 125/200-7,5/4	7.50	IE3	6086240	K	6,999.-	A	615.-	A	615.-	A	110.-	13
Atmos GIGA-N 125/250-11/4	11.00	IE3	6086243	K	8,404.-	A	772.-	A	772.-	A	110.-	14
Atmos GIGA-N 125/250-15/4	15.00	IE3	6086246	K	8,811.-	A	772.-	A	772.-	A	110.-	14
Atmos GIGA-N 125/250-18,5/4	18.50	IE3	6086248	K	9,864.-	A	772.-	A	772.-	A	110.-	14
Atmos GIGA-N 125/250-22/4	22.00	IE3	6086249	K	9,952.-	A	772.-	A	772.-	A	110.-	13
Atmos GIGA-N 125/250-7,5/4	7.50	IE3	6086251	K	7,689.-	A	772.-	A	772.-	A	110.-	13
Atmos GIGA-N 125/315-15/4	15.00	IE3	6086255	K	11,403.-	A	1,232.-	A	1,232.-	A	232.-	13
Atmos GIGA-N 125/315-18,5/4	18.50	IE3	6086256	K	12,455.-	A	1,232.-	A	1,232.-	A	232.-	14
Atmos GIGA-N 125/315-22/4	22.00	IE3	6086257	K	12,544.-	A	1,232.-	A	1,232.-	A	232.-	14
Atmos GIGA-N 125/315-30/4	30.00	IE3	6086258	K	13,172.-	A	1,232.-	A	1,232.-	A	232.-	14
Atmos GIGA-N 125/315-37/4	37.00	IE3	6086259	K	15,168.-	A	1,232.-	A	1,232.-	A	232.-	14
Atmos GIGA-N 125/315-45/4	45.00	IE3	6086260	K	15,729.-	A	1,232.-	A	1,232.-	A	232.-	14
Atmos GIGA-N 125/400-30/4	30.00	IE3	6086261	K	15,291.-	A	1,481.-	A	1,481.-	A	232.-	14
Atmos GIGA-N 125/400-37/4	37.00	IE3	6086262	K	17,287.-	A	1,481.-	A	1,481.-	A	232.-	14

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☞ = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG4

Ordering information (4-pole) with spacer coupling												
	Rated power	Motor efficiency class	Art. no.			Red brass impeller (L1 version)		Stainless steel impeller (L4 version)		-S1		GRD group
	P_2 kW				EUR		EUR		EUR		EUR	
Atmos GIGA-N 125/400-45/4	45.00	IE3	6086263	K	17,847.-	A	1,481.-	A	1,481.-	A	232.-	14
Atmos GIGA-N 125/400-55/4	55.00	IE3	6086264	K	20,118.-	A	1,481.-	A	1,481.-	A	232.-	14
Atmos GIGA-N 125/400-75/4	75.00	IE3	6086265	K	21,764.-	A	1,481.-	A	1,481.-	A	232.-	14
Atmos GIGA-N 125/400-90/4	90.00	IE3	6086266	K	25,314.-	A	1,481.-	A	1,481.-	A	232.-	14
Atmos GIGA-N 150/200-11/4	11.00	IE3	6086267	K	9,903.-	A	799.-	A	799.-	A	110.-	14
Atmos GIGA-N 150/200-15/4	15.00	IE3	6086269	K	10,310.-	A	799.-	A	799.-	A	110.-	13
Atmos GIGA-N 150/200-7,5/4	7.50	IE3	6086270	K	9,188.-	A	799.-	A	799.-	A	110.-	13
Atmos GIGA-N 150/250-11/4	11.00	IE3	6086273	K	10,762.-	A	1,059.-	A	1,059.-	A	232.-	13
Atmos GIGA-N 150/250-15/4	15.00	IE3	6086276	K	11,168.-	A	1,059.-	A	1,059.-	A	232.-	14
Atmos GIGA-N 150/250-18,5/4	18.50	IE3	6086278	K	12,221.-	A	1,059.-	A	1,059.-	A	232.-	14
Atmos GIGA-N 150/250-22/4	22.00	IE3	6086280	K	12,309.-	A	1,059.-	A	1,059.-	A	232.-	14
Atmos GIGA-N 150/250-30/4	30.00	IE3	6086281	K	12,938.-	A	1,059.-	A	1,059.-	A	232.-	14
Atmos GIGA-N 150/315-18,5/4	18.50	IE3	6086283	K	14,122.-	A	1,261.-	A	1,261.-	A	232.-	14
Atmos GIGA-N 150/315-22/4	22.00	IE3	6086284	K	14,211.-	A	1,261.-	A	1,261.-	A	232.-	14
Atmos GIGA-N 150/315-30/4	30.00	IE3	6086285	K	14,839.-	A	1,261.-	A	1,261.-	A	232.-	14
Atmos GIGA-N 150/315-37/4	37.00	IE3	6086286	K	16,835.-	A	1,261.-	A	1,261.-	A	232.-	14
Atmos GIGA-N 150/315-45/4	45.00	IE3	6086287	K	17,396.-	A	1,261.-	A	1,261.-	A	232.-	14
Atmos GIGA-N 150/315-55/4	55.00	IE3	6086288	K	19,667.-	A	1,261.-	A	1,261.-	A	232.-	14
Atmos GIGA-N 32/125-0,25/4	0.25	IE3	6086289	K	3,410.-	A	331.-	A	331.-	A	61.-	14
Atmos GIGA-N 32/125-0,37/4	0.37	IE3	6086290	K	3,518.-	A	331.-	A	331.-	A	61.-	12
Atmos GIGA-N 32/125-0,55/4	0.55	IE3	6086291	K	3,494.-	A	331.-	A	331.-	A	61.-	12
Atmos GIGA-N 40/125-0,25/4	0.25	IE3	6086305	K	3,579.-	A	331.-	A	331.-	A	61.-	12
Atmos GIGA-N 40/125-0,37/4	0.37	IE3	6086306	K	3,686.-	A	331.-	A	331.-	A	61.-	12
Atmos GIGA-N 40/125-0,55/4	0.55	IE3	6086307	K	3,664.-	A	331.-	A	331.-	A	61.-	12
Atmos GIGA-N 40/125-0,75/4	0.75	IE3	6086308	K	3,549.-	A	331.-	A	331.-	A	61.-	12





 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
 Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Ordering information (4-pole) with spacer coupling					Price group: PG4							
	Rated power	Motor efficiency class	Art. no.			Red brass impeller (L1 version)		Stainless steel impeller (L4 version)		-S1		GRD group
	P_2 kW				EUR	EUR	EUR	EUR	EUR	EUR		
Atmos GIGA-N 50/125-0,37/4	0.37	IE3	6086314	K	3,975.-	A	350.-	A	350.-	A	61.-	12
Atmos GIGA-N 50/125-0,55/4	0.55	IE3	6086315	K	3,952.-	A	350.-	A	350.-	A	61.-	12
Atmos GIGA-N 50/125-0,75/4	0.75	IE3	6086316	K	3,838.-	A	350.-	A	350.-	A	61.-	12
Atmos GIGA-N 50/125-1,1/4	1.10	IE3	6086317	K	3,882.-	A	350.-	A	350.-	A	61.-	12
Atmos GIGA-N 50/160-0,55/4	0.55	IE3	6086322	K	3,845.-	A	388.-	A	388.-	A	61.-	12
Atmos GIGA-N 50/160-0,75/4	0.75	IE3	6086323	K	3,731.-	A	388.-	A	388.-	A	61.-	12
Atmos GIGA-N 50/160-1,1/4	1.10	IE3	6086324	K	3,775.-	A	388.-	A	388.-	A	61.-	12
Atmos GIGA-N 50/160-1,5/4	1.50	IE3	6086325	K	3,836.-	A	388.-	A	388.-	A	61.-	12
Atmos GIGA-N 65/125-0,55/4	0.55	IE3	6086333	K	3,825.-	A	327.-	A	327.-	A	61.-	12
Atmos GIGA-N 65/125-0,75/4	0.75	IE3	6086334	K	3,710.-	A	327.-	A	327.-	A	61.-	12
Atmos GIGA-N 65/125-1,1/4	1.10	IE3	6086335	K	3,754.-	A	327.-	A	327.-	A	61.-	12
Atmos GIGA-N 65/160-0,75/4	0.75	IE3	6086343	K	3,834.-	A	363.-	A	363.-	A	61.-	12
Atmos GIGA-N 65/160-1,1/4	1.10	IE3	6086344	K	3,879.-	A	363.-	A	363.-	A	61.-	12
Atmos GIGA-N 65/160-1,5/4	1.50	IE3	6086345	K	3,939.-	A	363.-	A	363.-	A	61.-	12
Atmos GIGA-N 65/160-2,2/4	2.20	IE3	6086349	K	4,051.-	A	363.-	A	363.-	A	61.-	12
Atmos GIGA-N 65/200-1,5/4	1.50	IE3	6086353	K	4,562.-	A	409.-	A	409.-	A	61.-	12
Atmos GIGA-N 65/200-2,2/4	2.20	IE3	6086357	K	4,674.-	A	409.-	A	409.-	A	61.-	12
Atmos GIGA-N 65/200-3/4	3.00	IE3	6086359	K	4,783.-	A	409.-	A	409.-	A	61.-	12
Atmos GIGA-N 65/200-4/4	4.00	IE3	6086362	K	4,945.-	A	409.-	A	409.-	A	61.-	12
Atmos GIGA-N 80/160-1,1/4	1.10	IE3	6086363	K	4,573.-	A	407.-	A	407.-	A	61.-	12
Atmos GIGA-N 80/160-1,5/4	1.50	IE3	6086364	K	4,633.-	A	407.-	A	407.-	A	61.-	12
Atmos GIGA-N 80/160-2,2/4	2.20	IE3	6086368	K	4,744.-	A	407.-	A	407.-	A	61.-	12
Atmos GIGA-N 80/160-3/4	3.00	IE3	6086370	K	4,853.-	A	407.-	A	407.-	A	61.-	12
Atmos GIGA-N 80/200-2,2/4	2.20	IE3	6086374	K	5,078.-	A	560.-	A	560.-	A	110.-	13
Atmos GIGA-N 80/200-3/4	3.00	IE3	6086376	K	5,188.-	A	560.-	A	560.-	A	110.-	13

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☞ = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG4

Ordering information (4-pole) with spacer coupling												
	Rated power	Motor efficiency class	Art. no.			Red brass impeller (L1 version)		Stainless steel impeller (L4 version)		-S1		GRD group
	P_2 kW				EUR		EUR		EUR		EUR	
Atmos GIGA-N 80/200-4/4	4.00	IE3	6086379	K	5,349.-	A	560.-	A	560.-	A	110.-	13
Atmos GIGA-N 80/200-5,5/4	5.50	IE3	6086381	K	5,701.-	A	560.-	A	560.-	A	110.-	13
Atmos GIGA-N 80/200-7,5/4	7.50	IE3	6086383	K	6,017.-	A	560.-	A	560.-	A	110.-	13
Atmos GIGA-N 80/315-22/4	22.00	IE3	6086399	K	9,582.-	A	972.-	A	972.-	A	110.-	13
Atmos GIGA-N 80/315-18,5/4	18.50	IE3	6086400	K	9,493.-	A	972.-	A	972.-	A	110.-	13
Atmos GIGA-N 80/315-15/4	15.00	IE3	6086401	K	8,442.-	A	972.-	A	972.-	A	110.-	13
Atmos GIGA-N 80/315-11/4	11.00	IE3	6086402	K	8,034.-	A	972.-	A	972.-	A	110.-	13
Atmos GIGA-N 80/315-7,5/4	7.50	IE3	6086403	K	7,320.-	A	972.-	A	972.-	A	110.-	13
Atmos GIGA-N 150/400-110/4	110.00	IE3	6086407	K	32,147.-	A	1,660.-	A	1,660.-	A	232.-	14
Atmos GIGA-N 150/400-90/4	90.00	IE3	6086408	K	27,833.-	A	1,660.-	A	1,660.-	A	232.-	14
Atmos GIGA-N 150/400-75/4	75.00	IE3	6086409	K	24,283.-	A	1,660.-	A	1,660.-	A	232.-	14
Atmos GIGA-N 150/400-55/4	55.00	IE3	6086410	K	22,637.-	A	1,660.-	A	1,660.-	A	232.-	14
Atmos GIGA-N 150/400-45/4	45.00	IE3	6086411	K	20,367.-	A	1,660.-	A	1,660.-	A	232.-	14
Atmos GIGA-N 100/315-30/4	30.00	IE3	6086418	K	10,976.-	A	1,031.-	A	1,031.-	A	110.-	13
Atmos GIGA-N 100/315-22/4	22.00	IE3	6086419	K	10,348.-	A	1,031.-	A	1,031.-	A	110.-	13
Atmos GIGA-N 100/315-18,5/4	18.50	IE3	6086420	K	10,260.-	A	1,031.-	A	1,031.-	A	110.-	13
Atmos GIGA-N 100/315-15/4	15.00	IE3	6086421	K	9,208.-	A	1,031.-	A	1,031.-	A	110.-	13
Atmos GIGA-N 100/315-11/4	11.00	IE3	6086422	K	8,800.-	A	1,031.-	A	1,031.-	A	110.-	14
Atmos GIGA-N 100/400-55/4	55.00	IE3	6086424	K	18,468.-	A	1,442.-	A	1,442.-	A	232.-	14
Atmos GIGA-N 100/400-45/4	45.00	IE3	6086425	K	16,197.-	A	1,442.-	A	1,442.-	A	232.-	14
Atmos GIGA-N 100/400-37/4	37.00	IE3	6086426	K	15,637.-	A	1,442.-	A	1,442.-	A	232.-	14
Atmos GIGA-N 100/400-30/4	30.00	IE3	6086427	K	13,641.-	A	1,442.-	A	1,442.-	A	232.-	14
Atmos GIGA-N 100/400-22/4	22.00	IE3	6086428	K	13,011.-	A	1,442.-	A	1,442.-	A	232.-	13
Atmos GIGA-N 80/400-45/4	45.00	IE3	6086430	K	15,505.-	A	1,246.-	A	1,246.-	A	232.-	14
Atmos GIGA-N 80/400-37/4	37.00	IE3	6086431	K	14,943.-	A	1,246.-	A	1,246.-	A	232.-	14
Atmos GIGA-N 80/400-30/4	30.00	IE3	6086432	K	12,947.-	A	1,246.-	A	1,246.-	A	232.-	14

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Ordering information (4-pole) with spacer coupling					Price group: PG4							
	Rated power	Motor efficiency class	Art. no.			Red brass impeller (L1 version)		Stainless steel impeller (L4 version)		-S1		GRD group
	P_2 kW				EUR	EUR	EUR	EUR	EUR	EUR		
Atmos GIGA-N 80/400-22/4	22.00	IE3	6086433	K	12,319.-	A	1,246.-	A	1,246.-	A	232.-	14
Atmos GIGA-N 80/400-18,5/4	18.50	IE3	6086434	K	12,231.-	A	1,246.-	A	1,246.-	A	232.-	14
Atmos GIGA-N 80/250-11/4	11.00	IE3	6086436	K	7,554.-	A	685.-	A	685.-	A	110.-	13
Atmos GIGA-N 80/250-7,5/4	7.50	IE3	6086437	K	6,840.-	A	685.-	A	685.-	A	110.-	13
Atmos GIGA-N 80/250-5,5/4	5.50	IE3	6086438	K	6,525.-	A	685.-	A	685.-	A	110.-	13
Atmos GIGA-N 80/250-4/4	4.00	IE3	6086439	K	6,173.-	A	685.-	A	685.-	A	110.-	13
Atmos GIGA-N 80/250-3/4	3.00	IE3	6086440	K	6,011.-	A	685.-	A	685.-	A	110.-	13
Atmos GIGA-N 65/315-15/4	15.00	IE3	6086448	K	7,964.-	A	901.-	A	901.-	A	110.-	13
Atmos GIGA-N 65/315-11/4	11.00	IE3	6086449	K	7,556.-	A	901.-	A	901.-	A	110.-	13
Atmos GIGA-N 65/315-7,5/4	7.50	IE3	6086450	K	6,842.-	A	901.-	A	901.-	A	110.-	13
Atmos GIGA-N 65/315-5,5/4	5.50	IE3	6086451	K	6,526.-	A	901.-	A	901.-	A	110.-	13
Atmos GIGA-N 65/315-4/4	4.00	IE3	6086452	K	6,174.-	A	901.-	A	901.-	A	110.-	13
Atmos GIGA-N 65/250-7,5/4	7.50	IE3	6086460	K	5,999.-	A	617.-	A	617.-	A	110.-	13
Atmos GIGA-N 65/250-5,5/4	5.50	IE3	6086461	K	5,683.-	A	617.-	A	617.-	A	110.-	13
Atmos GIGA-N 65/250-4/4	4.00	IE3	6086462	K	5,331.-	A	617.-	A	617.-	A	110.-	13
Atmos GIGA-N 65/250-3/4	3.00	IE3	6086463	K	5,169.-	A	617.-	A	617.-	A	110.-	13
Atmos GIGA-N 65/250-2,2/4	2.20	IE3	6086464	K	5,061.-	A	617.-	A	617.-	A	110.-	13
Atmos GIGA-N 50/315-11/4	11.00	IE3	6086472	K	7,080.-	A	892.-	A	892.-	A	110.-	13
Atmos GIGA-N 50/315-7,5/4	7.50	IE3	6086473	K	6,365.-	A	892.-	A	892.-	A	110.-	13
Atmos GIGA-N 50/315-5,5/4	5.50	IE3	6086474	K	6,050.-	A	892.-	A	892.-	A	110.-	13
Atmos GIGA-N 50/315-4/4	4.00	IE3	6086475	K	5,698.-	A	892.-	A	892.-	A	110.-	13
Atmos GIGA-N 50/315-3/4	3.00	IE3	6086476	K	5,537.-	A	892.-	A	892.-	A	110.-	13
Atmos GIGA-N 50/250-4/4	4.00	IE3	6086484	K	4,876.-	A	439.-	A	439.-	A	61.-	12
Atmos GIGA-N 50/250-3/4	3.00	IE3	6086485	K	4,715.-	A	439.-	A	439.-	A	61.-	12
Atmos GIGA-N 50/250-2,2/4	2.20	IE3	6086486	K	4,606.-	A	439.-	A	439.-	A	61.-	12
Atmos GIGA-N 50/250-1,5/4	1.50	IE3	6086487	K	4,494.-	A	439.-	A	439.-	A	61.-	12

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☞ = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG4

Ordering information (4-pole) with spacer coupling												
	Rated power	Motor efficiency class	Art. no.			Red brass impeller (L1 version)		Stainless steel impeller (L4 version)		-S1		GRD group
	P_2 kW				EUR	EUR	EUR	EUR	EUR	EUR	EUR	
Atmos GIGA-N 50/200-3/4	3.00	IE3	6086494	K	4,213.-	A	376.-	A	376.-	A	61.-	12
Atmos GIGA-N 50/200-2,2/4	2.20	IE3	6086495	K	4,103.-	A	376.-	A	376.-	A	61.-	12
Atmos GIGA-N 50/200-1,5/4	1.50	IE3	6086496	K	3,992.-	A	376.-	A	376.-	A	61.-	12
Atmos GIGA-N 50/200-1,1/4	1.10	IE3	6086497	K	3,932.-	A	376.-	A	376.-	A	61.-	12
Atmos GIGA-N 40/315-7,5/4	7.50	IE3	6086506	K	6,181.-	A	825.-	A	825.-	A	110.-	13
Atmos GIGA-N 40/315-5,5/4	5.50	IE3	6086507	K	5,866.-	A	825.-	A	825.-	A	110.-	13
Atmos GIGA-N 40/315-4/4	4.00	IE3	6086508	K	5,514.-	A	825.-	A	825.-	A	110.-	13
Atmos GIGA-N 40/315-3/4	3.00	IE3	6086509	K	5,352.-	A	825.-	A	825.-	A	110.-	13
Atmos GIGA-N 40/315-2,2/4	2.20	IE3	6086510	K	5,243.-	A	825.-	A	825.-	A	110.-	13
Atmos GIGA-N 40/250-3/4	3.00	IE3	6086517	K	4,399.-	A	423.-	A	423.-	A	61.-	12
Atmos GIGA-N 40/250-2,2/4	2.20	IE3	6086518	K	4,290.-	A	423.-	A	423.-	A	61.-	12
Atmos GIGA-N 40/250-1,5/4	1.50	IE3	6086519	K	4,179.-	A	423.-	A	423.-	A	61.-	12
Atmos GIGA-N 40/250-1,1/4	1.10	IE3	6086520	K	4,118.-	A	423.-	A	423.-	A	61.-	12
Atmos GIGA-N 40/250-11/2	11.00	IE3	6086527	K	6,026.-	A	423.-	A	423.-	A	61.-	12
Atmos GIGA-N 40/200-2,2/4	2.20	IE3	6086528	K	3,971.-	A	393.-	A	393.-	A	61.-	12
Atmos GIGA-N 40/200-1,5/4	1.50	IE3	6086529	K	3,860.-	A	393.-	A	393.-	A	61.-	12
Atmos GIGA-N 40/200-1,1/4	1.10	IE3	6086530	K	3,800.-	A	393.-	A	393.-	A	61.-	12
Atmos GIGA-N 40/200-0,75/4	0.75	IE3	6086531	K	3,755.-	A	393.-	A	393.-	A	61.-	12
Atmos GIGA-N 40/160-1,1/4	1.10	IE3	6086540	K	3,731.-	A	331.-	A	331.-	A	61.-	12
Atmos GIGA-N 40/160-0,75/4	0.75	IE3	6086541	K	3,685.-	A	331.-	A	331.-	A	61.-	12
Atmos GIGA-N 40/160-0,55/4	0.55	IE3	6086542	K	3,800.-	A	331.-	A	331.-	A	61.-	12
Atmos GIGA-N 40/160-0,37/4	0.37	IE3	6086543	K	3,824.-	A	331.-	A	331.-	A	61.-	12
Atmos GIGA-N 32/250-2,2/4	2.20	IE3	6086549	K	4,440.-	A	533.-	A	533.-	A	61.-	12
Atmos GIGA-N 32/250-1,5/4	1.50	IE3	6086550	K	4,328.-	A	533.-	A	533.-	A	61.-	12
Atmos GIGA-N 32/250-1,1/4	1.10	IE3	6086551	K	4,268.-	A	533.-	A	533.-	A	61.-	12
Atmos GIGA-N 32/250-0,75/4	0.75	IE3	6086552	K	4,223.-	A	533.-	A	533.-	A	61.-	12

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Ordering information (4-pole) with spacer coupling						Price group: PG4						
	Rated power	Motor efficiency class	Art. no.			Red brass impeller (L1 version)		Stainless steel impeller (L4 version)		-S1	GRD group	
	P_2 kW			🚚	EUR	🚚	EUR	🚚	EUR	🚚	EUR	
Atmos GIGA-N 32/250-0,55/4	0.55	IE3	6086553	K	4,337.-	A	533.-	A	533.-	A	61.-	12
Atmos GIGA-N 32/200-1,1/4	1.10	IE3	6086562	K	3,585.-	A	372.-	A	372.-	A	61.-	12
Atmos GIGA-N 32/200-0,75/4	0.75	IE3	6086563	K	3,541.-	A	372.-	A	372.-	A	61.-	12
Atmos GIGA-N 32/200-0,55/4	0.55	IE3	6086564	K	3,655.-	A	372.-	A	372.-	A	61.-	12
Atmos GIGA-N 32/200-0,37/4	0.37	IE3	6086565	K	3,679.-	A	372.-	A	372.-	A	61.-	12
Atmos GIGA-N 32/160-0,55/4	0.55	IE3	6086572	K	3,634.-	A	340.-	A	340.-	A	61.-	12
Atmos GIGA-N 32/160-0,37/4	0.37	IE3	6086573	K	3,657.-	A	340.-	A	340.-	A	61.-	12
Atmos GIGA-N 32/160-0,25/4	0.25	IE3	6086574	K	3,549.-	A	340.-	A	340.-	A	61.-	12
Atmos GIGA-N 32/160.1-0,55/4	0.55	IE3	6086591	K	3,579.-	A	331.-	A	331.-	A	61.-	12
Atmos GIGA-N 32/160.1-0,37/4	0.37	IE3	6086592	K	3,603.-	A	331.-	A	331.-	A	61.-	12
Atmos GIGA-N 32/160.1-0,25/4	0.25	IE3	6086593	K	3,494.-	A	331.-	A	331.-	A	61.-	12
Atmos GIGA-N 32/250-3/4	3.00	IE3	6086600	K	4,549.-	A	533.-	A	533.-	A	61.-	12
Atmos GIGA-N 100/160-2,2/4	2.20	IE3	6086206	K	3,965.-	A	530.-	A	530.-	A	110.-	13
Atmos GIGA-N 100/160-3/4	3.00	IE3	6086208	K	4,074.-	A	530.-	A	530.-	A	110.-	13
Atmos GIGA-N 100/160-4/4	4.00	IE3	6086211	K	4,235.-	A	530.-	A	530.-	A	110.-	13

🚚 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, 📞 = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG4

Ordering information (4-pole) without spacer coupling											
	Rated power	Motor efficiency class	Art. no.	Red brass impeller (L1 version)		Stainless steel impeller (L4 version)		-S1	GRD group		
	P_2 kW										
Atmos GIGA-N 32/250-3/4-P5	3.00	IE3	6086601	A	☺	A	☺	A	☺	12	
Atmos GIGA-N 100/160-2,2/4-P5	2.20	IE3	6086614	A	☺	A	☺	A	☺	13	
Atmos GIGA-N 100/160-3/4-P5	3.00	IE3	6086616	A	☺	A	☺	A	☺	13	
Atmos GIGA-N 100/160-4/4-P5	4.00	IE3	6086619	A	☺	A	☺	A	☺	13	
Atmos GIGA-N 100/200-3/4-P5	3.00	IE3	6086623	A	☺	A	☺	A	☺	13	
Atmos GIGA-N 100/200-4/4-P5	4.00	IE3	6086626	A	☺	A	☺	A	☺	13	
Atmos GIGA-N 100/200-5,5/4-P5	5.50	IE3	6086628	A	☺	A	☺	A	☺	13	
Atmos GIGA-N 100/200-7,5/4-P5	7.50	IE3	6086630	A	☺	A	☺	A	☺	13	
Atmos GIGA-N 100/250-11/4-P5	11.00	IE3	6086632	A	☺	A	☺	A	☺	13	
Atmos GIGA-N 100/250-15/4-P5	15.00	IE3	6086633	A	☺	A	☺	A	☺	13	
Atmos GIGA-N 100/250-5,5/4-P5	5.50	IE3	6086634	A	☺	A	☺	A	☺	13	
Atmos GIGA-N 100/250-7,5/4-P5	7.50	IE3	6086636	A	☺	A	☺	A	☺	13	
Atmos GIGA-N 125/200-11/4-P5	11.00	IE3	6086642	A	☺	A	☺	A	☺	13	
Atmos GIGA-N 125/200-15/4-P5	15.00	IE3	6086644	A	☺	A	☺	A	☺	13	
Atmos GIGA-N 125/200-5,5/4-P5	5.50	IE3	6086646	A	☺	A	☺	A	☺	13	
Atmos GIGA-N 125/200-7,5/4-P5	7.50	IE3	6086648	A	☺	A	☺	A	☺	13	
Atmos GIGA-N 125/250-11/4-P5	11.00	IE3	6086651	A	☺	A	☺	A	☺	13	
Atmos GIGA-N 125/250-15/4-P5	15.00	IE3	6086654	A	☺	A	☺	A	☺	13	
Atmos GIGA-N 125/250-18,5/4-P5	18.50	IE3	6086656	A	☺	A	☺	A	☺	13	
Atmos GIGA-N 125/250-22/4-P5	22.00	IE3	6086657	A	☺	A	☺	A	☺	13	
Atmos GIGA-N 125/250-7,5/4-P5	7.50	IE3	6086659	A	☺	A	☺	A	☺	13	
Atmos GIGA-N 125/315-15/4-P5	15.00	IE3	6086663	A	☺	A	☺	A	☺	14	
Atmos GIGA-N 125/315-18,5/4-P5	18.50	IE3	6086664	A	☺	A	☺	A	☺	14	
Atmos GIGA-N 125/315-22/4-P5	22.00	IE3	6086665	A	☺	A	☺	A	☺	14	
Atmos GIGA-N 125/315-30/4-P5	30.00	IE3	6086666	A	☺	A	☺	A	☺	14	

= ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☺ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Heating, air conditioning, cooling

Ordering information (4-pole) without spacer coupling				Price group: PG4								
	Rated power	Motor efficiency class	Art. no.	Red brass impeller (L1 version)			Stainless steel impeller (L4 version)			-S1	GRD group	
	P_2 kW											
Atmos GIGA-N 125/315-37/4-P5	37.00	IE3	6086667	A	☺	A	☺	A	☺	A	☺	14
Atmos GIGA-N 125/315-45/4-P5	45.00	IE3	6086668	A	☺	A	☺	A	☺	A	☺	14
Atmos GIGA-N 125/400-30/4-P5	30.00	IE3	6086669	A	☺	A	☺	A	☺	A	☺	14
Atmos GIGA-N 125/400-37/4-P5	37.00	IE3	6086670	A	☺	A	☺	A	☺	A	☺	14
Atmos GIGA-N 125/400-45/4-P5	45.00	IE3	6086671	A	☺	A	☺	A	☺	A	☺	14
Atmos GIGA-N 125/400-55/4-P5	55.00	IE3	6086672	A	☺	A	☺	A	☺	A	☺	14
Atmos GIGA-N 125/400-75/4-P5	75.00	IE3	6086673	A	☺	A	☺	A	☺	A	☺	14
Atmos GIGA-N 125/400-90/4-P5	90.00	IE3	6086674	A	☺	A	☺	A	☺	A	☺	14
Atmos GIGA-N 150/200-11/4-P5	11.00	IE3	6086675	A	☺	A	☺	A	☺	A	☺	13
Atmos GIGA-N 150/200-15/4-P5	15.00	IE3	6086677	A	☺	A	☺	A	☺	A	☺	13
Atmos GIGA-N 150/200-7,5/4-P5	7.50	IE3	6086678	A	☺	A	☺	A	☺	A	☺	13
Atmos GIGA-N 150/250-11/4-P5	11.00	IE3	6086681	A	☺	A	☺	A	☺	A	☺	14
Atmos GIGA-N 150/250-15/4-P5	15.00	IE3	6086684	A	☺	A	☺	A	☺	A	☺	14
Atmos GIGA-N 150/250-18,5/4-P5	18.50	IE3	6086686	A	☺	A	☺	A	☺	A	☺	14
Atmos GIGA-N 150/250-22/4-P5	22.00	IE3	6086688	A	☺	A	☺	A	☺	A	☺	14
Atmos GIGA-N 150/250-30/4-P5	30.00	IE3	6086689	A	☺	A	☺	A	☺	A	☺	14
Atmos GIGA-N 150/315-18,5/4-P5	18.50	IE3	6086691	A	☺	A	☺	A	☺	A	☺	14
Atmos GIGA-N 150/315-22/4-P5	22.00	IE3	6086692	A	☺	A	☺	A	☺	A	☺	14
Atmos GIGA-N 150/315-30/4-P5	30.00	IE3	6086693	A	☺	A	☺	A	☺	A	☺	14
Atmos GIGA-N 150/315-37/4-P5	37.00	IE3	6086694	A	☺	A	☺	A	☺	A	☺	14
Atmos GIGA-N 150/315-45/4-P5	45.00	IE3	6086695	A	☺	A	☺	A	☺	A	☺	14
Atmos GIGA-N 150/315-55/4-P5	55.00	IE3	6086696	A	☺	A	☺	A	☺	A	☺	14
Atmos GIGA-N 32/125-0,25/4-P5	0.25	IE3	6086697	A	☺	A	☺	A	☺	A	☺	12
Atmos GIGA-N 32/125-0,37/4-P5	0.37	IE3	6086698	A	☺	A	☺	A	☺	A	☺	12
Atmos GIGA-N 32/125-0,55/4-P5	0.55	IE3	6086699	A	☺	A	☺	A	☺	A	☺	12

☺ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☺ = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG4

Ordering information (4-pole) without spacer coupling												
	Rated power	Motor efficiency class	Art. no.			Red brass impeller (L1 version)		Stainless steel impeller (L4 version)		-S1	GRD group	
	P_2 kW											
Atmos GIGA-N 40/125-0,25/4-P5	0.25	IE3	6086713	A	☺	A	☺	A	☺	A	☺	12
Atmos GIGA-N 40/125-0,37/4-P5	0.37	IE3	6086714	A	☺	A	☺	A	☺	A	☺	12
Atmos GIGA-N 40/125-0,55/4-P5	0.55	IE3	6086715	A	☺	A	☺	A	☺	A	☺	12
Atmos GIGA-N 40/125-0,75/4-P5	0.75	IE3	6086716	A	☺	A	☺	A	☺	A	☺	12
Atmos GIGA-N 50/125-0,37/4-P5	0.37	IE3	6086722	A	☺	A	☺	A	☺	A	☺	12
Atmos GIGA-N 50/125-0,55/4-P5	0.55	IE3	6086723	A	☺	A	☺	A	☺	A	☺	12
Atmos GIGA-N 50/125-0,75/4-P5	0.75	IE3	6086724	A	☺	A	☺	A	☺	A	☺	12
Atmos GIGA-N 50/125-1,1/4-P5	1.10	IE3	6086725	A	☺	A	☺	A	☺	A	☺	12
Atmos GIGA-N 50/160-0,55/4-P5	0.55	IE3	6086730	A	☺	A	☺	A	☺	A	☺	12
Atmos GIGA-N 50/160-0,75/4-P5	0.75	IE3	6086731	A	☺	A	☺	A	☺	A	☺	12
Atmos GIGA-N 50/160-1,1/4-P5	1.10	IE3	6086732	A	☺	A	☺	A	☺	A	☺	12
Atmos GIGA-N 50/160-1,5/4-P5	1.50	IE3	6086733	A	☺	A	☺	A	☺	A	☺	12
Atmos GIGA-N 65/125-0,55/4-P5	0.55	IE3	6086741	A	☺	A	☺	A	☺	A	☺	12
Atmos GIGA-N 65/125-0,75/4-P5	0.75	IE3	6086742	A	☺	A	☺	A	☺	A	☺	12
Atmos GIGA-N 65/125-1,1/4-P5	1.10	IE3	6086743	A	☺	A	☺	A	☺	A	☺	12
Atmos GIGA-N 65/160-0,75/4-P5	0.75	IE3	6086751	A	☺	A	☺	A	☺	A	☺	12
Atmos GIGA-N 65/160-1,1/4-P5	1.10	IE3	6086752	A	☺	A	☺	A	☺	A	☺	12
Atmos GIGA-N 65/160-1,5/4-P5	1.50	IE3	6086753	A	☺	A	☺	A	☺	A	☺	12
Atmos GIGA-N 65/160-2,2/4-P5	2.20	IE3	6086757	A	☺	A	☺	A	☺	A	☺	12
Atmos GIGA-N 65/200-1,5/4-P5	1.50	IE3	6086761	A	☺	A	☺	A	☺	A	☺	12
Atmos GIGA-N 65/200-2,2/4-P5	2.20	IE3	6086765	A	☺	A	☺	A	☺	A	☺	12
Atmos GIGA-N 65/200-3/4-P5	3.00	IE3	6086767	A	☺	A	☺	A	☺	A	☺	12
Atmos GIGA-N 65/200-4/4-P5	4.00	IE3	6086770	A	☺	A	☺	A	☺	A	☺	12
Atmos GIGA-N 80/160-1,1/4-P5	1.10	IE3	6086771	A	☺	A	☺	A	☺	A	☺	12
Atmos GIGA-N 80/160-1,5/4-P5	1.50	IE3	6086772	A	☺	A	☺	A	☺	A	☺	12

= ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☺ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Heating, air conditioning, cooling

Ordering information (4-pole) without spacer coupling				Price group: PG4								
	Rated power	Motor efficiency class	Art. no.	Red brass impeller (L1 version)			Stainless steel impeller (L4 version)			-S1	GRD group	
	P_2 kW											
Atmos GIGA-N 80/160-2,2/4-P5	2.20	IE3	6086776	A	☺	A	☺	A	☺	A	☺	12
Atmos GIGA-N 80/160-3/4-P5	3.00	IE3	6086778	A	☺	A	☺	A	☺	A	☺	12
Atmos GIGA-N 80/200-2,2/4-P5	2.20	IE3	6086782	A	☺	A	☺	A	☺	A	☺	13
Atmos GIGA-N 80/200-3/4-P5	3.00	IE3	6086784	A	☺	A	☺	A	☺	A	☺	13
Atmos GIGA-N 80/200-4/4-P5	4.00	IE3	6086787	A	☺	A	☺	A	☺	A	☺	13
Atmos GIGA-N 80/200-5,5/4-P5	5.50	IE3	6086789	A	☺	A	☺	A	☺	A	☺	13
Atmos GIGA-N 80/200-7,5/4-P5	7.50	IE3	6086791	A	☺	A	☺	A	☺	A	☺	13
Atmos GIGA-N 80/315-22/4-P5	22.00	IE3	6086807	A	☺	A	☺	A	☺	A	☺	13
Atmos GIGA-N 80/315-18,5/4-P5	18.50	IE3	6086808	A	☺	A	☺	A	☺	A	☺	13
Atmos GIGA-N 80/315-15/4-P5	15.00	IE3	6086809	A	☺	A	☺	A	☺	A	☺	13
Atmos GIGA-N 80/315-11/4-P5	11.00	IE3	6086810	A	☺	A	☺	A	☺	A	☺	13
Atmos GIGA-N 80/315-7,5/4-P5	7.50	IE3	6086811	A	☺	A	☺	A	☺	A	☺	13
Atmos GIGA-N 150/400-110/4-P5	110.00	IE3	6086815	A	☺	A	☺	A	☺	A	☺	14
Atmos GIGA-N 150/400-90/4-P5	90.00	IE3	6086816	A	☺	A	☺	A	☺	A	☺	14
Atmos GIGA-N 150/400-75/4-P5	75.00	IE3	6086817	A	☺	A	☺	A	☺	A	☺	14
Atmos GIGA-N 150/400-55/4-P5	55.00	IE3	6086818	A	☺	A	☺	A	☺	A	☺	14
Atmos GIGA-N 150/400-45/4-P5	45.00	IE3	6086819	A	☺	A	☺	A	☺	A	☺	14
Atmos GIGA-N 100/315-30/4-P5	30.00	IE3	6086826	A	☺	A	☺	A	☺	A	☺	13
Atmos GIGA-N 100/315-22/4-P5	22.00	IE3	6086827	A	☺	A	☺	A	☺	A	☺	13
Atmos GIGA-N 100/315-18,5/4-P5	18.50	IE3	6086828	A	☺	A	☺	A	☺	A	☺	13
Atmos GIGA-N 100/315-15/4-P5	15.00	IE3	6086829	A	☺	A	☺	A	☺	A	☺	13
Atmos GIGA-N 100/315-11/4-P5	11.00	IE3	6086830	A	☺	A	☺	A	☺	A	☺	13
Atmos GIGA-N 100/400-55/4-P5	55.00	IE3	6086832	A	☺	A	☺	A	☺	A	☺	14
Atmos GIGA-N 100/400-45/4-P5	45.00	IE3	6086833	A	☺	A	☺	A	☺	A	☺	14
Atmos GIGA-N 100/400-37/4-P5	37.00	IE3	6086834	A	☺	A	☺	A	☺	A	☺	14
Atmos GIGA-N 100/400-30/4-P5	30.00	IE3	6086835	A	☺	A	☺	A	☺	A	☺	14

☺ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☺ = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG4

Ordering information (4-pole) without spacer coupling												
	Rated power	Motor efficiency class	Art. no.				Red brass impeller (L1 version)		Stain-less steel impeller (L4 version)		-S1	GRD group
	P_2 kW											
Atmos GIGA-N 100/400-22/4-P5	22.00	IE3	6086836	A	☺	A	☺	A	☺	A	☺	14
Atmos GIGA-N 80/400-45/4-P5	45.00	IE3	6086838	A	☺	A	☺	A	☺	A	☺	14
Atmos GIGA-N 80/400-37/4-P5	37.00	IE3	6086839	A	☺	A	☺	A	☺	A	☺	14
Atmos GIGA-N 80/400-30/4-P5	30.00	IE3	6086840	A	☺	A	☺	A	☺	A	☺	14
Atmos GIGA-N 80/400-22/4-P5	22.00	IE3	6086841	A	☺	A	☺	A	☺	A	☺	14
Atmos GIGA-N 80/400-18,5/4-P5	18.50	IE3	6086842	A	☺	A	☺	A	☺	A	☺	14
Atmos GIGA-N 80/250-11/4-P5	11.00	IE3	6086844	A	☺	A	☺	A	☺	A	☺	13
Atmos GIGA-N 80/250-7,5/4-P5	7.50	IE3	6086845	A	☺	A	☺	A	☺	A	☺	13
Atmos GIGA-N 80/250-5,5/4-P5	5.50	IE3	6086846	A	☺	A	☺	A	☺	A	☺	13
Atmos GIGA-N 80/250-4/4-P5	4.00	IE3	6086847	A	☺	A	☺	A	☺	A	☺	13
Atmos GIGA-N 80/250-3/4-P5	3.00	IE3	6086848	A	☺	A	☺	A	☺	A	☺	13
Atmos GIGA-N 65/315-15/4-P5	15.00	IE3	6086856	A	☺	A	☺	A	☺	A	☺	13
Atmos GIGA-N 65/315-11/4-P5	11.00	IE3	6086857	A	☺	A	☺	A	☺	A	☺	13
Atmos GIGA-N 65/315-7,5/4-P5	7.50	IE3	6086858	A	☺	A	☺	A	☺	A	☺	13
Atmos GIGA-N 65/315-5,5/4-P5	5.50	IE3	6086859	A	☺	A	☺	A	☺	A	☺	13
Atmos GIGA-N 65/315-4/4-P5	4.00	IE3	6086860	A	☺	A	☺	A	☺	A	☺	13
Atmos GIGA-N 65/250-7,5/4-P5	7.50	IE3	6086868	A	☺	A	☺	A	☺	A	☺	13
Atmos GIGA-N 65/250-5,5/4-P5	5.50	IE3	6086869	A	☺	A	☺	A	☺	A	☺	13
Atmos GIGA-N 65/250-4/4-P5	4.00	IE3	6086870	A	☺	A	☺	A	☺	A	☺	13
Atmos GIGA-N 65/250-3/4-P5	3.00	IE3	6086871	A	☺	A	☺	A	☺	A	☺	13
Atmos GIGA-N 65/250-2,2/4-P5	2.20	IE3	6086872	A	☺	A	☺	A	☺	A	☺	13
Atmos GIGA-N 50/315-11/4-P5	11.00	IE3	6086880	A	☺	A	☺	A	☺	A	☺	13
Atmos GIGA-N 50/315-7,5/4-P5	7.50	IE3	6086881	A	☺	A	☺	A	☺	A	☺	13
Atmos GIGA-N 50/315-5,5/4-P5	5.50	IE3	6086882	A	☺	A	☺	A	☺	A	☺	13
Atmos GIGA-N 50/315-4/4-P5	4.00	IE3	6086883	A	☺	A	☺	A	☺	A	☺	13
Atmos GIGA-N 50/315-3/4-P5	3.00	IE3	6086884	A	☺	A	☺	A	☺	A	☺	13

☺ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☺ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Heating, air conditioning, cooling


Ordering information (4-pole) without spacer coupling				Price group: PG4								
	Rated power	Motor efficiency class	Art. no.	Red brass impeller (L1 version)			Stainless steel impeller (L4 version)			-S1	GRD group	
	P_2 kW											
Atmos GIGA-N 50/250-4/4-P5	4.00	IE3	6086892	A	☺	A	☺	A	☺	A	☺	12
Atmos GIGA-N 50/250-3/4-P5	3.00	IE3	6086893	A	☺	A	☺	A	☺	A	☺	12
Atmos GIGA-N 50/250-2,2/4-P5	2.20	IE3	6086894	A	☺	A	☺	A	☺	A	☺	12
Atmos GIGA-N 50/250-1,5/4-P5	1.50	IE3	6086895	A	☺	A	☺	A	☺	A	☺	12
Atmos GIGA-N 50/200-3/4-P5	3.00	IE3	6086902	A	☺	A	☺	A	☺	A	☺	12
Atmos GIGA-N 50/200-2,2/4-P5	2.20	IE3	6086903	A	☺	A	☺	A	☺	A	☺	12
Atmos GIGA-N 50/200-1,5/4-P5	1.50	IE3	6086904	A	☺	A	☺	A	☺	A	☺	12
Atmos GIGA-N 50/200-1,1/4-P5	1.10	IE3	6086905	A	☺	A	☺	A	☺	A	☺	12
Atmos GIGA-N 40/315-7,5/4-P5	7.50	IE3	6086914	A	☺	A	☺	A	☺	A	☺	13
Atmos GIGA-N 40/315-5,5/4-P5	5.50	IE3	6086915	A	☺	A	☺	A	☺	A	☺	13
Atmos GIGA-N 40/315-4/4-P5	4.00	IE3	6086916	A	☺	A	☺	A	☺	A	☺	13
Atmos GIGA-N 40/315-3/4-P5	3.00	IE3	6086917	A	☺	A	☺	A	☺	A	☺	13
Atmos GIGA-N 40/315-2,2/4-P5	2.20	IE3	6086918	A	☺	A	☺	A	☺	A	☺	13
Atmos GIGA-N 40/250-3/4-P5	3.00	IE3	6086925	A	☺	A	☺	A	☺	A	☺	12
Atmos GIGA-N 40/250-2,2/4-P5	2.20	IE3	6086926	A	☺	A	☺	A	☺	A	☺	12
Atmos GIGA-N 40/250-1,5/4-P5	1.50	IE3	6086927	A	☺	A	☺	A	☺	A	☺	12
Atmos GIGA-N 40/250-1,1/4-P5	1.10	IE3	6086928	A	☺	A	☺	A	☺	A	☺	12
Atmos GIGA-N 40/200-2,2/4-P5	2.20	IE3	6086936	A	☺	A	☺	A	☺	A	☺	12
Atmos GIGA-N 40/200-1,5/4-P5	1.50	IE3	6086937	A	☺	A	☺	A	☺	A	☺	12
Atmos GIGA-N 40/200-1,1/4-P5	1.10	IE3	6086938	A	☺	A	☺	A	☺	A	☺	12
Atmos GIGA-N 40/200-0,75/4-P5	0.75	IE3	6086939	A	☺	A	☺	A	☺	A	☺	12
Atmos GIGA-N 40/160-1,1/4-P5	1.10	IE3	6086948	A	☺	A	☺	A	☺	A	☺	12
Atmos GIGA-N 40/160-0,75/4-P5	0.75	IE3	6086949	A	☺	A	☺	A	☺	A	☺	12
Atmos GIGA-N 40/160-0,55/4-P5	0.55	IE3	6086950	A	☺	A	☺	A	☺	A	☺	12
Atmos GIGA-N 40/160-0,37/4-P5	0.37	IE3	6086951	A	☺	A	☺	A	☺	A	☺	12
Atmos GIGA-N 32/250-2,2/4-P5	2.20	IE3	6086957	A	☺	A	☺	A	☺	A	☺	12

☺ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☺ = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG4


Ordering information (4-pole) without spacer coupling														
	Rated power	Motor efficiency class	Art. no.				Red brass impeller (L1 version)		Stain-less steel impeller (L4 version)		-S1		GRD group	
	P_2 kW													
Atmos GIGA-N 32/250-1,5/4-P5	1.50	IE3	6086958	A	☺	A	☺	A	☺	A	☺	A	☺	12
Atmos GIGA-N 32/250-1,1/4-P5	1.10	IE3	6086959	A	☺	A	☺	A	☺	A	☺	A	☺	12
Atmos GIGA-N 32/250-0,75/4-P5	0.75	IE3	6086960	A	☺	A	☺	A	☺	A	☺	A	☺	12
Atmos GIGA-N 32/250-0,55/4-P5	0.55	IE3	6086961	A	☺	A	☺	A	☺	A	☺	A	☺	12
Atmos GIGA-N 32/200-1,1/4-P5	1.10	IE3	6086970	A	☺	A	☺	A	☺	A	☺	A	☺	12
Atmos GIGA-N 32/200-0,75/4-P5	0.75	IE3	6086971	A	☺	A	☺	A	☺	A	☺	A	☺	12
Atmos GIGA-N 32/200-0,55/4-P5	0.55	IE3	6086972	A	☺	A	☺	A	☺	A	☺	A	☺	12
Atmos GIGA-N 32/200-0,37/4-P5	0.37	IE3	6086973	A	☺	A	☺	A	☺	A	☺	A	☺	12
Atmos GIGA-N 32/160-0,55/4-P5	0.55	IE3	6086980	A	☺	A	☺	A	☺	A	☺	A	☺	12
Atmos GIGA-N 32/160-0,37/4-P5	0.37	IE3	6086981	A	☺	A	☺	A	☺	A	☺	A	☺	12
Atmos GIGA-N 32/160-0,25/4-P5	0.25	IE3	6086982	A	☺	A	☺	A	☺	A	☺	A	☺	12
Atmos GIGA-N 32/160.1-0,55/4-P5	0.55	IE3	6086999	A	☺	A	☺	A	☺	A	☺	A	☺	12
Atmos GIGA-N 32/160.1-0,37/4-P5	0.37	IE3	6087000	A	☺	A	☺	A	☺	A	☺	A	☺	12
Atmos GIGA-N 32/160.1-0,25/4-P5	0.25	IE3	6087001	A	☺	A	☺	A	☺	A	☺	A	☺	12

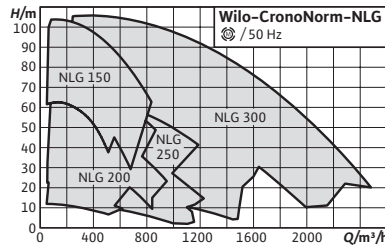

Accessories **Page**
Commissioning/maintenance 683

Select 4 online

All information at www.wilo-select.com



Wilo-CronoNorm-NLG

Construction

Single-stage, low-pressure centrifugal pump with axial suction, mounted on a baseplate.

Application

- Pumping of heating water (acc. to VDI 2035), cold water and water/glycol mixtures without abrasive substances in heating, cold water and cooling systems.
- Applications for irrigation, building services, general industry, power stations, etc.

Scope of delivery

- Pump
- Installation and operating instructions
- Pump with free shaft end **or**
- Pump on baseplate with coupling and coupling guard **or**
- Completely mounted pump on baseplate with electric motor

Options

- Other materials and versions on request
- Other voltages and frequencies available on request.

Your advantages

- Reduced life cycle costs thanks to optimized efficiency
- Bidirectional, force-flushed mechanical seal
- Interchangeable neck rings
- Permanently lubricated, generously dimensioned roller bearings
- Low NPSH, best cavitation properties

Notice


- Motors with energy efficiency class IE3

General notes - ErP (Ecodesign) Directive

The minimum efficiency index, MEI, of the pump series is ≥ 0.4 . For detailed information on the MEI values of the individual pump types, see: Wilo Online Catalogue, available at www.wilo.com

Price group:

Ordering information			
Type	Art. no.		
On Request	On Request	A	☎

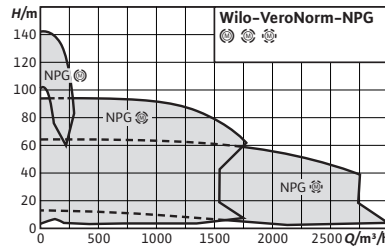

Accessories


Commissioning/maintenance

Page

683

Select 4 online

All information at www.wilo-select.com



Wilo-VeroNorm NPG

Construction

Single-stage low-pressure centrifugal pump mounted on the baseplate

Application

- Pumping of heating water (acc. to VDI 2035), cold water and water/glycol mixtures without abrasive substances in heating, cold water and cooling systems.
- Applications in municipal water supply, irrigation, building services, general industry, power stations, etc.

Scope of delivery

- Pump
- Installation and operating instructions

Options

- Other materials and versions on request
- Other voltages and frequencies available on request.

Your advantages

- Suitable for temperatures up to 140°C
- Back-pull-out version
- Extension of the DIN EN 733 product range



Notice



Other voltages and frequencies available on request.


General notes – ErP (Ecodesign) Directive

The minimum efficiency index, MEI, of the pump series is ≥ 0.4 . For detailed information on the MEI values of the individual pump types, see: Wilo Online Catalogue, available at www.wilo.com

Price group:

Ordering information			
Type	Art. no.		
On Request	On Request	 A	

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

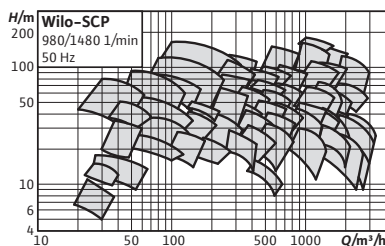

Accessories **Page**
Commissioning/maintenance 683

Select 4 online

All information at www.wilo-select.com

Wilo-SCP



Construction

Axially split case pump mounted on a baseplate

Application

- Pumping heating water in accordance with VDI 2035 water/glycol mixtures, cooling/cold water and domestic hot water
- Applications in municipal water supply, irrigation, building services, general industry, power stations, etc.

Scope of delivery

- Pump
- Installation and operating instructions

Options

- Other motor versions on request
- Higher volume flow up to 17 000 m³/h as special version


Your advantages

- Efficient hydraulics for high flow rates up to 17,000 m³/h
- Low NPSH thanks to double suction impeller
- High process reliability and easy maintenance without removing the pressure or suction lines
- Decreased noise level and reduced vibrations
- Options: energy efficient IE3-/IE4 motors, drinking water approval (KTW, ACS), innovative Ceram CT coating

- Special motor (6000V, 10 000 V etc.)
- Special construction
 - Impeller: Bronze, grey cast iron, stainless steel
 - Housing: grey cast iron, spheroidal cast iron
- Cyclone separator (for flushing the gasket)

Price group:

Ordering information			
Type	Art. no.		
On Request	On Request	A	☎

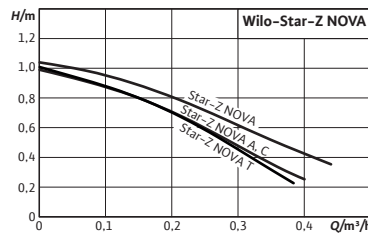

Accessories	Page
Pipe installation/ screwed connection	179
Pipe installation/ adaptor fitting	181

COMPATIBLE WITH **Wbutler** **Select 4 online**
All information at www.wilo-select.com

Wilo-Star-Z NOVA



Construction

Glandless circulator with screwed connection and blocking-current proof synchronous motor

Application

Domestic hot water circulation systems for building services and industry.

Scope of delivery

- Pump
- Thermal insulation
- Wilo-Connector
- Gaskets (Star-Z NOVA A, C, T)
- Installation and operating instructions

Options

- Star-Z-NOVA A with ball shut-off valve and non-return valve
- Star-Z-NOVA C with ball shut-off valve, non-return valve and plug-in time switch
- Star-Z-NOVA T with ball shut-off valve, non-return valve, time switch, thermostat and thermal disinfection detection

Your advantages


- High degree of hygiene safe thanks to proven technology
- Improved energy efficiency due to the adapted motor technology with a power consumption of only 3 – 6 watts and thermal insulation shell as standard
- Quick, easy installation and replacement of common pump types thanks to the flexible service motor and Wilo-Connector
- The "T" version offers the highest degree of hygiene safety, thanks to the integrated time switch, thermostat and automatic thermal disinfection detection. The Green Button Technology and an intuitive user interface with an LCD display make the "T" version extremely user-friendly


Price group: PG1


Ordering information									
Type	Pump connection	Port-to-port length	Max. operating pressure	Mains connection	Gross weight, approx.	Pieces per pallet	Art. no.		
		<i>l</i> mm	<i>p</i> bar		<i>m</i> kg				EUR
Star-Z NOVA	Rp 1/2	84	10	1~230 V, 50 Hz	0.9	320	4132760	L	225.-
Star-Z NOVA A	G 1	138	10	1~230 V, 50 Hz	1.1	320	4132761	L	250.-


🚚 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, 📞 = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG1

Ordering information									
Type	Pump connection	Port-to-port length	Max. operating pressure	Mains connection	Gross weight, approx.	Pieces per pallet	Art. no.		
		<i>l</i> mm	<i>p</i> bar		<i>m</i> kg				EUR
Star-Z NOVA C	G 1	138	10	1~230 V, 50 Hz	1.3	147	4132762	L	334.-
Star-Z NOVA T	G 1	138	10	1~230 V, 50 Hz	1.6	270	4222650	L	340.-

Service motor						
Type	Gross weight, approx.		Pieces per pallet	Art. no.		
	<i>m</i> kg					
					EUR	
Service motor Star-Z NOVA	0.9		320	4132763	L	202.-

Accessories					
Type	Description	Art. no.		Price group	
					EUR
Angle plug	Angle plug, angled to the left, with permanently attached (cast) 2 m connection cable	4150229	L	PG14	22.-
Wilo-Connector	Wilo-Connector with 2 m connection cable and shockproof plug	4200870	L	PG14	24.-

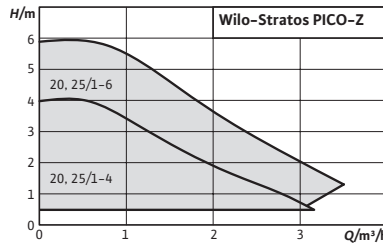

Accessories	Page
Pipe installation/ screwed connection	179
Pipe installation/ adapter fitting	181

Select 4 online
All information at www.wilo-select.com

Wilo-Stratos PICO-Z



Construction

Glandless circulator with screwed connection, blocking-current proof EC motor and integrated electronic power control.

Application

Domestic hot water circulation systems for building services and industry.

Scope of delivery

- Pump
- Thermal insulation
- Wilo-Connector
- Gaskets
- Installation and operating instructions


Your advantages


- Manual and temperature-controlled mode for optimum operation
- Identification of the thermal disinfection of the domestic hot water tank
- Display of the current consumption in Watts and the cumulative kilowatt hours or of the current flow and the temperature
- Stainless steel pump housing protects against bacteria and corrosion
- Wilo-Connector

Price group: PG1

Ordering information									
Type	Pump connection	Port-to-port length	Max. operating pressure	Mains connection	Gross weight, approx.	Pieces per pallet	Art. no.		
		<i>l</i> mm	<i>p</i> bar		<i>m</i> kg				EUR
Stratos PICO-Z 20/1-4	G 1¼	150	10	1~230 V, 50/60 Hz	2.1	146	4216470	L	782.-
Stratos PICO-Z 20/1-6	G 1¼	150	10	1~230 V, 50/60 Hz	2.1	146	4216471	L	900.-
Stratos PICO-Z 25/1-4	G 1½	180	10	1~230 V, 50/60 Hz	2.2	146	4216472	L	728.-
Stratos PICO-Z 25/1-6	G 1½	180	10	1~230 V, 50/60 Hz	2.2	146	4216473	L	837.-

= ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Accessories					
Type	Description	Art. no.		Price group	
					EUR
Angle plug	Angle plug, angled to the left, with permanently attached (cast) 2 m connection cable	4150229	 L	PG14	22.-
Wilo-Connector	Wilo-Connector with 2 m connection cable and shockproof plug	4200870	L	PG14	24.-

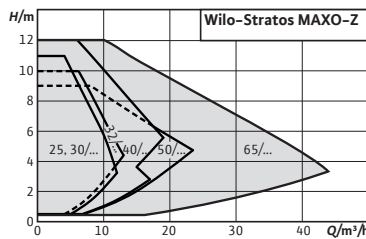

Accessories	Page
Pipe installation/ screwed connection	179
Pipe installation/ adapter fitting	181
Pump control/IF module/CIF module	219

Select 4 online
All information at www.wilo-select.com

Wilo-Stratos MAXO-Z



Construction

Smart glandless circulator with screwed connection or flange connection, EC motor with integrated electronic power adjustment

Application

Domestic hot water circulation systems of all kinds, hot-water heating systems of all kinds, air-conditioning, closed cooling circuits, industrial circulation systems

Scope of delivery

- Pump
- Optimised Wilo-Connector
- 2x threaded cable connection M16 x 1.5
- Washers for flange screws (for nominal connection diameters DN 32 - DN 65)
- Including gaskets for threaded connection
- Thermal insulation
- Installation and operating instructions

Options

- Special versions for operating pressure PN 16


Notice

According to the German Drinking Water Ordinance (TrinkwV) and DIN 50930-6, only circulators with corrosion-resistant pump housings made of stainless steel or red brass (CC 499K) are to be used in domestic hot water circulation systems.

Your advantages


- Intuitive operation by means of application-guided settings with the Setup Guide plus the combination of a new display and operating button using Green Button Technology.
- Highest standard of drinking water hygiene and energy efficiency with the new, innovative, intelligent T-const. control function.
- Optimum hygiene promotion through thermal disinfection detection.
- Latest communication interfaces (e.g. Bluetooth) for connection to mobile devices and direct pump networking for multiple pump control via Wilo Net.
- Maximum convenience in electrical installation thanks to a clearly arranged and spacious terminal room and the optimised Wilo-Connector.

Price group: PG17

Ordering information PN6/10									
Type	Connection	Energy efficiency index (EEI)	Port-to-port length	Max. operating pressure	Mains connection	Gross weight, approx.	Art. no.		
			<i>l</i> mm	<i>p</i> bar		<i>m</i> kg			EUR
Stratos MAXO-Z 25/0,5-6	G 1½	≤ 0.18	180	10	1~230 V, 50/60 Hz	8.6	2164666	L	1,582.-
Stratos MAXO-Z 25/0,5-8	G 1½	≤ 0.19	180	10	1~230 V, 50/60 Hz	8.6	2164667	L	1,765.-
Stratos MAXO-Z 25/0,5-12	G 1½	≤ 0.19	180	10	1~230 V, 50/60 Hz	8.9	2164668	L	2,363.-
Stratos MAXO-Z 30/0,5-6	G 2	≤ 0.18	180	10	1~230 V, 50/60 Hz	8.6	2164669	L	1,704.-
Stratos MAXO-Z 30/0,5-8	G 2	≤ 0.19	180	10	1~230 V, 50/60 Hz	8.6	2164670	L	1,898.-
Stratos MAXO-Z 30/0,5-12	G 2	≤ 0.19	180	10	1~230 V, 50/60 Hz	8.9	2164671	L	2,680.-
Stratos MAXO-Z 32/0,5-8	DN 32	≤ 0.18	220	10	1~230 V, 50/60 Hz	15.2	2164672	L	1,942.-
Stratos MAXO-Z 32/0,5-12	DN 32	≤ 0.18	220	10	1~230 V, 50/60 Hz	15.5	2164673	L	3,002.-
Stratos MAXO-Z 40/0,5-8	DN 40	≤ 0.19	220	10	1~230 V, 50/60 Hz	17.9	2164674	L	3,141.-
Stratos MAXO-Z 40/0,5-12	DN 40	≤ 0.17	250	10	1~230 V, 50/60 Hz	21.9	2164675	L	3,718.-
Stratos MAXO-Z 50/0,5-9	DN 50	≤ 0.17	280	10	1~230 V, 50/60 Hz	20.1	2164676	L	4,594.-
Stratos MAXO-Z 65/0,5-12	DN 65	≤ 0.17	340	10	1~230 V, 50/60 Hz	37.5	2164677	L	5,594.-

The benchmark for the most efficient circulators is EEI ≤ 0.20

Price group: PG17

Ordering information PN 16									
Type	Connection	Energy efficiency index (EEI)	Port-to-port length	Max. operating pressure	Mains connection	Gross weight, approx.	Art. no.		
			<i>l</i> mm	<i>p</i> bar		<i>m</i> kg			EUR
Stratos MAXO-Z 25/0,5-6	G 1½	≤ 0.18	180	16	1~230 V, 50/60 Hz	8.6	2186307	C	1,947.-
Stratos MAXO-Z 25/0,5-8	G 1½	≤ 0.19	180	16	1~230 V, 50/60 Hz	8.6	2186308	C	2,130.-
Stratos MAXO-Z 25/0,5-12	G 1½	≤ 0.19	180	16	1~230 V, 50/60 Hz	8.9	2186309	C	2,728.-
Stratos MAXO-Z 30/0,5-6	G 2	≤ 0.18	180	16	1~230 V, 50/60 Hz	8.6	2186310	C	2,179.-
Stratos MAXO-Z 30/0,5-8	G 2	≤ 0.19	180	16	1~230 V, 50/60 Hz	8.6	2186311	C	2,373.-
Stratos MAXO-Z 30/0,5-12	G 2	≤ 0.19	180	16	1~230 V, 50/60 Hz	8.9	2186312	C	3,155.-
Stratos MAXO-Z 32/0,5-8	DN 32	≤ 0.18	220	16	1~230 V, 50/60 Hz	15.2	2186313	C	2,467.-
Stratos MAXO-Z 32/0,5-12	DN 32	≤ 0.18	220	16	1~230 V, 50/60 Hz	15.5	2186314	C	3,527.-
Stratos MAXO-Z 40/0,5-8	DN 40	≤ 0.19	220	16	1~230 V, 50/60 Hz	17.9	2186315	C	3,711.-
Stratos MAXO-Z 40/0,5-12	DN 40	≤ 0.17	250	16	1~230 V, 50/60 Hz	21.9	2186316	C	4,288.-


The benchmark for the most efficient circulators is EEI ≤ 0.20

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.


Price group: PG17



Ordering information PN 16


Type	Connection	Energy efficiency index (EEI)	Port-to-port length	Max. operating pressure	Mains connection	Gross weight, approx.	Art. no.		
			<i>l</i> mm	<i>p</i> bar		<i>m</i> kg			EUR
Stratos MAXO-Z 50/0,5-9	DN 50	≤ 0.17	280	16	1~230 V, 50/60 Hz	20.1	2186317	C	5,164.-
Stratos MAXO-Z 65/0,5-12	DN 65	≤ 0.17	340	16	1~230 V, 50/60 Hz	37.5	2186318	C	6,219.-

The benchmark for the most efficient circulators is EEI ≤ 0.20

Accessories

Type	Description	Art. no.		Price group	
					EUR
Immersion temperature sensor Pt 1000 AA	Pt 1000 AA immersion temperature sensor for installation in immersion sleeve. Connection to Wilo-Stratos MAXO.	2193422	L	PG14	27.-
Temperature sensor Pt 1000 B	Pt 1000 B temperature sensor to connect to piping. Connection to Wilo-Stratos MAXO-Z.	2193421	L	PG14	27.-
G ½ immersion sleeve, 100 mm	Immersion sleeve with 100 mm port-to-port length incl. screw-in thread G 1/2" to attach the Pt 1000 AA immersion temperature sensor.	2193424	L	PG14	24.-
G ½ immersion sleeve, 45 mm	Immersion sleeve with 45 mm port-to-port length incl. screw-in thread G 1/2" to attach the Pt 1000 AA immersion temperature sensor.	2193423	L	PG14	22.-
Wilo-Smart Gateway	REG device to establish communication between Wilo products with Wilo Net and the Wilo-Smart Cloud, as well as over the Internet. Enables remote monitoring and control of connected products using the Wilo-Smart Connect function in the Wilo Assistant app.	2197100	L	PG14	490.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

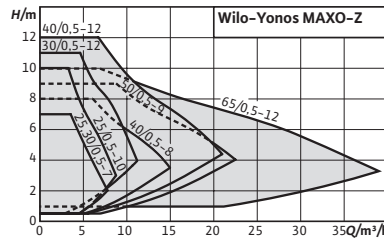

Accessories	Page
Pipe installation/ screwed connection	179
Pipe installation/ adapter fitting	181
Thermal insulation	198

Select 4 online

All information at www.wilo-select.com

Wilo-Yonos MAXO-Z



Construction

Glandless circulator with threaded connection or flange connection, EC motor with automatic power adjustment.

Application

Domestic hot water circulation systems in industry and building services.

Scope of delivery

- Pump
- Including gaskets for threaded connection
- Incl. washers for flange screws (for nominal connection diameters DN 40 – DN 65)
- Including installation and operating instructions

Notice

According to the Drinking Water Ordinance and DIN 50930-6, only circulators with corrosion-resistant pump housings made of stainless steel or red brass (CC 499K) are to be used in domestic hot water circulation systems.

Your advantages

- High drinking water hygiene ensured through collective fault signal
- Energy-saving due to high-efficiency hydraulics and synchronous motor
- Complete transparency of the delivery head, speed and possible faults thanks to its LED display
- Simple adjustment over three speed stages using the green Knob when replacing an uncontrolled standard pump
- Easier electrical connection thanks to the Wilo-Plug
- Compact design and proven user-friendliness

Price group: PG2

Ordering information									
Type	Connection	Energy efficiency index (EEI)	Port-to-port length	Max. operating pressure	Mains connection	Gross weight, approx.	Art. no.		
			l mm	p bar		m kg			EUR
Yonos MAXO-Z 25/0.5-7 PN 10	G 1½	≤ 0.20	180	10	1~230 V, 50/60 Hz	5	2175538	L	1,491.-

The benchmark for the most efficient circulators is EEI ≤ 0.20


Price group: PG2

Ordering information										
Type	Connection	Energy efficiency index (EEI)	Port-to-port length	Max. operating pressure	Mains connection	Gross weight, approx.	Art. no.			
			<i>l</i> mm	<i>p</i> bar		<i>m</i> kg				EUR
Yonos MAXO-Z 25/0,5-10 PN 10	G 1½	≤ 0.20	180	10	1~230 V, 50/60 Hz	5	2175539	L		1,618.-
Yonos MAXO-Z 30/0,5-7 PN 10	G 2	≤ 0.20	180	10	1~230 V, 50/60 Hz	5.3	2175540	L		1,602.-
Yonos MAXO-Z 30/0,5-12 PN 10	G 2	≤ 0.20	180	10	1~230 V, 50/60 Hz	5.3	2175541	L		2,175.-
Yonos MAXO-Z 40/0,5-8 PN 6/10	DN 40	≤ 0.20	220	10	1~230 V, 50/60 Hz	13	2175542	L		2,651.-
Yonos MAXO-Z 40/0,5-12 PN 6/10	DN 40	≤ 0.20	250	10	1~230 V, 50/60 Hz	18.4	2175543	L		3,139.-
Yonos MAXO-Z 50/0,5-9 PN 6/10	DN 50	≤ 0.20	280	10	1~230 V, 50/60 Hz	19.8	2175544	L		3,879.-
Yonos MAXO-Z 65/0,5-12 PN 6/10	DN 65	≤ 0.20	340	10	1~230 V, 50/60 Hz	33.8	2175545	L		4,721.-

The benchmark for the most efficient circulators is EEI ≤ 0.20

Type	Description	Art. no.	Price group	
Wilo-Connect Module Yonos MAXO	Wilo-Connect Module Yonos MAXO for single and twin-head pumps. Retrofittable plug-in module for Wilo-Yonos MAXO/Yonos MAXO-D/Yonos MAXO-Z pump types. The Connect Module Yonos MAXO is installed on the electronic module of the pump at the position of the Wilo plug. With SBM run signal, overriding Off control input (Ext. Off) and main/standby mode with runtime-dependent switchover from main to standby pump.	2210108	PG14	L

Note: Available from April 2020

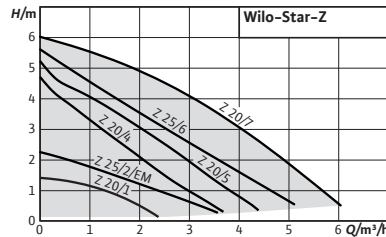

Accessories	Page
Pipe installation/ screwed connection	179
Pipe installation/ adapter fitting	181
Thermal insulation	198
Motor protection	231

Select 4 online

All information at www.wilo-select.com

Wilo-Star-Z



Construction

Glandless circulator with screwed connection

Application

Domestic hot water circulation systems for building services and industry.

Scope of delivery


- Pump
- Gaskets for threaded connection
- Installation and operating instructions

Your advantages

- AC pumps with electrical quick connection
- All plastic parts that come into contact with the fluid fulfil KTW recommendations

Price group: PG1

Ordering information									
Type	Pump connection	Port-to-port length	Max. operating pressure	Mains connection	Gross weight, approx.	Pieces per pallet	Art. no.		
		<i>l</i> mm	<i>p</i> bar		<i>m</i> kg				EUR
Star-Z 20/1	G 1¼	140	10	1~230 V, 50 Hz	2.3	256	4028111	L	335.-
Star-Z 20/4-3	G 1¼	150	10	1~230 V, 50 Hz	2.4	256	4081193	L	546.-
Star-Z 20/5-3	G 1¼	150	10	1~230 V, 50 Hz	2.5	256	4081198	L	577.-
Star-Z 20/7-3	G 1¼	150	10	1~230 V, 50 Hz	2.9	256	4081203	L	605.-
Star-Z 25/2 EM	G 1½	180	10	1~230 V, 50 Hz	2.5	256	4029062	L	537.-
Star-Z 25/6-3	G 1½	180	10	1~230 V, 50 Hz	2.7	256	4047573	L	577.-

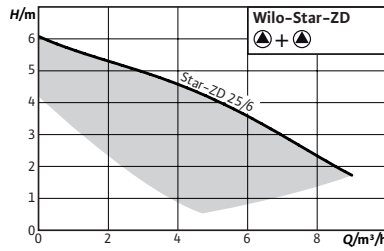

Accessories	Page
Pipe installation/ screwed connection	179
Pipe installation/ adapter fitting	181
Motor protection	231

Select 4 online
All information at www.wilo-select.com

Wilo-Star-ZD



Construction

Glandless twin-head circulator with screwed connection; preselectable speed stages for power adjustment

Application

Domestic hot water circulation systems for building services and industry.


Scope of delivery


- Pump
- Gaskets
- Installation and operating instructions

Your advantages

- Twin-head pump for single or parallel operation
- Suitable for every installation position with horizontal shaft; terminal box in 3-6-9-12 o'clock position
- Internal bypass circulation, which prevents Legionella growth in the standby unit
- Increased reliability in individual operation due to the constant availability of a standby unit ready for operation

Price group: PG1

Ordering information								
Type	Pump connection	Port-to-port length	Max. operating pressure	Mains connection	Gross weight, approx.	Pieces per pallet	Art. no.	
		<i>l</i> mm	<i>p</i> bar		<i>m</i> kg			
Star-ZD 25/6	G 1½	180	10	1~230 V, 50 Hz	6.7	60	4111288	 EUR

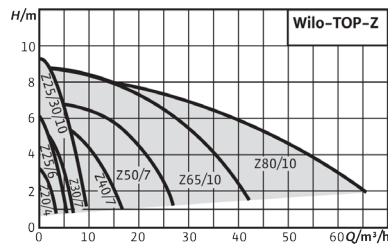

Accessories	Page
Pipe installation/ screwed connection	179
Pipe installation/ adapter fitting	181
Thermal insulation	198
Motor protection	231

Select 4 online

All information at www.wilo-select.com

Wilo-TOP-Z



Construction

Glandless pump circulator with screwed connection or flange connection. Pre-selectable speed stages for power adjustment

Application

Domestic hot water circulation systems in industry and building services.

Scope of delivery

- Pump
- Including thermal insulation
- Including gaskets for threaded connection
- Including washers for flange screws (for nominal connection diameters DN 40 - DN 65)
- Including installation and operating instructions

Your advantages

- Direction of rotation signal lamp for displaying the correct sense of rotation (only with 3~)
- With thermal insulation as standard

Options

- Special versions for operating pressure PN 16
- Version for special voltage on request

Notice


According to the Drinking Water Ordinance and DIN 50930-6, only circulators with corrosion-resistant pump housings made of stainless steel or red brass (CC 499K) are to be used in domestic hot water circulation systems.

Price group: PG2


Ordering information									
Type	Pump housing material	Pump connection	Port-to-port length	Max. operating pressure	Mains connection	Gross weight, approx.	Art. no.		
			l0 mm	p bar		m kg			EUR
TOP-Z 20/4	1.4031	G 1¼	150	10	1~230 V, 50 Hz	3.7	2045519	L	880.-
TOP-Z 20/4	1.4031	G 1¼	150	10	3~400 V, 50 Hz	3.8	2045520	L	830.-
TOP-Z 25/6	1.4031	G 1½	180	10	1~230 V, 50 Hz	4.1	2045521	L	896.-
TOP-Z 25/6	1.4031	G 1½	180	10	3~400 V, 50 Hz	4.1	2045522	L	872.-
TOP-Z 25/10	CC499K	G 1½	180	10	1~230 V, 50 Hz	7.8	2061964	L	1,465.-



☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☞ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG2


Ordering information									
Type	Pump housing material	Pump connection	Port-to-port length	Max. operating pressure	Mains connection	Gross weight, approx.	Art. no.		
			<i>l</i> mm	<i>p</i> bar		<i>m</i> kg			EUR
TOP-Z 25/10	CC499K	G 1½	180	10	3~400 V, 50 Hz	7.8	2175509	L	1,420.-
TOP-Z 30/7	CC499K	G 2	180	10	1~230 V, 50 Hz	6	2048340	L	950.-
TOP-Z 30/7	CC499K	G 2	180	10	3~400 V, 50 Hz	5.9	2048341	L	901.-
TOP-Z 30/10	CC499K	G 2	180	10	1~230 V, 50 Hz	7.6	2059857	L	1,501.-
TOP-Z 30/10	CC499K	G 2	180	10	3~400 V, 50 Hz	7.8	2175512	C	1,420.-
TOP-Z 40/7	EN-GJL-250	DN 40	250	10	1~230 V, 50 Hz	12.4	2046631	L	1,445.-
TOP-Z 40/7	CC499K	DN 40	250	10	1~230 V, 50 Hz	14.2	2046637	L	2,369.-
TOP-Z 40/7	EN-GJL-250	DN 40	250	10	3~400 V, 50 Hz	12	2175515	L	1,333.-
TOP-Z 40/7	CC499K	DN 40	250	10	3~400 V, 50 Hz	14.2	2175516	L	2,603.-
TOP-Z 50/7	EN-GJL-250	DN 50	280	10	3~400 V, 50 Hz	17.9	2175521	L	1,892.-
TOP-Z 50/7	CC499K	DN 50	280	10	3~400 V, 50 Hz	20.7	2175522	L	3,084.-
TOP-Z 65/10	EN-GJL-250	DN 65	340	10	3~400 V, 50 Hz	29.7	2175527	C	3,244.-
TOP-Z 65/10	CC499K	DN 65	340	10	3~400 V, 50 Hz	32.5	2175528	L	4,578.-
TOP-Z 80/10	EN-GJL-250	DN 80	360	6	3~400 V, 50 Hz	30	2175531	C	3,932.-
TOP-Z 80/10	CC499K	DN 80	360	6	3~400 V, 50 Hz	34.5	2175532	C	5,328.-
TOP-Z 80/10	EN-GJL-250	DN 80	360	10	3~400 V, 50 Hz	34	2175533	C	4,127.-
TOP-Z 80/10	CC499K	DN 80	360	10	3~400 V, 50 Hz	37	2175534	C	5,526.-


Price group: PG2

Ordering information PN 16									
Type	Pump housing material	Pump connection	Port-to-port length	Max. operating pressure	Mains connection	Gross weight, approx.	Art. no.		
			<i>l</i> mm	<i>p</i> bar		<i>m</i> kg			EUR
TOP-Z 25/10	CC499K	G 1½	180	16	1~230 V, 50 Hz	7.8	2086131	C	1,901.-
TOP-Z 25/10	CC499K	G 1½	180	16	3~400 V, 50 Hz	7.8	2175510	C	1,817.-
TOP-Z 30/10	CC499K	G 2	180	16	1~230 V, 50 Hz	7.6	2115863	C	2,008.-
TOP-Z 30/10	CC499K	G 2	180	16	3~400 V, 50 Hz	7.7	2175513	C	2,040.-
TOP-Z 40/7	CC499K	DN 40	250	16	1~230 V, 50 Hz	14.2	2070569	C	3,267.-
TOP-Z 40/7	EN-GJL-250	DN 40	250	16	1~230 V, 50 Hz	12.4	2071094	C	2,064.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Heating, air conditioning, cooling

Ordering information PN 16									
Type	Pump housing material	Pump connection	Port-to-port length	Max. operating pressure	Mains connection	Gross weight, approx.	Art. no.		
			<i>l</i> mm	<i>p</i> bar		<i>m</i> kg			EUR
TOP-Z 40/7	EN-GJL-250	DN 40	250	16	3~400 V, 50 Hz	12.4	2175517	C	1,954.-
TOP-Z 40/7	CC499K	DN 40	250	16	3~400 V, 50 Hz	14.2	2175518	C	3,160.-
TOP-Z 50/7	EN-GJL-250	DN 50	280	16	3~400 V, 50 Hz	18	2175523	C	2,578.-
TOP-Z 50/7	CC499K	DN 50	280	16	3~400 V, 50 Hz	21	2175524	C	3,878.-
TOP-Z 65/10	EN-GJL-250	DN 65	340	16	3~400 V, 50 Hz	29.7	2175529	C	3,925.-
TOP-Z 65/10	CC499K	DN 65	340	16	3~400 V, 50 Hz	32.5	2175530	C	5,259.-
TOP-Z 80/10	CC499K	DN 80	360	16	3~400 V, 50 Hz	37	2175536	C	6,206.-
TOP-Z 80/10	EN-GJL-250	DN 80	360	16	3~400 V, 50 Hz	34	2175535	C	4,930.-

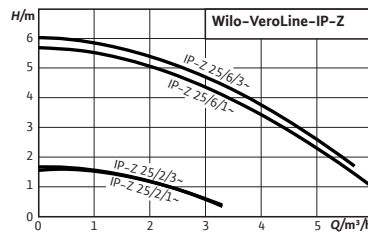

Select 4 online

All information at www.wilo-select.com

Wilo-VeroLine-IP-Z



Construction

Glanded circulator in in-line design with screwed connection

Top suction inlet. A special version (-N0) is required for a downward suction inlet.

Application

For pumping drinking water, cold and hot water (in accordance with VDI 2035) without abrasive substances, in heating, cold water and cooling water systems

Your advantages

- High resistance to corrosive fluids due to stainless steel housing and Noryl impeller
- Wide range of applications due to suitability for water hardness up to 5 mmol/l (28 °dH)
- All plastic parts that come into contact with the fluid fulfil KTW recommendations

Scope of delivery

- Pump
- Installation and operating instructions

Price group: PG3

Ordering information (2-pole types)

Type	Port-to-port length	Max. operating pressure	Mains connection	Gross weight, approx.	Art. no.		
	<i>l</i> mm	<i>p</i> bar		<i>m</i> kg			EUR
VeroLine-IP-Z 25/6 DM	180	10	3~230 V, 3~400 V, 50 Hz	5.2	4090294	L	835.-
VeroLine-IP-Z 25/6 EM	180	10	1~230 V, 50 Hz	6.1	4090295	L	905.-


Price group: PG3


Ordering information (4-pole types)

Type	Port-to-port length	Max. operating pressure	Mains connection	Gross weight, approx.	Art. no.		
	<i>l</i> mm	<i>p</i> bar		<i>m</i> kg			EUR
VeroLine-IP-Z 25/2 DM	180	10	3~230 V, 3~400 V, 50 Hz	4.7	4090292	L	743.-
VeroLine-IP-Z 25/2 EM	180	10	1~230 V, 50 Hz	5.7	4090293	L	771.-

= ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG14

Accessories				
Type	Description	Art. no.		
KIT-NEC-33-IL-Z	2 stainless steel adapters (1 set), G1½ i x G2 a x 33	4037301	 L	EUR 79.-

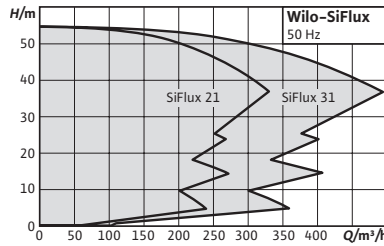

Select 4 online

All information at www.wilo-select.com

Wilo-SiFlux



Construction

High-efficiency, fully automatic, ready for connection multi-pump system for the implementation of larger volume flows in heating, cold water and cooling systems. 3 to 4 parallel-switched, electronically controlled inline pumps in glanded design of the series VeroLine-IP-E or CronoLine-IL-E. One pump in each case as standby pump. Including Smart Controller SCe.

Application

For pumping heating water (in accordance with VDI 2035), water-glycol mixtures and cooling and cold water without abrasive substances in heating, cold water and cooling water systems

Scope of delivery

→ Multi-pump system Wilo-SiFlux

Your advantages

- Rapid, easy installation with pre-installed system. Troubleshooting minimised as a result.
- Energy-saving: Operation in partial load range in accordance with current demand.
- Reliable system thanks to intermatched components.
- Compact design, good accessibility of all components.
- Everything from a single source. Less need for clarification at time of procurement.

- Wilo-SiFlux installation and operating instructions
- Pump installation and operating instructions
- Switchgear installation and operating instructions


Price group: PG6

Ordering information							
Type	Mains connection	Max. operating pressure	Flow rate	Rated current	Gross weight, approx.	Art. no.	
		<i>p</i> bar	<i>Q</i> m³/h	<i>I_N</i> A	<i>m</i> kg		EUR
SiFlux 21-95-IL-E 80/160-11/2-SC-16-T4	3~440 V, 50 Hz	16	95.0	18.5	1576	4189235	A 54,845.-
SiFlux 21-120-IL-E 80/160-11/2-SC-16-T4	3~440 V, 50 Hz	16	120.0	18.5	1912	4189241	A 69,979.-
SiFlux 21-IL-E 40/170-5,5/2-SC-16-T4	3~440 V, 50 Hz	16	25.0	10.3	582	4189218	K 34,353.-
SiFlux 21-IL-E 50/180-7,5/2-SC-16-T4	3~440 V, 50 Hz	16	45.0	13.2	1058	4189224	K 38,186.-
SiFlux 21-IL-E 65/160-7,5/2-SC-16-T4	3~440 V, 50 Hz	16	65.0	13.2	1180	4189230	K 46,155.-
SiFlux 21-IL-E 80/140-7,5/2-SC-16-T4	3~440 V, 50 Hz	16	120.0	13.2	1709	4189240	A 55,769.-

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Ordering information							
Type	Mains connection	Max. operating pressure	Flow rate	Rated current	Gross weight, approx.	Art. no.	
		p bar	Q m ³ /h	I_N A	m kg		EUR
SiFlux 21-IL-E 80/170-15/2-SC-16-T4	3~440 V, 50 Hz	16	95.0	25.3	1596	4189236	A 63,336.-
SiFlux 21-IL-E 80/200-22/2-SC-16-T4	3~440 V, 50 Hz	16	120.0	20.7	2069	4189242	A 77,267.-
SiFlux 21-IP-E 40/120-1,5/2-SC-16-T4	3~440 V, 50 Hz	16	25.0	4.5	680	4189216	K 24,380.-
SiFlux 21-IP-E 40/160-4/2-SC-16-T4	3~440 V, 50 Hz	16	25.0	10.5	723	4189217	K 27,635.-
SiFlux 21-IP-E 50/130-2,2/2-SC-16-T4	3~440 V, 50 Hz	16	45.0	7.2	833	4189222	K 27,589.-
SiFlux 21-IP-E 50/150-4/2-SC-16-T4	3~440 V, 50 Hz	16	45.0	10.5	873	4189223	C 33,231.-
SiFlux 21-IP-E 65/120-3/2-SC-16-T4	3~440 V, 50 Hz	16	65.0	8.9	1002	4189228	K 33,352.-
SiFlux 21-IP-E 65/130-4/2-SC-16-T4	3~440 V, 50 Hz	16	65.0	10.5	1027	4189229	K 40,257.-
SiFlux 21-IP-E 80/110-4/2-SC-10-T4	3~440 V, 50 Hz	10	95.0	10.5	1224	4196555	A 41,994.-
SiFlux 31-95-IL-E 80/160-11/2-SC-16-T4	3~440 V, 50 Hz	16	95.0	18.5	1997	4189238	A 71,329.-
SiFlux 31-120-IL-E 80/160-11/2-SC-16-T4	3~440 V, 50 Hz	16	120.0	18.5	2379	4189244	A 87,851.-
SiFlux 31-IL-E 40/170-5,5/2-SC-16-T4	3~440 V, 50 Hz	16	25.0	10.3	1167	4189221	K 42,320.-
SiFlux 31-IL-E 50/180-7,5/2-SC-16-T4	3~440 V, 50 Hz	16	45.0	13.2	1437	4189227	K 49,121.-
SiFlux 31-IL-E 65/160-7,5/2-SC-16-T4	3~440 V, 50 Hz	16	65.0	13.2	1620	4189233	A 62,973.-
SiFlux 31-IL-E 80/140-7,5/2-SC-16-T4	3~440 V, 50 Hz	16	120.0	13.2	2109	4189243	A 74,069.-
SiFlux 31-IL-E 80/170-15/2-SC-16-T4	3~440 V, 50 Hz	16	95.0	25.3	2024	4189239	A 83,671.-
SiFlux 31-IL-E 80/200-22/2-SC-16-T4	3~440 V, 50 Hz	16	120.0	20.7	2590	4189245	A 98,470.-
SiFlux 31-IP-E 40/120-1,5/2-SC-16-T4	3~440 V, 50 Hz	16	25.0	4.5	936	4189219	K 30,166.-
SiFlux 31-IP-E 40/160-4/2-SC-16-T4	3~440 V, 50 Hz	16	25.0	10.5	994	4189220	K 34,811.-
SiFlux 31-IP-E 50/130-2,2/2-SC-16-T4	3~440 V, 50 Hz	16	45.0	7.2	1137	4189225	K 37,393.-
SiFlux 31-IP-E 50/150-4/2-SC-16-T4	3~440 V, 50 Hz	16	45.0	10.5	1191	4189226	K 42,467.-
SiFlux 31-IP-E 65/120-3/2-SC-16-T4	3~440 V, 50 Hz	16	65.0	8.9	1350	4189231	A 46,205.-
SiFlux 31-IP-E 65/130-4/2-SC-16-T4	3~440 V, 50 Hz	16	65.0	10.5	1379	4189232	A 52,909.-
SiFlux 31-IP-E 80/110-4/2-SC-10-T4	3~440 V, 50 Hz	16	95.0	10.5	1532	4196556	A 57,706.-

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☞ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

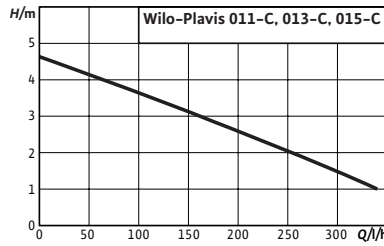

Select 4online
All information at www.wilo-select.com

Wilo-Plavis 011-C



Construction

Automatic condensate lifting unit

Application

- Condensing boiler technology
- Air-conditioning and cooling systems (e.g. refrigerators and evaporators)

Scope of delivery

- Condensate lifting unit with electrode level switching
- Tank, cover and service cap
- 1.5 m long electric cable
- Installation and operating instructions

Notice


Changed dimensions to previous model

Your advantages

- Reliable level measurement guarantees high levels of operational reliability
- Easy installation thanks to Plug & Pump system with adaptable inlet
- Quick and easy maintenance thanks to removable service cap and integrated non-return ball valve
- Energy savings due to low electricity consumption (≤ 20 W)
- Perfect integration into the customer environment thanks to its compact, modern design and quiet operation (≤ 40 dBA)

Price group: PG7

Ordering information				
Type	Volume	Art. no.		
			V	
				EUR
Plavis 011-C	0.7	2548593	L	91.-

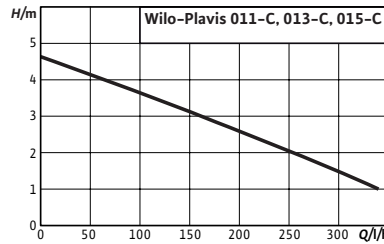

Select 4 online
All information at www.wilo-select.com

Wilo-Plavis 013-C



Construction

Automatic condensate lifting unit

Application

- Condensing boiler technology
- Air-conditioning and cooling systems (e.g. refrigerators and evaporators)

Scope of delivery

- Condensate lifting unit with electrode level switching
- Tank, cover and service cap
- 1.5 m long electric cable
- Hose on the pressure side (Ø 8 mm, 5 m)
- Adjustable inlets (2 rubber guides Ø 2/32 mm)
- Screws (Ø 4) and anchors (2x) for wall fixation
- Installation and operating instructions

Your advantages


- Higher operational reliability thanks to integrated visual alarm and alarm contact (NC/NO contact)
- Reliable level measurement via electrode level switching
- Easy installation thanks to Plug & Pump system with adaptable inlet and rotatable cover
- Quick and easy maintenance thanks to removable service cap and integrated non-return ball valve
- Energy savings due to low electricity consumption (≤ 20 W)
- Perfect integration into the customer environment thanks to its compact, modern construction and quiet operation (≤ 40 dBA)

Notice

Changed dimensions to previous model

Price group: PG7

Ordering information				
Type	Volume	Art. no.		
			V	
Plavis 013-C	1.1	2548552	L	EUR 117.-

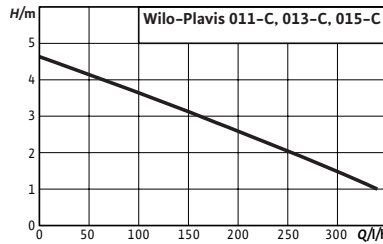

Select 4online

All information at www.wilo-select.com

Wilo-Plavis 015-C



Construction

Automatic condensate lifting unit

Application

- Condensing boiler technology
- Air-conditioning and cooling systems (e.g. refrigerators and evaporators)

Scope of delivery

- Condensate lifting unit with electrode level switching
- Tank, cover and service cap
- 1.5 m long electric cable
- Hose on the pressure side (Ø 8 mm, 5 m)
- Adjustable inlets (4 rubber guides Ø 2/32 mm)
- Screws (Ø 4) and anchors (2x) for wall fixation
- Granulate chamber incl. pH-neutralisation granulate
- Installation and operating instructions

Notice


Changed dimensions to previous model

Your advantages

- Higher operational reliability thanks to integrated visual and acoustic alarm and alarm contact (NC/NO contact)
- Reliable level measurement via electrode level switching
- Neutralisation of condensate thanks to integrated granulate chamber
- Easy installation thanks to Plug & Pump system with adaptable inlet and rotatable cover
- Quick and easy maintenance thanks to removable service cap and integrated non-return ball valve
- Energy savings due to low electricity consumption (≤ 20 W)
- Perfect integration into the customer environment thanks to its compact, modern construction and quiet operation (≤ 40 dBA)

Price group: PG7

Ordering information			
Type	Volume	Art. no.	
			V
Plavis 015-C	1.6	2548553	L EUR 157.-

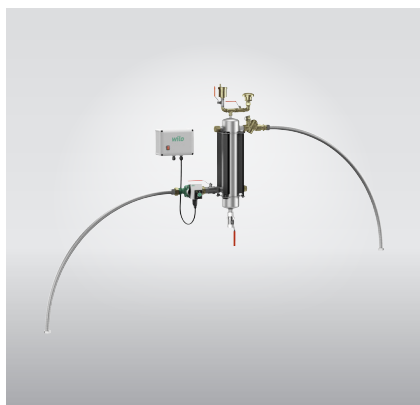

Wilo-SiClean



Construction

Compact particle separator delivered as kit and easy to install. Kit consisting of mechanical and hydraulic components: Circulator, particle separator, drain valve, automatic volume flow limiter, ventilation unit, switchbox for monitoring the circulator. For wall fixation or floor installation (type-dependent). Suction and pressure connections as well as mains connection are provided by the customer. Manual emptying of the system.

Application

WILO-SiClean removes magnetic and non-magnetic particles from heating systems via natural physical phenomena. The ventilation unit can also be used to expel micro bubbles. For installation in commercial properties (office buildings, hotels, hospitals, shopping centres, schools,...) and heating and air conditioning systems for district heating.

Your advantages

- Removal of magnetic and non-magnetic particles from the medium and venting of micro bubbles
- High cleaning efficiency due to physical effects (gravity, filtration, magnetic effects, pressure reduction effect)
- Easy to use due to ease of installation, maintenance, and simplified settings
- Corrosion-resistant thanks to stainless steel particle separator

Scope of delivery

- Particle separator Wilo-SiClean (pre-assembled kit)
- Switchbox
- Wilo-SiClean installation and operating instructions
- Circulator installation and operating instructions

Price group: PG6

Ordering information					
Type	Mains connection	Gross weight, approx.	Art. no.		
		<i>m</i> kg			
SiClean 0.5	1~230 V, 50 Hz	14	4195118	C	3,331.-
SiClean 1	1~230 V, 50 Hz	16	4195119	C	3,677.-
SiClean 2	1~230 V, 50 Hz	18	4195120	C	4,076.-
SiClean 3	1~230 V, 50 Hz	55	4195121	C	5,154.-
SiClean 4	1~230 V, 50 Hz	68	4195122	C	6,428.-
SiClean 5	1~230 V, 50 Hz	74	4195123	C	7,157.-

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
 Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.



Wilo-SiClean Comfort



Construction

Fully-automatic, compact particle separator, provided as "Plug & Play" version, easy to install. System consisting of mechanical and hydraulic components: Pump, separator including particle collection chamber, automatic flushing device, venting unit, SC switchgear for controlling the pump and the flushing device. The system is placed at the installation location and fixed to the floor. Suction and pressure connections as well as mains connection are provided by the customer. The system is drained automatically based on the switchgear parameters.

Application

WILO-SiClean Comfort removes particles from heating systems using natural physical phenomena. For installation in commercial properties (office buildings, hotels, hospitals, shopping centres, schools,...) and heating and air conditioning systems for district heating.

Scope of delivery

→ Particle separator Wilo-SiClean Comfort

Your advantages

- High efficiency via combination of physical effects: Centrifugal forces, magnetophoresis and Vortex effect
- Easy to handle thanks to fully automated operation
- Rapid and easy installation via „plug & play” design
- Very convenient due to fully automated and adjustable disposal of collected particles in the desludging tank
- Highly functional thanks to removal of all magnetic and non-magnetic particles, free air and micro-bubbles in the fluid, as well as support for the degasification process.

- Wilo-SiClean Comfort installation and operating instructions (including description of SC switchgear)
- Wilo-Veroline IPL... installation and operating instructions

Price group: PG6

Ordering information						
Type	Mains connection	Gross weight, approx.	Art. no.			
		<i>m</i> kg				
SiClean Comfort 12	3~400 V, 50 Hz	137	4194907			13,795.-
SiClean Comfort 15	3~400 V, 50 Hz	137	4194908		K	14,095.-
SiClean Comfort 20	3~400 V, 50 Hz	138	4194909		K	14,573.-
SiClean Comfort 25	3~400 V, 50 Hz	139	4194910		K	14,852.-
SiClean Comfort 30	3~400 V, 50 Hz	195	4194911		K	15,803.-

= ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Ordering information					
Type	Mains connection	Gross weight, approx.	Art. no.		
		<i>m</i> kg			
SiClean Comfort 40	3~400 V, 50 Hz	202	4194912	K	16,440.-
SiClean Comfort 50	3~400 V, 50 Hz	211	4194913	K	16,955.-
SiClean Comfort 65	3~400 V, 50 Hz	252	4194914	K	18,420.-



Fig. A: Special union inserts with Whitworth male thread (DIN EN 10226-1) and female thread for choice between threaded connections and solder joints on copper pipe (DIN EN 1057)

Fig. B: Union inserts with female threads for connection to copper pipes (DIN EN 1057) with Whitworth pipe thread in accordance with DIN EN 10226-1.

Price group: PG14

Screwed connections for circulators made of malleable cast iron (GTW)							
Type	Packaging	Gross weight, approx.	Version	Art. no.		For Wilo pumps	
		m kg					
					EUR		
Rp ½ x G 1, 1 Set	1 kit	0.3	B	4090808	L	10.-	Nominal diameter 15/20
Rp 1 x G 1½, 1 Set	1 kit	0.4	B	4092741	L	6.-	Nominal diameter 25
Rp 1 x G 1½, 72 Set	72 kit	34.2	B	112047298	L	568.-	Nominal diameter 25
Rp 1¼ x G 2, 1 Set	1 kit	0.8	B	4092742	L	8.-	Nominal diameter 30
Rp 1¼ x G 2, 48 Set	48 kit	38.6	B	112047390	L	511.-	Nominal diameter 30

1 set of screwed connections consisting of: 2 union nuts, 2 flat gaskets and 2 union inserts

Price group: PG14

Screwed connections for domestic hot water circulators made of brass							
Type	Packaging	Gross weight, approx.	Version	Art. no.		For Wilo pumps	
		m kg					
					EUR		
R ½ /Ø 15 i x G 1, 1 Set	1 kit	0.3	A	4092743	L	7.-	Nominal diameter 15/20
R ½ /Ø 15 i x G 1, 96 Set	96 kit	32.9	A	112047493	L	704.-	Nominal diameter 15/20
Rp ¾ x G 1¼, 1 Set	1 kit	0.4	B	4016172	L	17.-	TOP-Z 20/4, Stratos PICO-Z 20
R 1/Ø 28 i x G 1½, 1 Set	1 kit	0.7	A	112047195	L	19.-	Nominal diameter 25
R 1/Ø 28 i x G 1½, 24 Set	24 kit	16.2	A	112047596	L	456.-	Nominal diameter 25
R 1¼/Ø 35 i x G 2, 1 Set	1 kit	1.1	A	112082691	L	30.-	Nominal diameter 30
R 1¼/Ø 35 i x G 2, 24 Set	24 kit	24.5	A	112082794	L	568.-	Nominal diameter 30

1 set of screwed connections consisting of: 2 union nuts (GTW chromated), 2 flat gaskets and 2 union inserts (brass CW 614N), screw or soldering connection

Price group: PG14

Adapter (threaded ring) made of brass							
Type	Packaging	Gross weight, approx.	Art. no.		For Wilo pumps		
		m kg					
					EUR		
Adapter G 1½/G 2	1 kit	0.2	4105914	L	19.-	Pumps with threaded connection DN 25 (1")	

Adapter for Wilo pumps with threaded connection DN 25 on pipe connection DN 30. The overall length of the pump remains the same with the adapter (extension 0 mm).

1 set of threaded rings consisting of two rings incl. gaskets.



Wilо counter flange kit

Two steel weld neck flanges in accordance with DIN-EN 1092-1 type 11 with a neck for welding to pipes as well as gaskets and screws/nuts for the flange connections.

Version PN 6

DN 32 – DN 65

2 steel counter flanges (DIN-EN 1092-1/11 B2)
2 flat gaskets and 4 screws/nuts M12

DN 80 – DN 100

2 steel counter flanges (DIN-EN 1092-1/11 B2)

2 flat gaskets and 8 screws/nuts M16

Version PN 10

DN 32 – DN 65


2 steel counter flanges (DIN-EN 1092-1/11 B2)
2 flat gaskets and 8 screws/nuts M16

DN 80 – DN 100

2 steel counter flanges (DIN-EN 1092-1/11 B2)
2 flat gaskets and 16 screws/nuts M16

Price group: PG14

Counter flange kit						
Type	Pipe connection	Max. inlet pressure	Gross weight, approx.	Art. no.		
		<i>p</i> bar	<i>m</i> kg			EUR
Counter flange kit	DN 32	6.0	3	2105576	L	51.-
Counter flange kit	DN 40	6.0	3.4	2105578	L	52.-
Counter flange kit	DN 50	6.0	3.6	2105580	L	54.-
Counter flange kit	DN 65	6.0	4.4	2105582	L	64.-
Counter flange kit	DN 80	6.0	6.6	2105584	L	90.-
Counter flange kit	DN 100	6.0	8	2105586	L	99.-
Counter flange kit	DN 32	10.0	4.6	2105577	L	70.-
Counter flange kit	DN 40	10.0	5	2105579	L	72.-
Counter flange kit	DN 50	10.0	6.2	2105581	L	80.-
Counter flange kit	DN 65	10.0	7.6	2105583	L	91.-
Counter flange kit	DN 80	10.0	10.2	2105585	L	125.-
Counter flange kit	DN 100	10.0	11.8	2105587	L	140.-



Wilo-R adapters are provided for length compensation in pipe joints. Adapters R5, R12 and R22 made of bronze brass CW 612 N are approved for drinking water circulation


systems. The piping has to be changed if no adapters are available.

Price group: PG14

Adapters for length compensation, Wilo-R

Type	New pump DN	New pump G in	Pipe C	Pipe con- nection	Dimen- sions L1 mm	Dimen- sions L2 mm	Material	Net weight, approx. m kg	Art. no.		EUR
R 6	DN 25	G 1½	R 2	R 2	13.0	15	GG-25	0.4	110678493	L	35.-
R 7	DN 25	G 1½	R 2	R 2	18.0	20	GG-25	0.5	110787094	L	35.-
R 24	DN 25	G 1½	R 1½	R 1½	18.0	20	GG-25	0.3	110880596	L	35.-
R 1	DN 25	G 1½	R 1½	R 1½	28.0	30	GG-25	0.4	110786891	L	35.-
R 12	DN 25	G 1½	R 2¼	R 2¼	3.0	5	MS	0.2	110788294	L	35.-
R 2	DN 25	G 1½	R 1½	R 1½	38.0	40	GG-25	0.5	110626790	L	35.-
R 14	DN 32	G 2	R 2	R 2	38.0	40	GG-25	0.6	110627497	L	37.-
R 8	DN 32	G 2	R 2	R 2	18.0	20	GG-25	0.4	110627199	L	35.-
R 9	DN 32	G 2	R 2	R 2	23.0	25	GG-25	0.5	110627291	L	35.-
R 22	DN 32	G 2	R 2	R 2	38.0	40	MS	0.9	110680092	L	78.-
R 10	DN 32	G 2	R 2	R 2	28.0	30	GG-25	0.5	110627394	L	35.-
R 11	DN 32	G 2	R 2	R 2	68.0	70	GG-25	1.1	110627590	L	40.-
R 5	DN 25	G 1½	R 2	R 2	3.0	5	MS	0.1	110678298	L	35.-

Notice: Scope of delivery includes 1 adapter and 2 gaskets

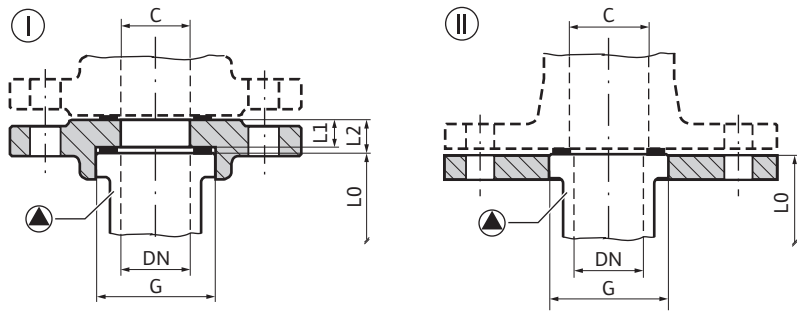

The Wilo-RF flanged rings are – apart from a few exceptions – intended for length compensation with PN 6 flanges (RF 4, RF 5 and RF 6 and also in PN 16). For length compensation with PN 10/16 flanges, a pipe modification

is required.
RF7 (oval flange, hole circle D.80)
RF 8 (square flange, hole circle D.90)

Price group: PG14

Flanged Ring PN6, Wilo-RF

	New pump	New pump	Pipe	Version	Dimen- sions	Dimen- sions	Material	Net weight, approx.	Art. no.		
	DN	G in	C		L1 mm	L2 mm		m kg			EUR
RF 7	DN 25	G 1½	DN 25	II	-	-	GG-20	0.3	110628790	L	37.-
RF 10	DN 25	G 1½	DN 25	I	25.5	30	GG-20	1.1	110851499	L	46.-
RF 1	DN 32	G 2	DN 32	II	-	-	GG-20	1.1	110627990	L	46.-
RF 4	DN 32	G 2	DN 32	I	30.5	35	GG-20	1.8	110680699	L	53.-
RF 3	DN 32	G 2	DN 32	I	15.5	20	GG-20	1.5	110680596	L	46.-
RF 2	DN 32	G 2	DN 32	I	2.5	7	GG-20	1.4	110680298	L	46.-
RF 9	DN 25	G 1½	DN 40	I	15.5	20	GG-20	1.4	110679395	L	53.-
RF 12	DN 32	G 2	DN 40	I	5.5	10	GG-20	1.4	110851797	L	46.-
RF 8	DN 32	G 2	DN 40	I	5.5	10	GG-20	1.1	110680997	L	46.-
RF 0	DN 32	G 2	DN 40	II	-	-	GG-20	1.4	110679796	L	46.-
RF 13	DN 25	G 1½	DN 50	I	25.5	30	GG-20	2.1	110679498	L	46.-
RF 6	DN 32	G 2	DN 50	I	30.5	35	GG-20	2.1	110787290	L	53.-
RF 11	DN 32	G 2	DN 50	II	-	-	GG-20	1.9	110679899	L	53.-
RF 5	DN 32	G 2	DN 50	I	6.0	20	GG-20	1.8	110787197	L	53.-


Note: The scope of delivery includes: 1 flange ring, 2 gaskets and screws

Price group: PG14

Flanged ring PN10/16, Wilo-RF

	New pump	New pump	Pipe	Version	Dimen- sions	Dimen- sions	Material	Net weight, approx.	Art. no.		
	DN	G in	C		L1 mm	L2 mm		m kg			EUR
RF 4	DN 32	G 2	DN 32	I	30.5	35	GG-20	2.6	110680791	L	59.-
RF 5	DN 32	G 2	DN 50	I	15.5	20	GG-20	3.2	110791299	L	72.-
RF 6	DN 32	G 2	DN 50	I	30.5	35	GG-20	3.4	110791391	L	72.-

Note: The scope of delivery includes: 1 flange ring, 2 gaskets and screws

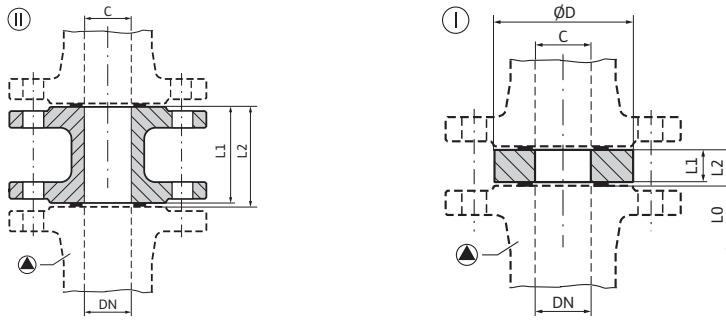

The Wilo-F flange intermediate connecting pieces – with some exceptions – are intended for length compensation with the flanges PN 6 or PN 16. The piping has to be changed if no adapters are available. The washers included

in the scope of delivery must be used for pumps that have combination flanges. F1-MS flange pieces are made of bronze brass CW 612 N and are approved for domestic hot water circulation systems.

Price group: PG14

Intermediate flange for lenght compensation											
Type	New pump	Pipe	Version	Dimensions			Rated pressure	Net weight, approx.	Art. no.		
	DN	C		L1 mm	L2 mm	ØD mm	PN	m kg			EUR
F 0	DN 40	DN 40	I	13.0	15	91	PN6	0.8	110842497	L	36.-
F 1	DN 40	DN 40	I	28.0	30	91	PN6	1.4	110586593	L	41.-
F 1-MS	DN 40	DN 40	I	28.0	30	91	PN6	1.6	2060865	L	82.-
F 2	DN 50	DN 50	I	8.0	10	106	PN6	0.7	110787690	L	36.-
F 3	DN 50	DN 50	I	18.0	20	106	PN6	1.3	110623098	L	40.-
F 4	DN 50	DN 50	I	28.0	30	106	PN6	1.7	110681292	L	49.-
F 5	DN 50	DN 50	I	33.0	35	106	PN6	2	110623293	L	54.-
F 9	DN 65	DN 65	I	8.0	10	126	PN6	0.9	110787896	L	41.-
F 10	DN 65	DN 65	I	18.0	20	126	PN6	1.5	110624092	L	50.-
F 11	DN 65	DN 65	I	28.0	30	126	PN6	2.1	110624298	L	53.-
F 16	DN 80	DN 80	I	8.0	10	141	PN6	1.3	110788099	L	38.-
F 17	DN 80	DN 80	I	18.0	20	141	PN6	2.2	110625097	L	51.-
F 18	DN 80	DN 80	I	38.0	40	141	PN6	3.7	110625292	L	69.-
F 26	DN 40	DN 40	I	48.0	50	91	PN6	2.2	110851098	L	61.-
F 28	DN 65	DN 65	I	38.0	40	126	PN6	3.1	110681498	L	61.-
F 29	DN 65	DN 65	I	43.0	45	126	PN6	3.2	110681693	L	75.-
F 30	DN 80	DN 80	I	23.0	25	141	PN6	2.5	110681899	L	59.-
F 34	DN 100	DN 100	I	33.0	35	161	PN6	3.9	110851293	L	87.-
F 35	DN 100	DN 100	I	53.0	55	161	PN6	5.7	110862592	L	88.-

Note: The scope of delivery includes: 1 flange ring, 2 gaskets and screws

Price group: PG14

Intermediate flange for lenght compensation PN 10/16, Wilo-F											
Type	New pump	Pipe	Version	Dimensions			Rated pressure	Net weight, approx.	Art. no.		
	DN	C		L1 mm	L2 mm	ØD mm	PN	m kg			EUR
F 0	DN 40	DN 40	I	13.0	15	91	PN10/16	1.1	110842590	L	40.-
F 1	DN 40	DN 40	I	28.0	30	91	PN10/16	1.7	110586696	L	50.-
F 1-MS	DN 40	DN 40	I	28.0	30	91	PN10/16	1.9	2060920	L	87.-
F 2	DN 50	DN 50	I	8.0	10	106	PN10/16	1	110791494	L	36.-

Note: The scope of delivery includes: 1 flange ring, 2 gaskets and screws

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Intermediate flange for length compensation PN 10/16, Wilo-F												
Type	New pump		Pipe	Version	Dimensions			Rated pressure	Net weight, approx.	Art. no.		
	DN	C			L1 mm	L2 mm	ØD mm			PN	m kg	
F 3	DN 50	DN 50	I		18.0	20	106	PN10/16	1.6	110623190	L	42.-
F 4	DN 50	DN 50	I		28.0	30	106	PN10/16	2	110681395	L	55.-
F 5	DN 50	DN 50	I		33.0	35	106	PN10/16	2.4	110623396	L	59.-
F 9	DN 65	DN 65	I		8.0	10	126	PN10/16	1.3	110791690	L	50.-
F 10	DN 65	DN 65	I		18.0	20	126	PN10/16	1.9	110624195	L	55.-
F 11	DN 65	DN 65	I		28.0	30	126	PN10/16	2.5	110624390	L	58.-
F 26	DN 40	DN 40	I		48.0	50	91	PN10/16	2.5	110851190	L	72.-
F 28	DN 65	DN 65	I		38.0	40	126	PN10/16	3.4	110681590	L	72.-
F 29	DN 65	DN 65	I		43.0	45	126	PN10/16	4.5	110681796	L	88.-
F 30	DN 80	DN 80	I		23.0	25	141	PN10/16	3.3	110681991	L	70.-
F 34	DN 100	DN 100	I		33.0	35	161	PN10/16	3.8	110851396	L	96.-
F 35	DN 100	DN 100	I		35.0	55	161	PN10/16	5.8	110862695	L	121.-
F40	DN 50	DN 50	II		158.0	160	165	PN10/16	7.4	2101156	L	326.-
F41	DN 65	DN 65	II		133.0	135	185	PN10/16	8.3	2101157	L	382.-
F42	DN 80	DN 80	II		138.0	140	200	PN10/16	11.6	2101158	L	442.-
F43	DN 100	DN 100	II		188.0	190	220	PN10/16	13.3	2101159	L	483.-

Note: The scope of delivery includes: 1 flange ring, 2 gaskets and screws

Adapter for the replacement of flange-end pumps											
Type	Nominal flange diameter	Rated pressure		Adapter length/compensable length dimension		Art. no.					
		p bar		l mm							
Adapter A40-40 set	DN 40	16		40		2117416	L	104.-			
Adapter A40-60 set	DN 40	16		60		2085210	L	155.-			
Adapter A40-100 set	DN 40	16		100		2085211	L	189.-			
Adapter A40-160 set	DN 40	16		160		2119558	L	559.-			
Adapter A65-20 set	DN 65	16		20		2085470	L	152.-			
Adapter A65-45 set	DN 65	16		45		2085471	L	174.-			
Adapter A80-10 set	DN 80	16		10		2085472	L	192.-			
Adapter A80-50 set	DN 80	16		50		2085212	L	206.-			
Adapter A80-60 kit	DN 80	16		60		2085213	L	219.-			

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☞ = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG14

Mounting bracket for installation on a base for inline pumps					
Type	Number of angles	For Wilo pumps	Art. no.		EUR
Mounting bracket F 2-12 SET	2	IP-E40/115-0,55/2, IP-E50/105-0,75/2, IP-E65/115-1,5/2, IP-E80/115-2,2/2, IPL40/80-0,09/4, IPL40/110-0,12/4, IPL40/75-0,12/2, IPL40/90-0,37/2, IPL40/115-0,55/2, IPL50/105-0,12/4, IPL50/95-0,55/2, IPL50/105-0,75/2, IPL65/115-1,5/2, IPL80/115-2,2/2	2085234	L	67.-
Mounting bracket F 3-12 SET	3	Stratos GIGA(-D) 40/4-63/11, Stratos GIGA(-D) 50/4-53/11, Stratos GIGA(-D) 50/4-62/15, IP-E/DP-E 32/... to 80/..., IL-E/DL-E 40/... to 50/..., IPL/DPL 32/... to 80/..., IL/DL 32/... to 50/... (Exceptions: see mounting bracket F 2-12 SET, 2085234 or F 3-14 SET, 2040968)	2040967	L	73.-
Mounting bracket F 3-14 SET	3	Stratos GIGA/GIGA-D 40/... to 100/... (Exception: see mounting bracket F 3-12 SET, 2040967), IL-E/DL-E 65/... to 100/..., IL/DL 65/... to 100/..., IPL65/145-5,5/2, IPL65/155-5,5/2, IPL65/155-7,5/2, IPL65/165-5,5/2, IPL65/175-5,5/2, IPL65/175-7,5/2, IPL80/145-5,5/2, IPL80/155-7,5/2, IPL 100/...	2040968	L	91.-
Mounting bracket F 3-18 SET	3	IL/DL 125/... to 200/..., IL-E/DL-E 125/... to 200/...	2040969	L	128.-

Price group: PG14

Brackets for wall-mounted installation					
Type	Art. no.		Wilo-TOP twin-head pumps		EUR
Mounting bracket F 3-12 SET	2040967	L	40/7, 40/10, 40/15, 50/7, 50/10, 50/15, 65/10, 65/13, 65/15, 80/10, 80/15, 80/20		73.-


1 set = 3 brackets incl. screws

Further brackets, see accessories for glanded pumps


Equipment/function

Supporting blocks for installation on a base of monobloc pumps. Comprised of several supporting blocks (number dependent on the pump type), intended for the screwed connection with the screw-on bases or feet of the pump/motor. The supporting blocks ensure secure fastening of the pump to the foundation. Various sets are available for the pump and motor. Furthermore, they equalise the difference in height between the pump and the motor, if the pump housing is bigger than the axle height of the motor or vice-versa. This prevents turbulent running of the pump and possible premature wear of the mechanical seal.

Price group: PG14

Support pump			
	Art. no.		
			EUR
Supporting block pump housing H20 (50/200)	4213026	K	65.-
Supporting block pump housing H28	4213027	K	138.-
Supporting block pump housing H20 (65/200)	4213030	K	86.-
Supporting block pump housing H45	4213031	K	102.-
Supporting block pump housing H80	4213032	K	231.-

Price group: PG14

Support motor			
	Art. no.		
			EUR
Supporting block motor H68 BG.132	4213041	K	101.-
Supporting block motor H118 BG.132	4213043	K	143.-
Supporting block motor H65 BG.160	4213044	K	124.-
Supporting block motor H90 BG.160	4213045	K	161.-
Supporting block motor H120 BG.160	4213046	K	209.-
Supporting block motor H70 BG.180	4213047	K	124.-
Supporting block motor H100 BG.180	4213048	K	161.-
Supporting block motor H80 BG.200	4213051	K	140.-
Supporting block motor H115 BG.200	4213052	K	224.-
Supporting block motor H90 BG.225	4213053	K	159.-
Supporting block motor H28 BG.132	4213054	K	116.-
Supporting block motor H40 BG.160	4213056	K	137.-
Supporting block motor H50 BG.200	4213057	K	163.-
Supporting block motor H30 BG.250	4213058	K	152.-
Supporting block motor H48 BG.112	4213063	K	130.-
Supporting block motor H20 BG.160	4213065	K	112.-
Supporting block motor H25 BG.200	4213067	K	104.-
Supporting block motor H55 BG.225	4213071	K	212.-
Supporting block motor H65 BG.250	4213073	K	270.-
Supporting block motor H35 BG.280	4213075	K	215.-
Supporting block motor H148 BG.132	4213025	K	☺

Assignment to the pump	Supporting block	Supporting block for the pump housing
CronoBloc-BL-E 32/140-2,2/2	-	-
CronoBloc-BL-E 32/140-2,2/2-R1	-	-
CronoBloc-BL-E 32/150-3/2	-	-
CronoBloc-BL-E 32/150-3/2-R1	-	-
CronoBloc-BL-E 32/160-4/2	-	-
CronoBloc-BL-E 32/160-4/2-R1	-	-
CronoBloc-BL-E 32/170-5,5/2	4213054	-
CronoBloc-BL-E 32/170-5,5/2-R1	4213054	-
CronoBloc-BL-E 32/210-7,5/2	4213054	-
CronoBloc-BL-E 32/210-7,5/2-R1	4213054	-
CronoBloc-BL-E 32/220-11/2	4213065	-
CronoBloc-BL-E 32/220-11/2-R1	4213065	-
CronoBloc-BL-E 40/110-1,5/2	-	-
CronoBloc-BL-E 40/110-1,5/2-R1	-	-
CronoBloc-BL-E 40/120-2,2/2	-	-
CronoBloc-BL-E 40/120-2,2/2-R1	-	-
CronoBloc-BL-E 40/130-3/2	-	-
CronoBloc-BL-E 40/130-3/2-R1	-	-
CronoBloc-BL-E 40/140-4/2	-	-
CronoBloc-BL-E 40/140-4/2-R1	-	-
CronoBloc-BL-E 40/160-5,5/2	4213054	-
CronoBloc-BL-E 40/160-5,5/2-R1	4213054	-
CronoBloc-BL-E 40/170-7,5/2	4213054	-
CronoBloc-BL-E 40/170-7,5/2-R1	4213054	-
CronoBloc-BL-E 40/180-7,5/2	4213054	-
CronoBloc-BL-E 40/180-7,5/2-R1	4213054	-
CronoBloc-BL-E 40/210-11/2	4213065	-
CronoBloc-BL-E 40/210-11/2-R1	4213065	-
CronoBloc-BL-E 40/220-15/2	4213065	-
CronoBloc-BL-E 40/220-15/2-R1	4213065	-
CronoBloc-BL-E 40/230-18,5/2	4213065	-
CronoBloc-BL-E 40/230-18,5/2-R1	4213065	-
CronoBloc-BL-E 40/240-22/2	-	-
CronoBloc-BL-E 40/240-22/2-R1	-	-
CronoBloc-BL-E 50/110-3/2	-	-
CronoBloc-BL-E 50/110-3/2-R1	-	-
CronoBloc-BL-E 50/120-4/2	-	-
CronoBloc-BL-E 50/120-4/2-R1	-	-
CronoBloc-BL-E 50/130-5,5/2	4213054	-
CronoBloc-BL-E 50/130-5,5/2-R1	4213054	-
CronoBloc-BL-E 50/140-7,5/2	4213054	-
CronoBloc-BL-E 50/140-7,5/2-R1	4213054	-
CronoBloc-BL-E 50/150-7,5/2	4213054	-
CronoBloc-BL-E 50/150-7,5/2-R1	4213054	-
CronoBloc-BL-E 50/170-11/2	-	-

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Assignment to the pump	Supporting block	Supporting block for the pump housing
CronoBloc-BL-E 50/170-11/2-R1	-	-
CronoBloc-BL-E 50/200-15/2	4213065	-
CronoBloc-BL-E 50/200-15/2-R1	4213065	-
CronoBloc-BL-E 50/210-18,5/2	4213065	-
CronoBloc-BL-E 50/210-18,5/2-R1	4213065	-
CronoBloc-BL-E 50/220-22/2	-	-
CronoBloc-BL-E 50/220-22/2-R1	-	-
CronoBloc-BL-E 50/270-5,5/4	4213063	-
CronoBloc-BL-E 50/270-5,5/4-R1	4213063	-
CronoBloc-BL-E 65/120-4/2	-	-
CronoBloc-BL-E 65/120-4/2-R1	-	-
CronoBloc-BL-E 65/130-5,5/2	4213054	-
CronoBloc-BL-E 65/130-5,5/2-R1	4213054	-
CronoBloc-BL-E 65/140-7,5/2	4213054	-
CronoBloc-BL-E 65/140-7,5/2-R1	4213054	-
CronoBloc-BL-E 65/160-11/2	4213065	-
CronoBloc-BL-E 65/160-11/2-R1	4213065	-
CronoBloc-BL-E 65/170-15/2	4213065	-
CronoBloc-BL-E 65/170-15/2-R1	4213065	-
CronoBloc-BL-E 65/190-18,5/2	4213065	-
CronoBloc-BL-E 65/190-18,5/2-R1	4213065	-
CronoBloc-BL-E 65/210-22/2	-	-
CronoBloc-BL-E 65/210-22/2-R1	-	-
CronoBloc-BL-E 65/240-5,5/4	4213041	-
CronoBloc-BL-E 65/240-5,5/4-R1	4213041	-
CronoBloc-BL-E 65/265-7,5/4	4213041	-
CronoBloc-BL-E 65/265-7,5/4-R1	4213041	-
CronoBloc-BL-E 80/145-11/2	4213065	-
CronoBloc-BL-E 80/145-11/2-R1	4213065	-
CronoBloc-BL-E 80/150-15/2	4213065	-
CronoBloc-BL-E 80/150-15/2-R1	4213065	-
CronoBloc-BL-E 80/160-18,5/2	4213065	-
CronoBloc-BL-E 80/160-18,5/2-R1	4213065	-
CronoBloc-BL-E 80/165-22/2	-	-
CronoBloc-BL-E 80/165-22/2-R1	-	-
CronoBloc-BL-E 80/220-5,5/4	4213041	-
CronoBloc-BL-E 80/220-5,5/4-R1	4213041	-
CronoBloc-BL-E 80/250-7,5/4	4213041	-
CronoBloc-BL-E 80/250-7,5/4-R1	4213041	-
CronoBloc-BL-E 80/270-11/4	4213056	-
CronoBloc-BL-E 80/270-11/4-R1	4213056	-
CronoBloc-BL-E 100/200-5,5/4	4213041	-
CronoBloc-BL-E 100/200-5,5/4-R1	4213041	-
CronoBloc-BL-E 100/220-7,5/4	4213041	-
CronoBloc-BL-E 100/220-7,5/4-R1	4213041	-

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Assignment to the pump	Supporting block	Supporting block for the pump housing
CronoBloc-BL-E 100/250-11/4	4213044	-
CronoBloc-BL-E 100/250-11/4-R1	4213044	-
CronoBloc-BL-E 100/270-15/4	4213044	-
CronoBloc-BL-E 100/270-15/4-R1	4213044	-
CronoBloc-BL-E 100/305-18,5/4	4213047	-
CronoBloc-BL-E 100/305-18,5/4-R1	4213047	-
CronoBloc-BL-E 100/315-22/4	4213047	-
CronoBloc-BL-E 100/315-22/4-R1	4213047	-
CronoBloc-BL-E 125/185-5,5/4	4213043	-
CronoBloc-BL-E 125/185-5,5/4-R1	4213043	-
CronoBloc-BL-E 125/210-7,5/4	4213043	-
CronoBloc-BL-E 125/210-7,5/4-R1	4213043	-
CronoBloc-BL-E 125/225-11/4	4213045	-
CronoBloc-BL-E 125/225-11/4-R1	4213045	-
CronoBloc-BL-E 125/245-15/4	4213045	-
CronoBloc-BL-E 125/245-15/4-R1	4213045	-
CronoBloc-BL-E 125/265-18,5/4	4213048	-
CronoBloc-BL-E 125/265-18,5/4-R1	4213048	-
CronoBloc-BL-E 125/275-22/4	4213048	-
CronoBloc-BL-E 125/275-22/4-R1	4213048	-
CronoBloc-BL 32/85-1,1/2	-	-
CronoBloc-BL 32/95-1,5/2	-	-
CronoBloc-BL 32/105-0,25/4	-	-
CronoBloc-BL 32/105-2,2/2	-	-
CronoBloc-BL 32/115-0,37/4	-	-
CronoBloc-BL 32/115-3/2	-	4213026
CronoBloc-BL 32/125-0,55/4	-	-
CronoBloc-BL 32/125-4/2	-	4213026
CronoBloc-BL 32/140-2,2/2	-	-
CronoBloc-BL 32/140-2,2/2	-	-
CronoBloc-BL 32/150-0,37/4	-	-
CronoBloc-BL 32/150-3/2	-	-
CronoBloc-BL 32/160-0,55/4	-	-
CronoBloc-BL 32/160-4/2	-	-
CronoBloc-BL 32/160-4/2	-	-
CronoBloc-BL 32/170-0,75/4	-	-
CronoBloc-BL 32/170-0,75/4	-	-
CronoBloc-BL 32/170-5,5/2	-	-
CronoBloc-BL 32/170-5,5/2	4213054	-
CronoBloc-BL 32/210-1,1/4	-	-
CronoBloc-BL 32/210-1,1/4	-	-
CronoBloc-BL 32/210-7,5/2	4213054	-
CronoBloc-BL 32/220-1,5/4	-	-
CronoBloc-BL 32/220-1,5/4	-	-
CronoBloc-BL 32/220-11/2	4213065	-

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Assignment to the pump	Supporting block	Supporting block for the pump housing
CronoBloc-BL 32/220.1-0,55/4	-	-
CronoBloc-BL 32/230.1-0,75/4	-	-
CronoBloc-BL 32/230.1-5,5/2	4213063	-
CronoBloc-BL 32/240.1-1,1/4	-	-
CronoBloc-BL 32/240.1-7,5/2	4213063	-
CronoBloc-BL 32/250.1-1,5/4	-	-
CronoBloc-BL 32/250.1-11/2	4213065	-
CronoBloc-BL 40/95-0,25/4	-	-
CronoBloc-BL 40/105-0,37/4	-	-
CronoBloc-BL 40/110-1,5/2	-	-
CronoBloc-BL 40/110-1,5/2	-	-
CronoBloc-BL 40/115-0,55/4	-	-
CronoBloc-BL 40/120-2,2/2	-	-
CronoBloc-BL 40/120-2,2/2	-	-
CronoBloc-BL 40/125-0,75/4	-	-
CronoBloc-BL 40/130-3/2	-	-
CronoBloc-BL 40/130-3/2	-	-
CronoBloc-BL 40/140-3/2	-	-
CronoBloc-BL 40/140-4/2	-	-
CronoBloc-BL 40/140-4/2	-	-
CronoBloc-BL 40/150-0,55/4	-	-
CronoBloc-BL 40/160-0,75/4	-	-
CronoBloc-BL 40/160-0,75/4	-	-
CronoBloc-BL 40/160-5,5/2	-	-
CronoBloc-BL 40/160-5,5/2	4213054	-
CronoBloc-BL 40/170-1,1/4	-	-
CronoBloc-BL 40/170-1,1/4	-	-
CronoBloc-BL 40/170-5,5/2	4213054	-
CronoBloc-BL 40/170-7,5/2	4213054	-
CronoBloc-BL 40/180-7,5/2	4213054	-
CronoBloc-BL 40/210-1,5/4	-	-
CronoBloc-BL 40/210-1,5/4	-	-
CronoBloc-BL 40/210-11/2	4213065	-
CronoBloc-BL 40/220-2,2/4	-	-
CronoBloc-BL 40/220-2,2/4	-	-
CronoBloc-BL 40/220-11/2	4213065	-
CronoBloc-BL 40/220-15/2	4213065	-
CronoBloc-BL 40/225-2,2/4	-	-
CronoBloc-BL 40/225-2,2/4	-	-
CronoBloc-BL 40/230-15/2	4213065	-
CronoBloc-BL 40/230-18,5/2	4213065	-
CronoBloc-BL 40/240-2,2/4	-	-
CronoBloc-BL 40/240-2,2/4	-	-
CronoBloc-BL 40/240-3/4	-	-
CronoBloc-BL 40/240-3/4	-	-

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Assignment to the pump	Supporting block	Supporting block for the pump housing
CronoBloc-BL 40/240-18,5/2	4213065	-
CronoBloc-BL 40/240-22/2	-	-
CronoBloc-BL 40/245-22/2	-	-
CronoBloc-BL 40/245-30/2	4213067	-
CronoBloc-BL 40/260-22/2	-	-
CronoBloc-BL 40/260-30/2	4213067	-
CronoBloc-BL 40/265-3/4	-	-
CronoBloc-BL 40/265-3/4	-	-
CronoBloc-BL 40/265-4/4	-	-
CronoBloc-BL 40/265-4/4	-	-
CronoBloc-BL 50/95-0,37/4	-	-
CronoBloc-BL 50/105-0,55/4	-	-
CronoBloc-BL 50/110-3/2	-	-
CronoBloc-BL 50/110-3/2	-	-
CronoBloc-BL 50/115-0,75/4	-	-
CronoBloc-BL 50/120-3/2	-	-
CronoBloc-BL 50/120-3/2	-	-
CronoBloc-BL 50/120-4/2	-	-
CronoBloc-BL 50/120-4/2	-	-
CronoBloc-BL 50/125-1,1/4	-	-
CronoBloc-BL 50/130-5,5/2	-	-
CronoBloc-BL 50/130-5,5/2	4213054	-
CronoBloc-BL 50/140-5,5/2	-	-
CronoBloc-BL 50/140-5,5/2	4213054	-
CronoBloc-BL 50/140-7,5/2	4213054	-
CronoBloc-BL 50/150-5,5/2	-	-
CronoBloc-BL 50/150-5,5/2	4213054	-
CronoBloc-BL 50/150-7,5/2	4213054	-
CronoBloc-BL 50/160-1,1/4	-	-
CronoBloc-BL 50/160-1,1/4	-	-
CronoBloc-BL 50/170-1,1/4	-	-
CronoBloc-BL 50/170-1,5/4	-	-
CronoBloc-BL 50/170-1,5/4	-	-
CronoBloc-BL 50/170-11/2	-	-
CronoBloc-BL 50/200-2,2/4	-	-
CronoBloc-BL 50/200-2,2/4	-	-
CronoBloc-BL 50/200-11/2	4213065	-
CronoBloc-BL 50/200-15/2	4213065	-
CronoBloc-BL 50/210-15/2	4213065	-
CronoBloc-BL 50/210-18,5/2	4213065	-
CronoBloc-BL 50/220-2,2/4	-	-
CronoBloc-BL 50/220-2,2/4	-	-
CronoBloc-BL 50/220-3/4	-	-
CronoBloc-BL 50/220-3/4	-	-
CronoBloc-BL 50/220-18,5/2	4213065	-

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Assignment to the pump	Supporting block	Supporting block for the pump housing
CronoBloc-BL 50/220-22/2	-	-
CronoBloc-BL 50/240-30/2	-	-
CronoBloc-BL 50/250-3/4	-	-
CronoBloc-BL 50/250-3/4	-	-
CronoBloc-BL 50/250-4/4	-	-
CronoBloc-BL 50/250-4/4	-	-
CronoBloc-BL 50/260-30/2	-	-
CronoBloc-BL 50/260-37/2	-	-
CronoBloc-BL 50/270-5,5/4	-	-
CronoBloc-BL 50/270-5,5/4	4213063	-
CronoBloc-BL 65/105-0,55/4	-	-
CronoBloc-BL 65/115-0,75/4	-	-
CronoBloc-BL 65/120-4/2	-	-
CronoBloc-BL 65/120-4/2	-	-
CronoBloc-BL 65/125-1,1/4	-	-
CronoBloc-BL 65/130-5,5/2	-	-
CronoBloc-BL 65/130-5,5/2	4213054	-
CronoBloc-BL 65/140-7,5/2	4213054	-
CronoBloc-BL 65/150-1,1/4	-	-
CronoBloc-BL 65/150-1,1/4	-	-
CronoBloc-BL 65/160-1,5/4	-	-
CronoBloc-BL 65/160-1,5/4	-	-
CronoBloc-BL 65/160-11/2	4213065	-
CronoBloc-BL 65/170-2,2/4	-	-
CronoBloc-BL 65/170-2,2/4	-	-
CronoBloc-BL 65/170-11/2	4213065	-
CronoBloc-BL 65/170-15/2	4213065	-
CronoBloc-BL 65/190-15/2	4213065	-
CronoBloc-BL 65/190-18,5/2	4213065	-
CronoBloc-BL 65/210-3/4	-	-
CronoBloc-BL 65/210-3/4	-	-
CronoBloc-BL 65/210-18,5/2	4213065	-
CronoBloc-BL 65/210-22/2	-	-
CronoBloc-BL 65/220-4/4	-	-
CronoBloc-BL 65/220-4/4	-	-
CronoBloc-BL 65/220-30/2	4213067	-
CronoBloc-BL 65/240-5,5/4	-	-
CronoBloc-BL 65/240-5,5/4	4213041	-
CronoBloc-BL 65/265-5,5/4	-	-
CronoBloc-BL 65/265-5,5/4	4213041	-
CronoBloc-BL 65/265-7,5/4	4213041	-
CronoBloc-BL 80/145-11/2	4213065	-
CronoBloc-BL 80/150-1,5/4	-	-
CronoBloc-BL 80/150-1,5/4	-	-
CronoBloc-BL 80/150-15/2	4213065	-

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Assignment to the pump	Supporting block	Supporting block for the pump housing
CronoBloc-BL 80/160-2,2/4	-	-
CronoBloc-BL 80/160-2,2/4	-	-
CronoBloc-BL 80/160-15/2	4213065	-
CronoBloc-BL 80/160-18,5/2	4213065	-
CronoBloc-BL 80/165-22/2	-	-
CronoBloc-BL 80/170-3/4	-	-
CronoBloc-BL 80/170-3/4	-	-
CronoBloc-BL 80/170-30/2	4213067	-
CronoBloc-BL 80/200-3/4	-	-
CronoBloc-BL 80/200-3/4	-	-
CronoBloc-BL 80/200-4/4	-	-
CronoBloc-BL 80/200-4/4	-	-
CronoBloc-BL 80/200-30/2	4213067	-
CronoBloc-BL 80/210-30/2	4213067	-
CronoBloc-BL 80/210-37/2	4213067	-
CronoBloc-BL 80/220-5,5/4	-	-
CronoBloc-BL 80/220-5,5/4	4213063	-
CronoBloc-BL 80/250-5,5/4	-	-
CronoBloc-BL 80/250-5,5/4	4213041	-
CronoBloc-BL 80/250-7,5/4	4213041	-
CronoBloc-BL 80/270-11/4	4213056	-
CronoBloc-BL 100/145-1,5/4	-	-
CronoBloc-BL 100/145-15/2	4213056	-
CronoBloc-BL 100/150-2,2/4	-	-
CronoBloc-BL 100/150-2,2/4	-	-
CronoBloc-BL 100/150-18,5/2	4213056	-
CronoBloc-BL 100/160-3/4	-	-
CronoBloc-BL 100/160-3/4	-	-
CronoBloc-BL 100/160-22/2	4213065	-
CronoBloc-BL 100/160-30/2	4213058	4213034
CronoBloc-BL 100/165-30/2	4213051	-
CronoBloc-BL 100/170-4/4	-	-
CronoBloc-BL 100/170-4/4	-	-
CronoBloc-BL 100/170-37/2	4213051	-
CronoBloc-BL 100/175-37/2	4213058	4213034
CronoBloc-BL 100/180-4/4	-	-
CronoBloc-BL 100/180-4/4	4213041	-
CronoBloc-BL 100/180-45/2	4213058	4213033
CronoBloc-BL 100/190-55/2	4213058	4213035
CronoBloc-BL 100/200-5,5/4	4213041	-
CronoBloc-BL 100/200-75/2	-	4213035
CronoBloc-BL 100/210-55/2	4213058	4213033
CronoBloc-BL 100/220-5,5/4	-	-
CronoBloc-BL 100/220-5,5/4	4213041	-
CronoBloc-BL 100/220-7,5/4	4213041	-

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Assignment to the pump	Supporting block	Supporting block for the pump housing
CronoBloc-BL 100/220-75/2	-	4213033
CronoBloc-BL 100/230-90/2	-	4213033
CronoBloc-BL 100/240-110/2	4213077	4213036
CronoBloc-BL 100/250-11/4	4213044	-
CronoBloc-BL 100/250-132/2	4213077	4213036
CronoBloc-BL 100/270-15/4	4213044	-
CronoBloc-BL 100/305-18,5/4	4213047	-
CronoBloc-BL 100/315-18,5/4	4213047	-
CronoBloc-BL 100/315-22/4	4213047	-
CronoBloc-BL 100/330-22/4	4213047	-
CronoBloc-BL 100/330-30/4	4213057	-
CronoBloc-BL 100/345-22/4	4213047	-
CronoBloc-BL 100/345-30/4	4213057	-
CronoBloc-BL 125/170-45/2	4213067	-
CronoBloc-BL 125/180-55/2	4213058	4213034
CronoBloc-BL 125/185-5,5/4	-	-
CronoBloc-BL 125/185-5,5/4	4213043	-
CronoBloc-BL 125/190-75/2	-	4213034
CronoBloc-BL 125/200-90/2	-	4213034
CronoBloc-BL 125/210-7,5/4	4213043	-
CronoBloc-BL 125/210-75/2	-	4213034
CronoBloc-BL 125/220-90/2	-	4213034
CronoBloc-BL 125/225-11/4	4213045	-
CronoBloc-BL 125/230-110/2	4213059 + 4213077	4213036
CronoBloc-BL 125/240-132/2	4213059 + 4213077	4213036
CronoBloc-BL 125/245-15/4	4213045	-
CronoBloc-BL 125/250-160/2	4213059 + 4213077	4213036
CronoBloc-BL 125/265-15/4	4213045	-
CronoBloc-BL 125/265-18,5/4	4213047	-
CronoBloc-BL 125/272-18,5/4	4213048	-
CronoBloc-BL 125/275-18,5/4	4213047	-
CronoBloc-BL 125/275-22/4	4213048	-
CronoBloc-BL 125/285-22/4	4213048	-
CronoBloc-BL 125/295-30/4	4213051	-
CronoBloc-BL 125/305-37/4	4213071	-
CronoBloc-BL 125/315-45/4	4213071	-
CronoBloc-BL 125/360-37/4	4213053	-
CronoBloc-BL 125/370-45/4	4213053	-
CronoBloc-BL 125/380-55/4	4213073	-
CronoBloc-BL 125/390-75/4	4213075	-
CronoBloc-BL 125/400-90/4	4213075	-
CronoBloc-BL 150/180-7,5/4	4213025	-
CronoBloc-BL 150/180-75/2	-	-
CronoBloc-BL 150/190-11/4	4213046	-
CronoBloc-BL 150/190-90/2	-	-

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Assignment to the pump	Supporting block	Supporting block for the pump housing
CronoBloc-BL 150/200-15/4	4213046	-
CronoBloc-BL 150/200-110/2	4213077	4213040
CronoBloc-BL 150/210-11/4	4213046	-
CronoBloc-BL 150/210-90/2	-	-
CronoBloc-BL 150/220-15/4	4213046	-
CronoBloc-BL 150/220-110/2	4213077	4213040
CronoBloc-BL 150/230-18,5/4	4213048	-
CronoBloc-BL 150/230-132/2	4213077	4213040
CronoBloc-BL 150/240-160/2	4213077	4213040
CronoBloc-BL 150/250-30/4	4213051	-
CronoBloc-BL 150/250-200/2	4213077	4213040
CronoBloc-BL 150/275-22/4	4213048	-
CronoBloc-BL 150/285-30/4	4213051	-
CronoBloc-BL 150/295-37/4	4213071	-
CronoBloc-BL 150/305-45/4	4213071	-
CronoBloc-BL 150/315-55/4	4213058	-
Stratos GIGA B 32/1-13/0,8	-	-
Stratos GIGA B 32/1-13/0,8-R1	-	-
Stratos GIGA B 32/1-19/1,2	-	-
Stratos GIGA B 32/1-19/1,2-R1	-	-
Stratos GIGA B 32/1-25/1,6	-	-
Stratos GIGA B 32/1-25/1,6-R1	-	-
Stratos GIGA B 32/1-25/1,9	-	-
Stratos GIGA B 32/1-25/1,9-R1	-	-
Stratos GIGA B 32/1-32/2,3	-	-
Stratos GIGA B 32/1-32/2,3-R1	-	-
Stratos GIGA B 32/1-32/2,6	-	-
Stratos GIGA B 32/1-32/2,6-R1	-	-
Stratos GIGA B 32/1-35/3,0	-	-
Stratos GIGA B 32/1-35/3,0-R1	-	-
Stratos GIGA B 32/1-38/3,0	-	-
Stratos GIGA B 32/1-38/3,0-R1	-	-
Stratos GIGA B 32/1-41/3,8	-	-
Stratos GIGA B 32/1-41/3,8-R1	-	-
Stratos GIGA B 32/1-45/3,8	-	-
Stratos GIGA B 32/1-45/3,8-R1	-	-
Stratos GIGA B 32/1-48/4,5	-	-
Stratos GIGA B 32/1-48/4,5-R1	-	-
Stratos GIGA B 32/1-51/4,5	-	-
Stratos GIGA B 32/1-51/4,5-R1	-	-
Stratos GIGA B 32/5-74/11	4213065	-
Stratos GIGA B 32/5-74/11-R1	-	-
Stratos GIGA B 40/1-33/3,0	-	-
Stratos GIGA B 40/1-33/3,0-R1	-	-
Stratos GIGA B 40/1-38/3,8	-	-

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Assignment to the pump	Supporting block	Supporting block for the pump housing
Stratos GIGA B 40/1-38/3,8-R1	-	-
Stratos GIGA B 40/1-44/4,5	-	-
Stratos GIGA B 40/1-44/4,5-R1	-	-
Stratos GIGA B 40/4-51/11	4213065	-
Stratos GIGA B 40/4-51/11-R1	-	-
Stratos GIGA B 40/4-58/15	4213065	-
Stratos GIGA B 40/4-58/15-R1	-	-
Stratos GIGA B 40/5-70/18,5	4213067	-
Stratos GIGA B 40/5-70/18,5-R1	-	-
Stratos GIGA B 40/6-80/22	4213067	-
Stratos GIGA B 40/6-80/22-R1	-	-
Stratos GIGA B 50/1-8/0,6	-	-
Stratos GIGA B 50/1-8/0,6-R1	-	-
Stratos GIGA B 50/1-12/1,2	-	-
Stratos GIGA B 50/1-12/1,2-R1	-	-
Stratos GIGA B 50/1-17/1,9	-	-
Stratos GIGA B 50/1-17/1,9-R1	-	-
Stratos GIGA B 50/1-21/2,3	-	-
Stratos GIGA B 50/1-21/2,3-R1	-	-
Stratos GIGA B 50/1-27/3,0	-	-
Stratos GIGA B 50/1-27/3,0-R1	-	-
Stratos GIGA B 50/1-32/3,8	-	-
Stratos GIGA B 50/1-32/3,8-R1	-	-
Stratos GIGA B 50/1-37/5,0	-	-
Stratos GIGA B 50/1-37/5,0-R1	-	-
Stratos GIGA B 50/3-42/11	4213056	-
Stratos GIGA B 50/3-42/11-R1	-	-
Stratos GIGA B 50/4-49/15	4213067	-
Stratos GIGA B 50/4-49/15-R1	-	-
Stratos GIGA B 50/4-55/18,5	4213067	-
Stratos GIGA B 50/4-55/18,5-R1	-	-
Stratos GIGA B 50/4-60/22	4213067	-
Stratos GIGA B 50/4-60/22-R1	-	-
Stratos GIGA B 65/1-18/1,9	-	-
Stratos GIGA B 65/1-18/1,9-R1	-	-
Stratos GIGA B 65/1-22/3,0	-	-
Stratos GIGA B 65/1-22/3,0-R1	-	-
Stratos GIGA B 65/2-30/11	4213056	-
Stratos GIGA B 65/2-30/11-R1	-	-
Stratos GIGA B 65/3-38/15	4213056	-
Stratos GIGA B 65/3-38/15-R1	-	-
Stratos GIGA B 65/4-50/18,5	4213067	-
Stratos GIGA B 65/4-50/18,5-R1	-	-
Stratos GIGA B 65/4-56/22	4213067	-
Stratos GIGA B 65/4-56/22-R1	-	-

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Assignment to the pump	Supporting block	Supporting block for the pump housing
Stratos GIGA B 80/1-13/1,9	-	-
Stratos GIGA B 80/1-13/1,9-R1	-	-
Stratos GIGA B 80/1-18/3,2	-	-
Stratos GIGA B 80/1-18/3,2-R1	-	-
Stratos GIGA B 80/1-27/4,5	-	-
Stratos GIGA B 80/1-27/4,5-R1	-	-
Stratos GIGA B 80/1-32/5,6	-	-
Stratos GIGA B 80/1-32/5,6-R1	-	-
Stratos GIGA B 80/2-23/11	4213056	-
Stratos GIGA B 80/2-23/11-R1	-	-
Stratos GIGA B 80/2-25/11	4213056	-
Stratos GIGA B 80/2-25/11-R1	-	-
Stratos GIGA B 80/2-27/15	4213056	-
Stratos GIGA B 80/2-27/15-R1	-	-
Stratos GIGA B 80/2-29/18,5	4213056	-
Stratos GIGA B 80/2-29/18,5-R1	-	-
Stratos GIGA B 80/3-32/22	4213056	-
Stratos GIGA B 80/3-32/22-R1	-	-
Stratos GIGA B 100/2-20/11	4213047	-
Stratos GIGA B 100/2-20/11-R1	-	-
Stratos GIGA B 100/2-24/15	4213047	-
Stratos GIGA B 100/2-24/15-R1	-	-
Stratos GIGA B 125/1-15/11	4213047	-
Stratos GIGA B 125/1-15/11-R1	-	-
Stratos GIGA B 125/2-18/15	4213048	-
Stratos GIGA B 125/2-18/15-R1	-	-



Accessories , Wilo thermal insulation shell



Accessories for Wilo-Yonos MAXO series

Application

For on-site thermal insulation of the pump housing in heating applications.

Your advantages

- Reduces the heat losses of the pump by up to 85 % (depending on the electrical power P1)
- Reduces the overall energy consumption of the heating system
- Saves energy costs
- Resistant to moisture, salts, many acids, most greases and solvents
- Ensures even temperature distribution at the pump
- Protects the pump from outside moisture
- Neutral to ground water, propellant-free, formaldehyde-free
- 100 % recyclable

Price group: PG14

Thermal insulation shell						
Type	Gross weight, approx.	For Wilo pumps	Packaging	Art. no.		
	m kg					EUR
Thermal insulation shell (Size 14)	0.2	Stratos-ECO STG - 180 mm Star-Z 20/1 - 140 mm and Star-Z 25 - 180 mm long Star-STG 25(30) - 180 mm long (not Star-STG 25(30)/8) Size 14 thermal insulation shell	1 piece	4046444	L	18.-
Thermal insulation shell	0.2	Heating circulators Yonos PICO and Stratos PICO as of year of manufacture 09/2015 Size 14 thermal insulation shell	1 piece	4206066	L	18.-

Price group: PG14


Thermal insulation shell						
Type	Gross weight, approx.	For Wilo pumps	Packaging	Art. no.		
	m kg					EUR
Thermal insulation shell Yonos MAXO 25(30)/0.5-7	0.14	Yonos MAXO 25(30)/0.5-7; Yonos MAXO 25(30)/0.5-10	1 piece	2123369	L	21.-
Thermal insulation shell Yonos MAXO 25(30)/0.5 - 12	0.15	Yonos MAXO 25(30)/0.5-12	1 piece	2123370	L	21.-
Thermal insulation shell Yonos MAXO 40/0.5-4	0.15	Yonos MAXO 40/0.5-4	1 piece	2123371	L	30.-

= ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG14


Thermal insulation shell						
Type	Gross weight, approx.	For Wilo pumps	Packaging	Art. no.		
	<i>m</i> kg					EUR
Thermal insulation shell Yonos MAXO 40/0.5-8	0.15	Yonos MAXO 40/0,5-8	1 piece	2123372	L	30.-
Thermal insulation shell Yonos MAXO 40/0.5-12	0.19	Yonos MAXO 40/0,5-12	1 piece	2123373	L	30.-
Thermal insulation shell Yonos MAXO 40/0.5-16	0.25	Yonos MAXO 40/0,5-16	1 piece	2123374	L	30.-
Thermal insulation shell Yonos MAXO 50/0.5-8	0.15	Yonos MAXO 50/0,5-8	1 piece	2123375	L	35.-
Thermal insulation shell Yonos MAXO 50/0.5-9(12)	0.20	Yonos MAXO 50/0,5-9; Yonos MAXO 50/0,5-12	1 piece	2123376	L	35.-
Thermal insulation shell Yonos MAXO 50/0.5-16	0.36	Yonos MAXO 50/0,5-16	1 piece	2123377	L	35.-
Thermal insulation shell Yonos MAXO 65/0.5-9	0.20	Yonos MAXO 65/0,5-9	1 piece	2123378	L	41.-
Thermal insulation shell Yonos MAXO 65/0.5-12	0.36	Yonos MAXO 65/0,5-12	1 piece	2123379	L	41.-
Thermal insulation shell Yonos MAXO 65/0.5-16	0.35	Yonos MAXO 65/0,5-16	1 piece	2123380	L	41.-
Thermal insulation shell Yonos MAXO 80/0.5-6(12)	0.43	Yonos MAXO 80/0,5-6; Yonos MAXO 80/0,5-12	1 piece	2123381	L	49.-
Thermal insulation shell Yonos MAXO 100/0.5-12	0.42	Yonos MAXO 100/0,5-12	1 piece	2152297	L	54.-

Price group: PG15

Thermal insulation shell						
Type	Gross weight, approx.	For Wilo pumps	Packaging	Art. no.		
	<i>m</i> kg					EUR
Therm.insulation shell MG.33(30/1-12)KIT	0.10	Yonos MAXO-Z 30/0.5-12	1 piece	2037924	L	28.-
Therm.insulation shell MG.43(40/1-12)KIT	0.18	Yonos MAXO-Z 40/0.5-12	1 piece	2051210	L	30.-
Thermal insulation shell MG.23 KIT	0.09	Yonos MAXO-Z 25(30)/0.5-7; Yonos MAXO-Z 25/0.5-10	1 piece	2051172	L	19.-
Thermal insulation shell MG.33 KIT	0.10	Yonos MAXO-Z 40/0.5-8	1 piece	2037925	L	28.-
Thermal insulation shell MG.43 KIT	0.15	Yonos MAXO-Z 50/0.5-9	1 piece	2042946	L	33.-
Thermal insulation shell MG.53 KIT	0.32	Yonos MAXO-Z 65/0.5-12	1 piece	2058023	C	36.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.



Wilo-ClimaForm

Application

Diffusion-proof cold water insulation shell for on-site insulation of pump housings in air-conditioning systems and cooling systems.

Suitable for single pumps of the series:

- Wilo-Stratos MAXO
- Wilo-Stratos MAXO-Z


For avoiding condensation formation on the surface of the pump housing and consequential damage caused by drips and corrosion on the pump housing and on the rest of the system.

Your advantages

→ Industrially prefabricated standard solution for the fast insulation of pump housings and secure connection with on-site diffusion-proof pipe insulation manufactured by Armacell GmbH.

→ Dimensionally precise adjustment to the housing geometry reduces the hollow space between insulation and the pump housing and thus the inclusion of air and moisture.

Price group: PG14

Thermal insulation shell				
Type	Gross weight, approx.	Art. no.		
	<i>m</i> kg			EUR
ClimaForm Stratos MAXO 25/0.5-4/6-12	0.5	2201729	L	160.-
ClimaForm Stratos MAXO 30/0.5-4/6-14	0.5	2201730	L	160.-
ClimaForm Stratos MAXO 32/0.5-8/10/12	1	2201731	L	169.-
ClimaForm Stratos MAXO 32/0.5-16	1	2201732	L	169.-
ClimaForm Stratos MAXO 40/0.5-4/8	1	2201733	L	180.-
ClimaForm Stratos MAXO 40/0.5-12/16	1.1	2201734	L	180.-
ClimaForm Stratos MAXO 50/0.5-6	1.1	2201735	L	193.-
ClimaForm Stratos MAXO 50/0.5-8	1.1	2201736	L	193.-
ClimaForm Stratos MAXO 50/0.5-9/12	1.7	2201737	L	193.-
ClimaForm Stratos MAXO 50/0.5-14/16	1.9	2201738	L	207.-
ClimaForm Stratos MAXO 65/0.5-12/16	2	2201740	L	240.-
ClimaForm Stratos MAXO 65/0.5-6/9	1.8	2201739	L	223.-
ClimaForm Stratos MAXO 80/0.5-6/12/16	2.2	2201741	L	259.-
ClimaForm Stratos MAXO 100/0.5-6/12	2.4	2201742	L	279.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.



Accessories	Page
Commissioning/maintenance	683

Wilo-CC-HVAC system

Construction

Comfort control system for all conventional pumps in glandless and glanded design with fixed speeds and three-phase motors.

Application

For stageless power adjustment to the variable operating states of single, double or multi-pump systems (up to 6 pumps). Controlling depends on the differential pressure Δp , feed/return temperature ($\pm T$) or differential temperature (ΔT), including the free adjustment of the duty point by means of advance correction of the full-load pump output.

Notice

- Wall fixation (WM) up to P2 = 4 kW
- Floor model (BM) up to P2 = 5.5 kW
- Mains connection 3~400 V, 50 Hz


Your advantages

- **Easy operation:** User-oriented menu navigation with multi-language plain text display and/or symbol navigation.
- **Easy-to-use system:** Storage and output of operating data, display and storage of error messages.
- **Reliable system:** Conductivity test of the transmitter paths, motor protection, status indicator for drives.
- **Advanced settings:** 3 adjustable setpoints, PID controller.
- **Optional modules for connection to bus systems:** Profibus, CANBus, ModBus RTU, LON, BACnet and others.

Price group: PG14

Ordering information						
CC-HVAC system	Max. number of controllable pumps	Max. nominal current	Art. no.			
		I A				
				🚚	EUR	
1x1.1 FC WM	1	2.7	2527800	K		6,596.-
1x1.5 FC WM	1	3.9	2527806	K		6,714.-
1x2.2 FC WM	1	5.3	2527812	K		6,818.-
1x3.0 FC WM	1	6.9	2527818	K		7,137.-
1x4.0 FC WM	1	8.9	2527824	K		7,454.-
1x5.5 FC BM	1	13	2527830	K		8,974.-
1x7.5 FC BM	1	16	2527836	K		9,201.-
1x11.0 FC BM	1	24	2527842	K		11,522.-
1x15.0 FC BM	1	32	2527848	K		12,572.-

🚚 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, 📞 = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Ordering information					
CC-HVAC system	Max. number of controllable pumps	Max. nominal current	Art. no.		
		/			
		A			
					EUR
1x18.5 FC BM	1	37.5	2527854	K	14,551.-
1x22.0 FC BM	1	43.1	2527860	K	14,551.-
1x30.0 FC BM	1	58	2527866	K	16,834.-
1x37.0 FC BM	1	64	2527872	K	18,878.-
1x45.0 FC BM	1	85	2527878	K	21,792.-
2x1.1 FC WM	2	2.7	2527801	K	7,072.-
2x1.5 FC WM	2	3.9	2527807	K	7,223.-
2x2.2 FC WM	2	5.3	2527813	K	7,325.-
2x3.0 FC WM	2	6.9	2527819	K	7,656.-
2x4.0 FC WM	2	8.9	2527825	K	7,994.-
2x5.5 FC BM	2	13	2527831	K	9,620.-
2x7.5 FC BM	2	16	2527837	K	9,846.-
2x11.0 FC BM	2	24	2527843	K	12,482.-
2x15.0 FC BM	2	32	2527849	K	13,740.-
2x18.5 FC BM	2	37.5	2527855	K	15,605.-
2x22.0 FC BM	2	43.1	2527861	K	15,605.-
2x30.0 FC BM	2	58	2527867	K	18,291.-
2x37.0 FC BM	2	64	2527873	K	21,031.-
2x45.0 FC BM	2	85	2527879	K	24,198.-
3x1.1 FC WM	3	2.7	2527802	K	7,463.-
3x1.5 FC WM	3	3.9	2527808	K	7,587.-
3x2.2 FC WM	3	5.3	2527814	K	7,689.-
3x3.0 FC WM	3	6.9	2527820	K	8,032.-
3x4.0 FC WM	3	8.9	2527826	K	8,409.-
3x5.5 FC BM	3	13	2527832	K	10,367.-
3x7.5 FC BM	3	16	2527838	K	10,595.-
3x11.0 FC BM	3	24	2527844	K	13,510.-
3x15.0 FC BM	3	32	2527850	K	14,914.-
3x18.5 FC BM	3	37.5	2527856	K	16,898.-
3x22.0 FC BM	3	43.1	2527862	K	16,898.-
3x30.0 FC BM	3	58	2527868	K	20,274.-
3x37.0 FC BM	3	64	2527874	K	24,378.-
3x45.0 FC BM	3	85	2527880	K	29,280.-
4x1.1 FC WM	4	2.7	2527803	K	8,034.-
4x1.5 FC WM	4	3.9	2527809	K	8,160.-
4x2.2 FC WM	4	5.3	2527815	K	8,261.-
4x3.0 FC WM	4	6.9	2527821	K	8,630.-
4x4.0 FC WM	4	8.9	2527827	K	9,000.-
4x5.5 FC BM	4	13	2527833	K	11,183.-
4x7.5 FC BM	4	16	2527839	K	11,466.-
4x11.0 FC BM	4	24	2527845	K	14,640.-
4x15.0 FC BM	4	32	2527851	K	16,203.-
4x18.5 FC BM	4	37.5	2527857	K	18,123.-
4x22.0 FC BM	4	43.1	2527863	K	18,123.-
4x30.0 FC BM	4	58	2527869	K	21,781.-
4x37.0 FC BM	4	64	2527875	K	27,408.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG14

Ordering information						
CC-HVAC system	Max. number of controllable pumps	Max. nominal current	Art. no.			
		I A				EUR
4x45.0 FC BM	4	85	2527881	K		31,605.-
5x1.1 FC WM	5	2.7	2527804	K		8,665.-
5x1.5 FC WM	5	3.9	2527810	K		8,787.-
5x2.2 FC WM	5	5.3	2527816	K		8,907.-
5x3.0 FC WM	5	6.9	2527822	K		9,252.-
5x4.0 FC WM	5	8.9	2527828	K		9,294.-
5x5.5 FC BM	5	13	2527834	K		12,012.-
5x7.5 FC BM	5	16	2527840	K		12,293.-
5x11.0 FC BM	5	24	2527846	K		15,581.-
5x15.0 FC BM	5	32	2527852	K		17,690.-
5x18.5 FC BM	5	37.5	2527858	K		21,499.-
5x22.0 FC BM	5	43.1	2527864	K		21,499.-
5x30.0 FC BM	5	58	2527870	K		26,022.-
5x37.0 FC BM	5	64	2527876	K		28,729.-
5x45.0 FC BM	5	85	2527882	K		33,417.-
6x1.1 FC WM	6	2.7	2527805	K		9,093.-
6x1.5 FC WM	6	3.9	2527811	K		8,832.-
6x2.2 FC WM	6	5.3	2527817	K		9,346.-
6x3.0 FC WM	6	6.9	2527823	K		9,714.-
6x4.0 FC WM	6	8.9	2527829	K		9,752.-
6x5.5 FC BM	6	13	2527835	K		12,780.-
6x7.5 FC BM	6	16	2527841	K		13,096.-
6x11.0 FC BM	6	24	2527847	K		16,545.-
6x15.0 FC BM	6	32	2527853	K		18,710.-
6x18.5 FC BM	6	37.5	2527859	K		23,948.-
6x22.0 FC BM	6	43.1	2527865	K		23,948.-
6x30.0 FC BM	6	58	2527871	K		28,014.-
6x37.0 FC BM	6	64	2527877	K		30,083.-
6x45.0 FC BM	6	85	2527883	K		35,195.-

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☞ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.



Wilo-CCE-HVAC system

Construction

Comfort control system for controlling glandless pumps and glanded pumps with integral frequency converters, or infinitely variable electronically controlled pumps.

Application

For infinitely variable power adjustment to the variable operating statuses of single, double or multi-pump systems of the series Wilo Stratos/-D/-Z, Stratos GIGA, IP-E/DP-E, IL-E/DL-E, BL-E, IL-E...BF (up to 6 pumps). Controlling depends on the differential pressure Δp , feed/return temperature ($\pm T$) or differential temperature (ΔT), including the free adjustment of the duty point by means of advance correction of the full-load pump output.


Notice



Mains connection 3~400 V, 50 Hz (others on request)

Your advantages


- **Easy operation:** User-oriented menu navigation with multi-language plain text display and/or symbol navigation.
- **Easy-to-use system:** Storage and output of operating data, display and storage of error messages.
- **Reliable system:** Conductivity test of the transmitter paths, motor protection, status indicator for actuators.
- **Advanced settings:** 3 adjustable setpoints, PID controller.
- **Optional modules for connection to bus systems:** Profibus, CANBus, Modbus RTU, LON, BACnet and others. Remote data transmission possible via GPRS modem



Price group: PG14

Ordering information					
CCE-HVAC system	Max. number of controllable pumps	Max. nominal current	Art. no.		
		/			
		A			EUR
1 x ...	1	0	2536640	K	3,236.-
1 x 0.37	1	1.2	2536646	K	3,954.-
1 x 0.55	1	2	2536652	K	3,954.-
1 x 0.75	1	2.9	2536658	K	3,954.-
1 x 1.1	1	3.8	2536664	K	3,954.-
1 x 1.5	1	5.5	2536670	K	3,954.-
1 x 2.2	1	7.8	2536676	K	3,957.-
1 x 3.0	1	9.3	2536682	K	4,079.-
1 x 4.0	1	10.8	2536688	K	4,079.-


 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG14


Ordering information					
CCE-HVAC system	Max. number of controllable pumps	Max. nominal current	Art. no.		
		I A			EUR
1 x 5.5	1	12	2536694	K	4,095.-
1 x 7.5	1	13.2	2536700	K	4,084.-
1 x 11.0	1	22	2536706	K	4,110.-
1 x 15.0	1	25.9	2536712	K	4,110.-
1 x 18.5	1	32	2536718	K	4,173.-
1 x 22.0	1	42	2536724	K	4,212.-
2 x ...	2	0	2536641	K	3,341.-
2 x 0.37	2	1.2	2536647	K	4,220.-
2 x 0.55	2	2	2536653	K	4,220.-
2 x 0.75	2	2.9	2536659	K	4,220.-
2 x 1.1	2	3.8	2536665	K	4,220.-
2 x 1.5	2	5.5	2536671	K	4,220.-
2 x 2.2	2	7.8	2536677	K	4,227.-
2 x 3.0	2	9.3	2536683	K	4,356.-
2 x 4.0	2	10.8	2536689	K	4,356.-
2 x 5.5	2	12	2536695	K	4,371.-
2 x 7.5	2	13.2	2536701	K	4,364.-
2 x 11.0	2	22	2536707	K	4,413.-
2 x 15.0	2	25.9	2536713	K	4,405.-
2 x 18.5	2	32	2536719	K	4,968.-
2 x 22.0	2	42	2536725	K	5,103.-
3 x ...	3	0	2536642	K	3,992.-
3 x 0.37	3	1.2	2536648	K	4,472.-
3 x 0.55	3	2	2536654	K	4,472.-
3 x 0.75	3	2.9	2536660	K	4,472.-
3 x 1.1	3	3.8	2536666	K	4,472.-
3 x 1.5	3	5.5	2536672	K	4,472.-
3 x 2.2	3	7.8	2536678	K	4,489.-
3 x 3.0	3	9.3	2536684	K	4,632.-
3 x 4.0	3	10.8	2536690	K	4,632.-
3 x 5.5	3	12	2536696	K	4,645.-
3 x 7.5	3	13.2	2536702	K	4,626.-
3 x 11.0	3	22	2536708	K	6,567.-
3 x 15.0	3	25.9	2536714	K	6,716.-
3 x 18.5	3	32	2536720	K	6,947.-
3 x 22.0	3	42	2536726	K	5,664.-
4 x ...	4	0	2536643	K	4,113.-
4 x 0.37	4	1.2	2536649	K	4,632.-
4 x 0.55	4	2	2536655	K	4,668.-
4 x 0.75	4	2.9	2536661	K	4,668.-
4 x 1.1	4	3.8	2536667	K	4,668.-
4 x 1.5	4	5.5	2536673	K	4,668.-
4 x 2.2	4	7.8	2536679	K	4,690.-
4 x 3.0	4	9.3	2536685	K	4,835.-
4 x 4.0	4	10.8	2536691	K	4,848.-
4 x 5.5	4	12	2536697	K	4,963.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG14

Ordering information					
CCE-HVAC system	Max. number of controllable pumps	Max. nominal current	Art. no.		
		I A			EUR
4 x 7.5	4	13.2	2536703	K	4,924.-
4 x 11.0	4	22	2536709	K	7,034.-
4 x 15.0	4	25.9	2536715	K	7,086.-
4 x 18.5	4	32	2536721	K	7,422.-
4 x 22.0	4	42	2536727	K	6,062.-
5 x ...	5	0	2536644	K	4,667.-
5 x 0.37	5	1.2	2536650	K	5,475.-
5 x 0.55	5	2	2536656	K	5,475.-
5 x 0.75	5	2.9	2536662	K	5,504.-
5 x 1.1	5	3.8	2536668	K	5,475.-
5 x 1.5	5	5.5	2536674	K	5,475.-
5 x 2.2	5	7.8	2536680	K	5,502.-
5 x 3.0	5	9.3	2536686	K	5,702.-
5 x 4.0	5	10.8	2536692	K	6,017.-
5 x 5.5	5	12	2536698	K	6,077.-
5 x 7.5	5	13.2	2536704	K	6,120.-
5 x 11.0	5	22	2536710	K	6,487.-
5 x 15.0	5	25.9	2536716	K	6,536.-
5 x 18.5	5	32	2536722	K	6,925.-
5 x 22.0	5	42	2536728	K	7,406.-
6 x ...	6	0	2536645	K	4,788.-
6 x 0.37	6	1.2	2536651	K	5,674.-
6 x 0.55	6	2	2536657	K	5,674.-
6 x 0.75	6	2.9	2536663	K	5,702.-
6 x 1.1	6	3.8	2536669	K	5,674.-
6 x 1.5	6	5.5	2536675	K	5,674.-
6 x 2.2	6	7.8	2536681	K	5,703.-
6 x 3.0	6	9.3	2536687	K	5,907.-
6 x 4.0	6	10.8	2536693	K	6,268.-
6 x 5.5	6	12	2536699	K	6,330.-
6 x 7.5	6	13.2	2536705	K	6,482.-
6 x 11.0	6	22	2536711	K	6,894.-
6 x 15.0	6	25.9	2536717	K	6,878.-
6 x 18.5	6	32	2536723	K	7,610.-
6 x 22.0	6	42	2536729	K	7,847.-

Price group: PG14

Required accessories					
Type	Description	Art. no.			
					EUR
BMS base module	Series module in a plastic housing with LEDs for status display of inputs, fixation on a 35 mm DIN rail	2533800	A		527.-
CANopen communication module	Additional module for equipping the switchgear series Wilo-CC system for communication in CanOpen networks (slave).	2533867	K		1,447.-
CC communication module	Plug-in cartridge for installation in the CPU for connecting the CC switchgear to communication systems (GSM, Modbus, web server, LON etc.), if no frequency converter is installed.	2533850	K		204.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo


Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG14


Required accessories				
Type	Description	Art. no.		EUR
Communication module LON	Additional module for equipping the switchgear series Wilo-CC system for communication in LON networks.	2533868	K	2,382.-
Communication module Modbus RTU	Additional module for equipping the Wilo-CC system switchgear series for communication in Modbus RTU networks.	2533869	A	448.-
Communication module Profibus DP	Additional module for equipping the switchgear series Wilo-CC system for communication in Profibus DP networks (slave).	2533866	K	905.-
Communication module WebServer	Additional module for internet connection.	2533865	K	1,076.-
Control module pump 1-2	Double row terminal block with status LED for the supply voltage, secured on 35 mm DIN rail	2533712	K	231.-
Control module pump 3-4	Double row terminal block with status LED for the supply voltage, secured on 35 mm DIN rail	2533734	K	231.-
Control module pump 5-6	Double row terminal block with status LED for the supply voltage, secured on 35 mm DIN rail	2533756	K	221.-
Control modules connecting cable	Connection cable for connecting up to 4 control modules with the GLT base module. The number of connection cables required for control modules per CC-switchgear is always 1.	2533790	K	141.-
DDC control module	Double row terminal block with status LED for the supply voltage, secured on 35 mm DIN rail	2533795	K	231.-
DDG impulse selector	Impulse selector for installation in a switch cabinet, channel selection with DIP switches accessible from the front, LEDs for operation and output signal, galvanic separation between measurement signal and supply voltage, fixation on 35 mm DIN rail	2533770	K	416.-
DDG power supply unit	For DDG together with impulse selector	501865293	L	238.-
DDG transducer	(Amplifier) incl. power supply unit for differential pressure sensor (DDG)	501771990	K	2,198.-
GPRS module	Insulating housing for switch cabinet installation, secured on 35 mm DIN rail. SIM cards are not within the scope of delivery, they must be procured by the customer!	2533860	K	1,117.-
GSM/GPRS aerial with cable 2.5 m	Flexible antenna with plastic coating, magnetic stand and shielded aerial cable with FEM plug.	2533862	A	131.-
GSM/GPRS aerial with cable 10 m	Antenna with plastic coating, including bracket for outdoor installation and shielded antenna cable with FME plug.	2533863	A	395.-
GSM/GPRS aerial with cable 15 m	Antenna with plastic coating, including bracket for outdoor installation and shielded antenna cable with FME plug.	2533864	A	438.-
GSM module	Insulant housing for installation in a switch cabinet, fixation by means of the supplied accessories kit (adapter plate). SIM cards are not within the scope of delivery, they must be procured by the customer!	2533861	K	883.-
Outdoor temperature sensor Pt 100	Insulant housing made of glass-fibre reinforced polycarbonate, greyish RAL 7035. Fixation with two to four screws of 4 mm (not included in the scope of delivery). Attention: Don't expose the housing to direct sun!	2533772	K	94.-
PTC thermistor tripping unit	Tripping unit for switch cabinet installation for all IPL/DPL, IL/DL, IPH-O/W, IPS, IP-Z, BAC, BL, Helix and MVI series pumps equipped with PTC thermistor sensors.	509275993	L	434.-
Signal converter 0-10 V / 0-20 mA	Additional module for equipping the switchgear area Wilo-CC system for conversion of 0 - 10 V signals to 0 - 20 V signals	2534992	K	193.-
Signalling module pump 1-2	Relay module with operating status LEDs, secured on 35 mm DIN rail	2533812	K	322.-
Signalling module pump 3-6	Relay module with operating status LEDs, secured on 35 mm DIN rail	2533836	K	311.-
Signalling modules connecting cable	Connection cable for connecting up to 4 signalling modules with the BMS base module. The number of connection cables required for signalling modules per CC switchgear is always 1.	2533890	K	141.-
Temperature module for systems with 1-3 pumps	Module to be arranged on a 35 mm DIN rail with four channels in order to detect temperature sensors which have to be provided by the customer (PT100/PT1000) in 2 or 3-wire technology. Feed temperature (T_v), return temperature (T_r), process temperature (T_p), ambient temperature (T_a)	2534991	K	819.-

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG14

Required accessories				
Type	Description	Art. no.		
				EUR
Temperature module for systems with 4-6 pumps	Module to be arranged on a 35 mm DIN rail with four channels in order to detect temperature sensors which have to be provided by the customer (PT100/PT1000) in 2 or 3-wire technology. Feed temperature (T_v), return temperature (T_R), process temperature (T_p), ambient temperature (T_A)	2533771	K	647.-
communication module BACnet IP (Slave)	Bus communication module for BACnet networks	2537051	K	1,097.-
communication module BACnet MS/TP (Slave)	Bus communication module for BACnet networks	2537050	K	1,097.-

Price group: PG14

Differential pressure sensor, DDG (4 – 20mA)				
Type	Description	Art. no.		
				EUR
DDG 100	4-20 mA; not applicable with VR-HVAC	503184799	L	774.-
DDG 2	4-20 mA; not applicable with VR-HVAC	503184295	C	774.-
DDG 10	4-20 mA	503184398	L	774.-
DDG 20	4-20 mA	503184490	L	774.-
DDG 40	4-20 mA	503184593	L	774.-
DDG 60	4-20 mA	503184696	L	774.-



Accessories	Page
Commissioning/maintenance	683

Heating, air conditioning, cooling

Wilo-SCe-HVAC system

Construction

Digitally controlled, variable Smart control systems for driving glandless and glanded pumps of all makes and single and multi-pump systems

SCe version:

Control of electronic pumps or pumps with built-in or external frequency converters

Application

For stageless power adjustment to the variable operating states of single, double or multi-pump systems (up to 4 pumps). Controlling depends on the differential pressure Δp , feed/return temperature ($\pm T$) or differential temperature (ΔT), including the free adjustment of the duty point by means of advance correction of the full-load pump output.


Notice



- Device versions: WM (wall fixation); BM (floor model)
- Mains connection: 3~400 V, 50 Hz; 1~230 V, 50/60 Hz (only versions SCe without performance part)


Your advantages

- Easy operation: Display, symbols and menu navigation analogous to the Wilo glanded pumps of the latest design
- Easy-to-use system: System access to the service menu protected via code, error history code with up to 16 individual messages
- Reliable system: Permanent display of pump and system status, as well as the current actual value, SBM and SSM as standard, other error messages/ alarm signals can optionally be output via relay or via other communication tools (e.g., bus systems)
- Advanced setting parameters: 2 adjustable set-points, remote setpoint adjustment possible
- Communication capability: connectable bus systems: BACnet, modbus RTU (RS 232) (LON connectable via optional module)

Price group: PG14

Ordering information					
SCe-HVAC system	Max. number of controllable pumps	Max. nominal current	Art. no.		
		/			
		A			EUR
H-1x10A-T34-WM-PKG	1	10	2545254	K	2,083.-
H-1x13A-T34-WM-PKG	1	13	2545258	K	1,882.-
H-1x16A-T34-WM-PKG	1	16	2545262	K	1,994.-
H-1x24A-T34-WM-PKG	1	24	2545266	K	2,073.-
H-1x32A-T34-WM-PKG	1	32	2545270	K	2,425.-
H-1x37,5A-T34-WM-PKG	1	37.5	2545274	K	2,493.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Ordering information					
SCe-HVAC system	Max. number of controllable pumps	Max. nominal current	Art. no.		
		/			
		A			
					EUR
H-1x49A-T34-WM-PKG	1	49	2545278	K	2,516.-
H-2x10A-T34-WM-PKG	2	10	2545255	K	2,198.-
H-2x13A-T34-WM-PKG	2	13	2545259	K	2,051.-
H-2x16A-T34-WM-PKG	2	16	2545263	K	2,163.-
H-2x24A-T34-WM-PKG	2	24	2545267	K	2,365.-
H-2x32A-T34-WM-PKG	2	32	2545271	K	2,961.-
H-2x37,5A-T34-WM-PKG	2	37.5	2545275	K	3,084.-
H-2x49A-T34-WM-PKG	2	49	2545279	K	3,294.-
H-3x10A-T34-WM-PKG	3	10	2545256	K	1,832.-
H-3x13A-T34-WM-PKG	3	13	2545260	K	2,176.-
H-3x16A-T34-WM-PKG	3	16	2545264	K	2,351.-
H-3x24A-T34-WM-PKG	3	24	2545268	K	4,622.-
H-3x32A-T34-WM-PKG	3	32	2545272	K	5,851.-
H-3x37,5A-T34-WM-PKG	3	37.5	2545276	K	6,217.-
H-3x49A-T34-WM-PKG	3	49	2545280	K	6,272.-
H-4x10A-T34-WM-PKG	4	10	2545257	K	1,967.-
H-4x13A-T34-WM-PKG	4	13	2545261	K	2,281.-
H-4x16A-T34-WM-PKG	4	16	2545265	K	2,516.-
H-4x24A-T34-WM-PKG	4	24	2545269	K	5,318.-
H-4x32A-T34-WM-PKG	4	32	2545273	K	6,713.-
H-4x37,5A-T34-WM-PKG	4	37.5	2545277	K	6,862.-
H-4x49A-T34-WM-PKG	4	49	2545281	K	8,037.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.



Accessories	Page
Commissioning/maintenance	683

Wilo-SC/SC-FC-HVAC system

Construction

Digitally controlled, variable Smart control systems for driving glandless and glanded pumps of all makes and single and multi-pump systems.

SC version:

Control of fixed speed pumps via contactors (cascade connection)

SC-FC version:

Control of fixed speed pumps via contactors (cascade connection), but control of a pump via frequency converter as a base-load pump, control of the peak-load pumps in cascade connection

Application

For stageless power adjustment to the variable operating states of single, double or multi-pump systems (up to 4 pumps). Controlling depends on the differential pressure Δp , feed/return temperature ($\pm T$) or differential temperature (ΔT), including the free adjustment of the duty point by means of advance correction of the full-load pump output.

Notice


Your advantages


- Easy operation: Display, symbols and menu navigation analogous to the Wilo glanded pumps of the latest design
- Easy-to-use system: System access to the service menu protected via code, error history code with up to 16 individual messages
- Reliable system: Permanent display of pumps and system status as well as the actual value present in the display
- SBM and SSM as standard, other error messages/ alarm signals can optionally be output via relay or via other communication tools (e.g., bus systems)
- Advanced settings: 2 adjustable setpoints, remote setpoint adjustment possible
- Communication capability: Connectible bus systems: BACnet, modbus RTU(RS 232) (LON connectible via optional module)


- Wall fixation (WM)
- Floor model (BM)
- Mains connection 3~400V, 50Hz


Ordering information						
SC/SC-FC-HVAC system	Max. number of controllable pumps	Max. nominal current	Art. no.			
		/				
		A				
1x1.6A-WM (direct starting)	1	1.6	2545310	K		2,631.-
2x1.6A-WM (direct starting)	2	1.6	2545311	K		2,847.-
3x1.6A-WM (direct starting)	3	1.6	2545312	K		3,148.-


☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☞ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.


Ordering information					
SC/SC-FC-HVAC system	Max. number of controllable pumps	Max. nominal current	Art. no.		
		I A			EUR
4x1.6A-WM (direct starting)	4	1.6	2545313	K	3,351.-
1x2.4A-WM (direct starting)	1	2.4	2545314	K	2,631.-
2x2.4A-WM (direct starting)	2	2.4	2545315	K	2,847.-
3x2.4A-WM (direct starting)	3	2.4	2545316	K	3,148.-
4x2.4A-WM (direct starting)	4	2.4	2545317	K	3,351.-
1x4A-WM (direct starting)	1	4	2545318	K	2,613.-
2x4A-WM (direct starting)	2	4	2545319	K	2,847.-
3x4A-WM (direct starting)	3	4	2545320	K	3,148.-
4x4A-WM (direct starting)	4	4	2545321	K	3,351.-
1x6.3A-WM (direct starting)	1	6.3	2545322	K	2,613.-
2x6.3A-WM (direct starting)	2	6.3	2545323	K	2,847.-
3x6.3A-WM (direct starting)	3	6.3	2545324	K	3,151.-
4x6.3A-WM (direct starting)	4	6.3	2545325	K	3,352.-
1x10A-WM (direct starting)	1	10	2545326	K	3,176.-
2x10A-WM (direct starting)	2	10	2545327	K	3,421.-
3x10A-WM (direct starting)	3	10	2545328	K	2,656.-
4x10A-WM (direct starting)	4	10	2545329	K	2,897.-
1x12A-WM (direct starting)	1	12	2545330	K	2,707.-
2x12A-WM (direct starting)	2	12	2545331	K	2,981.-
3x12A-WM (direct starting)	3	12	2545332	K	3,307.-
4x12A-WM (direct starting)	4	12	2545333	K	3,577.-
1x16A-WM (direct starting)	1	16	2545334	K	2,815.-
2x16A-WM (direct starting)	2	16	2545335	K	3,104.-
3x16A-WM (direct starting)	3	16	2545336	K	3,476.-
4x16A-WM (direct starting)	4	16	2545337	K	3,799.-
1x20A-WM (direct starting)	1	20	2545338	A	☞
2x20A-WM (direct starting)	2	20	2545339	A	☞
3x20A-WM (direct starting)	3	20	2545340	A	☞
4x20A-WM (direct starting)	4	20	2545341	A	☞
1x24A-WM (direct starting)	1	24	2545342	K	3,251.-
2x24A-WM (direct starting)	2	24	2545343	K	3,568.-
3x24A-WM (direct starting)	3	24	2545344	K	4,006.-
4x24A-WM (direct starting)	4	24	2545345	K	5,292.-
1x32A-WM (direct starting)	1	32	2545346	K	3,486.-
2x32A-WM (direct starting)	2	32	2545347	K	3,863.-
3x32A-WM (direct starting)	3	32	2545348	K	4,377.-
4x32A-WM (direct starting)	4	32	2545349	K	5,664.-
1x13A-WM (star-delta starting)	1	13	2545350	K	3,303.-
2x13A-WM (star-delta starting)	2	13	2545351	K	3,920.-
3x13A-WM (star-delta starting)	3	13	2545352	K	4,549.-
4x13A-WM (star-delta starting)	4	13	2545353	K	5,285.-
1x16A-WM (star-delta starting)	1	16	2545354	K	3,403.-
2x16A-WM (star-delta starting)	2	16	2545355	K	3,920.-
3x16A-WM (star-delta starting)	3	16	2545356	K	4,549.-
4x16A-WM (star-delta starting)	4	16	2545357	K	5,350.-


 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☞ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.


Ordering information					
SC/SC-FC-HVAC system	Max. number of controllable pumps	Max. nominal current	Art. no.		
		I A			EUR
1x19A-WM (star-delta starting)	1	19	2545358	A	☞
2x19A-WM (star-delta starting)	2	19	2545359	A	☞
3x19A-WM (star-delta starting)	3	19	2545360	A	☞
4x19A-WM (star-delta starting)	4	19	2545361	A	☞
1x24A-WM (star-delta starting)	1	24	2545362	K	3,769.-
2x24A-WM (star-delta starting)	2	24	2545363	K	4,415.-
3x24A-WM (star-delta starting)	3	24	2545364	K	5,250.-
4x24A-WM (star-delta starting)	4	24	2545365	K	6,224.-
1x32A-WM (star-delta starting)	1	32	2545366	K	4,084.-
2x32A-WM (star-delta starting)	2	32	2545367	K	4,690.-
3x32A-BM (star-delta starting)	3	32	2545368	K	8,024.-
4x32A-BM (star-delta starting)	4	32	2545369	K	8,903.-
1x37.5A-WM (star-delta starting)	1	37.5	2545370	K	4,265.-
2x37.5A-WM (star-delta starting)	2	37.5	2545371	K	4,887.-
3x37.5A-BM (star-delta starting)	3	37.5	2545372	K	8,364.-
4x37.5A-BM (star-delta starting)	4	37.5	2545373	K	9,223.-
1x43A-WM (star-delta starting)	1	43	2545374	K	4,317.-
2x43A-WM (star-delta starting)	2	43	2545375	K	4,938.-
3x43A-BM (star-delta starting)	3	43	2545376	K	8,463.-
4x43A-BM (star-delta starting)	4	43	2545377	K	9,327.-

Ordering information					
SC/SC-FC-HVAC system	Max. number of controllable pumps	Max. nominal current	Art. no.		
		I A			EUR
1x1.6A-FC-WM (direct starting)	1	1.6	2545426	K	5,283.-
2x1.6A-FC-WM (direct starting)	2	1.6	2545427	K	5,614.-
3x1.6A-FC-WM (direct starting)	3	1.6	2545428	K	5,940.-
4x1.6A-FC-WM (direct starting)	4	1.6	2545429	K	6,281.-
1x2.4A-FC-WM (direct starting)	1	2.4	2545430	K	5,296.-
2x2.4A-FC-WM (direct starting)	2	2.4	2545431	K	5,623.-
3x2.4A-FC-WM (direct starting)	3	2.4	2545432	K	5,963.-
4x2.4A-FC-WM (direct starting)	4	2.4	2545433	K	6,336.-
1x4A-FC-WM (direct starting)	1	4	2545434	K	5,382.-
2x4A-FC-WM (direct starting)	2	4	2545435	K	5,728.-
3x4A-FC-WM (direct starting)	3	4	2545436	K	6,094.-
4x4A-FC-WM (direct starting)	4	4	2545437	K	6,422.-
1x6.3A-FC-WM (direct starting)	1	6.3	2545438	K	6,260.-
2x6.3A-FC-WM (direct starting)	2	6.3	2545439	K	6,586.-
3x6.3A-FC-WM (direct starting)	3	6.3	2545440	K	5,765.-
4x6.3A-FC-WM (direct starting)	4	6.3	2545441	K	6,132.-
1x10A-FC-WM (direct starting)	1	10	2545442	K	6,904.-
2x10A-FC-WM (direct starting)	2	10	2545443	K	7,330.-
3x10A-FC-WM (direct starting)	3	10	2545444	K	6,422.-


 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☞ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.



Ordering information					
SC/SC-FC-HVAC system	Max. number of controllable pumps	Max. nominal current	Art. no.		
		I A			EUR
4x10A-FC-WM (direct starting)	4	10	2545445	K	6,803.-
1x12A-FC-BM (direct starting)	1	12	2545446	K	9,828.-
2x12A-FC-BM (direct starting)	2	12	2545447	K	10,364.-
3x12A-FC-BM (direct starting)	3	12	2545448	K	10,898.-
4x12A-FC-BM (direct starting)	4	12	2545449	K	11,464.-
1x16A-FC-BM (direct starting)	1	16	2545450	K	10,555.-
2x16A-FC-BM (direct starting)	2	16	2545451	K	11,164.-
3x16A-FC-BM (direct starting)	3	16	2545452	K	12,120.-
4x16A-FC-BM (direct starting)	4	16	2545453	K	12,786.-
1x20A-FC-BM (direct starting)	1	20	2545454	A	☞
2x20A-FC-BM (direct starting)	2	20	2545455	A	☞
3x20A-FC-BM (direct starting)	3	20	2545456	A	☞
4x20A-FC-BM (direct starting)	4	20	2545457	A	☞
1x24A-FC-BM (direct starting)	1	24	2545458	K	12,238.-
2x24A-FC-BM (direct starting)	2	24	2545459	K	13,029.-
3x24A-FC-BM (direct starting)	3	24	2545460	K	14,387.-
4x24A-FC-BM (direct starting)	4	24	2545461	K	15,498.-
1x32A-FC-BM (direct starting)	1	32	2545462	K	13,609.-
2x32A-FC-BM (direct starting)	2	32	2545463	K	14,507.-
3x32A-FC-BM (direct starting)	3	32	2545464	K	16,042.-
4x32A-FC-BM (direct starting)	4	32	2545465	K	17,775.-
1x13A-FC-BM (star-delta starting)	1	13	2545466	K	10,924.-
2x13A-FC-BM (star-delta starting)	2	13	2545467	K	11,861.-
3x13A-FC-BM (star-delta starting)	3	13	2545468	K	13,074.-
4x13A-FC-BM (star-delta starting)	4	13	2545469	K	14,053.-
1x16A-FC-BM (star-delta starting)	1	16	2545470	K	11,199.-
2x16A-FC-BM (star-delta starting)	2	16	2545471	K	12,171.-
3x16A-FC-BM (star-delta starting)	3	16	2545472	K	13,530.-
4x16A-FC-BM (star-delta starting)	4	16	2545473	K	14,392.-
1x19A-FC-BM (star-delta starting)	1	19	2545474	A	☞
2x19A-FC-BM (star-delta starting)	2	19	2545475	A	☞
3x19A-FC-BM (star-delta starting)	3	19	2545476	A	☞
4x19A-FC-BM (star-delta starting)	4	19	2545477	A	☞
1x24A-FC-BM (star-delta starting)	1	24	2545478	K	13,486.-
2x24A-FC-BM (star-delta starting)	2	24	2545479	K	14,167.-
3x24A-FC-BM (star-delta starting)	3	24	2545480	K	16,457.-
4x24A-FC-BM (star-delta starting)	4	24	2545481	K	17,644.-
1x32A-FC-BM (star-delta starting)	1	32	2545482	K	14,671.-
2x32A-FC-BM (star-delta starting)	2	32	2545483	K	16,093.-
3x32A-FC-BM (star-delta starting)	3	32	2545484	K	17,968.-
4x32A-FC-BM (star-delta starting)	4	32	2545485	K	19,832.-
1x37.5A-FC-BM (star-delta starting)	1	37.5	2545486	K	16,194.-
2x37.5A-FC-BM (star-delta starting)	2	37.5	2545487	K	17,743.-
3x37.5A-FC-BM (star-delta starting)	3	37.5	2545488	K	19,835.-
4x37.5A-FC-BM (star-delta starting)	4	37.5	2545489	K	21,588.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☞ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Ordering information					
SC/SC-FC-HVAC system	Max. number of controllable pumps	Max. nominal current	Art. no.		
		/			
		A			
					EUR
1x43A-FC-BM (star-delta starting)	1	43	2545490	K	17,514.-
2x43A-FC-BM (star-delta starting)	2	43	2545491	K	19,038.-
3x43A-FC-BM (star-delta starting)	3	43	2545492	K	21,509.-
4x43A-FC-BM (star-delta starting)	4	43	2545493	K	22,955.-

Price group: PG14

Required accessories					
Type	Description	Art. no.			
					EUR
PTC thermistor tripping unit	Tripping unit for switch cabinet installation for all IPL/DPL, IL/DL, IPH-O/W, IPS, IP-Z, BAC, BL, Helix and MVI series pumps equipped with PTC thermistor sensors.	509275993	L		434.-
SC-HVAC signal board	Signal board	2119646	L		179.-
Signal converter 0-10 V / 0-20 mA	Additional module for equipping the switchgear area Wilo-CC system for conversion of 0 – 10 V signals to 0 – 20 V signals	2534992	K		193.-
DDG impulse selector	Impulse selector for installation in a switch cabinet, channel selection with DIP switches accessible from the front, LEDs for operation and output signal, galvanic separation between measurement signal and supply voltage, fixation on 35 mm DIN rail	2533770	K		416.-
Outdoor temperature sensor Pt 100	Insulant housing made of glass-fibre reinforced polycarbonate, greyish RAL 7035. Fixation with two to four screws of 4 mm (not included in the scope of delivery). Attention: Don't expose the housing to direct sun!	2533772	K		94.-
DDG transducer	(Amplifier) incl. power supply unit for differential pressure sensor (DDG)	501771990	K		2,198.-
Communication module ModBus RTU (SC)	For connection of Wilo-Control SC series with Modbus RTU networks.	2538241	L		473.-
Communication module BACnet (SC)	For connection of Wilo-Control SC series with BACnet MSTP networks.	2538242	L		503.-
Communication module LON (SC)	For connection of Wilo-Control SC series with Modbus LON networks.	2538243	K		489.-
Communication module GSM (SC)	Additional module for equipping the switchgear series SC/SCe for dialling into GSM mobile phone networks.	2542216	A		444.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
 Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.



Wilo-EFC

Construction

Stand-alone frequency converter

Application

- This frequency converter for wall fixation can be installed in fixed speed pumps with asynchronous or permanent magnet motors for various applications, in particular for heating, air conditioning and pressure boosting.

Scope of delivery

- Stand-alone frequency converter
- Installation and operating instructions

Your advantages

- Quick and effective commissioning thanks to user-friendly operation assistant
- High energy efficiency and compact design due to high efficiency of up to 98 per cent
- Cost-effective solution due to low cooling requirements
- Covers a wide range of pump applications using adjustable control modes
- Flexible connectivity due to optional connection to various bus systems

Price group: PG14

Ordering information					
EFC	Max. number of controllable pumps	Max. nominal current	Art. no.		EUR
		I A			
0.55 3x380-480V	1	1.8	2193430	C	1,337.-
0.75 3x380-480V	1	2.4	2193431	C	1,365.-
1.1 3x380-480V	1	3	2193432	C	1,428.-
1.5 3x380-480V	1	4.1	2193433	C	1,492.-
2.2 3x380-480V	1	5.6	2193434	C	1,611.-
3 3x380-480V	1	7.2	2193435	C	1,762.-
4 3x380-480V	1	10	2193436	C	1,922.-
5.5 3x380-480V	1	13	2193437	C	2,197.-
7.5 3x380-480V	1	16	2193438	C	2,569.-
11 3x380-480V	1	24	2193439	C	3,093.-
15 3x380-480V	1	32	2193440	C	3,522.-
18.5 3x380-480V	1	37.5	2193441	C	4,203.-
22 3x380-480V	1	44	2193442	C	4,844.-

Price group: PG14

Ordering information					
EFC	Max. number of controllable pumps	Max. nominal current	Art. no.		
		/			
		A			EUR
30 3x380-480V	1	61	2193443	C	5,452.-
37 3x380-480V	1	73	2193444	C	6,115.-
45 3x380-480V	1	90	2193445	C	7,215.-
55 3x380-480V	1	106	2193446	C	8,485.-
75 3x380-480V	1	147	2193447	C	10,282.-
90 3x380-480V	1	177	2193448	C	11,729.-
110 3x380-480V	1	212	2193449	C	15,489.-
132 3x380-480V	1	260	2193450	C	18,691.-
C0.37 3x380-480V	1	1.3	2193429	C	1,315.-

Price group: PG14

Accessories					
Type	Description	Art. no.			
					EUR
Profibus DP MCA Wilo-EFC	Plug-in module on the Wilo-EFC frequency converter, Profibus DP operates the frequency converter via fieldbus and enables the lowering of system costs.	2193451	C		377.-
DeviceNet MCA Wilo-EFC	Plug-in module on the Wilo-EFC frequency converter – DeviceNet provides key capabilities to effectively decide which information is required when.	2193452	C		341.-
Profinet MCA Wilo-EFC	Plug-in module on Wilo-EFC frequency converter, Profinet provides users with Ethernet access and supplies diagnostic data.	2193453	C		558.-
Ethernet/IP MCA Wilo-EFC	Plug-in module on the Wilo-EFC frequency converter – EtherNet/IP is based on state-of-the-art technologies available for industrial use and meets even the most complex requirements.	2193454	C		558.-
Modbus TCP MCA Wilo-EFC	Plug-in module on the Wilo-EFC frequency converter, Modbus TCP has an integrated webserver for remote diagnostics and reading out of basic operating parameters.	2193455	C		558.-
Sensor Input Card MCB Wilo-EFC	-	6084915	K		263.-

Price group: PG14

Accessories					
Type		Art. no.			
					EUR
Filter 177A du/dt IP00 Wilo-EFC		6084550	A		1,926.-
Filter 315A du/dt IP00 Wilo-EFC		6084551	A		2,265.-
Filter 480A du/dt IP00 Wilo-EFC		6084552	A		2,945.-
Filter 40A du/dt IP20 Wilo-EFC		6084553	A		702.-
Filter 90A du/dt IP20 Wilo-EFC		6084554	A		1,246.-
Filter 106A du/dt IP20 Wilo-EFC		6084555	A		1,632.-
Filter 177A du/dt IP20 Wilo-EFC		6084556	A		2,492.-
Filter 315A du/dt IP23 Wilo-EFC		6084557	A		3,171.-
Filter 480A du/dt IP23 Wilo-EFC		6084558	A		3,738.-
Filter 2.4A sin IP54 Wilo-EFC		6084559	A		939.-
Filter 4.1A sin IP54 Wilo-EFC		6084560	A		959.-
Filter 7.5A sin IP54 Wilo-EFC		6084561	A		1,130.-
Filter 10A sin IP54 Wilo-EFC		6084562	A		1,226.-
Filter 17A sin IP54 Wilo-EFC		6084563	A		1,399.-
Filter 24.2A sin IP54 Wilo-EFC		6084564	A		1,918.-
Filter 32A sin IP54 Wilo-EFC		6084565	A		2,837.-

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☞ = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Accessories			
Type	Art. no.		
			EUR
Filter 37.5A sin IP54 Wilo-EFC	6084566	A	3,087.-
Filter 46.2A sin IP54 Wilo-EFC	6084567	A	3,451.-
Filter 61A sin IP54 Wilo-EFC	6084568	A	4,084.-
Filter 75A sin IP54 Wilo-EFC	6084569	A	4,561.-
Filter 90A sin IP54 Wilo-EFC	6084570	A	5,367.-
Filter 106A sin IP54 Wilo-EFC	6084571	A	5,903.-
Filter 150A sin IP54 Wilo-EFC	6084572	A	8,320.-
Filter 180A sin IP54 Wilo-EFC	6084573	A	9,125.-
Filter 2.5A sin IP00 Wilo-EFC	6084574	A	294.-
Filter 4.5A sin IP00 Wilo-EFC	6084575	A	310.-
Filter 8A sin IP00 Wilo-EFC	6084576	A	387.-
Filter 10A sin IP00 Wilo-EFC	6084577	A	401.-
Filter 17A sin IP00 Wilo-EFC	6084578	A	436.-
Filter 24A sin IP00 Wilo-EFC	6084579	A	711.-
Filter 38A sin IP00 Wilo-EFC	6084580	A	1,055.-
Filter 48A sin IP00 Wilo-EFC	6084581	A	1,325.-
Filter 62A sin IP00 Wilo-EFC	6084582	A	1,632.-
Filter 75A sin IP00 Wilo-EFC	6084583	A	2,131.-
Filter 115A sin IP00 Wilo-EFC	6084584	A	3,598.-
Filter 180A sin IP00 Wilo-EFC	6084585	A	4,883.-
Filter 260A sin IP00 Wilo-EFC	6084586	A	5,031.-
Filter 410A sin IP00 Wilo-EFC	6084587	A	7,800.-
Filter 510A sin IP00 Wilo-EFC	6084588	A	11,618.-
Filter 2.5A sin IP20 Wilo-EFC	6084900	A	291.-
Filter 4.5A sin IP20 Wilo-EFC	6084901	A	315.-
Filter 8A sin IP20 Wilo-EFC	6084902	A	386.-
Filter 10A sin IP20 Wilo-EFC	6084903	A	430.-
Filter 17A sin IP20 Wilo-EFC	6084904	A	477.-
Filter 24A sin IP20 Wilo-EFC	6084905	A	736.-
Filter 38A sin IP20 Wilo-EFC	6084906	A	1,316.-
Filter 48A sin IP20 Wilo-EFC	6084907	A	2,414.-
Filter 62A sin IP20 Wilo-EFC	6084908	A	2,672.-
Filter 75A sin IP20 Wilo-EFC	6084909	A	3,224.-
Filter 115A sin IP23 Wilo-EFC	6084910	A	4,630.-
Filter 180A sin IP23 Wilo-EFC	6084911	A	6,338.-
Filter 260A sin IP23 Wilo-EFC	6084912	A	8,144.-
Filter 410A sin IP23 Wilo-EFC	6084913	A	10,259.-
Filter 510A sin IP23 Wilo-EFC	6084914	A	13,937.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.



Wilo-IF module Stratos LON



Wilo-IF module LON




Wilo-CIF module

Price group: PG14


IF module for glandless pumps				
Type	Description	Art. no.		
Wilo-Smart IF module Stratos	Retrofittable plug-in module to expand the communication interfaces of the Stratos pump featuring Wilo-Smart Connect functions usable via Bluetooth and Wilo Net.	2197101	L	EUR 290.-
IF-Modul Stratos DP	Retrofittable plug-in module for the pump types Wilo-Stratos/Stratos-Z/Stratos-D. 2 x 2 terminals for through connection of BUS interfaces. Communication-capable dual pump management (depending on time, load and fault) connection cable, 0.7 m (2 x 2-core, shielded in pairs), included in the scope of delivery.	2105254	L	99.-
IF-Modul Stratos LON	Retrofittable plug-in module for the pump types Wilo-Stratos/Stratos-Z/Stratos-D. Serial/digital LON-interface for connection to building automation via LONWorks networks: LONTalk protocol and LONMark conformity. Communication-capable dual pump management (depending on time, load and fault). For the dual pump management of 2 circulators or 1 twin-head pump in alternating or parallel operation, an additional Stratos PLR IF module is required.	2030455	L	271.-
IF-Modul Stratos BACnet MS/TP	Retrofittable plug-in module for Wilo-Stratos/Stratos-Z/Stratos-D pump types. Serial/digital BACnet MS/TP master interface for connection to building automation (BA) via RS485 bus system. Protocol according to BACnet standard (ISO 16484-5). Communication-capable dual pump management (depending on time, load and fault). For the dual pump management of 2 circulators or 1 twin-head pump in alternating or parallel operation, an additional Stratos DP IF module is required.	2097810	L	258.-
IF-Modul Stratos PLR	Retrofittable plug-in module for the pump types Wilo-Stratos/Stratos-Z/Stratos-D. Serial/digital PLR interface for connection to building automation (BA) via Wilo interface converter or company-specific coupling modules. Communication-capable dual pump management (depending on time, load and fault). For the dual pump management of 2 circulators or 1 twin-head pump in alternating or parallel operation with 2 PLR IF modules. Connection cable, 0.7 m (2-core), included in the scope of delivery.	2030465	L	99.-
IF-Modul Stratos Ext. Off	Retrofittable plug-in module for the pump types Wilo-Stratos/Stratos-Z/Stratos-D. Control input overriding off. 0 – 10 V (remote speed adjustment or remote setpoint adjustment) for connection to building automation (BA). Communication-capable dual pump management (depending on time, load and fault). For the dual pump management of 2 circulators or 1 twin-head pump in alternating or parallel operation, an additional Stratos PLR IF module is required.	2030475	L	122.-
IF-Modul Stratos SBM	Retrofit plug-in module for pump types Wilo-Stratos/Stratos-Z/Stratos-D collective run signal. Control input 0 – 10 V (remote speed adjustment or remote setpoint adjustment) for connection to building automation (BA). Communication-capable dual pump management (depending on time, load and fault). For the dual pump management of 2 circulators or 1 twin-head pump in alternating or parallel operation, an additional Stratos SBM IF module is required.	2030495	L	138.-
IF-Modul Stratos CANopen	Retrofittable plug-in module for the pump types Wilo-Stratos/Stratos-Z/Stratos-D. Serial/digital CAN interface for connection to building automation (BA) via CAN bus system. Protocol according to standard CANopen (EN 50325-4). Communication-capable dual pump management (depending on time, load and fault). For the dual pump management of 2 circulators or 1 twin-head pump in alternating or parallel operation, an additional Stratos PLR IF module is required.	2066600	L	154.-
IF-Modul Stratos Modbus RTU	Retrofittable plug-in module for the pump types Wilo-Stratos/Stratos-Z/Stratos-D. Serial/digital Modbus RTU interface for connection to building automation systems (BA) via RS485 bus system. Protocol „Modbus over Serial Line“ in accordance with Modbus-IDA V 1.02. Communication-capable dual pump management (depending on time, load and fault). For the dual pump management of 2 circulators or 1 twin-head pump in alternating or parallel operation, an additional Stratos DP IF module is required.	2097808	L	234.-



= ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG14


IF module for glandless pumps				
Type	Description	Art. no.		
				EUR
IF-Modul Stratos Ext. Off/SBM	Retrofit plug-in module for pump types Wilo-Stratos/Stratos-Z/Stratos-D. Overriding Off control input, collective run signal. Communication-capable dual pump management (depending on time, load and fault). For the dual pump management of 2 circulators or 1 twin-head pump in alternating or parallel operation, an additional Stratos ext. Off/SBM IF module is required.	2084867	L	138.-
IF-Modul Stratos Ext. Min	Retrofittable plug-in module for the pump types Wilo-Stratos/Stratos-Z/Stratos-D. Control input overriding min (setback operation without Autopilot). 0 – 10 V (remote speed adjustment or remote setpoint adjustment) for connection to building automation (BA). Communication-capable dual pump management (depending on time, load and fault). For the dual pump management of 2 circulators or 1 twin-head pump in alternating or parallel operation, an additional Stratos PLR IF module is required.	2030485	L	122.-



Price group: PG14

IF module for glanded pumps				
Type	Description	Art. no.		
				EUR
Wilo-Smart IF module	Retrofittable plug-in module to expand the communication interfaces of the pump featuring Wilo-Smart Connect functions usable via Bluetooth and Wilo Net.	2197102	L	290.-
IF-Modul CANopen	Retrofittable plug-in module for pump types Wilo-Stratos GIGA, Stratos GIGA B, Stratos GIGA-D, VeroLine-IP-E, VeroTwin-DP-E, CronoLine-IL-E, CronoTwin-DL-E, CronoBloc-BL-E, Wilo-Helix EXCEL, Wilo-Economy MHIE, Wilo-Multivert MVIE, Wilo-Helix VE. Serial, digital CAN interface for connection to building automation (GA) via CAN bus system protocol according to CANopen standard (EN 50325-4). Note: The pump software must be compatible (for information, see Wilo homepage or consult the nearest Wilo branch).	2085044	L	170.-
IF-Modul Modbus RTU	Retrofittable plug-in module for pump types Wilo-Stratos GIGA, Stratos GIGA B, Stratos GIGA-D, VeroLine-IP-E, VeroTwin-DP-E, CronoLine-IL-E, CronoTwin-DL-E, CronoBloc-BL-E, Wilo-Helix EXCEL, Wilo-Economy MHIE, Wilo-Multivert MVIE, Wilo-Helix VE. Serial, digital Modbus RTU interface for connection to building automation (BA) via RS485 bus system. Protocol „Modbus over Serial Line“ in accordance with Modbus-IDA V 1.02. Notice: The pump software must be compatible (for information, see Wilo homepage or consult the nearest Wilo branch).	2097809	L	259.-
IF-Modul BACnet MS/TP	Retrofittable plug-in module for pump types Wilo-Stratos GIGA, Stratos GIGA B, Stratos GIGA-D, VeroLine-IP-E, VeroTwin-DP-E, CronoLine-IL-E, CronoTwin-DL-E, CronoBloc-BL-E, Wilo-Helix EXCEL, Wilo-Economy MHIE, Wilo-Multivert MVIE, Wilo-Helix VE. Serial, digital interface BACnet MS/TP master for connection to building automation (BA) via RS485 bus system. Protocol in accordance with the BACnet standard (ISO 16484-5) Notice: The pump software must be compatible (for information, see Wilo homepage or consult the nearest Wilo branch).	2097811	L	281.-
IF-Modul LON	Retrofittable plug-in module for pump types Wilo-Stratos GIGA, Stratos GIGA B, Stratos GIGA-D, VeroLine-IP-E, VeroTwin-DP-E, CronoLine-IL-E, CronoTwin-DL-E, CronoBloc-BL-E, Wilo-Helix EXCEL, Wilo-Economy MHIE, Wilo-Multivert MVIE, Wilo-Helix VE. Serial/digital LON interface for connection to building automation (BA) via LONWorks networks: LONTalk protocol, LONMark conformity. Notice: The pump software must be compatible (for information, see Wilo homepage or consult the nearest Wilo branch).	2022530	L	250.-
IF-Modul PLR	Retrofittable plug-in module for pump types Wilo-Stratos GIGA, Stratos GIGA B, Stratos GIGA-D, VeroLine-IP-E, VeroTwin-DP-E, CronoLine-IL-E, CronoTwin-DL-E, CronoBloc-BL-E, Wilo-Helix EXCEL, Wilo-Economy MHIE, Wilo-Multivert MVIE, Wilo-Helix VE. Serial, digital PLR interface for connection to building automation (BA) via Wilo interface converter or company-specific coupling modules. Notice: The pump software must be compatible (for information, see Wilo homepage or consult the nearest Wilo branch).	2035069	L	110.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG14


CIF module				
Type	Description	Art. no.		
				EUR
CIF module LON TP/FT-10	Retrofittable plug-in module for the pump types Wilo-Stratos MAXO/Stratos MAXO-Z/Stratos MAXO-D. Serial, digital LON interface for connection to building automation (BA) via LONWorks networks: LONTalk protocol and LONMark conformity.	2190370	L	282.-
CIF module BACnet MS/TP	Retrofittable plug-in module for the pump types Wilo-Stratos MAXO/Stratos MAXO-Z/Stratos MAXO-D. Serial/digital BACnet MS/TP master interface for connection to building automation (BA) via RS485 bus system. Protocol in accordance with the BACnet standard (ISO 16484-5)	2190367	L	282.-
CIF-Module Modbus RTU	Retrofittable plug-in module for the pump types Wilo-Stratos MAXO/Stratos MAXO-Z/Stratos MAXO-D. Serial/digital Modbus RTU interface for connection to building automation (BA) via RS485 bus system. Protocol „Modbus over Serial Line” in accordance with Modbus-IDA V 1.02.	2190368	L	282.-
CIF module CANopen	Retrofittable plug-in module for the pump types Wilo-Stratos MAXO/Stratos MAXO-Z/Stratos MAXO-D. Serial/digital CAN interface for connection to building automation (BA) via CAN bus system. Protocol in accordance with the CANopen standard (EN 50325-4).	2190369	L	171.-
CIF-Module PLR	Retrofittable plug-in module for the pump types Wilo-Stratos MAXO/Stratos MAXO-Z/Stratos MAXO-D. Serial/digital PLR interface for connection to building automation (BA) via Wilo interface converter or company-specific coupling modules.	2190371	L	110.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.



SK 601N

Price group: PG14

Time switching				
Type	Description	Art. no.		
				EUR
Switchgear SK 601N	Switchgear for automatic time-dependent On/Off switching of Wilo-pumps with 1~230 V, 50/60 Hz (EM) and 3~400 V, 50/60 Hz (DM) connection. With 24-hour time switch (1/4-hour interval settings) and battery backup, change-over switch for On /timed/Off.	2120443	L	137.-

Price group: PG14

Differential pressure display device DDA					
Type	Min. measuring range	Max. measuring range	Art. no.		
	<i>p</i> bar	<i>p</i> bar			EUR
DDA 6	0	0.6	503003598	L	453.-
DDA 16	0	1.6	502856499	L	453.-
DDA 40	0	4	503217592	L	453.-

Price group: PG14

Differential pressure contact manometer DDM					
Type	Min. measuring range	Max. measuring range	Art. no.		
	<i>p</i> bar	<i>p</i> bar			EUR
DDM 6	0	0.6	110460994	L	936.-
DDM 10	0	1	110461094	C	936.-
DDM 16	0	1.6	110461197	L	936.-
DDM 25	0	2.5	110461290	C	936.-



Price group: PG14


Differential pressure sensor, DDG (4 – 20mA)					
Type	Description	Art. no.			
					EUR
DDG 100	4–20 mA; not applicable with VR–HVAC	503184799	L		774.-
DDG 2	4–20 mA; not applicable with VR–HVAC	503184295	C		774.-
DDG 10	4–20 mA	503184398	L		774.-
DDG 20	4–20 mA	503184490	L		774.-
DDG 40	4–20 mA	503184593	L		774.-
DDG 60	4–20 mA	503184696	L		774.-

DDG (differential pressure sensor) with constant signal					
Type	Description	Art. no.		Price group	
					EUR
DDG power supply unit	For DDG together with impulse selector	501865293	L	PG14	238.-
DDG transducer	(Amplifier) incl. power supply unit for differential pressure sensor (DDG)	501771990	K	PG14	2,198.-
Extension for DDG kit	-	2166098	L	PG15	41.-

Price group: PG15

DDG (differential pressure sensor) with constant signal					
Type	Description	Art. no.			
					EUR
DDG 20-1	0–10 V	2104479	L		491.-
DDG 20-2	0–10 V	2104480	L		491.-
DDG 20-3	0–10 V	2104481	L		491.-
DDG 20-4	0–10 V	2104482	L		491.-
DDG 20-5	0–10 V	2104483	L		491.-
DDG 20-6	0–10 V	2104484	L		491.-
DDG 20-7	0–10 V	2116734	L		491.-
DDG 20-8	0–10 V	2123558	L		491.-
DDG 20-10	0–10 V	2137267	L		491.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
 Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

DDG (differential pressure sensor) with constant signal				
Type	Description	Art. no.		
				EUR
DDG 20-11	0-10 V	2137268	L	491.-
DDG 20-12	0-10 V	2137269	L	491.-
DDG 20-13	0-10 V	2162544	L	491.-
DDG 20-14	0-10 V	2191057	C	491.-
DDG 40-1	0-10 V	2104485	L	491.-
DDG 40-2	0-10 V	2104486	L	491.-
DDG 40-3	0-10 V	2104487	L	491.-
DDG 40-4	0-10 V	2104488	L	491.-
DDG 40-5	0-10 V	2104489	L	491.-
DDG 40-6	0-10 V	2104490	L	491.-
DDG 40-7	0-10 V	2123559	L	491.-
DDG 40-9	0-10 V	2137270	L	491.-
DDG 40-10	0-10 V	2137271	L	491.-
DDG 40-11	0-10 V	2137272	L	491.-
DDG 40-12	0-10 V	2162543	L	491.-
DDG 40-13	0-10 V	2178962	C	491.-
DDG 60-1	0-10 V	2104491	L	491.-
DDG 60-2	0-10 V	2116735	C	491.-
DDG 60-3	0-10 V	2123560	L	491.-
DDG 60-5	0-10 V	2137273	L	491.-
DDG 60-6	0-10 V	2137274	L	491.-
DDG 60-7	0-10 V	2168158	C	491.-
DDG 60-8	0-10 V	2191056	C	491.-
DDG 100-1	0-10 V	2104492	L	491.-
DDG 100-2	0-10 V	2137275	L	491.-
DDG 100-3	0-10 V	2137276	L	491.-

Assignment to the pump type/prices of the differential pressure sensors

Stratos GIGA	Item no. for DDG kit
40/1-51/4,2-R1	2123560
40/1-45/3,8-R1	2123560
40/1-39/3,0-R1	2123559
40/1-32/2,2-R1	2123559
40/1-25/1,6-R1	2123559
50/1-33/2,6-R1	2123559
50/1-26/1,9-R1	2123559
50/1-20/1,3-R1	2123558
50/1-14/0,8-R1	2123558
50/1-50/4,2-R1	2123560
50/1-44/3,2-R1	2123560
50/1-38/2,8-R1	2123559
65/1-17/1,7-R1	2123558
65/1-12/1,1-R1	2123558
65/1-8/0,6-R1	2123558

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Assignment to the pump type/prices of the differential pressure sensors

Stratos GIGA	Item no. for DDG kit
65/1-27/3,0-R1	2123559
65/1-21/2,3-R1	2123559
65/1-42/4,8-R1	2123560
65/1-38/3,8-R1	2123559
65/1-34/3,1-R1	2123559
80/1-21/3,5-R1	2123559
80/1-16/2,3-R1	2123558
80/1-37/5,3-R1	2123559
80/1-32/4,1-R1	2123559
100/1-17/3,7-R1	2123558
100/1-13/2,3-R1	2123558
100/1-33/6,0-R1	2123559
100/1-27/4,8-R1	2123559
40/4-63/11-R1	2104492
50/4-53/11-R1	2104491
50/4-62/15-R1	2104492
65/3-40/11-R1	2104489
65/3-49/15-R1	2104491
65/4-57/18,5-R1	2104491
65/5-65/22-R1	2104492
80/2-31/11-R1	2104489
80/3-40/15-R1	2104489
80/3-48/18,5-R1	2104491
80/4-53/22-R1	2104491
100/2-22/11-R1	2104489
100/2-26/15-R1	2104489
100/2-29/18,5-R1	2104489
100/3-33/22-R1	2104489
100/2-24/11-R1	2104489
150/1-14/11-R1	2116734
150/2-17/15-R1	2104484
200/1-14/15-R1	2104484

Assignment to the pump type/prices of the differential pressure sensors

Stratos GIGA B	Item no. for DDG kit
32/1-51/4,5-R1	2168158
32/1-45/3,8-R1	2168158
32/1-38/3,0-R1	2162543
32/1-32/2,3-R1	2162543
32/1-25/1,6-R1	2162543
32/1-32/2,6-R1	2162543
32/1-25/1,9-R1	2162543
32/1-19/1,2-R1	2162544
32/1-13/0,8-R1	2162544

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Assignment to the pump type/prices of the differential pressure sensors

Stratos GIGA B	Item no. for DDG kit
32/1-48/4,5-R1	2168158
32/1-41/3,8-R1	2168158
32/1-35/3,0-R1	2162543
50/1-17/1,9-R1	2162544
50/1-12/1,2-R1	2162544
50/1-8/0,6-R1	2162544
50/1-27/3,0-R1	2162543
50/1-21/2,3-R1	2162543
40/1-44/4,5-R1	2168158
40/1-38/3,8-R1	2162543
40/1-33/3,0-R1	2162543
65/1-22/3,0-R1	2162543
65/1-18/1,9-R1	2162544
50/1-37/5,0-R1	2162543
50/1-32/3,8-R1	2162543
80/1-18/3,2-R1	2162544
80/1-13/1,9-R1	2162544
80/1-32/5,6-R1	2162543
80/1-27/4,5-R1	2162543
32/5-74/11-R1	2137276
40/4-51/11-R1	2137274
40/4-58/15-R1	2137276
40/5-70/18,5-R1	2137276
40/6-80/22-R1	2137276
50/3-42/11-R1	2137274
50/4-49/15-R1	2137274
50/4-55/18,5-R1	2137274
50/4-60/22-R1	2137276
65/2-30/11-R1	2137272
65/3-38/15-R1	2137272
65/4-50/18,5-R1	2137274
65/4-56/22-R1	2137274
80/2-23/11-R1	2137272
80/2-27/15-R1	2137272
80/2-29/18,5-R1	2137272
80/3-32/22-R1	2137272
80/2-25/11-R1	2137272
100/2-20/11-R1	2137269
100/2-24/15-R1	2137272
100/2-29/18,5-R1	-
100/3-33/22-R1	-
125/1-15/11-R1	2137269
125/2-18/15-R1	2137269
125/2-22/18,5-R1	-
125/2-25/22-R1	-

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Assignment to the pump type/prices of the differential pressure sensors

Stratos GIGA-D	Item no. for DDG kit
40/1-51/4,2-R1	2191056
40/1-45/3,8-R1	2191056
40/1-39/3,0-R1	2178962
40/1-32/2,2-R1	2178962
40/1-25/1,6-R1	2178962
50/1-33/2,6-R1	2178962
50/1-26/1,9-R1	2178962
50/1-20/1,3-R1	2191057
50/1-14/0,8-R1	2191057
50/1-50/4,2-R1	2191056
50/1-44/3,2-R1	2191056
50/1-38/2,8-R1	2178962
65/1-17/1,7-R1	2191057
65/1-12/1,1-R1	2191057
65/1-8/0,6-R1	2191057
65/1-27/3,0-R1	2178962
65/1-21/2,3-R1	2178962
65/1-42/4,8-R1	2191056
65/1-38/3,8-R1	2178962
65/1-34/3,1-R1	2178962
80/1-21/3,5-R1	2178962
80/1-16/2,3-R1	2191057
80/1-37/5,3-R1	2178962
80/1-32/4,1-R1	2178962
100/1-17/3,7-R1	2191057
100/1-13/2,3-R1	2191057
100/1-33/6,0-R1	2178962
100/1-27/4,8-R1	2178962
40/4-63/11-R1	2104492
50/4-53/11-R1	2104491
50/4-62/15-R1	2104492
65/3-40/11-R1	2104489
65/3-49/15-R1	2104491
65/4-57/18,5-R1	2104491
65/5-65/22-R1	2104492
80/2-31/11-R1	2104489
80/3-40/15-R1	2104489
80/3-48/18,5-R1	2104491
80/4-53/22-R1	2104491
100/2-22/11-R1	2104489
100/2-26/15-R1	2104489
100/2-29/18,5-R1	2104489
100/3-33/22-R1	2104489
100/2-24/11-R1	2104489
150/1-14/11-R1	2104484
150/2-17/15-R1	2104484
200/1-14/15-R1	2104484

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☞ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Assignment to the pump type/prices of the differential pressure sensors

VeroLine-IP-E	Item no. for DDG kit
32/95-0,55/2-R1	2104479
32/105-0,75/2-R1	2104479
32/125-1,1/2-R1	2104479
32/135-1,1/2-R1	2104485
32/135-1,5/2-R1	2104485
40/115-0,55/2-R1	2104479
40/120-1,5/2-R1	2104479
40/130-2,2/2-R1	2104485
40/150-3/2-R1	2104485
40/160-4/2-R1	2104485
50/105-0,75/2-R1	2104479
50/130-2,2/2-R1	2104479
50/140-3/2-R1	2104485
50/150-4/2-R1	2104485
65/115-1,5/2-R1	2104480
65/110-2,2/2-R1	2104479
65/120-3/2-R1	2104479
65/130-4/2-R1	2104485
80/115-2,2/2-R1	2104480
80/105-3/2-R1	2104479
80/110-4/2-R1	2104479

Assignment to the pump type/prices of the differential pressure sensors

VeroTwin-DP-E	Item no. for DDG kit
32/95-0,55/2-R1	2104483
32/105-0,75/2-R1	2104483
32/125-1,1/2-R1	2104483
32/135-1,1/2-R1	2104488
32/135-1,5/2-R1	2104488
40/115-0,55/2-R1	2104481
40/120-1,5/2-R1	2104481
40/130-2,2/2-R1	2104487
40/150-3/2-R1	2104487
40/160-4/2-R1	2104487
50/105-0,75/2-R1	2104481
50/130-2,2/2-R1	2104481
50/140-3/2-R1	2104487
50/150-4/2-R1	2104487
65/115-1,5/2-R1	2104482
65/110-2,2/2-R1	2104479
65/120-3/2-R1	2104481
65/130-4/2-R1	2104487
80/115-2,2/2-R1	2104482

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Assignment to the pump type/prices of the differential pressure sensors

VeroTwin-DP-E	Item no. for DDG kit
80/105-3/2-R1	2104481
80/110-4/2-R1	2104481

Assignment to the pump type/prices of the differential pressure sensors

CronoLine-IL-E	Item no. for DDG kit
100/220-5,5/4-R1	2116734
125/210-5,5/4-R1	2116734
150/190-5,5/4-R1	2116734
100/270-11/4-R1	2104489
150/220-11/4-R1	2116734
150/250-15/4-R1	2104484
150/260-18,5/4-R1	2104489
150/270-22/4-R1	2104489
200/240-15/4-R1	2104484
200/250-18,5/4-R1	2104484
200/260-22/4-R1	2104484
100/250-7,5/4-R1	2116734
125/220-7,5/4-R1	2116734
150/200-7,5/4-R1	2116734

Assignment to the pump type/prices of the differential pressure sensors

CronoTwin-DL-E	Item no. for DDG kit
40/220-11/2-R1	2104492
40/170-5,5/2-R1	2104490
40/200-7,5/2-R1	2116734
50/210-11/2-R1	2104491
50/220-15/2-R1	2104492
50/160-5,5/2-R1	2104490
50/170-7,5/2-R1	2104490
50/180-7,5/2-R1	2116735
65/170-11/2-R1	2104489
65/200-15/2-R1	2104491
65/210-18,5/2-R1	2104491
65/220-22/2-R1	2104492
65/150-5,5/2-R1	2104490
65/160-7,5/2-R1	2104490
80/160-11/2-R1	2104489
80/170-15/2-R1	2104489
80/190-18,5/2-R1	2104491
80/200-22/2-R1	2104491
80/130-5,5/2-R1	2116734

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Assignment to the pump type/prices of the differential pressure sensors

CronoTwin-DL-E

Item no. for DDG kit

80/140-7,5/2-R1	2104490
80/150-7,5/2-R1	2104490
100/145-11/2-R1	2104489
100/150-15/2-R1	2104489
100/160-18,5/2-R1	2104489
100/165-22/2-R1	2104489

Assignment to the pump type/prices of the differential pressure sensors

CronoBloc-BL-E

Item no. for DDG kit

32/220-11/2-R1	2137276
40/210-11/2-R1	2137274
40/220-15/2-R1	2137276
40/230-18,5/2-R1	2137276
40/240-22/2-R1	2137276
50/170-11/2-R1	2137274
50/200-15/2-R1	2137274
50/210-18,5/2-R1	2137274
50/220-22/2-R1	2137276
65/160-11/2-R1	2137272
65/170-15/2-R1	2137272
65/190-18,5/2-R1	2137274
65/210-22/2-R1	2137274
80/145-11/2-R1	2137272
80/150-15/2-R1	2137272
80/160-18,5/2-R1	2137272
80/165-22/2-R1	2137272
32/140-2,2/2-R1	2137270
32/150-3/2-R1	2137270
32/160-4/2-R1	2137270
32/170-5,5/2-R1	2137273
32/210-7,5/2-R1	2137275
40/110-1,5/2-R1	2137267
40/120-2,2/2-R1	2137267
40/130-3/2-R1	2137270
40/140-4/2-R1	2137270
40/160-5,5/2-R1	2137271
40/170-7,5/2-R1	2137273
40/180-7,5/2-R1	2137273
50/110-3/2-R1	2137267
50/120-4/2-R1	2137267
50/130-5,5/2-R1	2137271
50/140-7,5/2-R1	2137271
50/150-7,5/2-R1	2137271

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.



SK 602N



SK 622N

Price group: PG14

Full motor protection					
Type	Description	Art. no.			
				🚚	EUR
Switchgear SK 602N	Wall-mounted unit for the electrical connection of single-phase (EM) and three-phase (DM) pumps with integrated thermal winding contacts (WSK) for monitoring the winding temperature. With On/Off switch with integrated run signal light, power contactor and potential-free switch-on/off.	2120444		L	178.-
Switchgear SK 622N	Like SK 602, but with potential-free contacts for external run signal (SBM) and fault signal (SSM) as well as fault signal light.	2120445		L	209.-

Price group: PG14

PTC thermistor tripping unit for glanded pumps					
Type		For Wilo pumps	Art. no.		
				🚚	EUR
PTC thermistor tripping unit	for switch cabinet installation (one device per motor required)	IPL, DPL, IL, DL, BL, IPS, IPH-O, IPH-W, NL, NPG	509275993	L	434.-


Price group:

PTC thermistor sensor					
Type		For Wilo pumps	Art. no.		
				🚚	EUR
Surcharge for thermistor sensor <7.5 kW	(Variant K3)	IPL, IPH-O/W, IPS, IL, BL < 7.5 kW	KLF_7_EP	K	202.-
Surcharge for thermistor sensor (dual pumps) <7.5 kW	(Variant K3)	DPL, DL < 7.5 kW	KLF_7_DP	K	405.-
Surcharge for thermistor sensor (dual pumps) >7.5 kW	(Variant K3)	DL 11-55 kW	KLF_11_DP	K	485.-
Surcharge for thermistor sensor 7.5 - 75 kW	(Variant K3)	IL, BL 11-55 kW	KLF_11_EP	K	243.-
Surcharge for PTC thermistor sensor >75 kW	(Variant K3)	IL >75 kW	KLF_75_EP	K	📞

🚚 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, 📞 = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Electrical accessories

232 Switching Plug

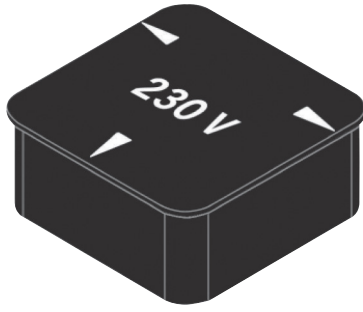

Wilo switching plug N

Price group: PG14

Accessories for Wilo-TOP...				
Type	Description	Art. no.		
Switching plug „N”	For conversion in terminal box of TOP three-phase pumps (2 plugs required for twin-head pumps) to existing mains voltage 3~230 V, 50 Hz . Approx. weight 30 g. The 3-stage connection of the pump is retained.	2040655	L	EUR 40.-

= ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.


Equipment/function

For Wilo-Stratos MAXO/Stratos MAXO-D pumps in the event of replacement

→ Functional unit with motor, impeller and electronic module

Price group: PG17

Wilo spare motors RMOT						
Type	Mains connection	Gross weight, approx.	Art. no.			
		m kg			EUR	
Stratos MAXO/-D 30/0.5-6 RMOT.	1-230 V, 50/60 Hz	5.6	2186325	L	1,012.-	
Stratos MAXO/-D 30/0.5-10 RMOT.	1-230 V, 50/60 Hz	5.9	2186327	L	1,229.-	
Stratos MAXO/-D 32/0.5-8 RMOT.	1-230 V, 50/60 Hz	7.8	2186330	L	1,153.-	
Stratos MAXO/-D 32/0.5-12 RMOT.	1-230 V, 50/60 Hz	8.1	2186332	L	1,782.-	
Stratos MAXO/-D 40/0.5-8 RMOT.	1-230 V, 50/60 Hz	8.1	2186335	L	1,865.-	
Stratos MAXO/-D 40/0.5-12 RMOT.	1-230 V, 50/60 Hz	11.1	2186336	L	2,208.-	
Stratos MAXO/-D 40/0.5-16 RMOT.	1-230 V, 50/60 Hz	11.1	2186337	L	3,032.-	
Stratos MAXO/-D 50/0.5-6 RMOT.	1-230 V, 50/60 Hz	8.1	2186338	L	2,100.-	
Stratos MAXO/-D 50/0.5-8 RMOT.	1-230 V, 50/60 Hz	11	2186339	L	2,415.-	
Stratos MAXO/-D 50/0.5-9 RMOT.	1-230 V, 50/60 Hz	11	2186340	L	2,727.-	
Stratos MAXO/-D 50/0.5-12 RMOT.	1-230 V, 50/60 Hz	11.1	2186341	L	2,910.-	
Stratos MAXO/-D 50/0.5-16 RMOT.	1-230 V, 50/60 Hz	18.6	2186343	L	3,949.-	
Stratos MAXO/-D 65/0.5-6 RMOT.	1-230 V, 50/60 Hz	11.1	2186344	L	2,560.-	
Stratos MAXO/-D 65/0.5-12 RMOT.	1-230 V, 50/60 Hz	17.5	2186346	L	3,321.-	
Stratos MAXO/-D 65/0.5-16 RMOT.	1-230 V, 50/60 Hz	18.6	2186347	L	4,037.-	
Stratos MAXO/-D 80/0.5-6 RMOT.	1-230 V, 50/60 Hz	17.5	2186348	L	3,457.-	
Stratos MAXO/-D 80/0.5-12 RMOT.	1-230 V, 50/60 Hz	18.6	2186349	L	4,409.-	
Stratos MAXO/-D 80/0.5-16 RMOT.	1-230 V, 50/60 Hz	18.6	2186350	L	5,290.-	
Stratos MAXO 25/0.5-4 RMOT.	1-230 V, 50/60 Hz	5.6	2186319	L	764.-	
Stratos MAXO 25/0.5-6 RMOT.	1-230 V, 50/60 Hz	5.6	2186320	L	940.-	
Stratos MAXO 25/0.5-8 RMOT.	1-230 V, 50/60 Hz	5.6	2186321	L	1,048.-	
Stratos MAXO 25/0.5-10 RMOT.	1-230 V, 50/60 Hz	5.9	2186322	L	1,137.-	
Stratos MAXO 25/0.5-12 RMOT.	1-230 V, 50/60 Hz	5.9	2186323	L	1,403.-	
Stratos MAXO 30/0.5-4 RMOT.	1-230 V, 50/60 Hz	5.6	2186324	L	901.-	
Stratos MAXO 30/0.5-8 RMOT.	1-230 V, 50/60 Hz	5.6	2186326	L	1,127.-	
Stratos MAXO 30/0.5-12 RMOT.	1-230 V, 50/60 Hz	5.9	2186328	L	1,591.-	
Stratos MAXO 30/0.5-14 RMOT.	1-230 V, 50/60 Hz	5.9	2186329	L	1,830.-	
Stratos MAXO 32/0.5-10 RMOT.	1-230 V, 50/60 Hz	8.1	2186331	L	1,282.-	
Stratos MAXO 32/0.5-16 RMOT.	1-230 V, 50/60 Hz	11	2186333	L	2,138.-	
Stratos MAXO 40/0.5-4 RMOT.	1-230 V, 50/60 Hz	7.8	2186334	L	1,215.-	
Stratos MAXO 50/0.5-14 RMOT.	1-230 V, 50/60 Hz	17.5	2186342	L	3,555.-	
Stratos MAXO 65/0.5-9 RMOT.	1-230 V, 50/60 Hz	11.1	2186345	L	2,954.-	
Stratos MAXO 100/0.5-6 RMOT.	1-230 V, 50/60 Hz	17.5	2186351	L	3,998.-	
Stratos MAXO 100/0.5-12 RMOT.	1-230 V, 50/60 Hz	18.6	2186352	L	5,328.-	

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.



Equipment/function
For Wilo-Stratos MAXO-Z pumps in the event of replacement

→ Functional unit with motor, impeller and electronic module

Price group: PG17

Wilo spare motors RMOT					
Type	Mains connection	Gross weight, approx.	Art. no.		
		m kg			EUR
Stratos MAXO-Z 25/0.5-6 RMOT.	1-230 V, 50/60 Hz	5.6	2186383	L	1,503.-
Stratos MAXO-Z 25/0.5-8 RMOT.	1-230 V, 50/60 Hz	5.6	2186384	L	1,677.-
Stratos MAXO-Z 25/0.5-12 RMOT.	1-230 V, 50/60 Hz	5.9	2186385	L	2,245.-
Stratos MAXO-Z 30/0.5-6 RMOT.	1-230 V, 50/60 Hz	5.6	2186386	L	1,619.-
Stratos MAXO-Z 30/0.5-8 RMOT.	1-230 V, 50/60 Hz	5.6	2186387	L	1,803.-
Stratos MAXO-Z 30/0.5-12 RMOT.	1-230 V, 50/60 Hz	5.9	2186388	L	2,546.-
Stratos MAXO-Z 32/0.5-8 RMOT.	1-230 V, 50/60 Hz	8.9	2186389	L	1,845.-
Stratos MAXO-Z 32/0.5-12 RMOT.	1-230 V, 50/60 Hz	9.3	2186390	L	2,852.-
Stratos MAXO-Z 40/0.5-8 RMOT.	1-230 V, 50/60 Hz	9.3	2186391	L	2,984.-
Stratos MAXO-Z 40/0.5-12 RMOT.	1-230 V, 50/60 Hz	12.2	2186392	L	3,532.-
Stratos MAXO-Z 50/0.5-9 RMOT.	1-230 V, 50/60 Hz	11	2186393	L	4,364.-
Stratos MAXO-Z 65/0.5-12 RMOT.	1-230 V, 50/60 Hz	19.5	2186394	L	5,314.-

= ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.



Equipment/function
For Wilo-Yonos MAXO/Yonos MAXO-D pumps in the event of replacement

→ Functional unit with motor, impeller and electronic module

Price group: PG2

Wilo spare motors RMOT					
Type	Mains connection	Gross weight, approx.	Art. no.		
		m kg			EUR
Yonos MAXO/-D 32/0.5-11 RMOT.	1-230 V, 50/60 Hz	5.1	2146475	L	1,505.-
Yonos MAXO /-D 40/0.5-8 RMOT.	1-230 V, 50/60 Hz	4.9	2146242	L	1,574.-
Yonos MAXO/-D 40/0.5-12 RMOT.	1-230 V, 50/60 Hz	6.1	2146243	L	1,863.-
Yonos MAXO /-D 40/0.5-16 RMOT.	1-230 V, 50/60 Hz	14.1	2146244	L	2,560.-
Yonos MAXO /-D 50/0.5-9 RMOT.	1-230 V, 50/60 Hz	6.1	2146246	L	2,302.-
Yonos MAXO/-D 50/0.5-12 RMOT.	1-230 V, 50/60 Hz	6.1	2146247	L	2,445.-
Yonos MAXO /-D 50/0.5-16 RMOT.	1-230 V, 50/60 Hz	15.5	2146248	L	3,108.-
Yonos MAXO /-D 65/0.5-12 RMOT.	1-230 V, 50/60 Hz	14.1	2146250	L	2,803.-
Yonos MAXO /-D 65/0.5-16 RMOT.	1-230 V, 50/60 Hz	15.5	2146251	L	3,407.-
Yonos MAXO /-D 80/0.5-6 RMOT.	1-230 V, 50/60 Hz	14.1	2146252	L	2,919.-
Yonos MAXO /-D 80/0.5-12 RMOT.	1-230 V, 50/60 Hz	15.5	2146253	L	3,780.-
Yonos MAXO 25/0.5-7 RMOT.	1-230 V, 50/60 Hz	3.4	2146235	L	880.-
Yonos MAXO 25/0.5-10 RMOT.	1-230 V, 50/60 Hz	3.4	2146236	L	961.-
Yonos MAXO 25/0.5-12 RMOT.	1-230 V, 50/60 Hz	4.9	2146237	L	1,184.-
Yonos MAXO 30(-D 32)/0.5-7 RMOT.	1-230 V, 50/60 Hz	3.4	2146238	L	990.-
Yonos MAXO 30/0.5-10 RMOT.	1-230 V, 50/60 Hz	3.4	2146239	L	1,037.-
Yonos MAXO 30/0.5-12 RMOT.	1-230 V, 50/60 Hz	4.9	2146240	L	1,343.-
Yonos MAXO 32/0.5-10 RMOT.	1-230 V, 50/60 Hz	-	2210115	A	☞
Yonos MAXO 40/0.5-4 RMOT.	1-230 V, 50/60 Hz	3.4	2146241	L	1,025.-
Yonos MAXO 50/0.5-8 RMOT.	1-230 V, 50/60 Hz	4.9	2146245	L	2,039.-
Yonos MAXO 65/0.5-9 RMOT.	1-230 V, 50/60 Hz	6.1	2146249	L	2,505.-
Yonos MAXO 100/0.5-12 RMOT.	1-230 V, 50/60 Hz	15.5	2146254	L	4,521.-

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☞ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.



Equipment/function
For Wilo-Yonos MAXO-Z pumps for replacement cases

→ Functional unit with motor, impeller and electronic module

Price group: PG2

Wilo spare motors RMOT					
Type	Mains connection	Gross weight, approx.	Art. no.		
		<i>m</i> kg			EUR
Yonos MAXO-Z 25/0,5-7 RMOT.	1-230 V, 50/60 Hz	3.4	2191261	L	1,227.-
Yonos MAXO-Z 25/0,5-10 RMOT.	1-230 V, 50/60 Hz	3.4	2191262	L	1,536.-
Yonos MAXO-Z 30/0,5-7 RMOT.	1-230 V, 50/60 Hz	3.4	2191263	L	1,379.-
Yonos MAXO-Z 30/0,5-12 RMOT.	1-230 V, 50/60 Hz	4.9	2191264	L	1,880.-
Yonos MAXO-Z 40/0,5-8 RMOT.	1-230 V, 50/60 Hz	4.9	2191265	L	2,518.-
Yonos MAXO-Z 40/0,5-12 RMOT.	1-230 V, 50/60 Hz	6.1	2191266	L	2,795.-
Yonos MAXO-Z 50/0,5-9 RMOT.	1-230 V, 50/60 Hz	6.1	2191267	L	3,453.-
Yonos MAXO-Z 65/0,5-12 RMOT.	1-230 V, 50/60 Hz	14.1	2191268	L	4,486.-

= ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.



Equipment/function

For Wilo-Stratos/Stratos-D pumps in the event of re-
placement

→ Functional unit with motor, impeller and electronic
module

Price group: PG2

Type	Mains connection	Gross weight, approx. m kg	Art. no.		EUR
STRATOS /-D 32/1-12 RMOT.CAN	1~230 V, 50/60 Hz	3.5	2095085	L	1,771.-
STRATOS /-D 40/1-8 RMOT.CAN	1~230 V, 50/60 Hz	5.2	2095087	L	1,853.-
STRATOS /-D 40/1-12 RMOT.CAN	1~230 V, 50/60 Hz	7.2	2095088	L	2,193.-
STRATOS /-D 40/1-16 RMOT.	1~230 V, 50/60 Hz	14.1	2146337	L	3,012.-
STRATOS /-D 50/1-8 RMOT.CAN	1~230 V, 50/60 Hz	5.2	2095089	L	2,399.-
STRATOS /-D 50/1-9 RMOT.CAN	1~230 V, 50/60 Hz	7.2	2095090	L	2,709.-
STRATOS /-D 50/1-12 RMOT.CAN	1~230 V, 50/60 Hz	7.2	2095091	L	2,891.-
STRATOS /-D 50/1-16 RMOT.	1~230 V, 50/60 Hz	15.2	2146338	L	3,924.-
STRATOS /-D 65/1-12 RMOT.(SW>=6.12)	1~230 V, 50/60 Hz	11.6	2163268	L	3,299.-
STRATOS /-D 65/1-12 RMOT.CAN	1~230 V, 50/60 Hz	11.6	2095093	L	3,299.-
STRATOS /-D 65/1-16 RMOT.	1~230 V, 50/60 Hz	15.2	2146339	L	4,010.-
STRATOS /-D 80/1-6 RMOT.	1~230 V, 50/60 Hz	13	2163269	C	3,434.-
STRATOS /-D 80/1-12 RMOT.CAN	1~230 V, 50/60 Hz	13	2095094	L	4,379.-
STRATOS 25/1-4 RMOT.	1~230 V, 50/60 Hz	4.3	2119570	L	741.-
STRATOS 25/1-6 RMOT.CAN	1~230 V, 50/60 Hz	4.3	2095080	L	938.-
STRATOS 25/1-8 RMOT.CAN	1~230 V, 50/60 Hz	4.3	2095081	L	1,041.-
STRATOS 25/1-10 RMOT.	1~230 V, 50/60 Hz	4.3	2119571	L	1,130.-
STRATOS 25/1-12 RMOT.	1~230 V, 50/60 Hz	5	2146520	L	1,393.-
STRATOS 30(-D 32)/1-8 RMOT.CAN	1~230 V, 50/60 Hz	4.3	2095083	L	1,119.-
STRATOS 30/1-4 RMOT.	1~230 V, 50/60 Hz	4.3	2119572	L	917.-
STRATOS 30/1-6 RMOT.CAN	1~230 V, 50/60 Hz	4.3	2095082	L	1,020.-
STRATOS 30/1-10 RMOT.	1~230 V, 50/60 Hz	4.3	2119573	L	1,221.-
STRATOS 30/1-12 RMOT.CAN	1~230 V, 50/60 Hz	5.1	2095084	L	1,580.-
STRATOS 32/1-10 RMOT.	1~230 V, 50/60 Hz	4.3	2119574	L	1,274.-
STRATOS 40/1-4 RMOT.CAN	1~230 V, 50/60 Hz	4.3	2095086	L	1,207.-
STRATOS 40/1-10 RMOT.	1~230 V, 50/60 Hz	4.3	2119575	L	1,566.-
STRATOS 50/1-10 RMOT.	1~230 V, 50/60 Hz	4.3	2119576	L	1,781.-
STRATOS 65/1-9 RMOT.CAN	1~230 V, 50/60 Hz	7.2	2095092	L	2,934.-
STRATOS 100/1-12 RMOT.CAN	1~230 V, 50/60 Hz	13	2095095	L	5,292.-
Stratos 50/1-6 RMOT.	1~230 V, 50/60 Hz	5.2	2151883	L	2,056.-
Stratos 65/1-6 RMOT.	1~230 V, 50/60 Hz	7.2	2151884	L	2,530.-
Stratos 100/1-6 RMOT.	1~230 V, 50/60 Hz	13	2151886	L	4,070.-

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.



Equipment/function

For Wilo-Stratos-Z/Stratos-ZD pumps in the event of replacement

→ Functional unit with motor, impeller and electronic module

Price group: PG2

Type	Mains connection	Gross weight, approx.	Art. no.		
		<i>m</i> kg			EUR
Stratos-Z 25/1-8 RMOT	1-230 V, 50/60 Hz	4.3	2095096	L	1,814.-
Stratos-Z 30/1-8 RMOT	1-230 V, 50/60 Hz	4.3	2095097	L	2,006.-
Stratos-Z 30/1-12 RMOT	1-230 V, 50/60 Hz	3.5	2095098	L	2,557.-
Stratos-Z 40/1-8 RMOT	1-230 V, 50/60 Hz	5.2	2095100	L	2,877.-
Stratos-Z 40/1-12 RMOT	1-230 V, 50/60 Hz	7.2	2095101	L	3,528.-
Stratos-Z 50/1-9 RMOT	1-230 V, 50/60 Hz	7.2	2095102	L	4,356.-
Stratos-Z 65/1-12 RMOT	1-230 V, 50/60 Hz	11.6	2095103	L	5,747.-
Stratos-ZD 32/1-12 RMOT	1-230 V, 50/60 Hz	4.5	2095099	L	2,789.-



Equipment/function

For Wilo-TOP-Z/-ZV pumps in the event of replacement

→ Function unit with motor, impeller and terminal box



Price group: PG2

Type	Mains connection	Gross weight, approx. m kg	Art. no.		EUR
TOP-Z/ZV30/7 DM RMOT.	3~400 V, 50 Hz	3.3	2048351	L	881.-
TOP-Z/ZV30/7 EM RMOT.	1~230 V, 50 Hz	3.3	2048350	L	929.-
TOP-Z/ZV65/10 DM RMOT.	3~400 V, 50 Hz	13	2046688	A	3,183.-
TOP-Z/ZV 65/10 DM RMOT. (from March 2017)	3~400 V, 50 Hz	13	2176070	L	3,183.-
TOP-Z 20/4 DM RMOT.	3~400 V, 50 Hz	3.4	2115469	C	809.-
TOP-Z 20/4 EM RMOT.	1~230 V, 50 Hz	3.4	2115468	C	858.-
TOP-Z25/6 DM RMOT.	3~400 V, 50 Hz	3.5	2122051	C	847.-
TOP-Z25/6 EM RMOT.	1~230 V, 50 Hz	3.5	2064235	C	901.-
TOP-Z25/10 DM PN6/10 RMOT.	3~400 V, 50 Hz	5.2	2087599	A	1,383.-
TOP-Z 25/10 DM RMOT. (from March 2017)	3~400 V, 50 Hz	5.2	2175537	C	☞
TOP-Z25/10 EM PN6/10 RMOT.	1~230 V, 50 Hz	5.2	2087600	L	1,463.-
TOP-Z30/10 DM PN6/10 RMOT.	3~400 V, 50 Hz	5.4	2109226	A	1,383.-
TOP-Z 30/10 DM PN6/10 RMOT. (from March 2017)	3~400 V, 50 Hz	5.4	2176066	C	1,383.-
TOP-Z30/10 EM PN6/10 RMOT.	1~230 V, 50 Hz	5	2090117	C	1,463.-
TOP-Z40/7 DM GG/RG RMOT.	3~400 V, 50 Hz	4.8	2046684	A	1,298.-
TOP-Z 40/7 DM GG/RG RMOT. (from March 2017)	3~400 V, 50 Hz	4.8	2176067	L	1,298.-
TOP-Z40/7 EM GG/RG RMOT.	1~230 V, 50 Hz	4.8	2046683	L	1,408.-
TOP-Z50/7 DM GG/RG RMOT.	3~400 V, 50 Hz	8	2046687	A	1,843.-
TOP-Z 50/7 DM GG/RG RMOT. (from March 2017)	3~400 V, 50 Hz	8	2176069	L	1,843.-
TOP-Z80/10 DM GG/RG RMOT.	3~400 V, 50 Hz	13.5	2046689	A	3,831.-
TOP-Z 80/10 DM GG/RG RMOT. (from March 2017)	3~400 V, 50 Hz	13.5	2176071	C	3,831.-
TOP-ZV25/7 DM RMOT.	3~400 V, 50 Hz	3.5	2048349	C	766.-
TOP-ZV25/7 EM RMOT.	1~230 V, 50 Hz	3.5	2048348	C	816.-
TOP-ZV40/4 DM RMOT.	3~400 V, 50 Hz	3.5	2048353	C	1,377.-
TOP-ZV40/4 EM RMOT.	1~230 V, 50 Hz	3.5	2048352	C	1,452.-
TOP-ZV50/6 DM RMOT.	3~400 V, 50 Hz	5	2046686	A	☞
TOP-ZV 50/6 DM RMOT. (from March 2017)	3~400 V, 50 Hz	5	2176068	C	1,732.-
TOP-ZV50/6 EM RMOT.	1~230 V, 50 Hz	5	2046685	C	1,882.-

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☞ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG3



Additional charges for mechanical seals for applications in cooling/air-conditioning systems, glycol proportion 20% to 40%, +40°C to +120°C;
Glycol proportion from 40% to 50%, -20°C to +120°C

Type	Code	Version	double pump		single-head pump	
			 EUR	EUR	 EUR	EUR
3	S1	Q1Q1X4GG	A	62.-	A	31.-
4	S1	Q1Q1X4GG	A	74.-	A	37.-
5	S1	Q1Q1X4GG	A	88.-	A	44.-
6	S1	Q1Q1X4GG	A	138.-	A	69.-
7	S1	Q1Q1X4GG	A	268.-	A	134.-
8	S1	Q1Q1X4GG	A	470.-	A	235.-
9	S1	Q1Q1X4GG	A	☺	A	1,617.-
10	S1	Q1Q1X4GG	A	☺	A	31.-
11	S1	Q1Q1X4GG	A	☺	A	44.-
12	S1	Q1Q1X4GG	A	☺	A	59.-
13	S1	Q1Q1X4GG	A	214.-	A	107.-
14	S1	Q1Q1X4GG	A	450.-	A	225.-
15	S1	Q1Q1X4GG	A	3,050.-	A	1,525.-
16	S1	Q1Q1X4GG	A	2,038.-	A	1,019.-
20	S1	Q1Q1X4GG	A	☺	A	234.-
21	S1	Q1Q1X4GG	A	☺	A	454.-

Version consisting of GRD and housing sealing

Price group: PG3

Additional charges for mechanical seals for applications in water oil emulsions and water with oil proportions up to 90°C

Type	Code	Version	double pump		single-head pump	
			 EUR	EUR	 EUR	EUR
3	S2	AQ1VGG	A	450.-	A	225.-
4	S2	AQ1VGG	A	586.-	A	293.-
5	S2	AQ1VGG	A	636.-	A	318.-
6	S2	AQ1VGG	A	764.-	A	382.-
7	S2	AQ1VGG	A	1,018.-	A	509.-
8	S2	AQ1VGG	A	1,204.-	A	602.-
10	S2	AQ1VGG	A	☺	A	225.-

Version consisting of GRD and housing sealing

Price group: PG15

Spare parts: Mechanical seals (GRD)

Type	For Wilo pumps	Art. no. S1 version		Art. no. standard version	
1	IPn, DPn, Bn	-	A	120613693	A
2	IPn, DPn, Bn	-	A	120613796	A
3	IPL, DPL, IP-E, DP-E	2062360	A	122097593	A
4	IL, DL, BL, IL-E, DL-E, IL-E...BF, BL-E	2064430	A	2026901	A
5	IL, DL, BL, IL-E, DL-E, IL-E...BF, BL-E	2064431	A	2026902	A
6	IL, DL, BL, IL-E, DL-E, IL-E...BF, BL-E	2064432	A	2026903	A
7	IL, DL, BL, IL-E, DL-E, IL-E...BF, BL-E	2064433	A	2052335	A
8	IL, DL, BL, IL-E, DL-E, IL-E...BF, BL-E	2064434	A	2052336	A
9	IL, DL, BL, IL-E, DL-E, IL-E...BF, BL-E	2064435	A	2056452	A
10	IPL 25..., IPL 30...	2085857	A	2087788	A
11	Stratos GIGA, Stratos GIGA-D, Stratos-GIGA-B	2132518	A	2125211	A
12	IL, DL, BL	2195047	A	2195046	A
13	IL, DL, BL	2195049	A	2194977	A
14	IL, DL, BL	2192844	A	2178970	A
15	IL, DL, BL	2192848	A	2178983	A
16	IL, DL, BL	2196614	A	2196613	A

Version consisting of GRD and housing sealing


Additional charges, special motors

Type	Price group	Price
EUR		
400/690 V, 50 Hz, up to 4 kW; 230/400 V, 50 Hz, up to 3 kW; 1 x 230 V, 50 Hz; 3 x 500 V, 50 Hz; 3 x 415 V, 50 Hz	A PG3	Plus 10% of the price of the correspondent standard pump
Other voltages; frequency 60 Hz; explosion-protected motors; all other special versions	A PG3	On request


Notes:

The standard voltage of three-phase motors for voltages according to DIN IEC 60038 (mains voltage) may have a tolerance of $\pm 10\%$. Electronically controlled glanded pumps cannot be supplied with special motors.

Price group: PG15

Blind flanges for glandless pumps				
Type	For Wilo pumps	Art. no.		
				EUR
Blind flange size 22 SET	TOP... 30/5, 32/7, 40/3	2016008	L	67.-
Blind flange size 43 SET	Stratos-D 40/1-12, 50/1-9, 50/1-12; Yonos MAXO-D 40/0,5-12, 50/0,5-9, 50/0,5-12	2049992	L	99.-
Blind flange size 32 SET	TOP... 32/10, 40/7	2016009	L	90.-
Blind flange size 33 SET	Stratos-D 32/1-12, 40/1-8, 50/1-8; Yonos MAXO-D 32/0,5-11, 40/0,5-8	2049991	L	90.-
Blind flange size 52 SET	TOP... 40/15, 50/15, 65/10, 65/13, 65/15, 80/10	2007497	L	107.-
Blind flange size 72 SET	TOP... 80/15, 80/20	2094641	L	141.-
Blind flange size 42 SET	TOP... 40/10, 50/7, 50/10, 65/10(450W), 80/7(450W)	2007496	L	95.-
Blind flange size 23 SET	Stratos-D 32/1-8; Yonos MAXO-D 32/0,5-7	2049280	L	87.-
Blind flange size 53/63 SET	Stratos-D 40/1-16, 50/1-16, 65/1-12, 65/1-16, 80/1-12; Yonos MAXO-D 40/0,5-16, 65/0,5-12, 50/0,5-16, 65/0,5-16, 80/0,5-12	2049279	L	141.-

Price group: PG14

Blind flanges for glanded pumps				
Type	Code	Art. no.		
				EUR
Blind flange P188 kit	F	2023964	L	171.-
Blind flange P154 kit	G	2023965	L	93.-
Blind flange P190 kit	A	2040970	L	277.-
Blind flange P228 kit	B	2040971	L	316.-
Blind flange P270 kit	C	2042861	L	387.-
Blind flange P330 set	D	2052701	L	433.-
Blind flange P400 kit	E	2052702	L	651.-
Blind flange P170 kit	H	2023981	L	112.-
Blind flange P165-D112 set	I	2179210	L	158.-
Blind flange P165-D136 set	J	2179211	L	158.-
Blind flange P215-D136 set	K	2179212	L	317.-
Blind flange P215-D164 set	L	2179213	L	317.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.



Direction-of-rotation indicator



IR-Monitor



IR-Stick

Price group: PG14

Accessories for Wilo pumps with Infrared interface

Type	Description	Art. no.		
				EUR
IR-Monitor for DE, GB, FR, NL	Operating and service unit for wireless data exchange for all Wilo pumps with infra-red interface. For all pumps and standard motors for measuring the direction of rotation, rotating field frequency and current operating status. Display (50 x 50 mm) for displaying, for example, the electrical and hydraulic actual values as well as the duty point of the pump, service information, device settings etc. The scope of delivery includes Mignon AA alkaline batteries.	2017390	L	335.-
IR-Monitor for IT, HU, PL, CZ	Operating and service unit for wireless data exchange for all Wilo pumps with infra-red interface. For all pumps and standard motors for measuring the direction of rotation, rotating field frequency and current operating status. Display (50 x 50 mm) for displaying, for example, the electrical and hydraulic actual values as well as the duty point of the pump, service information, device settings etc. The scope of delivery includes Mignon AA alkaline batteries.	2033336	L	335.-
IR-Stick	USB stick for wireless data exchange for all electronically controlled Wilo pumps with infra-red interface; can be adapted to a Windows laptop with a USB interface. The IRStick, together with the supplied Wilo software (CD-ROM), makes it possible to read out and save data records for pumps as well as the sending of previously defined pump settings.	2109467	L	240.-

Price group: PG18

Accessories for glandless pumps

Type	Description	Art. no.		
				EUR
Wilo direction-of-rotation indicator	Direction of rotation indicator (5 pcs. in the scope of delivery) for a contactless check/display of the direction of rotation of glandless pumps in 1~ or 3 ~ version.	2095967	L	44.-

Heating, air conditioning, cooling

= ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Standard glandless circulators for non-EU markets

Inside the EU*

According to the ErP Directive (2009/125/EG) with ordinances (EG) 641/2009 and (EG) 622/2012, uncontrolled standard glandless circulators are no longer allowed to be sold in the EU from 1 January 2013 on.

Exceptions to this rule are products like for example glandless circulators which are integrated in heat generators. These exceptions apply until the Directive prescribes also the replacement of newly installed heat generators or solar stations from August 2015 on.

Outside the EU

Pumps of the following series are allowed to be further distributed outside the EU, however in compliance with the legislation in force in these countries.

Star-RS/RSD
TOP-S/SD
TOP-RL
Star-STG




Note

An energy efficiency evaluation and a CE conformity declaration (CE mark) do no longer exist for these products.

*Austria, Belgium, Bulgaria, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Ireland, Italy, Latvia, Lithuania, Luxemburg, Malta, Netherlands, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Great Britain

+ Croatia (EU member from 2013 on), + Turkey (candidate country), + Serbia (candidate country)

+ 4 countries of the EFTA (European Free Trade Association) Iceland, Norway, Liechtenstein, Switzerland

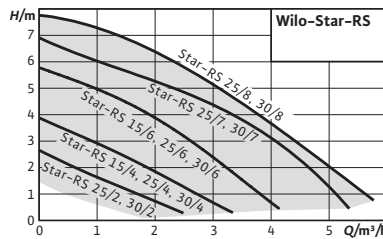

Accessories	Page
Pipe installation/ screwed connection	179
Pipe installation/ adapter fitting	181
Thermal insulation	198

Select 4 online

All information at www.wilo-select.com

Wilo-Star-RS



Construction

Glandless circulator with threaded connection. Preselectable speed stages for power adjustment

Application

Hot-water heating systems of all kinds, industrial circulation systems, cold water systems and air-conditioning systems

Scope of delivery

- Pump
- Gaskets
- Installation and operating instructions

Options

- Version ...RG with housing made of red brass
- Version ... -130 with short overall length of -130 mm


Your advantages


- Suitable for any installation location with a horizontal shaft; terminal box in 3-6-9-12 o'clock position
- Three preselectable speed stages for load adjustment
- Easy and safe installation due to practical wrench attachment point on pump body
- Simplified electrical installation due to terminal box with removable threaded cable connection that can be used on both sides; quick connection with spring clips


Price group: PG1

Ordering information									
	Pump connection	Port-to-port length	Max. operating pressure	Mains connection	Gross weight, approx.	Pieces per pallet	Art. no.		
		l0 mm	p bar		m kg				EUR
Star-RS 25/2	G 1½	180	10	1~230 V, 50 Hz	2.5	256	4032952	C	255.-
Star-RS 25/4	G 1½	180	10	1~230 V, 50 Hz	2.5	256	4032954	C	259.-
Star-RS 25/6	G 1½	180	10	1~230 V, 50 Hz	2.7	256	4032956	C	297.-
Star-RS 30/2	G 2	180	10	1~230 V, 50 Hz	2.7	256	4033760	C	284.-
Star-RS 30/4	G 2	180	10	1~230 V, 50 Hz	2.7	256	4033765	C	285.-

= ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Ordering information									
	Pump connection	Port-to-port length	Max. operating pressure	Mains connection	Gross weight, approx.	Pieces per pallet	Art. no.		
		<i>l</i> mm	<i>p</i> bar		<i>m</i> kg				EUR
Star-RS 30/6	G 2	180	10	1~230 V, 50 Hz	2.8	256	4033770	C	346.-
Star-RS 25/4-130	G 1½	130	10	1~230 V, 50 Hz	2.3	280	4033776	C	294.-
Star-RS 25/6-130	G 1½	130	10	1~230 V, 50 Hz	2.5	280	4033782	C	316.-
Star-RS 25/4-RG	G 1½	180	10	1~230 V, 50 Hz	2.7	256	4035758	C	473.-
Star-RS 25/6-RG	G 1½	180	10	1~230 V, 50 Hz	2.8	256	4035761	K	523.-
Star-RS 25/7	G 1½	180	10	1~230 V, 50 Hz	2.9	256	4037310	C	462.-
Star-RS 30/7	G 2	180	10	1~230 V, 50 Hz	3	256	4037311	C	476.-
Star-RS 15/4	G 1	130	10	1~230 V, 50 Hz	2.2	280	4063802	C	261.-
Star-RS 15/6	G 1	130	10	1~230 V, 50 Hz	2.3	280	4063803	C	307.-
Star-RS 25/8	G 1½	180	10	1~230 V, 50 Hz	3.6	140	4094258	C	626.-
Star-RS 30/8	G 2	180	10	1~230 V, 50 Hz	3.7	140	4094375	C	640.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

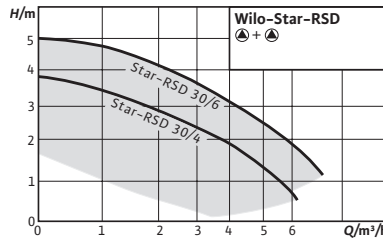

Accessories	Page
Pipe installation/ screwed connection	179
Pipe installation/ adaptor fitting	181

Select 4 online

All information at www.wilo-select.com

Wilo-Star-RSD



Construction

Glandless circulation twin-head pump with threaded connection; Preselectable speed stages for power adjustment

Application

Hot-water heating systems of all kinds, industrial circulating systems, cold-water systems and air-conditioning systems

Scope of delivery

- Twin-head pump
- Gaskets
- Installation and operating instructions


Your advantages

- Twin-head pump for single or parallel operation
- Suitable for every installation position with horizontal shaft; terminal box in 3-6-9-12 o'clock position
- Increased reliability in individual operation due to the constant availability of a standby unit ready for operation

Price group: PG1

Ordering information									
	Pump connection	Port-to-port length	Max. operating pressure	Mains connection	Gross weight, approx.	Pieces per pallet	Art. no.		
		<i>l</i> mm	<i>p</i> bar		<i>m</i> kg				EUR
Star-RSD 30/4	G 2	180	10	1~230 V, 50 Hz	5.2	108	4035759	C	845.-
Star-RSD 30/6	G 2	180	10	1~230 V, 50 Hz	5.6	108	4035763	C	970.-

= ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

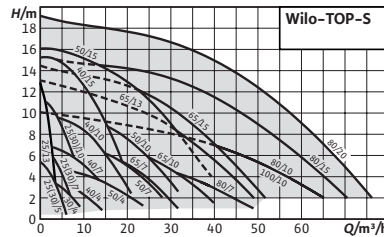

Accessories	Page
Pipe installation/ screwed connection	179
Pipe installation/counter flange	180
Pipe installation/ adapter fitting	181
Motor protection	231
Switching Plug	232

Select 4 online

All information at www.wilo-select.com

Wilo-TOP-S



Construction

Glandless circulator with screwed connection or flange connection.

Application

Hot-water heating systems of all kinds, industrial circulation systems, air-conditioning systems and closed cooling circuits

Scope of delivery

- Pump
- Thermal insulation
- Including gasket for threaded connection
- Washers for flange screws (for nominal connection diameters DN 40 - DN 65)
- Installation and operating instructions

Your advantages

- Direction of rotation signal lamp for displaying the correct sense of rotation (only with 3~)
- Manual power adjustment with 3 speed stages
- Pump housing with cataphoretic coating (KTL) protects against corrosion due to condensation formation

Options


- Version for special voltages on request.



Price group: PG2


Ordering information								
	Pump connection	Port-to-port length	Max. operating pressure	Mains connection	Gross weight, approx.	Art. no.		
		l0 mm	p bar		m kg			EUR
TOP-S 25/5	G 1½	180	10	1~230 V, 50 Hz	4.4	2044009	L	643.-
TOP-S 25/5	G 1½	180	10	3~400 V, 50 Hz	4.6	2044010	C	625.-
TOP-S 25/7	G 1½	180	10	1~230 V, 50 Hz	5.3	2048320	L	730.-
TOP-S 25/7	G 1½	180	10	3~400 V, 50 Hz	5.3	2048321	L	712.-
TOP-S 25/10	G 1½	180	10	1~230 V, 50 Hz	7.1	2061962	L	997.-
TOP-S 25/10	G 1½	180	10	3~400 V, 50 Hz	7	2165521	L	935.-
TOP-S 25/13	G 1½	180	10	1~230 V, 50 Hz	5.5	2084440	C	774.-
TOP-S 25/13	G 1½	180	10	3~400 V, 50 Hz	5.5	2084441	C	752.-
TOP-S 30/4	G 2	180	10	1~230 V, 50 Hz	5.1	2044011	C	751.-
TOP-S 30/4	G 2	180	10	3~400 V, 50 Hz	5.1	2044012	C	733.-
TOP-S 30/5	G 2	180	10	1~230 V, 50 Hz	4.6	2044013	C	793.-

= ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG2

Ordering information								
	Pump connection	Port-to-port length	Max. operating pressure	Mains connection	Gross weight, approx.	Art. no.		
		l mm	p bar		m kg			EUR
TOP-S 30/5	G 2	180	10	3~400 V, 50 Hz	4.7	2044014	C	777.-
TOP-S 30/7	DN 32	180	10	1~230 V, 50 Hz	5.5	2048322	L	880.-
TOP-S 30/7	DN 32	180	10	3~400 V, 50 Hz	5.6	2048323	L	860.-
TOP-S 30/10	DN 32	180	10	1~230 V, 50 Hz	7.2	2066132	L	997.-
TOP-S 30/10	G 2	180	10	3~400 V, 50 Hz	7.2	2165522	L	935.-
TOP-S 40/4	DN 40	220	10	1~230 V, 50 Hz	10.4	2080040	L	1,215.-
TOP-S 40/4	DN 40	220	10	3~400 V, 50 Hz	10.6	2080041	C	1,164.-
TOP-S 40/7	DN 40	250	10	1~230 V, 50 Hz	12.5	2080042	L	1,498.-
TOP-S 40/7	DN 40	250	10	3~400 V, 50 Hz	12.5	2165523	L	1,372.-
TOP-S 40/10	DN 40	250	10	3~400 V, 50 Hz	16	2165525	L	1,708.-
TOP-S 40/10 2-SPEEDS	DN 40	250	10	1~230 V, 50 Hz	15.5	2165524	L	1,802.-
TOP-S 40/15	DN 40	250	10	3~400 V, 50 Hz	22.5	2165527	L	2,216.-
TOP-S 40/15 2-SPEEDS	DN 40	250	10	1~230 V, 50 Hz	22.6	2165526	L	2,334.-
TOP-S 50/4	DN 50	240	10	1~230 V, 50 Hz	13.9	2080048	C	1,755.-
TOP-S 50/4	DN 50	240	10	3~400 V, 50 Hz	14	2165528	C	1,619.-
TOP-S 50/7	DN 50	280	10	3~400 V, 50 Hz	17.8	2165530	L	1,732.-
TOP-S 50/7 2-SPEEDS	DN 50	280	10	1~230 V, 50 Hz	17	2165529	L	2,012.-
TOP-S 50/10	DN 50	280	10	3~400 V, 50 Hz	19	2165532	L	2,123.-
TOP-S 50/10 2-SPEEDS	DN 50	280	10	1~230 V, 50 Hz	19	2165531	L	2,413.-
TOP-S 50/15	DN 50	340	10	3~400 V, 50 Hz	26.8	2165533	L	2,570.-
TOP-S 65/7	DN 65	280	10	3~400 V, 50 Hz	19.5	2165535	C	2,148.-
TOP-S 65/7 2-SPEEDS	DN 65	280	10	1~230 V, 50 Hz	20.5	2165534	C	2,486.-
TOP-S 65/10	DN 65	340	10	3~400 V, 50 Hz	23.3	2165537	C	2,334.-
TOP-S 65/10 2-SPEEDS	DN 65	340	10	1~230 V, 50 Hz	22.5	2165536	C	2,687.-
TOP-S 65/13	DN 65	340	10	3~400 V, 50 Hz	29.4	2165538	L	2,388.-
TOP-S 65/15	DN 65	340	10	3~400 V, 50 Hz	31	2165539	L	3,163.-
TOP-S 80/7	DN 80	360	6	3~400 V, 50 Hz	25	2165541	C	3,221.-
TOP-S 80/7	DN 80	360	10	3~400 V, 50 Hz	26.4	2165542	C	3,430.-
TOP-S 80/7 2-SPEEDS	DN 80	360	6	1~230 V, 50 Hz	26.5	2165540	C	3,187.-
TOP-S 80/10	DN 80	360	6	3~400 V, 50 Hz	33.9	2165543	C	3,352.-
TOP-S 80/10	DN 80	360	10	3~400 V, 50 Hz	33.3	2165544	C	3,558.-
TOP-S 80/15	DN 80	360	6	3~400 V, 50 Hz	45.7	2165545	C	3,860.-
TOP-S 80/15	DN 80	360	10	3~400 V, 50 Hz	45.7	2165546	C	4,066.-
TOP-S 80/20	DN 80	360	6	3~400 V, 50 Hz	48.9	2165547	C	4,323.-
TOP-S 80/20	DN 80	360	10	3~400 V, 50 Hz	48.9	2165548	C	4,529.-
TOP-S 100/10	DN 100	360	6	3~400 V, 50 Hz	36.9	2165549	C	3,695.-
TOP-S 100/10	DN 100	360	10	3~400 V, 50 Hz	36.9	2165550	C	3,956.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
 Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

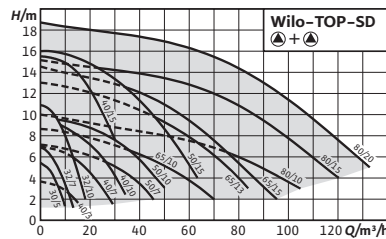

Accessories	Page
Switching Plug	232
Pipe installation/ screwed connection	179
Pipe installation/counter flange	180
Pipe installation/ adapter fitting	181
Motor protection	231
Blind flanges	242

Select 4 online

All information at www.wilo-select.com

Wilo-TOP-SD



Construction

Glandless twin-head circulator with flange connection (TOP-SD 30/5 with screwed connection).

Application

Hot-water heating systems of all kinds, industrial circulation systems, air-conditioning systems and closed cooling circuits

Scope of delivery

- Twin-head pump
- Including gaskets for screwed connection (only for TOP-SD 30/5)
- Including washers for flange screws (for nominal connection diameters DN 32 - DN 65)
- Installation and operating instructions

Your advantages

- Direction of rotation signal lamp for displaying the correct sense of rotation (only with 3~)
- Manual power adjustment with 3 speed stages
- Twin-head pump for main/standby or parallel operation
- Pump housing with cataphoretic (KTL) coating protects against corrosion due to condensation formation

Options


- Versions for special voltages on request


Price group: PG2

Ordering information								
	Pump connection	Port-to-port length	Max. operating pressure	Mains connection	Gross weight, approx.	Art. no.		
		<i>l</i> mm	<i>p</i> bar		<i>m</i> kg			EUR
TOP-SD 30/5	G 2	180	10	1~230 V, 50 Hz	9.2	2044015	C	1,687.-
TOP-SD 30/5	G 2	180	10	3~400 V, 50 Hz	9.6	2044016	C	1,437.-
TOP-SD 32/7	DN 32	220	10	1~230 V, 50 Hz	15.1	2048326	C	1,824.-
TOP-SD 32/7	DN 32	220	10	3~400 V, 50 Hz	15.1	2048327	C	1,720.-
TOP-SD 32/10	DN 32	220	10	1~230 V, 50 Hz	21.2	2080073	C	2,216.-
TOP-SD 32/10	DN 32	220	10	3~400 V, 50 Hz	20.5	2165551	C	1,872.-
TOP-SD 40/3	DN 40	250	10	1~230 V, 50 Hz	15.5	2044017	C	2,326.-
TOP-SD 40/3	DN 40	250	10	3~400 V, 50 Hz	15.9	2044018	C	2,238.-
TOP-SD 40/7	DN 40	250	10	1~230 V, 50 Hz	23	2080075	C	2,814.-
TOP-SD 40/7	DN 40	250	10	3~400 V, 50 Hz	23.1	2165552	C	2,539.-
TOP-SD 40/10	DN 40	250	10	3~400 V, 50 Hz	31.4	2165554	C	3,161.-

= ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG2

Ordering information								
	Pump connection	Port-to-port length	Max. operating pressure	Mains connection	Gross weight, approx.	Art. no.		
		<i>l</i> mm	<i>p</i> bar		<i>m</i> kg			EUR
TOP-SD 40/10 2-SPEEDS	DN 40	250	10	1~230 V, 50 Hz	32.9	2165553	C	3,364.-
TOP-SD 40/15	DN 40	250	10	3~400 V, 50 Hz	43	2165556	C	4,099.-
TOP-SD 40/15 2-SPEEDS	DN 40	250	10	1~230 V, 50 Hz	43	2165555	C	4,049.-
TOP-SD 50/7	DN 50	280	10	3~400 V, 50 Hz	33	2165558	C	3,201.-
TOP-SD 50/7 2-SPEEDS	DN 50	280	10	1~230 V, 50 Hz	34.4	2165557	C	3,586.-
TOP-SD 50/10	DN 50	280	10	3~400 V, 50 Hz	35.7	2165560	C	3,926.-
TOP-SD 50/10 2-SPEEDS	DN 50	280	10	1~230 V, 50 Hz	36.2	2165559	C	3,868.-
TOP-SD 50/15	DN 50	340	10	3~400 V, 50 Hz	48.5	2165561	C	4,752.-
TOP-SD 65/10	DN 65	340	10	3~400 V, 50 Hz	40.8	2165563	C	4,320.-
TOP-SD 65/10 2-SPEEDS	DN 65	340	10	1~230 V, 50 Hz	41.5	2165562	C	4,436.-
TOP-SD 65/13	DN 65	340	10	3~400 V, 50 Hz	55.6	2165564	C	4,420.-
TOP-SD 65/15	DN 65	340	10	3~400 V, 50 Hz	58.5	2165565	C	5,849.-
TOP-SD 80/7 2-SPEEDS	DN 80	360	6	1~230 V, 50 Hz	47.4	2165566	C	6,040.-
TOP-SD 80/10	DN 80	360	6	3~400 V, 50 Hz	61.1	2165567	C	6,201.-
TOP-SD 80/10	DN 80	360	10	3~400 V, 50 Hz	61.1	2165568	C	6,581.-
TOP-SD 80/15	DN 80	360	6	3~400 V, 50 Hz	100	2165569	C	7,140.-
TOP-SD 80/15	DN 80	360	10	3~400 V, 50 Hz	98	2165570	C	7,521.-
TOP-SD 80/20	DN 80	360	6	3~400 V, 50 Hz	104	2165571	C	7,998.-
TOP-SD 80/20	DN 80	360	10	3~400 V, 50 Hz	104	2165572	C	8,381.-

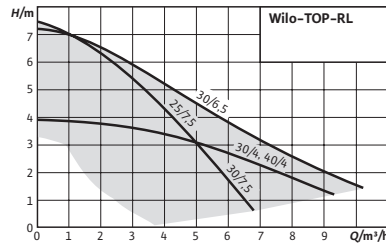

Accessories	Page
Pipe installation/ screwed connection	179
Pipe installation/ adapter fitting	181

Select 4 online

All information at www.wilo-select.com

Wilo-TOP-RL



Construction

Glandless circulator with screwed connection or flange connection

Application

Hot-water heating systems of all kinds, air-conditioning systems, closed cooling circuits, industrial circulation systems

Scope of delivery


- Pump
- Seals for threaded connection
- Including washers for flange bolts (for nominal connection diameter DN 40)
- Installation and operating instructions

Your advantages

- Manual power adjustment with 3 speed stages
- Pump housing with cataphoretic (KTL) coating protects against corrosion due to condensation formation

Price group: PG2

Ordering information							
	Pump connection	Port-to-port length	Max. operating pressure	Mains connection	Gross weight, approx.	Art. no.	
		l ₀ mm	p bar		m kg		EUR
TOP-RL 25/7.5	G 1½	180	10	1~230 V, 50 Hz	4.3	2045633	L 929.-
TOP-RL 30/4	G 2	180	10	1~230 V, 50 Hz	4.8	2045634	L 957.-
TOP-RL 30/6.5	G 2	180	10	1~230 V, 50 Hz	5	2045635	L 1,049.-
TOP-RL 30/7.5	G 2	180	10	1~230 V, 50 Hz	4.4	2045636	L 1,021.-
TOP-RL 40/4	DN 40	250	10	1~230 V, 50 Hz	8.8	2057044	C 1,334.-

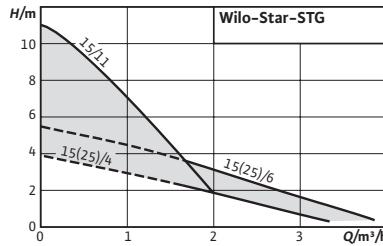

Accessories	Page
Pipe installation/ screwed connection	179
Pipe installation/ adapter fitting	181
Thermal insulation	198

Select 4 online

All information at www.wilo-select.com

Wilo-Star-STG



Construction

Glandless circulator with threaded connection. Preselectable speed stages for power adjustment

Application

Primary circuits of solar and geothermal systems

Scope of delivery

- Pump
- Gasket
- Installation and operating instructions

Your advantages

- Special hydraulics for use in solar and geothermal energy systems
- Pump housing with wrench attachment point
- Pump housing with cathaphoretic coating for preventing corrosion due to condensation formation

Price group: PG1

Ordering information									
	Pump connection	Port-to-port length	Pressure port	Mains connection	Gross weight, approx.	Pieces per pallet	Art. no.		
		l0 mm			m kg				EUR
Star-STG 15/4	G 1	130	G 1	1~230 V, 50 Hz	2.2	180	4056933	C	276.-
Star-STG 15/6	G 1	130	G 1	1~230 V, 50 Hz	2.4	180	4056946	C	323.-
Star-STG 15/11	G 1	180	G 1	1~230 V, 50 Hz	3.9	180	4061442	C	425.-
Star-STG 25/4	G 1½	180	G 1½	1~230 V, 50 Hz	2.7	180	4050265	C	303.-
Star-STG 25/6	G 1½	180	G 1½	1~230 V, 50 Hz	2.7	180	4050266	C	347.-

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.



Equipment/function

For Wilo-TOP-S/-SD/-SV pumps in the event of replacement

→ Function unit with motor, impeller and terminal box

Price group: PG2


Type	Mains connection	Gross weight, approx.	Art. no.		EUR
		<i>m</i> kg			
TOP-S/SD/SV30/7 DM RMOT.	3~400 V, 50 Hz	3.3	2048337	L	816.-
TOP-S/SD/SV30/7 EM RMOT.	1~230 V, 50 Hz	3.2	2048336	C	837.-
TOP-S/SD/SV65/10 DM RMOT.	3~400 V, 50 Hz	11.1	2046676	C	2,219.-
TOP-S/SD30/5 DM RMOT.	3~400 V, 50 Hz	3.5	2084786	C	739.-
TOP-S/SD30/5 EM RMOT.	1~230 V, 50 Hz	3.9	2110033	C	753.-
TOP-S/SD30/10 DM RMOT.	3~400 V, 50 Hz	4.8	2046664	C	889.-
TOP-S/SD30/10 DM RMOT.	3~400 V, 50 Hz	4.8	2165576	C	889.-
TOP-S/SD30/10 EM RMOT.	1~230 V, 50 Hz	4.8	2046663	C	948.-
TOP-S/SD40/7 DM RMOT.	3~400 V, 50 Hz	4.9	2046666	C	1,303.-
TOP-S/SD40/7 DM RMOT.	3~400 V, 50 Hz	4.9	2165577	C	1,303.-
TOP-S/SD40/7 EM RMOT.	1~230 V, 50 Hz	4.9	2046665	C	1,424.-
TOP-S/SD40/10 DM RMOT.	3~400 V, 50 Hz	7.9	2046667	C	1,622.-
TOP-S/SD40/10 DM RMOT.	3~400 V, 50 Hz	7.9	2165579	C	1,622.-
TOP-S/SD40/10 EM RMOT.	1~230 V, 50 Hz	7.8	2080017	L	1,812.-
TOP-S/SD40/10 EM RMOT.	1~230 V, 50 Hz	7.8	2165578	C	1,711.-
TOP-S/SD40/15 DM PN6/10 RMOT.	3~400 V, 50 Hz	13	2087601	C	2,118.-
TOP-S/SD40/15 DM PN6/10 RMOT.	3~400 V, 50 Hz	13	2165581	C	2,118.-
TOP-S/SD40/15 EM 2-SPEEDS RMOT.	1~230 V, 50 Hz	13	2099444	L	2,232.-
TOP-S/SD40/15 EM 2-SPEEDS RMOT.	1~230 V, 50 Hz	13	2165580	C	2,219.-
TOP-S/SD50/7 DM RMOT.	3~400 V, 50 Hz	7.9	2046672	C	1,644.-
TOP-S/SD50/7 DM RMOT.	3~400 V, 50 Hz	7.9	2165585	C	1,644.-
TOP-S/SD50/7 EM RMOT.	1~230 V, 50 Hz	8.6	2080018	L	1,828.-
TOP-S/SD50/7 EM RMOT.	1~230 V, 50 Hz	8.6	2165584	C	1,912.-
TOP-S/SD50/10 DM RMOT.	3~400 V, 50 Hz	8.4	2046673	C	2,015.-
TOP-S/SD50/10 DM RMOT.	3~400 V, 50 Hz	8.4	2165587	C	2,015.-
TOP-S/SD50/10 EM 2-SPEEDS RMOT.	1~230 V, 50 Hz	9	2046692	A	2,256.-
TOP-S/SD50/10 EM 2-SPEEDS RMOT.	1~230 V, 50 Hz	9	2165586	C	2,293.-
TOP-S/SD50/15 DM RMOT.	3~400 V, 50 Hz	13	2046674	C	2,441.-
TOP-S/SD50/15 DM RMOT.	3~400 V, 50 Hz	13	2165588	C	2,441.-
TOP-S/SD65/10 DM RMOT.(450 W)	3~400 V, 50 Hz	8.3	2080022	C	2,232.-
TOP-S/SD65/10 DM RMOT.(450 W)	3~400 V, 50 Hz	8.3	2165595	C	2,219.-
TOP-S/SD65/10 EM 2-SPEEDS RMOT.	1~230 V, 50 Hz	11	2046694	A	2,572.-
TOP-S/SD65/10 EM RMOT.(450 W)	1~230 V, 50 Hz	8.3	2080021	L	2,436.-


= ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG2

Type	Mains connection	Gross weight, approx. m kg	Art. no.		EUR
TOP-S/SD65/10 EM RMOT.(450 W)	1~230 V, 50 Hz	8.3	2165594	C	2,552.-
TOP-S/SD65/13 DM RMOT.	3~400 V, 50 Hz	13	2046677	C	2,269.-
TOP-S/SD65/13 DM RMOT.	3~400 V, 50 Hz	13	2165597	C	2,269.-
TOP-S/SD65/15 DM RMOT.	3~400 V, 50 Hz	14	2046678	C	3,004.-
TOP-S/SD65/15 DM RMOT.	3~400 V, 50 Hz	14	2165598	C	3,004.-
TOP-S/SD80/7 EM 2-SPEEDS RMOT.	1~230 V, 50 Hz	11	2046695	A	3,390.-
TOP-S/SD80/7 EM RMOT.(450 W)	1~230 V, 50 Hz	9.5	2080023	L	3,212.-
TOP-S/SD80/7 EM RMOT.(450 W)	1~230 V, 50 Hz	9.5	2165599	C	3,004.-
TOP-S/SD80/10 DM RMOT.	3~400 V, 50 Hz	13.1	2046681	C	3,184.-
TOP-S/SD80/10 DM RMOT.	3~400 V, 50 Hz	13.1	2165603	C	3,184.-
TOP-S/SD80/15 DM RMOT.	3~400 V, 50 Hz	24	2104063	C	3,666.-
TOP-S/SD80/15 DM RMOT.	3~400 V, 50 Hz	24	2165604	C	3,666.-
TOP-S/SD80/20 DM RMOT.	3~400 V, 50 Hz	27	2104064	C	4,106.-
TOP-S/SD80/20 DM RMOT.	3~400 V, 50 Hz	27	2165605	C	4,106.-
TOP-S/SV25/7 DM RMOT.	3~400 V, 50 Hz	3.3	2048335	C	677.-
TOP-S/SV25/7 EM RMOT.	1~230 V, 50 Hz	3.3	2048334	C	694.-
TOP-S/SV40/4 DM RMOT.	3~400 V, 50 Hz	3.3	2048339	C	1,112.-
TOP-S/SV40/4 EM RMOT.	1~230 V, 50 Hz	3.2	2048338	L	1,154.-
TOP-S25/5 DM RMOT.	3~400 V, 50 Hz	3.5	2122049	C	594.-
TOP-S25/5 EM RMOT.	1~230 V, 50 Hz	3.5	2122048	C	611.-
TOP-S25/10 DM RMOT.	3~400 V, 50 Hz	4.8	2122050	C	889.-
TOP-S25/10 DM RMOT.	3~400 V, 50 Hz	4.8	2165575	C	889.-
TOP-S25/10 EM RMOT.	1~230 V, 50 Hz	4.8	2117529	C	948.-
TOP-S30/4 DM RMOT.	3~400 V, 50 Hz	3.5	2085574	C	697.-
TOP-S30/4 EM RMOT.	1~230 V, 50 Hz	3.5	2085573	C	713.-
TOP-S50/4 DM RMOT.	3~400 V, 50 Hz	4.8	2046669	C	1,537.-
TOP-S50/4 DM RMOT.	3~400 V, 50 Hz	4.8	2165582	C	1,537.-
TOP-S50/4 EM RMOT.	1~230 V, 50 Hz	4.8	2046668	C	1,668.-
TOP-S65/7 DM RMOT.	3~400 V, 50 Hz	7.5	2046675	C	2,041.-
TOP-S65/7 DM RMOT.	3~400 V, 50 Hz	7.6	2165592	C	2,041.-
TOP-S65/7 DM RMOT.FROM 03/08	3~400 V, 50 Hz	7.6	2080020	C	2,040.-
TOP-S65/7 EM 2-SPEEDS RMOT.	1~230 V, 50 Hz	7.5	2046693	A	2,409.-
TOP-S65/7 EM RMOT.	1~230 V, 50 Hz	8.4	2165590	L	2,281.-
TOP-S65/7 EM RMOT.FROM 03/08	1~230 V, 50 Hz	8.4	2080019	A	⌚
TOP-S80/7 DM RMOT.	3~400 V, 50 Hz	11	2046679	C	3,060.-
TOP-S80/7 DM RMOT.(450 W)	3~400 V, 50 Hz	8.5	2046680	C	3,082.-
TOP-S80/7 DM RMOT.(450 W)	3~400 V, 50 Hz	8.5	2165601	C	3,082.-
TOP-S100/10 DM RMOT.	3~400 V, 50 Hz	13.3	2046682	C	3,511.-
TOP-S100/10 DM RMOT.	3~400 V, 50 Hz	13.3	2165606	C	3,511.-
TOP-SD40/3 DM RMOT.	3~400 V, 50 Hz	3.2	2063749	C	1,315.-
TOP-SD40/3 EM RMOT.	1~230 V, 50 Hz	3.5	2086903	C	1,382.-
TOP-SV50/6 DM RMOT.	3~400 V, 50 Hz	5	2046671	C	1,555.-
TOP-SV50/6 EM RMOT.	1~230 V, 50 Hz	5	2046670	C	1,676.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ⌚ = please contact Wilo
 Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

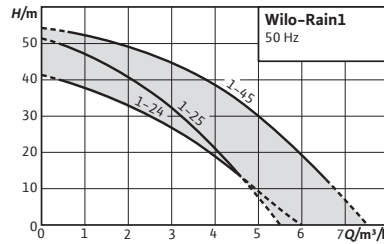

Accessories
Accessories

Page
265

Select 4online
All information at www.wilo-select.com

Wilo-RAIN1



Construction

Ready-to-plug single pump rainwater utilisation system

Application

Rainwater utilisation system is designed for applications that do not require drinking water supply such as:

- Toilets flushing tanks
- Washing machines
- Garden irrigation

(Please check that the application complies with local regulations)

Scope of delivery

- Ready-to-connect rainwater utilisation system with fixation material
- Installation and operating instructions
- Float switch
- Sticker "Do not expose to frost"
- Sticker "No drinking water"

Your advantages

- Easy installation thanks to ready-to-plug system and compact design with various hydraulic connection options
- Convenient operation and easy setting options thanks to intuitive user interface and a wide range of functions
- High level of reliability thanks to integrated self-protection routines
- Hygiene safety thanks to non-return valve and a break tank in accordance with DIN 1989 and EN 1717
- Easy maintenance with direct access to the system components


Options

Immersed pump could be placed in the rainwater storage tank to overcome pressure losses due to high suction distance (according to installation).

External alarm.

Price group: PG5

Ordering information					
RAIN1	Rated power	Mains connection	Art. no.		
	P_2 kW				EUR
24 EM	0.40	1~230 V, 50 Hz	2551468	L	2,035.-
25 EM	0.50	1~230 V, 50 Hz	2551469	L	2,068.-
45 EM	0.80	1~230 V, 50 Hz	2551470	L	2,171.-

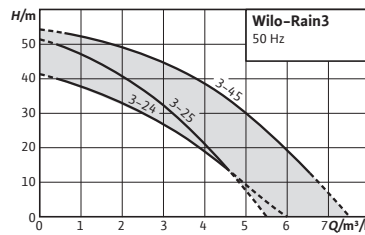

Accessories
Accessories

Page
265

Select 4 online
All information at www.wilo-select.com

Wilo-RAIN3



Construction

Ready-to-plug single pump rainwater utilisation system

Application

Rainwater utilisation system is designed for applications that do not require drinking water supply such as:

- Toilets flushing tanks
- Washing machines
- Garden irrigation

(Please check that the application complies with local regulations)

Scope of delivery

- Ready-to-connect rainwater utilisation system with fixation material
- Installation and operating instructions
- 4..20mA level sensor
- Sticker "Do not expose to frost"
- Sticker "No drinking water"

Options

Immersed pump could be placed in the rainwater storage tank to overcome pressure losses due to high suction distance (according to installation)

Your advantages


- Easy installation thanks to ready-to-plug system and compact design with various hydraulic connection options
- Convenient operation and easy setting options thanks to a unique combination of intuitive LCD touch screen operation and a wide range of functions
- High level of reliability thanks to integrated self-protection routines
- Hygiene safety thanks to non-return valve and a break tank in accordance with DIN 1989 and EN 1717
- Easy maintenance with direct access to the system components
- Quiet operation in residential spaces with smart home integration option

External alarm
Overflow or backflow detection sensor

Price group: PG5

Ordering information					
RAIN3	Rated power	Mains connection	Art. no.		
	P_2 kW				EUR
24 EM	0.40	1~230 V, 50 Hz	2551471	L	2,908.-
25 EM	0.50	1~230 V, 50 Hz	2551472	L	2,940.-
45 EM	0.80	1~230 V, 50 Hz	2551473	L	3,043.-

= ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

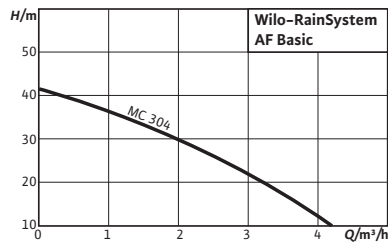

Accessories
Accessories

Page
265

Select 4 online
All information at www.wilo-select.com

Wilo-RainSystem AF Basic



Construction

Ready-to-plug rainwater utilisation system

Application

Rainwater utilisation for saving drinking water in conjunction with cisterns or tanks

Scope of delivery

- Ready-to-connect rainwater utilisation system with fixation material, installation sketch, Installation and operating instructions and packaging

Options

- Overflow signalling device
- Cover made of EPP

Your advantages


- Compact, ready-to-plug rainwater utilisation system according to DIN 1989 and EN 1717
- Low-noise through multi-stage centrifugal pump
- High economic efficiency due to needs-based fresh water replenishment
- Flow-optimised and noise-optimised replenishment reservoir
- All parts in contact with fluid are corrosion-free
- Optional connection of a back-up pump



Price group: PG5


Ordering information					
RainSystem AF Basic	Rated power	Mains connection	Art. no.		
	P_2 kW				
11 BASIC MC 304	0.55	1~230 V, 50 Hz	2534879	A	☎
MC 304	0.55	1~230 V, 50 Hz	2518349	L	☎

Accessories					
Type	Description	Art. no.		Price group	
					EUR
Cap for AF Basic MC 304	Cover for sound-insulation (can also be used as transport packaging)	2518385	L	PG14	178.-

☎ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Accessories					
Type	Description	Art. no.		Price group	
					EUR
overflow alarm For replenishment	-	2518360	L	PG14	120.-
Marking set for rain-water utilisation	-	2518362	L	PG14	46.-
Connection set for AF Basic/Comfort	Connection set for AF Basic/AF Comfort rainwater utilisation systems for flexible, vibration-insulated connection	2518363	L	PG14	102.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

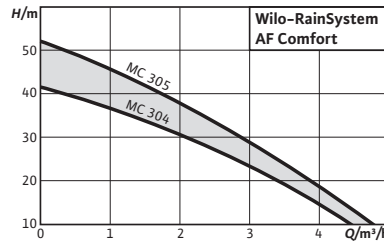

Accessories
Accessories

Page
265

Select 4 online

All information at www.wilo-select.com

Wilo-RainSystem AF Comfort



Construction

Ready-to-plug rainwater utilisation system

Application

Rainwater utilisation for saving drinking water in conjunction with cisterns or tanks

Scope of delivery

- Heavy-duty, ready-to-connect single-pump rainwater utilisation system with 3.0 m connecting cable and mains plug, RainControl Economy central switchgear with control electronics, level sensor with 20 m cable, measurement range 0–5 m
- **Including cover** and connection kit for replenishment overflow made of recyclable EPP

Your advantages

- Compact, ready-to-plug rainwater utilisation system according to DIN 1989 and EN 1717
- Tested according to RAL-GZ 994 quality standard
- Low-noise, due to multi-stage centrifugal pump and complete encapsulation of the system
- Automatic support function for evacuation of the air from the suction line
- High economic efficiency due to fresh water replenishment according to requirements

Options

- Overflow signalling device

Price group: PG5

Ordering information					
RainSystem AF Comfort	Rated power	Mains connection	Art. no.		
	P_2 kW				
MC 304	0.55	1~230 V, 50 Hz	2518350	L	☎
MC 305	0.75	1~230 V, 50 Hz	2518351	L	☎


Electrical accessories					
Type	Description	Art. no.	Price group		
					EUR
overflow alarm For replenishment	-	2518360	L PG14		120.-
Marking set for rain-water utilisation	-	2518362	L PG14		46.-

☎ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Electrical accessories					
Type	Description	Art. no.	Price group		
Connection set for AF Basic/Comfort	Connection set for AF Basic/AF Comfort rainwater utilisation systems for flexible, vibration-insulated connection	2518363	🚚		EUR
			L	PG14	102.-

Water supply

🚚 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, 📞 = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

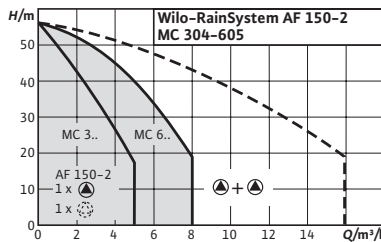

Accessories
Accessories

Page
265

Select 4 online

All information at www.wilo-select.com

Wilo-RainSystem AF 150



Construction

Automatic rainwater utilisation system with run-down tank and 2 self-priming pumps

Application

Rainwater utilisation in multi-family houses and small trade businesses for saving drinking water in conjunction with cisterns or tanks

Scope of delivery

- Two self-priming, MC multistage centrifugal pumps
- 150 l fresh water replenishment reservoir, transmitter unit with 8 l diaphragm pressure vessel,
- RainControl Professional central switchgear with control electronics, level sensor
- With 20 m cable, measurement range 0-5 m.

Your advantages

- Low-noise due to multistage centrifugal pumps
- All parts in contact with the fluid are corrosion-free
- Maximum operational reliability due to fully electronic RainControl Professional controller
- High economic efficiency due to needs-based fresh water replenishment
- High reliability, due to flow- and noise-optimised replenishment reservoir

Options


- Operating hours counter
- Individual run/fault signals
- Water backflow signalling device

Price group: PG6

Ordering information					
RainSystem AF 150	Rated power	Mains connection	Art. no.		
	P_2 kW				EUR
150-2 MC 304	0.55	1~230 V, 50 Hz	2530004	C	4,889.-
150-2 MC 305	0.75	1~230 V, 50 Hz	2531205	L	4,971.-
150-2 MC 604	0.75	1~230 V, 50 Hz	2531206	C	5,122.-
150-2 MC 605	1.10	1~230 V, 50 Hz	2531207	L	5,212.-

Accessories					
Type	Art. no.	Price group			
					EUR
Marking set for rainwater utilisation	2518362	L	PG14		46.-

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

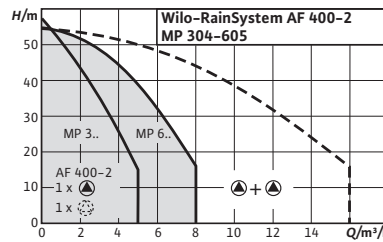

Accessories
Accessories **Page**
265

Select 4 online

All information at www.wilo-select.com

Wilo-RainSystem AF 400



Construction

Automatic rainwater utilisation system with run-down tanks and 2 non-self-priming pumps

Application

Commercial and industrial rainwater utilisation for conserving drinking water as a hybrid system in conjunction with rainwater storage tanks or vessels

Scope of delivery

- Two noise-reduced, non-self-priming, multistage centrifugal pumps
- 400 l hybrid tank with all required connections, transmitter unit with 8 l diaphragm pressure vessel, central switchgear, RainControl-Hybrid with control electronics and level control device of Wilo-Drain TM or TS rainwater storage tank pumps in three-phase version (optionally in single-phase version) to be ordered separately

Your advantages

- Low-noise due to optimised overall flow and noise concept (multistage centrifugal pumps)
- Maximum operating reliability through the use of fully electronic RainControl Hybrid controller
- High economic efficiency due to fresh water replenishment according to requirements
- Automatic control of the feeding pump
- System/level control in low-voltage range
- Tested according to requirements of RAL-GZ 994 quality standard


- Rainwater storage level indicator
- Elapsed time indicator
- Individual run/fault signals
- Time switch
- 3~230 V, 50 Hz
- 60 Hz versions
- Extension module AF 400


Options


Price group: PG6


Ordering information						
RainSystem AF 400	Rated power	Mains connection	Art. no.			
	P_2 kW					EUR
400-2 MP 304	0.55	1~230 V, 50 Hz	2504587	C		6,791.-
400-2 MP 305	0.75	3~400 V, 50 Hz	2504588	L		6,836.-
400-2 MP 603	0.55	3~400 V, 50 Hz	2504589	C		7,030.-
400-2 MP 604	0.75	3~400 V, 50 Hz	2504590	C		7,117.-
400-2 MP 605	0.75	3~400 V, 50 Hz	2504591	L		7,270.-



☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.


Accessories						
Type	Description	Art. no.	Price group			
					EUR	
Marking set for rain-water utilisation	-	2518362	L	PG14	46.-	
Extension module AF 400	850 x 800 x 1050 mm	2512897	C	PG14	1,475.-	
Level indicator AF 400	RainControl Economy controller including level sensor with 20 m cable. Measurement range 0-5 m.	2512862	L	PG14	681.-	



Electrical accessories						
Type	Description		Art. no.		Price group	
						EUR
Automatic kit R ½, 5 m cable	Automatic drinking water replenishment. Scope of delivery: Solenoid valve with 2 m cable, WAOEK 65 float switch, with ready-to-plug small switchgear for direct control of the solenoid valve	R ½, 5 m cable	180493296	L	PG14	513.-
Automatic kit R ½, 20 m cable	Automatic drinking water replenishment. Scope of delivery: Solenoid valve with 2 m cable, WAOEK 65 float switch, with ready-to-plug small switchgear for direct control of the solenoid valve	R ½ 20 m cable	2005645	L	PG14	638.-
Automatic kit R 1, 5 m cable	Automatic drinking water replenishment. Scope of delivery: Solenoid valve with 2 m cable, WAOEK 65 float switch, with ready-to-plug small switchgear for direct control of the solenoid valve	R 1, 5 m cable	180549795	L	PG14	780.-
Automatic kit R 1, 20 m cable	Automatic drinking water replenishment. Scope of delivery: Solenoid valve with 2 m cable, WAOEK 65 float switch, with ready-to-plug small switchgear for direct control of the solenoid valve	R 1, 20 m cable	2007158	L	PG14	906.-

Suction filter						
Type	Description		Art. no.		Price group	
						EUR
Coarse suction filter G	Mesh width 1.8 mm with 1¼" hose nozzle connection without non-return valve	Floating extractor	2024959	L	PG14	38.-
Coarse suction filter GR	Mesh width 1.8 mm with 1¼" hose nozzle connection with non-return valve	Floating extractor	2024960	L	PG14	73.-
Fine suction filter F	Mesh width 1.2 mm with 1¼" hose nozzle connection without non-return valve	Floating extractor	2024961	L	PG14	121.-
Fine suction filter FR	Mesh width 1.2 mm with 1¼" hose nozzle connection with non-return valve	Floating extractor	2024962	L	PG14	162.-
Fine suction filter	Fine suction filter with R 1¼ male thread for insertion into pump suction port of TWI5-SE	Threaded extraction	2025755	L	PG14	127.-

Mechanical accessories						
Type	Description		Art. no.		Price group	
						EUR
Foot valve R 1¼	High-quality foot valve made of red brass with integrated non-return valve. Strainer made of stainless steel 1.4301.	R 1¼	2502408	C	PG14	137.-
Foot valve R 1½	High-quality foot valve made of red brass with integrated non-return valve. Strainer made of stainless steel 1.4301.	R 1½	2502236	C	PG14	194.-
Foot valve R 2	High-quality foot valve made of red brass with integrated non-return valve. Strainer made of stainless steel 1.4301.	R 2	2502011	C	PG14	344.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Mechanical accessories						
Type	Description		Art. no.		Price group	
						EUR
Foot valve R 2½	High-quality foot valve made of red brass with integrated non-return valve. Strainer made of stainless steel 1.4301.	R 2½	2500711	C	PG14	511.-
Foot valve R 3	High-quality foot valve made of red brass with integrated non-return valve. Strainer made of stainless steel 1.4301.	R 3	2519816	A	PG14	608.-
Hose nozzle Ø 40 mm/R 1½	with male thread made of plastic, incl. hose clip	-	4027335	L	PG14	36.-
Hose nozzle Ø 60 mm/G 2	with male thread made of plastic, incl. hose clip	-	4027334	C	PG14	36.-
Suction/pressure hose 1¼" SE, PN 10, 1.5 m (cpl.)	Suction- and pressure-resistant hose, including two hose clips made of VA as well as R 1 and R 1¼ hose nozzles for connection to the floating discharge of the series TWI5-SE, MC.	1.5 m cpl.	2025973	L	PG14	45.-
Suction/pressure hose 1¼" SE, PN 10, 3.0 m (cpl.)	Suction- and pressure-resistant hose, including two hose clips made of VA as well as R 1 and R 1¼ hose nozzles for connection to the floating discharge of the series TWI5-SE, MC.	3.0 m cpl.	2025974	L	PG14	88.-
Suction/pressure hose 1¼" SE, PN 10, 5.0 m (cpl.)	Suction- and pressure-resistant hose, including two hose clips made of VA as well as R 1 and R 1¼ hose nozzles for connection to the floating discharge of the series TWI5-SE, MC.	5.0 m cpl.	2025975	L	PG14	144.-
Suction/pressure hose 1¼" SE, PN 10, 10.0 m (cpl.)	Suction- and pressure-resistant hose, including two hose clips made of VA as well as R 1 and R 1¼ hose nozzles for connection to the floating discharge of the series TWI5-SE, MC.	10.0 m cpl.	2025976	L	PG14	288.-
Suction/pressure hose 1¼" SE, PN 10, 15.0 m (cpl.)	Suction- and pressure-resistant hose, including two hose clips made of VA as well as R 1 and R 1¼ hose nozzles for connection to the floating discharge of the series TWI5-SE, MC.	15.0 m cpl.	2025977	L	PG14	428.-
Synthetic pressure hose 3 m, Ø 42 mm	Inside Ø 42 mm, PN 6, including hose clip	-	2027641	K	PG14	41.-
Synthetic pressure hose 3 m, Ø 60 mm	Inside Ø 60 mm, PN 6, including hose clip	-	2027644	A	PG14	109.-
Synthetic pressure hose 5 m, Ø 42 mm	Inside Ø 42 mm, PN 6, including hose clip	-	2027642	L	PG14	70.-
Synthetic pressure hose 5 m, Ø 60 mm	Inside Ø 60 mm, PN 6, including hose clip	-	2027645	A	PG14	164.-
Synthetic pressure hose 15 m, Ø 42 mm	Inside Ø 42 mm, PN 6, including hose clip	-	2027643	K	PG14	129.-
Synthetic pressure hose 15 m, Ø 60 mm	Inside Ø 60 mm, PN 6, including hose clip	-	2027646	A	PG14	215.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.



Accessories
Accessories **Page**
285

Select 4 online

All information at www.wilo-select.com

Wilo-Initial Jet



Construction

Self-priming multistage centrifugal pumps

Application

- Pumping water from wells
- Filling, pumping empty, transferring by pumping, irrigation and sprinkling
- As emergency pump for overflows

Scope of delivery

- Pump
- Installation and operating instructions

Your advantages

- User-friendly thanks to its low weight and compact dimensions
- High supply guarantee due to good hydraulic output, self-priming up to 7 m, even at low flow
- Heavy-duty design for long-lasting operation

Price group: PG5

Ordering information					
Initial Jet	Mains connection	Rated power	Art. no.		
		P_2 kW			EUR
3-4	1~230 V, 50 Hz	0.60	4185607	L	140.-
4-4	1~230 V, 50 Hz	0.75	4168023	L	189.-
9-4	1~230 V, 50 Hz	1.10	4186041	L	409.-



Accessories
Accessories

Page
285

Select 4 online

All information at www.wilo-select.com

Wilo-Initial Jet System



Construction

Self-priming water-supply unit

Application

- Water supply
- Sprinkling
- Irrigation and spraying
- Pumping water from wells and out of tanks lying at greater depths

Scope of delivery


- Pump
- Connection cable (2 m) with plug
- Pressure switch
- Pressure gauge
- Diaphragm pressure vessel (20/50 l)

Your advantages

- Automatic switching on and off, 2 tank sizes
- Reduction of switch-on frequency and avoidance of fluid hammers
- Pressure hose with steel casing and screwed connection
- Installation and operating instructions

Price group: PG5

Ordering information						
Initial Jet System	Mains connection	Rated power	Volume	Art. no.		
		P_2 kW	V l			EUR
3-4-22	1~230 V, 50 Hz	0.60	22	4185608	L	269.-
4-4-50	1~230 V, 50 Hz	0.75	50	4168024	L	431.-

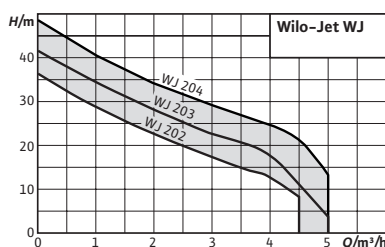

Accessories
Accessories

Page
285

Select 4 online

All information at www.wilo-select.com

Wilo-Jet WJ



Construction

Self-priming multistage centrifugal pumps

Application

- Pumping water from wells
- Filling, pumping empty, transferring by pumping, irrigation and sprinkling
- As emergency pump for overflows

Scope of delivery

- Pump with or without carrying frame, depending on the version
- Installation and operating instructions

Your advantages

- User-friendly thanks to its light weight, compact size and practical carrying handle
- High supply guarantee due to hydraulic output, self-priming up to 8 m; even at a low flow rate
- Robust stainless steel construction for durable operation, impeller, shaft and housing made of AISI 304
- IE3-IEC three-phase AC motor (≥ 0.75 kW)

Price group: PG5

Ordering information (with carrying handle)



Jet WJ	Mains connection	Rated power P_2 kW	Gross weight, approx. m kg	Art. no.		EUR
202	1~230 V, 50 Hz	0.55	11	4081224	L	245.-
203	1~230 V, 50 Hz	0.75	12	4081225	L	266.-
204	1~230 V, 50 Hz	1.00	13	4144401	L	310.-

Price group: PG5

Ordering information (without carrying handle)

Jet WJ	Mains connection	Rated power P_2 kW	Gross weight, approx. m kg	Art. no.		EUR
202 X	1~230 V, 50 Hz	0.55	10.2	4081221	L	225.-
203 X	1~230 V, 50 Hz	0.75	11.3	4081222	L	244.-
203 X	3~230 V, 3~400 V, 50 Hz	0.75	10.6	4212734	L	238.-
204 X	1~230 V, 50 Hz	1.00	12.3	4143999	L	277.-
204 X	3~230 V, 3~400 V, 50 Hz	1.00	14.4	4212735	L	270.-

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

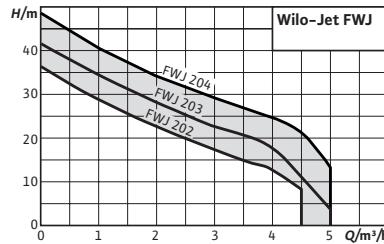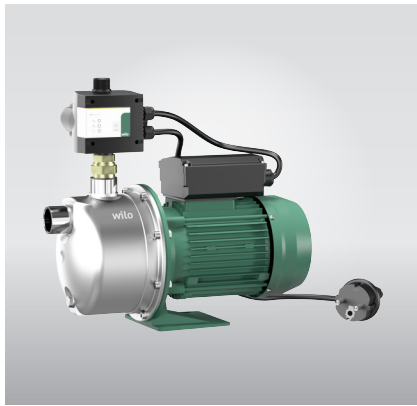

Accessories
Accessories

Page
285

Select 4 online
All information at www.wilo-select.com

Wilo-Jet FWJ



Construction

Self-priming water-supply units

Application

For pumping water and rainwater from wells and tanks for:

- Sprinkling
- Irrigation and spraying

Scope of delivery

- Wilo-Jet WJ pump
- Pump control Wilo-HiControl 1
- Installation and operating instructions for the Wilo-Jet WJ pump
- Installation and operating instructions for the Wilo-HiControl 1 switchgear

Your advantages

- Ideal for use in outside areas (hobby, garden) thanks to durable construction; continuously good performance thanks to corrosion-free materials
- Completely preassembled system, simple installation and maintenance through Plug&Pump system and 360° rotatable display, which means that it can be read from any direction
- Electronic pump control
- High operational reliability thanks to dry-running protection

- Optional carrying handle


Price group: PG5

Ordering information						
Jet FWJ	Mains connection	Rated power	Gross weight, approx.	Art. no.		
		P_2 kW	m kg			EUR
202	1~230 V, 50 Hz	0.55	14.4	2543629	L	425.-
203	1~230 V, 50 Hz	0.75	14.8	2543630	L	467.-
204	1~230 V, 50 Hz	1.00	16.1	2543631	L	525.-

Accessories

Type	Art. no.	Price group		EUR
Carrying handle for Wilo-Jet FWJ series pumps	4083526	L PG15		18.-

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

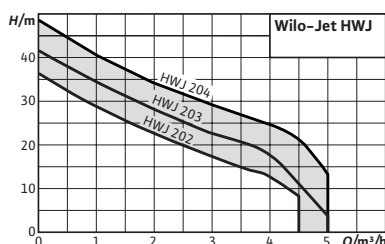

Accessories
Accessories

Page
285

Select 4 online

All information at www.wilo-select.com

Wilo-Jet HWJ



Construction

Self-priming water-supply unit

Application

- Water supply
- Sprinkling
- Irrigation and spraying
- Pumping water from wells and out of tanks lying at greater depths

Scope of delivery

- Pump
- Pressure switch
- Pressure gauge
- Diaphragm pressure vessel (20/50 l)

Your advantages

- Ideal for outdoor applications (hobby, garden)
- Rust-free stainless steel prevents corrosion, even with prolonged service life
- Reduction of switch-on frequency and avoidance of fluid hammer, thanks to diaphragm pressure vessel with 20/50 l capacity
- Electrical and hydraulic connections already in place, quick and safe to install

- Pressure hose with steel casing and screwed connection
- Installation and operating instructions

Price group: PG5

Ordering information (20 litre capacity)


Jet HWJ	Mains connection	Rated power	Gross weight, approx.	Art. no.		
		P_2 kW	m kg			EUR
20 L 202	1~230 V, 50 Hz	0.55	16.5	2549379	L	402.-
20 L 203	1~230 V, 50 Hz	0.75	16.9	2549380	L	444.-
20 L 204	1~230 V, 50 Hz	1.00	18.2	2549381	L	498.-

Price group: PG5

Ordering information (50 litre capacity)

Jet HWJ	Mains connection	Rated power	Gross weight, approx.	Art. no.		
		P_2 kW	m kg			EUR
50 L 202	1~230 V, 50 Hz	0.55	18.4	2549382	L	535.-
50 L 203	1~230 V, 50 Hz	0.75	18.8	2549383	L	544.-
50 L 204	1~230 V, 50 Hz	1.00	20	2549384	L	584.-

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

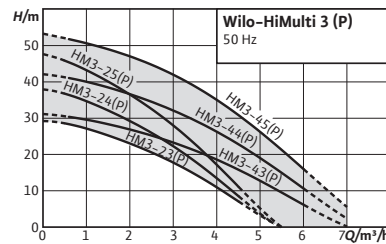

Accessories
Accessories

Page
285

Series modification

Select 4 online
All information at www.wilo-select.com

Wilo-HiMulti 3



Construction

Multistage centrifugal pump in non-self-priming version (HiMulti 3) or self-priming version (HiMulti 3 P)

Application

- Water supply (drinking water approval in accordance with ACS / in S1-version also in accordance with WRAS)
- Sprinkling
- Irrigation and spraying
- Rainwater utilisation

Scope of delivery

- Pump
- Two plastic connectors with gaskets for manual connection to the pipes
- Wilo-Connector (electrical quick connector)
- Installation and operating instructions

Options

- S1 execution with drinking water certification in accordance with WRAS

Your advantages

- Simple: Wilo-Connector (electrical quick-connector), on/off switch, filling and emptying devices, larger foot fastening
- Efficient: Highly efficient hydraulics, low electricity consumption and very compact thanks to motor optimisation
- Economical: smaller motor for optimum fulfilment of requirements
- Low noise (noise level between 56 dBA and 64 dBA)
- Version as domestic pump (pump for domestic water supply) with new pump design

Notice

Changed dimensions to previous model


Price group: PG5

Ordering information (not self-priming)


HiMulti 3	Mains connection	Rated power	Gross weight, approx.	Art. no.		
		P_2 kW	m kg			
						EUR
3-23	1~230 V, 50 Hz	0.40	10	4189516	L	328.-
3-23 S1	1~230 V, 50 Hz	0.40	10	4197375	C	341.-
3-24	1~230 V, 50 Hz	0.40	10.5	4189518	L	342.-
3-24 S1	1~230 V, 50 Hz	0.40	10.5	4197376	C	352.-
3-25	1~230 V, 50 Hz	0.50	11	4189520	L	375.-



= ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.


Price group: PG5

Ordering information (not self-priming)						
HiMulti 3	Mains connection	Rated power	Gross weight, approx.	Art. no.		
		P_2 kW	m kg			EUR
3-25 S1	1~230 V, 50 Hz	0.50	11	4197377	C	386.-
3-43	1~230 V, 50 Hz	0.40	10	4189522	L	368.-
3-43 S1	1~230 V, 50 Hz	0.40	10	4197378	C	382.-
3-44	1~230 V, 50 Hz	0.60	11	4189524	L	400.-
3-44 S1	1~230 V, 50 Hz	0.60	11	4197379	C	413.-
3-45	1~230 V, 50 Hz	0.80	13	4189526	L	477.-
3-45 S1	1~230 V, 50 Hz	0.80	13	4197380	C	488.-

Price group: PG5

Ordering information (self-priming)						
HiMulti 3	Mains connection	Rated power	Gross weight, approx.	Art. no.		
		P_2 kW	m kg			EUR
3-23 P	1~230 V, 50 Hz	0.40	10	4194279	L	364.-
3-23 P S1	1~230 V, 50 Hz	0.40	10	4197369	C	378.-
3-24 P	1~230 V, 50 Hz	0.40	10.5	4194280	L	380.-
3-24 P S1	1~230 V, 50 Hz	0.40	10.5	4197370	C	390.-
3-25 P	1~230 V, 50 Hz	0.50	11	4194281	L	404.-
3-25 P S1	1~230 V, 50 Hz	0.50	11	4197371	C	416.-
3-43 P	1~230 V, 50 Hz	0.40	10	4194282	L	397.-
3-43 P S1	1~230 V, 50 Hz	0.40	10	4197372	C	409.-
3-44 P	1~230 V, 50 Hz	0.60	11	4194283	L	416.-
3-44 P S1	1~230 V, 50 Hz	0.60	11	4197373	C	426.-
3-45 P	1~230 V, 50 Hz	0.80	13	4194284	L	526.-
3-45 P S1	1~230 V, 50 Hz	0.80	13	4197374	C	539.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

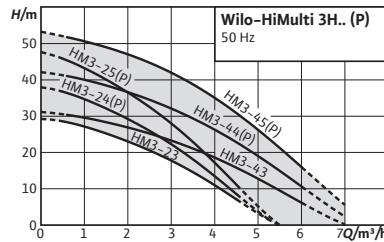

Accessories
Accessories

Page
285

Series modification

Select 4 online
All information at www.wilo-select.com

Wilo-HiMulti 3 H



Construction

Water-supply system with diaphragm pressure vessel in non-self-priming version (HiMulti 3 H) or self-priming version (HiMulti 3 H P)

Application

- Water supply (drinking water certification in accordance with ACS)
- Sprinkling
- Irrigation and spraying
- Rainwater utilisation

Scope of delivery

- Pump
- Pressure switch
- Pressure gauge
- Diaphragm pressure vessel (contents 50 l or 100 l)
- Pressure hose with steel housing and screwed connection

Your advantages

- Simple: Plug & Pump system
- Efficient: Highly efficient hydraulics, low electricity consumption and very compact thanks to motor optimisation
- Automatically functioning system, avoidance of fluid hammers thanks to pressure switching and diaphragm pressure vessel
- Low-noise: Noise level between 56 dB(A) and 64 dB(A)

- 1 piece plastic connector with seal for manual connection to the inlet pipe
- Wilo-Connector (electrical quick connector)
- Installation and operating instructions

Notice

Changed dimensions to previous model

Price group: PG5

Ordering information (self-priming)

HiMulti 3 H	Mains connection	Rated power	Gross weight, approx.	Art. no.		
		P_2 kW	m kg			EUR
20-24 P	1~230 V, 50 Hz	0.40	19.6	2550646	A	557.-
50-24 P	1~230 V, 50 Hz	0.40	22.8	2549339	L	643.-
50-25 P	1~230 V, 50 Hz	0.50	24.9	2549340	L	687.-
50-44 P	1~230 V, 50 Hz	0.60	24.6	2549341	L	773.-
50-45 P	1~230 V, 50 Hz	0.80	26.5	2549342	L	861.-
100-24 P	1~230 V, 50 Hz	0.40	53.6	2549343	L	773.-
100-25 P	1~230 V, 50 Hz	0.50	55.7	2549344	L	817.-

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☞ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.



Price group: PG5

Ordering information (self-priming)						
HiMulti 3 H	Mains connection	Rated power	Gross weight, approx.	Art. no.		
		P_2 kW	m kg			EUR
100-44 P	1~230 V, 50 Hz	0.60	55.4	2549345	L	905.-
100-45 P	1~230 V, 50 Hz	0.80	57.3	2549346	L	991.-

Price group: PG5

Ordering information (not self-priming)						
HiMulti 3 H	Mains connection	Rated power	Gross weight, approx.	Art. no.		
		P_2 kW	m kg			EUR
20-24	1~230 V, 50 Hz	0.40	19.6	2550647	A	524.-
50-23	1~230 V, 50 Hz	0.40	21.2	2549347	L	578.-
50-24	1~230 V, 50 Hz	0.40	22.8	2549348	L	599.-
50-25	1~230 V, 50 Hz	0.50	24.9	2549349	L	639.-
50-43	1~230 V, 50 Hz	0.40	22.5	2549350	L	673.-
50-44	1~230 V, 50 Hz	0.60	24.6	2549351	L	736.-
50-45	1~230 V, 50 Hz	0.80	26.6	2549352	L	818.-
100-23	1~230 V, 50 Hz	0.40	52	2549353	L	700.-
100-24	1~230 V, 50 Hz	0.40	53.6	2549354	L	719.-
100-25	1~230 V, 50 Hz	0.50	55.7	2549355	L	761.-
100-43	1~230 V, 50 Hz	0.40	53.3	2549356	L	798.-
100-44	1~230 V, 50 Hz	0.60	55.4	2549357	L	860.-
100-45	1~230 V, 50 Hz	0.80	57.3	2549358	L	942.-

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☞ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

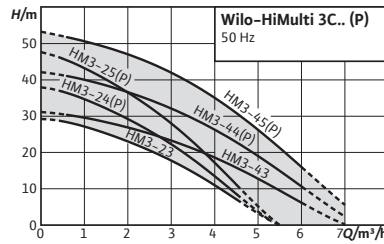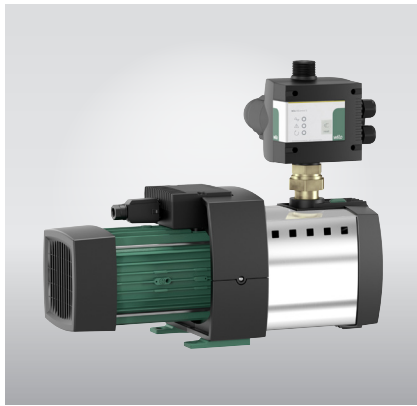

Accessories
Accessories

Page
285

Series modification

Select 4 online
All information at www.wilo-select.com

Wilo-HiMulti 3 C



Construction

Water-supply system with automatic pump control system in non self-priming version (HiMulti 3 C) or self-priming version (HiMulti 3 C P)

Application

- Water supply (drinking water certification in accordance with ACS)
- Sprinkling
- Irrigation and spraying
- Rainwater utilisation

Scope of delivery

- Pump
- Pump control Wilo-HiControl 1
- 1 piece plastic connector with seal for manual connection to the inlet pipe
- Wilo-Connector (electrical quick connector)
- Installation and operating instructions

Your advantages

- Simple: Plug & Pump system
- Efficient: Highly efficient hydraulics, low electricity consumption and very compact thanks to motor optimisation
- Automatically operating system and dry-running protection thanks to Wilo-HiControl 1
- Low-noise: Noise level between 56 dB(A) and 64 dB(A)
- 360° rotatable electronic pump control HiControl 1 for easy installation


Notice


Changed dimensions to previous model

Price group: PG5

Ordering information (not self-priming)						
HiMulti 3 C	Mains connection	Rated power	Gross weight, approx.	Art. no.		
		P_2 kW	m kg			EUR
1-23	1~230 V, 50 Hz	0.40	13.9	2543603	L	506.-
1-24	1~230 V, 50 Hz	0.40	15.5	2543604	L	526.-
1-25	1~230 V, 50 Hz	0.50	17.6	2543605	L	559.-
1-43	1~230 V, 50 Hz	0.40	15.2	2543606	L	591.-
1-44	1~230 V, 50 Hz	0.60	17.3	2543607	L	637.-
1-45	1~230 V, 50 Hz	0.80	19.2	2543608	L	703.-

Price group: PG5

Ordering information (self-priming)						
HiMulti 3 C	Mains connection	Rated power	Gross weight, approx.	Art. no.		
		P_2 kW	m kg			EUR
1-24 P	1~230 V, 50 Hz	0.40	15.5	2543599	L	567.-
1-25 P	1~230 V, 50 Hz	0.50	17.6	2543600	L	601.-
1-44 P	1~230 V, 50 Hz	0.60	17.3	2543601	L	671.-
1-45 P	1~230 V, 50 Hz	0.80	19.2	2543602	L	740.-

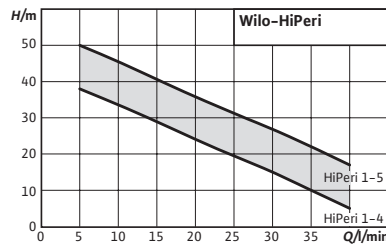

Accessories
Accessories

Page
285

Select 4 online

All information at www.wilo-select.com

Wilo-HiPeri



Construction

Non self-priming peripheral pump

Application

- Water distribution/boosting
- Raw water intake
- Sprinkling and spraying
- Rainwater utilisation

Scope of delivery


- Pump
- Installation and operating instructions

Your advantages

- Easy handling due to its light weight, perfect for continuous operation
- Brass impeller for fluids up to 60 °C
- Efficiently thanks to low power consumption with maximum delivery head and maximum volume flow
- Up to 7 m negative suction head
- Expandable with electronic control of pumps Wilo-HiControl 1

Price group: PG5

Ordering information						
HiPeri	Mains connection	Rated power	Gross weight, approx.	Art. no.		
		P_2 kW	m kg			EUR
1-4	1~230 V, 50 Hz	0,37	5,2	4186197	L	194,-
1-5	1~230 V, 50 Hz	0,55	6,6	4186198	L	258,-

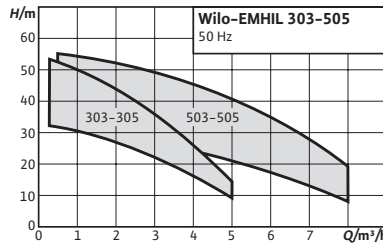

Accessories
Accessories

Page
285

Select 4 online
All information at www.wilo-select.com

Wilo-EMHIL



Construction

Non-self-priming water supply unit with frequency converter

Application

- Water supply (drinking water certification in accordance with ACS)
- Rainwater utilisation
- Irrigation and spraying

Scope of delivery

- 1 ElectronicControl control device with:
- 1 series MHIL pump with 1 ElectronicControl (1.4 m connection cable)
 - 1 rotatable connection and 1 shut-off valve
 - One each Installation and operating instructions for MHIL pump and for ElectronicControl

Your advantages

- Heavy-duty multistage pump with stainless steel hydraulics
- Simple operation and adjustment via display with plain text display, status indicator, analysis function, adjustment of the control parameters (PID), freeze protection
- Plug & Pump, pre-assembled and fitted with connection cable
- Meets the EMC standards for domestic use (EN 61000-6-2 and EN 61000-6-3)
- Float switch can be connected optionally

Price group: PG5

Ordering information						
EMHIL	Mains connection	Rated power	Gross weight, approx.	Art. no.		
		P_2 kW	m kg			EUR
303 M	3~400 V, 50 Hz	0.55	21	4161130	L	1,290.-
304 M	3~400 V, 50 Hz	0.55	21	4161131	L	1,344.-
305 M	3~400 V, 50 Hz	0.75	25	4161132	L	1,434.-
503 M	3~400 V, 50 Hz	0.55	21	4161133	L	1,344.-
504 M	3~400 V, 50 Hz	0.75	25	4161134	L	1,395.-
505 M	3~400 V, 50 Hz	1.10	23	4161135	L	1,487.-

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.



Accessories
Accessories

Page
285

Wilo-ElectronicControl

Construction

Water-cooled frequency converter with built-in pressure and flow monitor

Application

For controlling pumps in the fields:

- Water supply
- Rainwater utilisation
- Irrigation and spraying

Scope of delivery


1 control device Electronic Control incl.:


- Pre-cabling with 1.4 m connection cable and plug
- Pre-cabled motor cable with cable end sleeves
- Installation and operating instructions

Your advantages

- Easy adjustment and operation
- Large display with simplified menu and navigation in addition to LED status indicator
- Meets the EMC standards for domestic use (EN 61000-6-2 and EN 61000-6-3)
- Comfort functions: PID (APP function), frost protection automatic system AIS, automatic restart after error ART
- Float switch can be connected optionally

Price group: PG14

Ordering information							
	Mains connection	Rated voltage	Max. nominal current	Gross weight, approx.	Art. no.		
		U V	I A	m kg			EUR
MM5	1~230 V, 50/60 Hz	230.0	5	4	4160333	L	748.-
MM9	1~230 V, 50/60 Hz	230.0	9	4	4160334	L	802.-
MT6	1~230 V, 50/60 Hz	230.0	6	4	4160335	L	748.-
MT10	1~230 V, 50/60 Hz	230.0	10	4	4160336	L	802.-

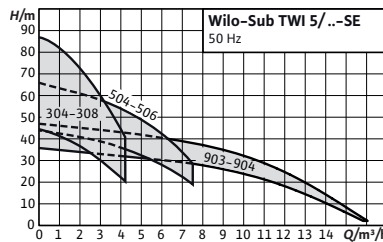

Accessories
Accessories

Page
285

Select 4 online

All information at www.wilo-select.com

Wilo-Sub TWI 5/TWI 5-SE



Construction

5" submersible pump in stainless steel, multistage

Application

Submersible pumps

- Pumping from wells, rainwater storage tanks and vessels
- Irrigation, sprinkling and pumping out
- Water supply
- Rainwater utilisation

Your advantages

- Highly efficient thanks to optimised hydraulics
- Self-cooling motor (dry well installation out of the water is possible)
- Single-phase current version, pre-assembled with switchbox and motor protection for an easy installation
- Easy handling, maintenance and repair
- Corrosion-resistant and low-wearing

Scope of delivery


- Pump with 20 m connecting cable
- Safety cable made of polypropylene
- Installation and operating instructions

Price group: PG5


Ordering information						
	Mains connection	Rated power	Gross weight, approx.	Art. no.		
		P_2 kW	m kg			EUR
304	1~230 V, 50 Hz	0.55	17	4104118	L	585.-
304 FS	1~230 V, 50 Hz	0.55	17.2	4144935	L	634.-
305	1~230 V, 50 Hz	0.75	18.8	4144948	K	620.-
305 FS	1~230 V, 50 Hz	0.75	19	4144936	K	669.-
306	1~230 V, 50 Hz	0.75	19.2	4104119	L	654.-
306	3~400 V, 50 Hz	0.75	18.8	4104123	K	585.-
306 FS	1~230 V, 50 Hz	0.75	19.5	4144937	L	703.-
307	1~230 V, 50 Hz	1.10	21	4144949	K	725.-
307 FS	1~230 V, 50 Hz	1.10	21.2	4144938	K	772.-
308	1~230 V, 50 Hz	1.10	21.5	4104120	L	797.-
308	3~400 V, 50 Hz	1.10	20.5	4104124	K	718.-
308 FS	1~230 V, 50 Hz	1.10	21.8	4144939	L	843.-
504	1~230 V, 50 Hz	0.75	17.5	4144950	K	652.-



☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.


Price group: PG5

Ordering information						
	Mains connection	Rated power	Gross weight, approx.	Art. no.		
		P_2 kW	m kg			EUR
504 FS	1~230 V, 50 Hz	0.75	17.8	4144940	K	700.-
505	1~230 V, 50 Hz	0.90	20	4144951	K	691.-
505 FS	1~230 V, 50 Hz	0.90	20.2	4144941	K	739.-
506	1~230 V, 50 Hz	1.10	20.8	4144952	K	731.-
506 FS	1~230 V, 50 Hz	1.10	21	4144942	K	776.-
903	1~230 V, 50 Hz	1.10	19.2	4104121	K	818.-
903	3~400 V, 50 Hz	1.10	18	4104125	K	743.-
904	1~230 V, 50 Hz	1.50	22.2	4104122	L	914.-
904	3~400 V, 50 Hz	1.50	20.2	4104126	K	824.-

Price group: PG5

Ordering information						
	Mains connection	Rated power	Gross weight, approx.	Art. no.		
		P_2 kW	m kg			EUR
304	1~230 V, 50 Hz	0.55	17.8	4104127	L	637.-
304 FS	1~230 V, 50 Hz	0.55	18	4144961	K	682.-
305	1~230 V, 50 Hz	0.75	19.5	4144974	K	671.-
305 FS	1~230 V, 50 Hz	0.75	19.8	4144962	K	716.-
306	1~230 V, 50 Hz	0.75	20	4104128	L	705.-
306	3~400 V, 50 Hz	0.75	19.5	4104132	K	635.-
306 FS	1~230 V, 50 Hz	0.75	20.2	4144963	K	751.-
307	1~230 V, 50 Hz	1.10	21.8	4144975	K	774.-
307 FS	1~230 V, 50 Hz	1.10	22	4144964	K	821.-
308	1~230 V, 50 Hz	1.10	22.2	4104129	L	845.-
308	3~400 V, 50 Hz	1.10	21.2	4104133	K	768.-
308 FS	1~230 V, 50 Hz	1.10	22.5	4144965	K	893.-
504	1~230 V, 50 Hz	0.75	18.5	4144976	K	708.-
504 FS	1~230 V, 50 Hz	0.75	18.8	4144966	K	753.-
505	1~230 V, 50 Hz	0.90	20.8	4144977	K	746.-
505 FS	1~230 V, 50 Hz	0.90	21	4144967	K	795.-
506	1~230 V, 50 Hz	1.10	21.5	4144978	K	785.-
506 FS	1~230 V, 50 Hz	1.10	21.8	4144968	K	832.-
903	1~230 V, 50 Hz	1.10	20	4104130	K	869.-
903	3~400 V, 50 Hz	1.10	18.8	4104134	K	791.-
904	1~230 V, 50 Hz	1.50	23	4104131	L	965.-
904	3~400 V, 50 Hz	1.50	21	4104135	K	874.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

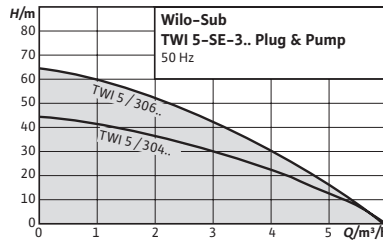

Accessories
Accessories

Page
285

Select **4**online
All information at www.wilo-select.com

Wilo-Sub TWI 5-SE Plug & Pump



Construction

Water-supply system with submersible pump, control and complete accessories

Application

- Pumping from wells, rainwater storage and tanks
- Irrigation, sprinkling or pumping out
- Water supply
- Rainwater utilisation

Scope of delivery


- Pump
- Complete control
- Safety cable made of polypropylene
- Fine suction filter
- Suction hose
- Installation and operating instructions

Your advantages

- Easy installation and commissioning thanks to ready-to-plug delivery including all accessories
- Thermal motor protection
- Pump (housing, stages, impellers) made entirely of stainless steel 1.4301 (AISI 304)
- The self-cooling motor also enables the provision outside the water

Price group: PG5

Ordering information						
Sub TWI 5-SE Plug & Pump	Mains connection	Rated power	Gross weight, approx.	Art. no.		
		P_2 kW	m kg			EUR
304 EM P&P	1~230 V, 50 Hz	0.55	22.5	2543632	L	1,003.-
306 EM P&P	1~230 V, 50 Hz	0.75	25	2543633	L	1,064.-

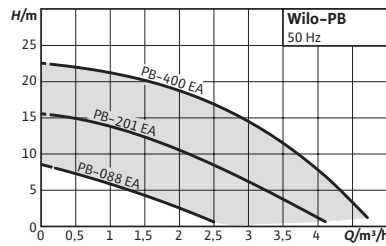

Accessories
Accessories

Page
285

Select 4 online
All information at www.wilo-select.com

Wilo-PB



Construction

Non self-priming single-stage centrifugal pump of in-line design

Application

- Automatic water supply/pressure boosting for single-/two-family houses from a tank to extraction points located beneath

Scope of delivery


- Pump
- Installation and operating instructions
- Installation accessories: 2 screwed connections, nipples and gaskets each



Your advantages

- Dry-running protection for high operational safety
- High reliability thanks to automatic operation and corrosion protection through coated hydraulics
- Standardised design for easy installation
- Compact design and quiet running (55 dbA) for domestic use
- Low power consumption thanks to automatic control

Price group: PG5

Ordering information						
PB	Mains connection	Rated power	Gross weight, approx.	Art. no.		
		P_2 kW	m kg			EUR
088 EA	1~230 V, 50 Hz	0.06	5.5	3068133	L	124.-
201 EA	1~230 V, 50 Hz	0.20	9.5	3068136	L	185.-
400 EA	1~230 V, 50 Hz	0.40	12.5	3068138	L	313.-



Mechanical accessories						
Type	Description		Art. no.		Price group	
						EUR
Coarse suction filter G	Mesh width 1.8 mm with 1¼" hose nozzle connection without non-return valve	Floating extractor	2024959	L	PG14	38.-
Coarse suction filter GR	Mesh width 1.8 mm with 1¼" hose nozzle connection with non-return valve	Floating extractor	2024960	L	PG14	73.-
Fine suction filter	Fine suction filter with R 1¼ male thread for insertion into pump suction port of TWI5-SE	Threaded extraction	2025755	L	PG14	127.-
Fine suction filter F	Mesh width 1.2 mm with 1¼" hose nozzle connection without non-return valve	Floating extractor	2024961	L	PG14	121.-
Fine suction filter FR	Mesh width 1.2 mm with 1¼" hose nozzle connection with non-return valve	Floating extractor	2024962	L	PG14	162.-
Foot valve R 1¼	High-quality foot valve made of red brass with integrated non-return valve. Strainer made of stainless steel 1.4301.	R 1¼	2502408	C	PG14	137.-
Foot valve R 1½	High-quality foot valve made of red brass with integrated non-return valve. Strainer made of stainless steel 1.4301.	R 1½	2502236	C	PG14	194.-
Foot valve R 2	High-quality foot valve made of red brass with integrated non-return valve. Strainer made of stainless steel 1.4301.	R 2	2502011	C	PG14	344.-
Foot valve R 2½	High-quality foot valve made of red brass with integrated non-return valve. Strainer made of stainless steel 1.4301.	R 2½	2500711	C	PG14	511.-
Foot valve R 3	High-quality foot valve made of red brass with integrated non-return valve. Strainer made of stainless steel 1.4301.	R 3	2519816	A	PG14	608.-
Handle	Carrying handle for Wilo-Jet FWJ series pumps	-	4083526	L	PG15	18.-
Quick coupling for submersible-motor pumps	R 1 quick coupling made of brass for fast installation/dismantling of submersible-motor pumps.	-	4027329	L	PG14	150.-
Suction/pressure hose 1¼" SE, PN 10, 1.5 m (cpl.)	Suction- and pressure-resistant hose, including two hose clips made of VA as well as R 1 and R 1¼ hose nozzles for connection to the floating discharge of the series TWI5-SE, MC.	1.5 m cpl.	2025973	L	PG14	45.-
Suction/pressure hose 1¼" SE, PN 10, 3.0 m (cpl.)	Suction- and pressure-resistant hose, including two hose clips made of VA as well as R 1 and R 1¼ hose nozzles for connection to the floating discharge of the series TWI5-SE, MC.	3.0 m cpl.	2025974	L	PG14	88.-
Suction/pressure hose 1¼" SE, PN 10, 5.0 m (cpl.)	Suction- and pressure-resistant hose, including two hose clips made of VA as well as R 1 and R 1¼ hose nozzles for connection to the floating discharge of the series TWI5-SE, MC.	5.0 m cpl.	2025975	L	PG14	144.-
Suction/pressure hose 1¼" SE, PN 10, 10.0 m (cpl.)	Suction- and pressure-resistant hose, including two hose clips made of VA as well as R 1 and R 1¼ hose nozzles for connection to the floating discharge of the series TWI5-SE, MC.	10.0 m cpl.	2025976	L	PG14	288.-
Suction/pressure hose 1¼" SE, PN 10, 15.0 m (cpl.)	Suction- and pressure-resistant hose, including two hose clips made of VA as well as R 1 and R 1¼ hose nozzles for connection to the floating discharge of the series TWI5-SE, MC.	15.0 m cpl.	2025977	L	PG14	428.-
Suction hose set G1, 7 m	7 m suction hose, Ø 1", plastic (Noryl) with foot valve and R 1 screwed connection	-	4027874	L	PG14	52.-
Suction hose set G1¼, 7 m	7 m suction hose, Ø 1¼", plastic (Noryl) with foot valve and R 1 screwed connection	-	4056081	L	PG14	80.-
Wall bracket	Wall bracket made of steel, galvanized, for installation of pumps and water-supply units from the series MP, MC, WJ, FMP, FMC, FWJ	-	4027328	L	PG14	124.-


 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
 Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.


Electrical accessories						
Type	Description		Art. no.	Price group		
						EUR
Automatic kit R 1, 5 m cable	Automatic drinking water replenishment. Scope of delivery: Solenoid valve with 2 m cable, WAOEK 65 float switch, with ready-to-plug small switchgear for direct control of the solenoid valve	R 1, 5 m cable	180549795	L	PG14	780.-
Automatic kit R 1, 20 m cable	Automatic drinking water replenishment. Scope of delivery: Solenoid valve with 2 m cable, WAOEK 65 float switch, with ready-to-plug small switchgear for direct control of the solenoid valve	R 1, 20 m cable	2007158	L	PG14	906.-
Automatic kit R ½, 5 m cable	Automatic drinking water replenishment. Scope of delivery: Solenoid valve with 2 m cable, WAOEK 65 float switch, with ready-to-plug small switchgear for direct control of the solenoid valve	R ½, 5 m cable	180493296	L	PG14	513.-
Automatic kit R ½, 20 m cable	Automatic drinking water replenishment. Scope of delivery: Solenoid valve with 2 m cable, WAOEK 65 float switch, with ready-to-plug small switchgear for direct control of the solenoid valve	R½ 20 m cable	2005645	L	PG14	638.-
Float switch WA65 with 5 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 60 °C. Switching: up „ON“/down „OFF“.	-	503211390	L	PG14	82.-
Float switch WA65 with 10 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 60 °C. Switching: up „ON“/down „OFF“.	-	503211893	L	PG14	155.-
Float switch WA65 with 20 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 60 °C. Switching: up „ON“/down „OFF“.	-	2004431	L	PG14	231.-
Float switch WA65 with 30 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 60 °C. Switching: up „ON“/down „OFF“.	-	2004432	L	PG14	314.-
Float switch WA95 B with 5 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 90 °C. Switching: up „ON“/down „OFF“.	-	6070646	A	PG14	☺
HiControl 1	Electrical accessories for pump automation and dry-running protection with volume flow monitoring	-	4190896	L	PG14	135.-
HiControl 1-EK	Wilo-HiControl 1 with two electrical cables (1.5 m) with built-in socket for easy connection to the pump and the power supply	-	4190895	L	PG14	183.-
Pressure switch WVA up to 6 bar	For the control of one pump, 8 l diaphragm pressure vessel, pressure gauge, control valve with integrated non-return valve, pressure switch.	Up to 6 bar	180492096	L	PG14	618.-
Pressure switch WVA up to 10 bar	For the control of one pump, 8 l diaphragm pressure vessel, pressure gauge, control valve with integrated non-return valve, pressure switch.	Up to 10 bar	2502050	L	PG14	613.-
Sensor kit ER-2	For control of two pumps, 8 l diaphragm pressure vessel, pressure gauge, 4 – 20 mA pressure sensor, fittings and ball valve.	-	2501886	L	PG14	543.-

☺ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☺ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Electrical accessories						
Type	Description		Art. no.		Price group	
						EUR
Submersible electrode, 10 m	Low-water signal transmitter for connection to a switchgear with triggering relay, e.g. ER... or SK277 for low-water protection of borehole pumps. H07 cable material approved for use in drinking water applications.	10 m	2501937	L	PG14	84.-
Switchgear ER-2 2 x 10.0 WM	Switchgear for wall fixation for pressure-dependent operation of two pumps, 230 and 400 V connection voltage.	Switching capacity max. 10 A	2511288	C	PG14	1,679.-
Switchgear ER 1 x 10,0 WM	Control device with electronic motor protection, test run, main switch / control switch, with low-water display and power interruption display, potential-free collective fault signal / collective run signal, protection class IP54 (ER1-4.0/IP41), can be used for 230 V and 400 V control device for pumps with motors suitable for direct starting.	Switching capacity max. 10 A	2514754	C	PG14	1,096.-
Switchgear SK 277	Including three electrodes, each with 3 m cable for the low-water cut-out switchgear with indirect connection in the break tank. Connected load for motors up to max. 3 kW.	-	180495295	L	PG14	825.-
Switchgear SK 602N	Wall-mounted unit for the electrical connection of single-phase (EM) and three-phase (DM) pumps with integrated thermal winding contacts (WSK) for monitoring the winding temperature. With On/Off switch with integrated run signal light, power contactor and potential-free switch-on/off.	-	2120444	L	PG14	178.-
Switchgear SK 622N	Like SK 602, but with potential-free contacts for external run signal (SBM) and fault signal (SSM) as well as fault signal light.	-	2120445	L	PG14	209.-
WAEK 65 float switch, 5 m cable	Signal transmitters for fluids up to a temperature of 60 °C. incl. small switchgear EK for pumps with AC motor up to 1 kW rated power. Switching: up „ON“/down „OFF“.	5 m cable	503211698	L	PG14	157.-
WAEK 65 float switch, 10 m cable	Signal transmitters for fluids up to a temperature of 60 °C. incl. small switchgear EK for pumps with AC motor up to 1 kW rated power. Switching: up „ON“/down „OFF“.	10 m cable	2005516	L	PG14	197.-
WAEK 65 float switch, 20 m cable	Signal transmitters for fluids up to a temperature of 60 °C. incl. small switchgear EK for pumps with AC motor up to 1 kW rated power. Switching: up „ON“/down „OFF“.	20 m cable	2005517	L	PG14	277.-
WAO 65 float switch, 5 m cable	Signal transmitters for fluids up to a temperature of 60 °C. Switching: up „Off“/down „On“.	5 m cable	503211595	L	PG14	114.-
WAO 65 float switch, 10 m cable	Signal transmitters for fluids up to a temperature of 60 °C. Switching: up „Off“/down „On“.	10 m cable	2006027	L	PG14	155.-
WAO 65 float switch, 20 m cable	Signal transmitters for fluids up to a temperature of 60 °C. Switching: up „Off“/down „On“.	20 m cable	2004429	L	PG14	231.-
WAO 65 float switch, 30 m cable	Signal transmitters for fluids up to a temperature of 60 °C. Switching: up „Off“/down „On“.	30 m cable	2004430	L	PG14	318.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
 Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Electrical accessories						
Type	Description		Art. no.	Price group		
						EUR
WAOEK 65 float switch, 20 m cable	Signal transmitters for fluids up to a temperature of 60 °C. incl. small switchgear EK for pumps with AC motor up to 1 kW rated power. Switching: up „Off“/ down „On“.	20 m cable	2005626	L	PG14	277.-
Wall bracket for Wilo-FluidControl	Made of galvanised steel incl. mounting accessories for the secure fixation of the Wilo-FluidControl and Wilo-HiControl 1-FC pressure and flow monitors.	-	4027326	L	PG14	63.-

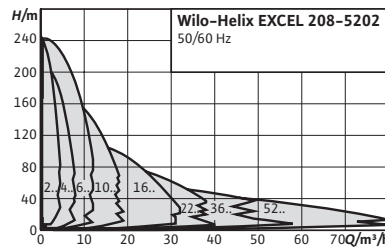

Accessories
Accessories

Page
357



Select 4 online

All information at www.wilo-select.com

Wilo-Helix EXCEL



Construction

Non-self-priming, highly efficient fully stainless-steel high-pressure multistage centrifugal pump with EC motor of energy efficiency class IE5 in accordance with IEC 60034-30-2, in vertical design with integrated high-efficiency drive and in-line connections

Application

- Water supply and pressure boosting
- Industrial circulation systems
- Process water
- Closed cooling circuits
- Washing systems
- Irrigation

Scope of delivery

- Helix EXCEL high-pressure multistage centrifugal pump
- Installation and operating instructions
- Helix EXCEL 2 – 16 (version PN16 with oval flanges): Counter flanges made of stainless steel with the corresponding screws, nuts and gaskets

General notes – ErP (Ecodesign) Directive

The following pages list the respective nominal flow rate within the series. Reference value MEI for water pumps with the best efficiency is ≥ 0.70 . For more detailed information on the MEI values of the individual pump types, see: Wilo Online Catalogue, available at www.wilo.com


Your advantages

- Highly efficient EC motor of energy efficiency class IE5 in accordance with IEC 60034-30-2
- Integrated electronic control “High-Efficiency Drive”
- Simple operation thanks to tried-and-tested Green Button Technology and a clearly arranged display
- User-friendly „X-Seal” cartridge mechanical seal and spacer coupling (from 5.5 kW) for fast and easy maintenance
- Flexible integration into building automation
- Drinking water approval for pumps with parts that come in contact with the fluid made of stainless steel (EPDM version)

Price group: PG6

Ordering information PN 16


MEI ≥ 0.70; materials: Hydraulics 1.4307 (AISI 304L), pump housing 1.4301 (AISI 304), gasket type: EPDM

Helix EXCEL	Pressure port	Rated power	Gross weight, approx.	Art. no.		
		P_2 kW	m kg			EUR
208	G 1	1.10	71.4	4171970	C	5,475.-
405	G 1	1.10	69.4	4171960	C	5,318.-
410	G 1	2.20	74.5	4162530	C	5,626.-
414	G 1	3.20	76.9	4162538	C	6,418.-
603	G 1	1.10	69.4	4171934	C	5,262.-
606	G 1	2.20	74.5	4162514	C	5,262.-
609	G 1	3.20	76.9	4162522	C	5,894.-
611	G 1	4.20	85.5	4171940	C	6,522.-
1002	G 1½	1.10	71.8	4171900	C	4,893.-
1004	G 1½	2.20	75.9	4162500	C	4,864.-
1005	G 1½	3.20	77.2	4162506	C	6,107.-
1007	G 1½	4.20	85.3	4171906	C	6,694.-
1009	G 1½	5.50	93	4171914	C	7,719.-
1010	G 1½	6.50	113.4	4171922	C	7,936.-

Price group: PG6

Ordering information PN 16


MEI ≥ 0.50; materials: Hydraulics 1.4307 (AISI 304L), pump housing 1.4301 (AISI 304), gasket type: EPDM

Helix EXCEL	Pressure port	Rated power	Gross weight, approx.	Art. no.		
		P_2 kW	m kg			EUR
1602	G 2	2.20	77.5	4162488	C	5,180.-
1603	G 2	3.20	78.9	4162494	C	5,797.-
1604	G 2	4.20	85.5	4171868	C	6,233.-
1605	G 2	5.50	92.1	4171876	C	7,050.-
1606	G 2	6.50	113.5	4171884	C	7,782.-
1607	G 2	7.50	114.5	4171892	C	8,301.-

Price group: PG6

Ordering information PN 16

MEI ≥ 0.70; materials: Hydraulics 1.4307 (AISI 304L), pump housing 1.4301 (AISI 304), gasket type: EPDM

Helix EXCEL	Pressure port	Rated power	Gross weight, approx.	Art. no.		
		P_2 kW	m kg			EUR
2201	DN 50	2.20	95	4212769	C	5,788.-
3601	DN 65	3.20	98	4212765	C	6,552.-
2202	DN 50	3.20	96	4212773	C	6,587.-
5201	DN 80	4.20	130	4212777	C	8,225.-
2203	DN 50	4.20	132	4212796	C	7,493.-
3602	DN 65	4.20	131	4212815	C	7,092.-
5202	DN 80	5.50	138	4212781	C	8,941.-
3602-5.5	DN 65	5.50	131	4212789	C	7,594.-
2203	DN 50	5.50	132	4212801	C	8,009.-
2203	DN 50	6.50	158	4212804	C	8,375.-
3602-7.5	DN 65	7.50	165	4212794	C	8,946.-
5202	DN 80	7.50	168	4212785	C	9,563.-
2204	DN 50	7.50	164	4212809	C	8,677.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact WiloSubject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG6

Ordering information PN 16

MEI ≥ 0.70; materials: Hydraulics 1.4404 (AISI 316L), pump housing 1.4404 (AISI 316L), gasket type: FKM

Helix EXCEL	Pressure port	Rated power	Gross weight, approx.	Art. no.		EUR
		P_2 kW	m kg			
2201	DN 50	2.20	89.5	4162479	C	7,694.-
2202	DN 50	3.20	99.1	4162485	C	8,468.-
2203-4.2	DN 50	4.20	95.5	4171835	C	8,698.-
2203-5.5	DN 50	5.50	101.1	4171842	C	8,953.-
2203-6.5	DN 50	6.50	121.5	4171852	C	9,305.-
2204	DN 50	7.50	125.5	4171862	C	9,667.-
3601	DN 65	3.20	97.9	4162473	C	8,266.-
3602-5.5	DN 65	5.50	121	4171819	C	9,127.-
3602-7.5	DN 65	7.50	136.5	4171826	C	9,616.-
3602/2	DN 65	4.20	115	4196395	C	8,740.-
5201	DN 80	4.20	124	4171795	C	9,320.-
5202	DN 80	7.50	151	4171807	C	10,627.-
5202/1	DN 80	5.50	135.5	4171801	C	9,968.-

Price group: PG6

Ordering information PN 25

MEI ≥ 0.70; materials: Hydraulics 1.4307 (AISI 304L), pump housing 1.4301 (AISI 304), gasket type: EPDM

Helix EXCEL	Pressure port	Rated power	Gross weight, approx.	Art. no.		EUR
		P_2 kW	m kg			
216	DN 25	2.20	80.5	4162546	C	6,060.-
222	DN 25	3.20	83.9	4162550	C	6,793.-
410	DN 25	2.20	77.5	4162536	C	5,662.-
414	DN 25	3.20	78.9	4162544	C	6,569.-
418	DN 25	4.20	86.5	4171966	C	7,477.-
606	DN 32	2.20	75.5	4162520	C	5,736.-
609	DN 32	3.20	78.9	4162528	C	5,941.-
611	DN 32	4.20	87.5	4171946	C	7,003.-
613	DN 32	5.50	130	4171948	C	8,062.-
616	DN 32	6.50	144.5	4171952	C	9,120.-
619	DN 32	7.50	147.5	4171956	C	9,964.-
1005	DN 40	3.20	77.2	4162512	C	6,222.-
1007	DN 40	4.20	85.3	4171912	C	6,949.-
1009	DN 40	5.50	100.9	4171920	C	7,937.-
1010	DN 40	6.50	113.9	4171928	C	8,326.-
1012	DN 40	7.50	115.7	4171930	C	8,649.-

Price group: PG6

Ordering information PN 25

MEI ≥ 0.70; materials: Hydraulics 1.4404 (AISI 316L), pump housing 1.4404 (AISI 316L), gasket type: FKM


Helix EXCEL	Pressure port	Rated power	Gross weight, approx.	Art. no.		EUR
		P_2 kW	m kg			
208	DN 25	1.10	74.4	4171973	C	5,798.-
216	DN 25	2.20	80.5	4162547	C	6,640.-
222	DN 25	3.20	83.9	4162551	C	7,663.-
405	DN 25	1.10	71.4	4171963	C	5,875.-

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☞ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG6

Ordering information PN 25


MEI ≥ 0.70; materials: Hydraulics 1.4404 (AISI 316L), pump housing 1.4404 (AISI 316L), gasket type: FKM

Helix EXCEL	Pressure port	Rated power	Gross weight, approx.	Art. no.		
		P_2 kW	m kg			EUR
410	DN 25	2.20	77.5	4162531	C	5,975.-
414	DN 25	3.20	78.9	4162539	C	7,491.-
418	DN 25	4.20	86.5	4171967	C	8,572.-
603	DN 32	1.10	71.4	4171937	C	5,609.-
606	DN 32	2.20	75.5	4162515	C	5,957.-
609	DN 32	3.20	78.9	4162523	C	6,616.-
611	DN 32	4.20	87.5	4171941	C	7,731.-
613	DN 32	5.50	130	4171949	C	8,673.-
616	DN 32	6.50	144.5	4171953	C	9,845.-
619	DN 32	7.50	147.5	4171957	C	11,041.-
1002	DN 40	1.10	72.4	4171903	C	5,517.-
1004	DN 40	2.20	75.9	4162503	C	5,460.-
1005	DN 40	3.20	77.2	4162507	C	6,869.-
1007	DN 40	4.20	85.3	4171907	C	7,799.-
1009	DN 40	5.50	100.9	4171915	C	8,870.-
1010	DN 40	6.50	113.9	4171923	C	9,269.-
1012	DN 40	7.50	115.7	4171931	C	9,586.-
2203-5.5	DN 50	5.50	108.5	4171846	C	9,224.-
2203-6.5	DN 50	6.50	121.5	4171856	C	9,674.-
2204	DN 50	7.50	125.5	4171866	C	9,903.-
3602-5.5	DN 65	5.50	121	4171819	C	9,127.-
3602-7.5	DN 65	7.50	136.5	4171826	C	9,616.-
3602-7.5	DN 65	7.50	139.5	4171830	C	10,096.-

Price group: PG6

Ordering information PN 25


MEI ≥ 0.50; materials: Hydraulics 1.4404 (AISI 316L), pump housing 1.4404 (AISI 316L), gasket type: FKM

Helix EXCEL	Pressure port	Rated power	Gross weight, approx.	Art. no.		
		P_2 kW	m kg			EUR
1602	DN 50	2.20	77.5	4162491	C	6,002.-
1603	DN 50	3.20	78.9	4162497	C	6,702.-
1604	DN 50	4.20	85.5	4171869	C	7,467.-
1605	DN 50	5.50	99.5	4171877	C	8,618.-
1606	DN 50	6.50	113.5	4171885	C	9,241.-
1607	DN 50	7.50	114.5	4171893	C	9,755.-

Price group: PG6

Ordering information PN 25

MEI ≥ 0.50; materials: Hydraulics 1.4307 (AISI 304L), pump housing 1.4301 (AISI 304), gasket type: EPDM


Helix EXCEL	Pressure port	Rated power	Gross weight, approx.	Art. no.		
		P_2 kW	m kg			EUR
1604	DN 50	4.20	85.5	4171874	C	6,766.-
1605	DN 50	5.50	99.5	4171882	C	7,283.-
1606	DN 50	6.50	113.5	4171890	C	7,841.-
1607	DN 50	7.50	114.5	4171898	C	8,806.-


 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact WiloSubject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG6

Ordering information PN 25

MEI ≥ 0.70; materials: Hydraulics 1.4404 (AISI 316L), pump housing 1.4404 (AISI 316L), gasket type: FKM

Helix EXCEL	Pressure port	Rated power	Gross weight, approx.	Art. no.		
		P_2 kW	m kg			EUR
2203-5.5	DN 50	5.50	108.5	4171846	C	9,224.-
2203-6.5	DN 50	6.50	121.5	4171856	C	9,674.-
2204	DN 50	7.50	125.5	4171866	C	9,903.-
3602-5.5	DN 65	5.50	121	4171819	C	9,127.-
3602-7.5	DN 65	7.50	136.5	4171826	C	9,616.-
3602-7.5	DN 65	7.50	139.5	4171830	C	10,096.-

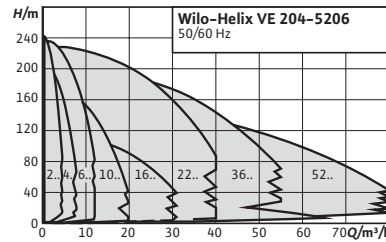

Accessories
Accessories

Page
357

IE4 **Select 4 online**
All information at www.wilo-select.com

Wilo-Helix VE



Construction

Electronically controlled, non-self-priming high-pressure multistage centrifugal pump in vertical design, with in-line connections

Application

- Water supply and pressure boosting
- Industrial circulation systems
- Process water
- Closed cooling circuits
- Fire extinguishing systems
- Washing systems
- Irrigation

Scope of delivery

- Helix VE high-pressure multistage centrifugal pump
- Installation and operating instructions
- Helix VE 2 – 16 (version PN16 with oval flanges): Counter flanges made of stainless steel with corresponding screws, nuts and gaskets

Notice

M13 or M2

Only with 1~ (alternating current) Preset operating mode on delivery M13 = mode 1 or 3 (manual or remote control)
M2 = mode 2 (pressure regulation mode)

Your advantages

- Multistage, speed-configurable stainless steel high-efficiency pump with 2D/3D hydraulics and standard motor
- Optimised design for easy operation, transportation and installation with handles, lantern adjustment and rotatable free flanges
- User-friendly display with Green Button Technology and full text menu
- IF plug-in module for quick communication with the BMS
- Quick maintenance due to innovative cartridge mechanical seal and spacers
- Lower life cycle costs due to new Helix design

General notes – ErP (Ecodesign) Directive

The following pages list the respective nominal flow rate within the series. Reference value MEI for water pumps with the best efficiency is ≥ 0.70 . For more detailed information on the MEI values of the individual pump types, see: Wilo Online Catalogue, available at www.wilo.com

Price group: PG6

Ordering information PN 16 1~230 V

MEI ≥ 0.70; materials: Hydraulics 1.4307 (AISI 304L), pump housing 1.4301 (AISI 304), gasket type: EPDM

Helix VE	Pressure port	Rated power	Gross weight, approx.	Art. no.	Standard me- chanical seal		
		P_2 kW	m kg				EUR
208 M2	G 1	1.10	35	4204032	C		2,782.-
208 M13	G 1	1.10	35	4204031	C		2,782.-
405 M2	G 1	1.10	29	4204036	C		2,504.-
405 M13	G 1	1.10	29	4204035	C		2,504.-

Price group: PG6

Ordering information PN 16

MEI ≥ 0.70; materials: Hydraulics 1.4307 (AISI 304L), pump housing 1.4301 (AISI 304), gasket type: EPDM

Helix VE	Pressure port	Rated power	Gross weight, approx.	Art. no.	Cartridge me- chanical seal	Art. no.	Standard me- chanical seal		
		P_2 kW	m kg						EUR
204	G 1	0.55	31.2	4171738	L	2,831.-	4201563	C	2,540.-
206	G 1	0.75	38.8	4171744	C	2,999.-	4201564	C	2,708.-
208	G 1	1.10	41.1	4164491	L	3,035.-	4201565	C	2,744.-
211	G 1	1.50	59.2	4171752	C	4,194.-	4201566	C	3,904.-

Price group: PG6

Ordering information PN 16

MEI ≥ 0.70; materials: Hydraulics 1.4307 (AISI 304L), pump housing 1.4301 (AISI 304), gasket type: EPDM

Helix VE	Pressure port	Rated power	Gross weight, approx.	Art. no.	Cartridge me- chanical seal	Art. no.	Standard me- chanical seal		
		P_2 kW	m kg						EUR
403	G 1	0.55	30.5	4171702	C	2,774.-	4201567	C	2,483.-
404	G 1	0.75	37.7	4171712	L	2,864.-	4201569	C	2,574.-
405	G 1	1.10	39.6	4164473	L	2,846.-	4201571	C	2,557.-
407	G 1	1.50	57.3	4171724	C	3,696.-	4201573	C	3,406.-
410	G 1	2.20	45.1	4164476	C	4,206.-	4201575	C	3,915.-

Price group: PG6

Ordering information PN 16

MEI ≥ 0.70; materials: Hydraulics 1.4307 (AISI 304L), pump housing 1.4301 (AISI 304), gasket type: EPDM

Helix VE	Pressure port	Rated power	Gross weight, approx.	Art. no.	Cartridge me- chanical seal	Art. no.	Standard me- chanical seal		
		P_2 kW	m kg						EUR
601	G 1¼	0.55	30.1	4171660	C	2,847.-	-	A	☺
602	G 1¼	0.75	33	4171670	C	2,866.-	4201577	C	2,576.-
603	G 1¼	1.10	39.1	4161425	L	2,880.-	4201579	C	2,590.-
604	G 1¼	1.50	56.5	4171680	L	3,568.-	4201581	C	3,278.-
606	G 1¼	2.20	47.7	4161426	L	3,865.-	4201583	C	3,574.-
608	G 1¼	3.00	69.2	4171692	C	4,645.-	4201585	C	4,354.-
611	G 1¼	4.00	83	4161428	C	4,933.-	4201587	C	4,642.-



= ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☺ = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG6

Ordering information PN 16



MEI ≥ 0.70; materials: Hydraulics 1.4307 (AISI 304L), pump housing 1.4301 (AISI 304), gasket type: EPDM

Helix VE	Pressure port	Rated power	Gross weight, approx.	Art. no. Cartridge me- chanical seal	Art. no. Standard me- chanical seal				
		P_2 kW	m kg			EUR		EUR	
1001	G 1½	0.75	35	4171628	C	3,305.-	-	A	☞
1002	G 1½	1.10	36.5	4161304	C	3,406.-	4201547	C	3,117.-
1003	G 1½	1.50	58.6	4171638	C	3,819.-	4201549	C	3,528.-
1004	G 1½	2.20	49.1	4161306	L	4,004.-	4201551	C	3,714.-
1005	G 1½	3.00	70	4171650	L	4,819.-	4201553	C	4,530.-
1006	G 1½	4.00	78.8	4161308	L	5,016.-	4201555	C	4,726.-
1009	G 1½	5.50	117.8	4161311	C	7,430.-	-	A	☞

Price group: PG6

Ordering information PN 16


MEI ≥ 0.50; materials: Hydraulics 1.4307 (AISI 304L), pump housing 1.4301 (AISI 304), gasket type: EPDM

Helix VE	Pressure port	Rated power	Gross weight, approx.	Art. no. Cartridge me- chanical seal	Art. no. Standard me- chanical seal				
		P_2 kW	m kg			EUR		EUR	
1601	G 2	1.10	42.3	4171608	C	3,573.-	-	A	☞
1602	G 2	2.20	48.8	4148083	L	3,924.-	4201557	C	3,634.-
1603-3.0	G 2	3.00	55	4171618	C	4,157.-	4201559	C	3,867.-
1603-4.0	G 2	4.00	64	4148086	L	4,216.-	4201561	C	3,926.-
1605	G 2	5.50	117	4141464	L	6,946.-	-	A	☞
1605 FF240	G 2	5.50	115.7	4190746	C	6,946.-	-	A	☞
1606	G 2	7.50	120.1	4141465	L	7,629.-	-	A	☞
1606 FF240	G 2	7.50	119	4190747	C	7,629.-	-	A	☞

Price group: PG6

Ordering information PN 16


MEI ≥ 0.70; materials: Hydraulics 1.4307 (AISI 304L), pump housing 1.4301 (AISI 304), gasket type: EPDM

Helix VE	Pressure port	Rated power	Gross weight, approx.	Art. no. Cartridge me- chanical seal	Art. no. Standard me- chanical seal	
		P_2 kW	m kg			EUR
2201	DN 50	2.20	82	4198845	C	4,459.-
2202-3.0	DN 50	3.00	92	4198847	C	5,339.-
2202-4.0	DN 50	4.00	99	4198849	C	5,603.-
2203	DN 50	5.50	164	4198851	C	6,816.-
2204	DN 50	7.50	168	4198853	C	8,115.-
2205	DN 50	11.00	254	4198855	C	10,962.-

Price group: PG6

Ordering information PN 16

MEI ≥ 0.70; materials: Hydraulics 1.4404 (AISI 316L), pump housing 1.4409 (AISI 316L), gasket type: FKM

Helix VE	Pressure port	Rated power	Gross weight, approx.	Art. no. Cartridge me- chanical seal	Art. no. Standard me- chanical seal	
		P_2 kW	m kg			EUR
2201	DN 50	2.20	80	4166864	C	6,869.-

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☞ = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG6

Ordering information PN 16

MEI ≥ 0.70; materials: Hydraulics 1.4404 (AISI 316L), pump housing 1.4409 (AISI 316L), gasket type: FKM

Helix VE	Pressure port	Rated power	Gross weight, approx.	Art. no.	Cartridge me- chanical seal	
		P_2 kW	m kg			EUR
2202-3.0	DN 50	3.00	104	4171606	C	7,298.-
2202-4.0	DN 50	4.00	99	4148001	C	7,739.-
2203	DN 50	5.50	136	4139930	C	8,474.-
2204	DN 50	7.50	143	4139931	C	9,007.-
2205	DN 50	11.00	234	4166203	C	14,422.-

Price group: PG6

Ordering information PN 16

MEI ≥ 0.70; materials: Monobloc pump housing EN-GJL-250 cataphoretic-coated, hydraulics 1.4307 (AISI 304L)

Helix VE	Pressure port	Rated power	Gross weight, approx.	Art. no.	Cartridge me- chanical seal	Art. no.	Standard me- chanical seal	
		P_2 kW	m kg					EUR
2202-3.0	DN 50	3.00	111	-	A	4184614	C	5,249.-
2202-4.0	DN 50	4.00	111	-	A	4183452	C	5,249.-
2203 FF240	DN 50	5.50	130	-	A	4183453	C	6,342.-
2204 FF240	DN 50	7.50	136	-	A	4183454	C	7,510.-
2205	DN 50	11.00	263	4183455	C	10,337.-	A	

Price group: PG6

Ordering information PN 16

MEI ≥ 0.70; materials: Hydraulics 1.4307 (AISI 304L), pump housing 1.4301 (AISI 304), gasket type: EPDM

Helix VE	Pressure port	Rated power	Gross weight, approx.	Art. no.	Cartridge me- chanical seal	
		P_2 kW	m kg			EUR
3601	DN 65	4.00	102	4198860	C	5,032.-
3602-5.5	DN 65	5.50	167	4198861	C	7,476.-
3602-7.5	DN 65	7.50	169	4198862	C	8,381.-
3604	DN 65	11.00	259	4198863	C	11,583.-
3605	DN 65	15.00	268	4198864	C	13,392.-

Price group: PG6

Ordering information PN 16

MEI ≥ 0.70; materials: Hydraulics 1.4404 (AISI 316L), pump housing 1.4409 (AISI 316L), gasket type: FKM

Helix VE	Pressure port	Rated power	Gross weight, approx.	Art. no.	Cartridge me- chanical seal	
		P_2 kW	m kg			EUR
3601	DN 65	4.00	103	4152028	C	10,879.-
3602-5.5	DN 65	5.50	143	4152029	C	8,866.-
3602-7.5	DN 65	7.50	147	4152030	C	13,433.-
3604	DN 65	11.00	247	4166253	C	15,022.-
3605	DN 65	15.00	289	4166254	C	17,779.-

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG6

Ordering information PN 16

MEI ≥ 0.70; materials: Hydraulics 1.4404 (AISI 316L), pump housing 1.4409 (AISI 316L), gasket type: FKM

Helix VE	Pressure port	Rated power	Gross weight, approx.	Art. no. Cartridge me- chanical seal	Art. no. Standard me- chanical seal		
		P_2 kW	m kg			EUR	EUR
3602-5.5 FF240	DN 65	5.50	135	-	A	4183460	6,936.-
3602-7.5 FF240	DN 65	7.50	139	-	A	4183461	7,753.-
3604	DN 65	11.00	269	4183462	C	10,894.-	
3605	DN 65	15.00	279	4183463	C	12,523.-	

Price group: PG6

Ordering information PN 16

MEI ≥ 0.70; materials: Hydraulics 1.4307 (AISI 304L), pump housing 1.4301 (AISI 304), gasket type: EPDM

Helix VE	Pressure port	Rated power	Gross weight, approx.	Art. no. Cartridge me- chanical seal		
		P_2 kW	m kg		EUR	
5201	DN 80	5.50	168	4198868	C	6,996.-
5202	DN 80	7.50	172	4198869	C	8,404.-
5203	DN 80	11.00	261	4198870	C	11,862.-
5204	DN 80	15.00	272	4198871	C	14,237.-
5205	DN 80	18.50	272	4198872	C	15,320.-

Price group: PG6

Ordering information PN 16

MEI ≥ 0.70; materials: Hydraulics 1.4404 (AISI 316L), pump housing 1.4404 (AISI 316L), gasket type: FKM

Helix VE	Pressure port	Rated power	Gross weight, approx.	Art. no. Cartridge me- chanical seal		
		P_2 kW	m kg		EUR	
5201	DN 80	5.50	151	4152064	C	12,681.-
5202	DN 80	7.50	161	4152065	C	14,091.-
5203	DN 80	11.00	258	4166259	C	14,923.-
5204	DN 80	15.00	301	4166260	C	17,800.-
5205	DN 80	18.50	347	4166261	C	18,966.-

Price group: PG6

Ordering information PN 16

MEI ≥ 0.70; materials: Monobloc pump housing EN-GJL-250 cataphoretic-coated, hydraulics 1.4307 (AISI 304L)

Helix VE	Pressure port	Rated power	Gross weight, approx.	Art. no. Cartridge me- chanical seal	Art. no. Standard me- chanical seal		
		P_2 kW	m kg			EUR	EUR
5202	DN 80	7.50	153	-	A	4183468	7,874.-
5203	DN 80	11.00	275	4183469	C	11,093.-	
5204	DN 80	15.00	318	4183470	C	13,231.-	
5205	DN 80	18.50	344	4183471	C	14,101.-	

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☞ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG6

Ordering information PN 25 1~230V

MEI ≥ 0.70; materials: Hydraulics 1.4307 (AISI 304L), pump housing 1.4301 (AISI 304), gasket type: EPDM

Helix VE	Pressure port	Rated power	Gross weight, approx.	Art. no.	Cartridge me- chanical seal	
		P_2 kW	m kg			EUR
208 M2	G 1	1.10	41.1	4204030	C	2,840.-
208 M13	G 1	1.10	41.1	4204029	C	2,840.-
405 M2	G 1	1.10	38.2	4204034	C	2,562.-
405 M13	G 1	1.10	38.2	4204033	C	2,562.-

Price group: PG6

Ordering information PN 25

MEI ≥ 0.70; materials: Hydraulics 1.4307 (AISI 304L), pump housing 1.4301 (AISI 304), gasket type: EPDM

Helix VE	Pressure port	Rated power	Gross weight, approx.	Art. no.	Cartridge me- chanical seal	
		P_2 kW	m kg			EUR
208	DN 25	1.10	43.2	4164493	C	3,093.-
211	DN 25	1.50	61.4	4171756	C	4,364.-
216	DN 25	2.20	53.5	4164494	C	4,808.-
220	DN 25	3.00	78.6	4171758	C	5,251.-
222	DN 25	4.00	87.8	4164496	C	5,360.-

Price group: PG6

Ordering information PN 25

MEI ≥ 0.70; materials: Hydraulics 1.4404 (AISI 316L), pump housing 1.4409 (AISI 316L), gasket type: FKM

Helix VE	Pressure port	Rated power	Gross weight, approx.	Art. no.	Cartridge me- chanical seal	
		P_2 kW	m kg			EUR
204	DN 25	0.55	37.8	4171740	C	3,191.-
206	DN 25	0.75	40.9	4171746	C	3,392.-
208	DN 25	1.10	43.2	4164492	C	3,539.-
211	DN 25	1.50	61.4	4171753	C	4,765.-
216	DN 25	2.20	53.5	4164495	C	5,235.-
220	DN 25	3.00	78.6	4171759	C	5,760.-
222	DN 25	4.00	87.8	4164497	C	6,022.-

Price group: PG6

Ordering information PN 25


MEI ≥ 0.70; materials: Hydraulics 1.4307 (AISI 304L), pump housing 1.4301 (AISI 304), gasket type: EPDM

Helix VE	Pressure port	Rated power	Gross weight, approx.	Art. no.	Cartridge me- chanical seal	
		P_2 kW	m kg			EUR
407	G 1	1.50	59.4	4171732	C	3,888.-
410	DN 25	2.20	50.5	4164479	C	4,328.-
413	DN 25	3.00	72.5	4171734	C	4,519.-
418	DN 25	4.00	85.4	4164480	C	5,880.-

Price group: PG6

Ordering information PN 25


MEI ≥ 0.70; materials: Hydraulics 1.4404 (AISI 316L), pump housing 1.4409 (AISI 316L), gasket type: FKM

Helix VE	Pressure port	Rated power	Gross weight, approx.	Art. no.	Cartridge me- chanical seal	
		P_2 kW	m kg			EUR
403	DN 25	0.55	32.6	4171704	C	3,067.-
404	DN 25	0.75	39.9	4171714	C	3,243.-
405	DN 25	1.10	41.7	4164475	C	3,344.-
407	DN 25	1.50	59.4	4171725	C	4,168.-
410	DN 25	2.20	50.5	4164477	C	4,738.-
413	DN 25	3.00	72.5	4171735	C	5,012.-
418	DN 25	4.00	85.4	4164481	C	6,439.-

Price group: PG6

Ordering information PN 25


MEI ≥ 0.70; materials: Hydraulics 1.4404 (AISI 316L), pump housing 1.4409 (AISI 316L), gasket type: FKM

Helix VE	Pressure port	Rated power	Gross weight, approx.	Art. no.	Cartridge me- chanical seal	
		P_2 kW	m kg			EUR
606	DN 32	2.20	51	4161427	C	4,032.-
608	DN 32	3.00	72.6	4171700	C	4,870.-
611	DN 32	4.00	86.3	4161429	C	5,161.-
615	DN 32	5.50	150.6	4161430	C	6,993.-
619	DN 32	7.50	156	4161431	C	7,802.-

Price group: PG6

Ordering information PN 25


MEI ≥ 0.70; materials: Hydraulics 1.4404 (AISI 316L), pump housing 1.4409 (AISI 316L), gasket type: FKM

Helix VE	Pressure port	Rated power	Gross weight, approx.	Art. no.	Cartridge me- chanical seal	
		P_2 kW	m kg			EUR
601	DN 32	0.55	31.5	4171662	C	3,119.-
602	DN 32	0.75	38.9	4171672	C	3,119.-
603	DN 32	1.10	40.5	4161432	C	3,171.-
604	DN 32	1.50	57.9	4171682	C	4,375.-
606	DN 32	2.20	51	4161433	C	4,516.-
608	DN 32	3.00	72.6	4171693	C	5,027.-
611	DN 32	4.00	86.3	4161434	C	5,623.-
615	DN 32	5.50	150.6	4161435	C	8,151.-
619	DN 32	7.50	156	4161436	C	9,128.-

Price group: PG6

Ordering information PN 25

MEI ≥ 0.70; materials: Hydraulics 1.4307 (AISI 304L), pump housing 1.4301 (AISI 304), gasket type: EPDM

Helix VE	Pressure port	Rated power	Gross weight, approx.	Art. no.	Cartridge me- chanical seal	
		P_2 kW	m kg			EUR
1005	DN 40	3.00	72.4	4171658	C	4,944.-
1006	DN 40	4.00	82	4161309	C	5,105.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact WiloSubject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG6

Ordering information PN 25

MEI ≥ 0.70; materials: Hydraulics 1.4307 (AISI 304L), pump housing 1.4301 (AISI 304), gasket type: EPDM

Helix VE	Pressure port	Rated power	Gross weight, approx.	Art. no.		
				Cartridge me- chanical seal		
		P_2 kW	m kg			EUR
1009	DN 40	5.50	121.1	4161312	C	7,629.-
1012	DN 40	7.50	126.3	4161314	C	8,559.-

Price group: PG6

Ordering information PN 25

MEI ≥ 0.70; materials: Hydraulics 1.4404 (AISI 316L), pump housing 1.4409 (AISI 316L), gasket type: FKM

Helix VE	Pressure port	Rated power	Gross weight, approx.	Art. no.		
				Cartridge me- chanical seal		
		P_2 kW	m kg			EUR
1001	DN 40	0.75	37.8	4171630	C	3,543.-
1002	DN 40	1.10	39.8	4161316	C	3,664.-
1003	DN 40	1.50	61.5	4171640	C	4,245.-
1004	DN 40	2.20	52.5	4161317	C	4,339.-
1005	DN 40	3.00	72.4	4171651	C	5,245.-
1006	DN 40	4.00	82	4161318	C	5,392.-
1009	DN 40	5.50	121.1	4161319	C	7,925.-
1012	DN 40	7.50	126.3	4161320	C	8,968.-

Price group: PG6

Ordering information PN 25

MEI ≥ 0.50; materials: Hydraulics 1.4307 (AISI 304L), pump housing 1.4301 (AISI 304), gasket type: EPDM

Helix VE	Pressure port	Rated power	Gross weight, approx.	Art. no.		
				Cartridge me- chanical seal		
		P_2 kW	m kg			EUR
1603-4.0	DN 50	4.00	78.6	4148087	C	4,263.-
1605	DN 50	5.50	117.7	4141466	C	7,078.-
1606	DN 50	7.50	121.1	4141467	C	7,763.-

Price group: PG6

Ordering information PN 25

MEI ≥ 0.50; materials: Hydraulics 1.4404 (AISI 316L), pump housing 1.4409 (AISI 316L), gasket type: FKM


Helix VE	Pressure port	Rated power	Gross weight, approx.	Art. no.		
				Cartridge me- chanical seal		
		P_2 kW	m kg			EUR
1601	DN 50	1.10	43.3	4171610	C	3,852.-
1602	DN 50	2.20	49.8	4152100	C	4,127.-
1603-3.0	DN 50	3.00	70.5	4171620	C	4,319.-
1603-4.0	DN 50	4.00	78.6	4152101	C	4,264.-
1605	DN 50	5.50	117.7	4152102	C	8,542.-
1606	DN 50	7.50	121.1	4152103	C	9,119.-

= ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG6

Ordering information PN 25


MEI ≥ 0.70; materials: Hydraulics 1.4307 (AISI 304L), pump housing 1.4301 (AISI 304), gasket type: EPDM

Helix VE	Pressure port	Rated power	Gross weight, approx.	Art. no.		
		P_2 kW	m kg	Cartridge me- chanical seal		
						EUR
2205	DN 50	11.00	254	4198856	C	11,041.-
2207	DN 50	15.00	263	4198857	C	13,900.-
2208	DN 50	18.50	277	4198858	C	14,049.-
2209	DN 50	22.00	318	4198859	C	16,677.-

Price group: PG6

Ordering information PN 25


MEI ≥ 0.70; materials: Hydraulics 1.4404 (AISI 316L), pump housing 1.4404 (AISI 316L), gasket type: FKM

Helix VE	Pressure port	Rated power	Gross weight, approx.	Art. no.		
		P_2 kW	m kg	Cartridge me- chanical seal		
						EUR
2203	DN 50	5.50	136	4140699	C	8,560.-
2204	DN 50	7.50	143	4140700	C	9,114.-
2205	DN 50	11.00	234	4166210	C	14,626.-
2207	DN 50	15.00	270	4166204	C	18,162.-
2208	DN 50	18.50	280	4166205	C	17,508.-
2209	DN 50	22.00	321	4166206	C	20,123.-

Price group: PG6

Ordering information PN 25


MEI ≥ 0.70; materials: Hydraulics 1.4307 (AISI 304L), pump housing 1.4301 (AISI 304), gasket type: EPDM

Helix VE	Pressure port	Rated power	Gross weight, approx.	Art. no.		
		P_2 kW	m kg	Cartridge me- chanical seal		
						EUR
3605	DN 65	15.00	268	4198865	C	13,447.-
3607	DN 65	18.50	286	4198866	C	16,133.-
3608	DN 65	22.00	328	4198867	C	18,197.-

Price group: PG6

Ordering information PN 25

MEI ≥ 0.70; materials: Hydraulics 1.4404 (AISI 316L), pump housing 1.4404 (AISI 316L), gasket type: FKM

Helix VE	Pressure port	Rated power	Gross weight, approx.	Art. no.		
		P_2 kW	m kg	Cartridge me- chanical seal		
						EUR
3604	DN 65	11.00	247	4166255	C	15,083.-
3605	DN 65	15.00	289	4166256	C	17,849.-
3607	DN 65	18.50	335	4166257	C	20,114.-
3608	DN 65	22.00	347	4166258	C	22,491.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact WiloSubject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG6

Ordering information PN 25

MEI ≥ 0.70; materials: Hydraulics 1.4307 (AISI 304L), pump housing 1.4301 (AISI 304), gasket type: EPDM


Helix VE	Pressure port	Rated power	Gross weight, approx.	Art. no.	Cartridge me- chanical seal	
		P_2 kW	m kg			EUR
5205	DN 80	18.50	272	4198873	C	15,363.-
5206	DN 80	22.00	329	4198874	C	17,858.-

Price group: PG6

Ordering information PN 25

MEI ≥ 0.70; materials: Hydraulics 1.4404 (AISI 316L), pump housing 1.4404 (AISI 316L), gasket type: FKM

Helix VE	Pressure port	Rated power	Gross weight, approx.	Art. no.	Cartridge me- chanical seal	
		P_2 kW	m kg			EUR
5203	DN 80	11.00	258	4166262	C	15,107.-
5204	DN 80	15.00	301	4166263	C	17,960.-
5205	DN 80	18.50	347	4166264	C	19,131.-
5206	DN 80	22.00	353	4166265	C	20,935.-

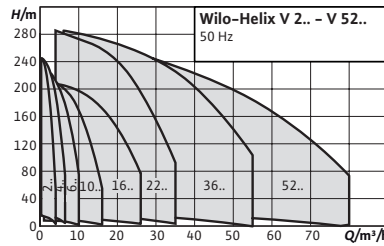

Accessories
Accessories

Page
357

Series extension

Select 4 online
All information at www.wilo-select.com



Wilo-Helix V

Construction

Non-self-priming, high-efficiency multistage high-pressure centrifugal pump in vertical design with in-line connections

Application

- Water supply and pressure boosting
- Industrial circulation systems
- Process water
- Closed cooling circuits
- Fire extinguishing systems
- Washing systems
- Irrigation

Scope of delivery

- Helix V high-pressure multistage centrifugal pump
- Installation and operating instructions
- Helix V 2 – 16 (version PN16 with oval flanges): counter flanges made of stainless steel with the corresponding screws, nuts and gaskets

Your advantages

- Efficiency-optimised, laser-welded 2D/3D hydraulics, flow and degassing optimised
- Corrosion-resistant impellers, guide vanes and stage housings
- Flow and NPSH-optimised pump housing
- Maintenance-friendly design with particularly robust coupling guard
- Drinking water approval for pumps with parts that come in contact with the fluid made of stainless steel (EPDM version)

General notes - ErP (Ecodesign) Directive

The following pages list the respective nominal flow rate within the series. Reference value MEI for water pumps with the best efficiency is ≥ 0.70 . For more detailed information on the MEI values of the individual pump types, see: Wilo Online Catalogue, available at www.wilo.com

Price group: PG6

Ordering information PN 16 1~230 V

MEI ≥ 0.70 ; materials: Hydraulics 1.4307 (AISI 304L), pump housing 1.4301 (AISI 304), gasket type: EPDM

Helix V	Pressure port	Gross weight, approx.	Rated power	Art. no.	Standard mechanical seal	
		<i>m</i> kg	<i>P₂</i> kW			EUR
202	G 1	21.8	0.37	4234038	C	813.-
203	G 1	22.3	0.37	4234039	C	859.-
204	G 1	22.6	0.37	4234040	C	959.-

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG6

Ordering information PN 16 1~230 V

MEI ≥ 0.70; materials: Hydraulics 1.4307 (AISI 304L), pump housing 1.4301 (AISI 304), gasket type: EPDM

Helix V	Pressure port	Gross weight, approx.	Rated power	Art. no.	Standard me- chanical seal	
		<i>m</i> kg	<i>P</i> ₂ kW			EUR
205	G 1	23.7	0.55	4234041	C	1,006.-
206	G 1	24.1	0.55	4234042	C	1,090.-
207	G 1	24.8	0.55	4234043	C	1,144.-
208	G 1	34.6	0.75	4234044	C	1,253.-
209	G 1	35.1	0.75	4234045	C	1,312.-
210	G 1	35.5	0.75	4234046	C	1,420.-
211	G 1	36.9	1.10	4234047	C	1,429.-
212	G 1	37.3	1.10	4234048	C	1,544.-
213	G 1	38.2	1.10	4234049	C	1,657.-
214	G 1	38.3	1.10	4234050	C	1,768.-
216	G 1	44.8	1.50	4234051	C	1,874.-
218	G 1	45.8	1.50	4234052	C	2,223.-

Price group: PG6

Ordering information PN 16

MEI ≥ 0.70; materials: Hydraulics 1.4307 (AISI 304L), pump housing 1.4301 (AISI 304), gasket type: EPDM

Helix V	Pressure port	Gross weight, approx.	Rated power	Art. no.	Cartridge me- chanical seal		Art. no.		Standard me- chanical seal	
		<i>m</i> kg	<i>P</i> ₂ kW			EUR			EUR	
202	G 1	26	0.37	4161704	C	987.-	4201337	L	812.-	
203	G 1	27	0.37	4161705	C	1,033.-	4201339	L	860.-	
204	G 1	27	0.37	4161706	C	1,132.-	4201341	L	959.-	
205	G 1	32	0.55	4161707	C	1,182.-	4201343	C	1,006.-	
206	G 1	32	0.55	4161708	C	1,263.-	4201345	C	1,089.-	
207	G 1	33	0.55	4161709	C	1,318.-	4201347	C	1,144.-	
208	G 1	38	0.75	4161710	C	1,427.-	4201349	C	1,253.-	
209	G 1	38	0.75	4161711	C	1,486.-	4201351	C	1,312.-	
210	G 1	39	0.75	4161713	C	1,594.-	4201353	C	1,421.-	
211	G 1	41	1.10	4161715	C	1,604.-	4201355	C	1,429.-	
212	G 1	44	1.10	4161717	C	1,717.-	4201357	C	1,544.-	
213	G 1	45	1.10	4161719	C	1,832.-	4201359	C	1,657.-	
214	G 1	45	1.10	4161721	C	1,941.-	4201360	C	1,768.-	
216	G 1	50	1.50	4161723	C	2,049.-	4201361	C	1,874.-	
218	G 1	51	1.50	4161725	C	2,397.-	4201362	C	2,223.-	
220	G 1	67	2.20	4161727	C	2,562.-	4201363	C	2,389.-	

Price group: PG6

Ordering information PN 16 1~230 V

MEI ≥ 0.70; materials: Hydraulics 1.4307 (AISI 304L), pump housing 1.4301 (AISI 304), gasket type: EPDM


Helix V	Pressure port	Gross weight, approx.	Rated power	Art. no.	Standard me- chanical seal	
		<i>m</i> kg	<i>P</i> ₂ kW			EUR
402	G 1	21.8	0.37	4234068	C	923.-
403	G 1	22.3	0.37	4234069	C	974.-

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG6

Ordering information PN 16 1~230 V


MEI ≥ 0.70; materials: Hydraulics 1.4307 (AISI 304L), pump housing 1.4301 (AISI 304), gasket type: EPDM

Helix V	Pressure port	Gross weight, approx.		Rated power		Art. no.	
		m kg		P ₂ kW		Standard me- chanical seal	
							EUR
404	G 1	23.2	0.55	4234070	C		1,084.-
405	G 1	28.6	0.75	4234071	C		1,144.-
406	G 1	29.1	0.75	4234072	C		1,273.-
407	G 1	34.9	1.10	4234073	C		1,326.-
408	G 1	35.4	1.10	4234074	C		1,464.-
409	G 1	35.9	1.10	4234075	C		1,521.-
410	G 1	41.9	1.50	4234076	C		1,627.-
411	G 1	42.4	1.50	4234077	C		1,747.-
412	G 1	42.8	1.50	4234078	C		1,870.-

Price group: PG6

Ordering information PN 16


MEI ≥ 0.70; materials: Hydraulics 1.4307 (AISI 304L), pump housing 1.4301 (AISI 304), gasket type: EPDM

Helix V	Pressure port	Gross weight, approx.		Rated power		Art. no.	
		m kg		P ₂ kW		Standard me- chanical seal	
							EUR
402	G 1	26	0.37	4160518	C		1,096.-
403	G 1	26	0.37	4160519	C		1,150.-
404	G 1	28	0.55	4160520	C		1,258.-
405	G 1	35	0.75	4160521	C		1,318.-
406	G 1	36	0.75	4160522	C		1,448.-
407	G 1	38	1.10	4160523	C		1,499.-
408	G 1	38	1.10	4193858	C		1,639.-
409	G 1	39	1.10	4160526	C		1,697.-
410	G 1	44	1.50	4160528	C		1,802.-
411	G 1	44	1.50	4160530	C		1,922.-
412	G 1	47	1.50	4160532	C		2,043.-
413	G 1	50	2.20	4160534	C		2,151.-
414	G 1	50	2.20	4160536	C		2,222.-
416	G 1	51	2.20	4160538	C		2,332.-
418	G 1	52	2.20	4160540	C		2,439.-
420	G 1	76	3.00	4160542	C		2,549.-

Price group: PG6

Ordering information PN 16 1~230 V

MEI ≥ 0.70; materials: Hydraulics 1.4307 (AISI 304L), pump housing 1.4301 (AISI 304), gasket type: EPDM

Helix V	Pressure port	Gross weight, approx.		Rated power		Art. no.	
		m kg		P ₂ kW		Standard me- chanical seal	
							EUR
601	G 1¼	22	0.37	4234090	C		970.-
602	G 1¼	22.2	0.55	4234091	C		1,064.-
603	G 1¼	23	0.55	4234092	C		1,118.-
604	G 1¼	29.4	0.75	4234093	C		1,259.-
605	G 1¼	35.5	1.10	4234094	C		1,367.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact WiloSubject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG6

Ordering information PN 16 1~230 V

MEI ≥ 0.70; materials: Hydraulics 1.4307 (AISI 304L), pump housing 1.4301 (AISI 304), gasket type: EPDM

Helix V	Pressure port	Gross weight, approx.	Rated power	Art. no. Standard me- chanical seal		
					m kg	P_2 kW
606	G 1¼	36.3	1.10	4234095	C	1,424.-
607	G 1¼	42.5	1.50	4234096	C	1,671.-
608	G 1¼	43.3	1.50	4234097	C	1,902.-

Price group: PG6

Ordering information PN 16

MEI ≥ 0.70; materials: Hydraulics 1.4307 (AISI 304L), pump housing 1.4301 (AISI 304), gasket type: EPDM

Helix V	Pressure port	Gross weight, approx.	Rated power	Art. no. Cartridge me- chanical seal			Art. no. Standard me- chanical seal		
					m kg	P_2 kW			EUR
601	G 1¼	26	0.37	4156030	C	1,200.-	-	A	☺
602	G 1¼	28	0.55	4156031	C	1,239.-	4201400	C	1,065.-
603	G 1¼	29	0.55	4156032	C	1,292.-	4201402	L	1,119.-
604	G 1¼	34	0.75	4156033	C	1,432.-	4201405	L	1,258.-
605	G 1¼	39	1.10	4156034	C	1,542.-	4201408	L	1,367.-
606	G 1¼	40	1.10	4156035	C	1,598.-	4201411	C	1,424.-
607	G 1¼	45	1.50	4156036	C	1,845.-	4201414	L	1,671.-
608	G 1¼	48	1.50	4156038	C	2,077.-	4201417	L	1,902.-
609	G 1¼	51	2.20	4156040	C	2,129.-	4201420	L	1,955.-
610	G 1¼	51	2.20	4156042	C	2,187.-	4201423	L	2,012.-
611	G 1¼	53	2.20	4156044	C	2,238.-	4201426	C	2,064.-
612	G 1¼	77	3.00	4156046	C	2,346.-	4201428	C	2,172.-
613	G 1¼	78	3.00	4156048	C	2,475.-	4201430	C	2,300.-
614	G 1¼	78	3.00	4156050	C	2,603.-	4201432	C	2,429.-
615	G 1¼	80	3.00	4156052	C	2,711.-	4201434	C	2,537.-
616	G 1¼	77	4.00	4156054	C	2,796.-	4201436	C	2,621.-

Price group: PG6

Ordering information PN 16 1~230 V



MEI ≥ 0.70; materials: Hydraulics 1.4307 (AISI 304L), pump housing 1.4301 (AISI 304), gasket type: EPDM

Helix V	Pressure port	Gross weight, approx.	Rated power	Art. no. Standard me- chanical seal		
					m kg	P_2 kW
1001	G 1½	29	0.55	4234106	C	1,104.-
1002	G 1½	30.5	0.75	4234107	C	1,211.-
1003	G 1½	32.3	1.10	4234108	C	1,313.-
1004	G 1½	43.2	1.50	4234109	C	1,490.-

Price group: PG6

Ordering information PN 16



MEI ≥ 0.70; materials: Hydraulics 1.4307 (AISI 304L), pump housing 1.4301 (AISI 304), gasket type: EPDM

Helix V	Pressure port	Gross weight, approx.	Rated power	Art. no. Cartridge me- chanical seal	Art. no. Standard me- chanical seal				
		<i>m</i> kg	<i>P</i> ₂ kW			EUR		EUR	
1001	G 1½	30	0.55	4150540	C	1,296.-	-	A	☺
1002	G 1½	35	0.75	4150541	C	1,385.-	4201281	C	1,211.-
1003	G 1½	40	1.10	4150542	C	1,487.-	4201284	L	1,313.-
1004	G 1½	46	1.50	4150543	C	1,665.-	4201287	L	1,490.-
1005	G 1½	48	2.20	4150544	C	1,876.-	4201290	L	1,703.-
1006	G 1½	49	2.20	4150546	C	1,981.-	4201293	L	1,808.-
1007	G 1½	60	3.00	4150548	C	2,300.-	4201296	L	2,127.-
1008	G 1½	61	3.00	4150550	C	2,404.-	4201299	L	2,230.-
1009	G 1½	72	4.00	4150552	C	2,607.-	4201302	L	2,433.-
1010	G 1½	76	4.00	4150554	C	2,736.-	4201304	L	2,561.-
1011	G 1½	77	4.00	4150556	C	2,934.-	4201306	C	2,759.-
1012	G 1½	90	5.50	4150558	C	3,365.-	4201308	C	3,191.-
1013	G 1½	91	5.50	4150560	C	3,871.-	4201310	C	3,698.-

Price group: PG6

Ordering information PN 16


MEI ≥ 0.50; materials: Hydraulics 1.4307 (AISI 304L), pump housing 1.4301 (AISI 304), gasket type: EPDM

Helix V	Pressure port	Gross weight, approx.	Rated power	Art. no. Cartridge me- chanical seal	Art. no. Standard me- chanical seal				
		<i>m</i> kg	<i>P</i> ₂ kW			EUR		EUR	
1601	G 2	41	0.75	4141144	C	1,293.-	-	A	☺
1602	G 2	47	1.50	4141145	C	1,609.-	4201313	C	1,434.-
1603	G 2	49	2.20	4141146	L	1,688.-	4201316	L	1,514.-
1604	G 2	60	3.00	4141147	L	2,032.-	4201321	L	1,858.-
1605	G 2	61	4.00	4141148	L	2,327.-	4201325	L	2,153.-
1606	G 2	72	4.00	4141150	L	2,616.-	4201328	L	2,442.-
1607	G 2	86	5.50	4141152	L	2,989.-	4201331	L	2,814.-
1608	G 2	90	5.50	4141154	C	3,278.-	4201334	C	3,103.-
1609	G 2	92	7.50	4141176	C	3,605.-	-	A	☺
1609 FF240	G 2	100	7.50	4182514	C	3,605.-	-	A	☺
1610	G 2	94	7.50	4141177	C	3,963.-	-	A	☺
1610 FF240	G 2	102	7.50	4182515	C	3,963.-	-	A	☺
1611	G 2	95	7.50	4141178	C	4,577.-	-	A	☺
1611 FF240	G 2	103	7.50	4182516	C	4,577.-	-	A	☺

Price group: PG6

Ordering information PN 16

MEI ≥ 0.70; materials: Hydraulics 1.4307 (AISI 304L), pump housing 1.4301 (AISI 304), gasket type: EPDM

Helix V	Pressure port	Gross weight, approx.	Rated power	Art. no. Cartridge me- chanical seal	Art. no. Standard me- chanical seal	
		<i>m</i> kg	<i>P</i> ₂ kW			EUR
2201	DN 50	74	1.50	4198455	C	1,917.-
2202	DN 50	83	3.00	4198456	C	2,563.-

☺ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☺ = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG6

Ordering information PN 16

MEI ≥ 0.70; materials: Hydraulics 1.4307 (AISI 304L), pump housing 1.4301 (AISI 304), gasket type: EPDM

Helix V	Pressure port	Gross weight, approx.	Rated power	Art. no.	Cartridge me- chanical seal	
		<i>m</i> kg	<i>P</i> ₂ kW			EUR
2203	DN 50	92	4.00	4198457	C	3,269.-
2204	DN 50	100	5.50	4198458	C	3,336.-
2205	DN 50	132	7.50	4198459	C	3,692.-
2206	DN 50	134	7.50	4198460	C	4,017.-
2207	DN 50	136	9.00	4198461	C	4,558.-
2208	DN 50	141	11.00	4198462	C	5,309.-

Price group: PG6

Ordering information PN 16

MEI ≥ 0.70; materials: Hydraulics 1.4404 (AISI 316L), pump housing 1.4409 (AISI 316L), gasket type: FKM

Helix V	Pressure port	Gross weight, approx.	Rated power	Art. no.	Cartridge me- chanical seal	
		<i>m</i> kg	<i>P</i> ₂ kW			EUR
2201	DN 50	77	1.50	4139774	C	2,500.-
2202	DN 50	92	3.00	4139775	C	3,063.-
2203	DN 50	95	4.00	4139776	C	3,440.-
2204	DN 50	110	5.50	4139777	C	4,335.-
2205	DN 50	124	7.50	4139779	C	4,797.-
2206	DN 50	126	7.50	4139781	C	5,223.-
2207	DN 50	144	9.00	4139783	C	5,926.-
2208	DN 50	162	11.00	4139785	C	6,903.-

Price group: PG6

Ordering information PN 16

MEI ≥ 0.50; materials: Monobloc pump housing EN-GJL-250 cataphoretic-coated, hydraulics 1.4307 (AISI 304L)



Helix V	Pressure port	Gross weight, approx.	Rated power	Art. no.	Standard me- chanical seal	
		<i>m</i> kg	<i>P</i> ₂ kW			EUR
2202	DN 50	78	3.00	4183363	C	2,309.-
2203	DN 50	81	4.00	4183364	C	2,945.-
2204	DN 50	93	5.50	4183365	C	3,002.-
2205	DN 50	105	7.50	4183366	C	3,321.-
2206	DN 50	106	7.50	4183367	C	3,614.-
2207	DN 50	127	9.00	4183368	C	4,104.-
2208	DN 50	131	11.00	4183369	C	4,777.-

Price group: PG6

Ordering information PN 16

MEI ≥ 0.70; materials: Hydraulics 1.4307 (AISI 304L), pump housing 1.4301 (AISI 304), gasket type: EPDM

Helix V	Pressure port	Gross weight, approx.	Rated power	Art. no.	Cartridge me- chanical seal	
		<i>m</i> kg	<i>P</i> ₂ kW			EUR
3601/1	DN 65	80	2.20	4198469	C	2,301.-
3601	DN 65	91	3.00	4198470	C	2,534.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
 Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG6

Ordering information PN 16

MEI ≥ 0.70; materials: Hydraulics 1.4307 (AISI 304L), pump housing 1.4301 (AISI 304), gasket type: EPDM

Helix V	Pressure port	Gross weight, approx.	Rated power	Art. no.	Cartridge me- chanical seal	
					EUR	EUR
		<i>m</i> kg	<i>P</i> ₂ kW		🚚	EUR
3602/2	DN 65	96	4.00	4198471	C	2,716.-
3602	DN 65	105	5.50	4198473	C	3,880.-
3602/1	DN 65	105	5.50	4198472	C	2,986.-
3603/1	DN 65	143	7.50	4198475	C	4,418.-
3603/2	DN 65	143	7.50	4198474	C	4,631.-
3603	DN 65	143	9.00	4198476	C	5,250.-
3604	DN 65	149	11.00	4198478	C	6,268.-
3604/2	DN 65	149	11.00	4198477	C	5,955.-
3605	DN 65	210	15.00	4198480	C	7,084.-
3605/2	DN 65	210	15.00	4198479	C	6,857.-
3606/2	DN 65	212	15.00	4198481	C	7,908.-
3606	DN 65	223	18.50	4198483	C	9,105.-

Price group: PG6

Ordering information PN 16

MEI ≥ 0.70; materials: Hydraulics 1.4404 (AISI 316L), pump housing 1.4409 (AISI 316L), gasket type: FKM

Helix V	Pressure port	Gross weight, approx.	Rated power	Art. no.	Art. no. Cartridge me- chanical seal	
					EUR	EUR
		<i>m</i> kg	<i>P</i> ₂ kW		🚚	EUR
3601/1	DN 65	87	2.20	4155387	A	3,418.-
3601	DN 65	100	3.00	4155388	A	3,571.-
3602/2	DN 65	104	4.00	4155389	A	3,882.-
3602	DN 65	115	5.50	4155391	A	5,046.-
3602/1	DN 65	115	5.50	4155390	A	4,891.-
3603/1	DN 65	135	7.50	-	A	6,235.-
3603/2	DN 65	135	7.50	-	A	5,744.-
3603	DN 65	151	9.00	-	A	6,828.-
3604	DN 65	171	11.00	-	A	8,149.-
3604/2	DN 65	171	11.00	-	A	7,737.-
3605	DN 65	224	15.00	-	A	9,360.-
3605/2	DN 65	224	15.00	-	A	8,916.-
3606/2	DN 65	256	15.00	-	A	10,281.-
3606	DN 65	260	18.50	-	A	11,840.-

Price group: PG6

Ordering information PN 16

MEI ≥ 0.50; materials: Monobloc pump housing EN-GJL-250 cataphoretic-coated, hydraulics 1.4307 (AISI 304L)

Helix V	Pressure port	Gross weight, approx.	Rated power	Art. no. Cartridge me- chanical seal	Art. no. Standard me- chanical seal	
					EUR	EUR
		<i>m</i> kg	<i>P</i> ₂ kW		🚚	EUR
3602/2	DN 65	85	4.00	-	A	2,444.-
3602	DN 65	91	5.50	-	A	3,490.-
3603/1	DN 65	108	7.50	-	A	3,975.-

🚚 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG6

Ordering information PN 16

MEI ≥ 0.50; materials: Monobloc pump housing EN-GJL-250 cataphoretic-coated, hydraulics 1.4307 (AISI 304L)

Helix V	Pressure port	Gross weight, approx.	Rated power	Art. no. Cartridge me- chanical seal	Art. no. Standard me- chanical seal				
		m kg	P ₂ kW			🚚	EUR	🚚	EUR
3603	DN 65	124	9.00	-		A	☒ 4183405	C	4,726.-
3604	DN 65	136	11.00	-		A	☒ 4183407	C	5,641.-
3604/2	DN 65	136	11.00	-		A	☒ 4183406	C	5,357.-
3605	DN 65	222	15.00	4183409		C	6,375.-	A	☒
3605/2	DN 65	222	15.00	4183408		C	6,170.-	A	☒
3606/2	DN 65	236	15.00	4183410		C	7,117.-	A	☒
3606	DN 65	247	18.50	4183411		C	8,194.-	A	☒

Price group: PG6

Ordering information PN 16

MEI ≥ 0.70; materials: Hydraulics 1.4307 (AISI 304L), pump housing 1.4301 (AISI 304), gasket type: EPDM

Helix V	Pressure port	Gross weight, approx.	Rated power	Art. no. Cartridge me- chanical seal		
		m kg	P ₂ kW		🚚	EUR
5201/1	DN 80	102	3.00	4198492	C	2,585.-
5201	DN 80	100	4.00	4198493	C	2,922.-
5202/2	DN 80	115	5.50	4198494	C	3,992.-
5202	DN 80	149	7.50	4198495	C	4,320.-
5203	DN 80	154	11.00	4198497	C	5,791.-
5203/2	DN 80	154	11.00	4198496	C	5,468.-
5204	DN 80	219	15.00	4198499	C	7,537.-
5204/2	DN 80	219	15.00	4198498	C	7,148.-
5205	DN 80	261	18.50	4198501	C	9,088.-
5205/2	DN 80	261	18.50	4198500	C	8,674.-
5206/2	DN 80	263	22.00	4198503	C	11,086.-

Price group: PG6

Ordering information PN 16

MEI ≥ 0.70; materials: Hydraulics 1.4404 (AISI 316L), pump housing 1.4409 (AISI 316L), gasket type: FKM



Helix V	Pressure port	Gross weight, approx.	Rated power	Art. no.	Art. no. Cartridge me- chanical seal				
		m kg	P ₂ kW			🚚	EUR	🚚	EUR
5201/1	DN 80	112	3.00	4155467		A	☒ 4150900	C	3,830.-
5201	DN 80	107	4.00	-		A	☒ 4150901	C	4,526.-
5202/2	DN 80	131	5.50	-		A	☒ 4150902	C	5,223.-
5202	DN 80	144	7.50	-		A	☒ 4150903	C	5,920.-
5203	DN 80	182	11.00	-		A	☒ 4150905	C	7,080.-
5203/2	DN 80	182	11.00	-		A	☒ 4150904	C	6,848.-
5204	DN 80	264	15.00	-		A	☒ 4150907	C	8,474.-
5204/2	DN 80	264	15.00	-		A	☒ 4150906	C	7,777.-
5205	DN 80	275	18.50	-		A	☒ 4150909	C	11,908.-
5205/2	DN 80	275	18.50	-		A	☒ 4150908	C	11,373.-
5206/2	DN 80	275	22.00	-		A	☒ 4150916	C	14,527.-

🚚 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☒ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG6

Ordering information PN 16


MEI ≥ 0.50; materials: Monobloc pump housing EN-GJL-250 cataphoretic-coated, hydraulics 1.4307 (AISI 304L)

Helix V	Pressure port	Gross weight, approx.	Rated power	Art. no. Cartridge me- chanical seal		Art. no. Standard me- chanical seal		
		<i>m</i> kg	<i>P</i> ₂ kW			EUR		EUR
5202/2	DN 80	105	5.50	-	A	☞ 4183428	C	3,592.-
5202	DN 80	115	7.50	-	A	☞ 4183429	C	3,888.-
5203	DN 80	139	11.00	-	A	☞ 4183431	C	5,212.-
5203/2	DN 80	139	11.00	-	A	☞ 4183430	C	4,921.-
5204	DN 80	242	15.00	4183433	C	6,782.-	-	A ☞
5204/2	DN 80	242	15.00	4183432	C	6,431.-	-	A ☞
5205	DN 80	257	18.50	4183435	C	8,179.-	-	A ☞
5205/2	DN 80	257	18.50	4183434	C	7,807.-	-	A ☞
5206/2	DN 80	261	22.00	4183450	C	9,976.-	-	A ☞

Price group: PG6

Ordering information PN 25 1~230V


MEI ≥ 0.70; materials: Hydraulics 1.4307 (AISI 304L), pump housing 1.4301 (AISI 304), gasket type: EPDM

Helix V	Pressure port	Gross weight, approx.	Rated power	Art. no. Standard me- chanical seal		
		<i>m</i> kg	<i>P</i> ₂ kW			EUR
202	DN 25	22.8	0.37	4234636	C	813.-
203	DN 25	22.3	0.37	4234599	C	859.-
204	DN 25	22.6	0.37	4234600	C	959.-
205	DN 25	23.7	0.55	4234601	C	1,006.-
206	DN 25	24.1	0.55	4234602	C	1,090.-
207	DN 25	24.8	0.55	4234603	C	1,144.-
208	DN 25	34.6	0.75	4234604	C	1,253.-
209	DN 25	35.1	0.75	4234605	C	1,312.-
210	DN 25	35.5	0.75	4234606	C	1,420.-
211	DN 25	36.9	1.10	4234607	C	1,429.-
212	DN 25	37.3	1.10	4234608	C	1,544.-
213	DN 25	38.2	1.10	4234609	C	1,657.-
214	DN 25	38.3	1.10	4234610	C	1,768.-
216	DN 25	44.8	1.50	4234611	C	1,874.-
218	DN 25	45.8	1.50	4234612	C	2,223.-

Price group: PG6

Ordering information PN 25

MEI ≥ 0.70; materials: Hydraulics 1.4307 (AISI 304L), pump housing 1.4301 (AISI 304), gasket type: EPDM


Helix V	Pressure port	Gross weight, approx.	Rated power	Art. no. Cartridge me- chanical seal		
		<i>m</i> kg	<i>P</i> ₂ kW			EUR
209	DN 25	40	0.75	4161712	C	1,486.-
210	DN 25	41	0.75	4161714	C	1,594.-
211	DN 25	43	1.10	4161716	C	1,604.-
212	DN 25	46	1.10	4161718	C	1,717.-
213	DN 25	47	1.10	4161720	C	1,832.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☞ = please contact WiloSubject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG6

Ordering information PN 25


MEI ≥ 0.70; materials: Hydraulics 1.4307 (AISI 304L), pump housing 1.4301 (AISI 304), gasket type: EPDM

Helix V	Pressure port	Gross weight, approx.	Rated power	Art. no.	Cartridge me- chanical seal		
						<i>m</i> kg	<i>P</i> ₂ kW
							EUR
214	DN 25	47	1.10	4161722	C		1,941.-
216	DN 25	52	1.50	4161724	C		2,049.-
218	DN 25	53	1.50	4161726	C		2,397.-
220	DN 25	69	2.20	4161728	C		2,562.-
222	DN 25	71	2.20	4161729	C		2,889.-
224	DN 25	72	2.20	4161730	C		3,057.-
226	DN 25	73	2.20	4161731	C		3,057.-
229	DN 25	75	2.20	4161732	C		3,217.-
231	DN 25	85	3.00	4161733	C		3,422.-
233	DN 25	114	3.00	4161734	C		3,471.-

Price group: PG6

Ordering information PN 25

MEI ≥ 0.70; materials: Hydraulics 1.4404 (AISI 316L), pump housing 1.4409 (AISI 316L), gasket type: FKM

Helix V	Pressure port	Gross weight, approx.	Rated power	Art. no.	Cartridge me- chanical seal		
						<i>m</i> kg	<i>P</i> ₂ kW
							EUR
202	DN 25	27	0.37	4161735	C		1,206.-
203	DN 25	28	0.37	4161736	C		1,312.-
204	DN 25	28	0.37	4161737	C		1,375.-
205	DN 25	33	0.55	4161738	C		1,478.-
206	DN 25	33	0.55	4161739	C		1,533.-
207	DN 25	34	0.55	4161740	C		1,634.-
208	DN 25	40	0.75	4161741	C		1,757.-
209	DN 25	40	0.75	4161742	C		1,819.-
210	DN 25	41	0.75	4161743	C		1,949.-
211	DN 25	43	1.10	4161744	C		2,015.-
212	DN 25	46	1.10	4161745	C		2,086.-
213	DN 25	47	1.10	4161746	C		2,212.-
214	DN 25	47	1.10	4161747	C		2,332.-
216	DN 25	52	1.50	4161748	C		2,458.-
218	DN 25	53	1.50	4161749	C		2,853.-
220	DN 25	69	2.20	4161750	C		3,039.-
222	DN 25	71	2.20	4161751	C		3,409.-
224	DN 25	72	2.20	4161752	C		3,593.-
226	DN 25	73	2.20	4161753	C		3,700.-
229	DN 25	75	2.20	4161754	C		3,850.-
231	DN 25	85	3.00	4161755	C		3,957.-
233	DN 25	114	3.00	4161756	C		4,131.-


 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG6

Ordering information PN 25 1~230V

MEI \geq 0.70; materials: Hydraulics 1.4307 (AISI 304L), pump housing 1.4301 (AISI 304), gasket type: EPDM

Helix V	Pressure port	Gross weight, approx.	Rated power	Art. no.	Standard me- chanical seal	
		<i>m</i> kg	<i>P</i> ₂ kW			EUR
402	DN 25	21.8	0.37	4234613	C	923.-
403	DN 25	22.3	0.37	4234614	C	974.-
404	DN 25	23.2	0.55	4234615	C	1,084.-
405	DN 25	28.6	0.75	4234616	C	1,144.-
406	DN 25	29.1	0.75	4234617	C	1,273.-
407	DN 25	34.9	1.10	4234618	C	1,326.-
408	DN 25	35.4	1.10	4234619	C	1,464.-
409	DN 25	35.9	1.10	4234620	C	1,521.-
410	DN 25	41.9	1.50	4234621	C	1,627.-
411	DN 25	42.4	1.50	4234622	C	1,747.-
412	DN 25	42.8	1.50	4234623	C	1,870.-

Price group: PG6

Ordering information PN 25


MEI \geq 0.70; materials: Hydraulics 1.4307 (AISI 304L), pump housing 1.4301 (AISI 304), gasket type: EPDM

Helix V	Pressure port	Gross weight, approx.	Rated power	Art. no.	Cartridge me- chanical seal	
		<i>m</i> kg	<i>P</i> ₂ kW			EUR
403	DN 25	27	0.37	4193998	C	1,312.-
408	DN 25	41	1.10	4160525	C	1,639.-
409	DN 25	41	1.10	4160527	C	1,697.-
410	DN 25	46	1.50	4160529	C	1,802.-
411	DN 25	46	1.50	4160531	C	1,922.-
412	DN 25	49	1.50	4160533	C	2,043.-
413	DN 25	52	2.20	4160535	C	2,151.-
414	DN 25	52	2.20	4160537	C	2,222.-
416	DN 25	53	2.20	4160539	C	2,332.-
418	DN 25	54	2.20	4160541	C	2,549.-
420	DN 25	78	3.00	4160543	C	2,656.-
422	DN 25	79	3.00	4193310	C	2,796.-
424	DN 25	80	3.00	4160545	C	2,906.-
426	DN 25	75	4.00	4160546	C	3,248.-
429	DN 25	76	4.00	4160547	C	3,361.-
431	DN 25	108	4.00	4160548	C	3,401.-

Price group: PG6

Ordering information PN 25

MEI \geq 0.70; materials: Hydraulics 1.4404 (AISI 316L), pump housing 1.4409 (AISI 316L), gasket type: FKM


Helix V	Pressure port	Gross weight, approx.	Rated power	Art. no.	Cartridge me- chanical seal	
		<i>m</i> kg	<i>P</i> ₂ kW			EUR
402	DN 25	27	0.37	4160549	C	1,258.-
404	DN 25	29	0.55	4160551	C	1,424.-
405	DN 25	36	0.75	4160552	C	1,478.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact WiloSubject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG6

Ordering information PN 25


MEI ≥ 0.70; materials: Hydraulics 1.4404 (AISI 316L), pump housing 1.4409 (AISI 316L), gasket type: FKM

Helix V	Pressure port	Gross weight, approx.	Rated power	Art. no.	Cartridge me- chanical seal	
		<i>m</i> kg	<i>P</i> ₂ kW			EUR
406	DN 25	37	0.75	4160553	C	1,575.-
407	DN 25	39	1.10	4160554	C	1,634.-
408	DN 25	41	1.10	4160555	C	1,757.-
409	DN 25	41	1.10	4160556	C	1,819.-
410	DN 25	46	1.50	4160557	C	1,949.-
411	DN 25	46	1.50	4160558	C	2,015.-
412	DN 25	49	1.50	4160559	C	2,086.-
413	DN 25	52	2.20	4160560	C	2,212.-
414	DN 25	52	2.20	4160561	C	2,332.-
416	DN 25	53	2.20	4160562	C	2,458.-
418	DN 25	54	2.20	4160563	C	2,853.-
420	DN 25	78	3.00	4160564	C	3,039.-
422	DN 25	79	3.00	4160565	C	3,409.-
424	DN 25	80	3.00	4160566	C	3,361.-
426	DN 25	75	4.00	4160567	C	3,700.-
429	DN 25	107	4.00	4160568	C	3,850.-
431	DN 25	108	4.00	4160569	C	3,957.-

Price group: PG6

Ordering information PN 25 1~230V


MEI ≥ 0.70; materials: Hydraulics 1.4307 (AISI 304L), pump housing 1.4301 (AISI 304), gasket type: EPDM

Helix V	Pressure port	Gross weight, approx.	Rated power	Art. no.	Standard me- chanical seal	
		<i>m</i> kg	<i>P</i> ₂ kW			EUR
601	DN 32	22	0.37	4234624	C	970.-
602	DN 32	22.2	0.55	4234625	C	1,064.-
603	DN 32	23	0.55	4234626	C	1,118.-
604	DN 32	29.4	0.75	4234627	C	1,259.-
605	DN 32	35.5	1.10	4234628	C	1,367.-
606	DN 32	36.3	1.10	4234629	C	1,424.-
607	DN 32	42.5	1.50	4234630	C	1,671.-
608	DN 32	43.3	1.50	4234631	C	1,902.-

Price group: PG6

Ordering information PN 25

MEI ≥ 0.70; materials: Hydraulics 1.4307 (AISI 304L), pump housing 1.4301 (AISI 304), gasket type: EPDM

Helix V	Pressure port	Gross weight, approx.	Rated power	Art. no.	Cartridge me- chanical seal	
		<i>m</i> kg	<i>P</i> ₂ kW			EUR
607	DN 32	49	1.50	4156037	C	1,845.-
608	DN 32	50	1.50	4156039	C	2,077.-
609	DN 32	53	2.20	4156041	C	2,129.-
610	DN 32	53	2.20	4156043	C	2,187.-
611	DN 32	68	2.20	4156045	C	2,238.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG6

Ordering information PN 25

MEI ≥ 0.70; materials: Hydraulics 1.4307 (AISI 304L), pump housing 1.4301 (AISI 304), gasket type: EPDM

Helix V	Pressure port	Gross weight, approx.	Rated power	Art. no. Cartridge me- chanical seal		
					m kg	P_2 kW
612	DN 32	79	3.00	4156047	C	2,346.-
613	DN 32	80	3.00	4156049	C	2,475.-
614	DN 32	80	3.00	4156051	C	2,603.-
615	DN 32	82	3.00	4156053	C	2,711.-
616	DN 32	79	4.00	4156055	C	2,796.-
618	DN 32	81	4.00	4156056	C	2,906.-
620	DN 32	110	4.00	4156057	C	3,012.-
621	DN 32	124	5.50	4156058	C	3,180.-
623	DN 32	125	5.50	4156059	C	3,491.-
625	DN 32	126	5.50	4156060	C	3,605.-
627	DN 32	129	5.50	4156061	C	3,826.-

Price group: PG6

Ordering information PN 25

MEI ≥ 0.70; materials: Hydraulics 1.4404 (AISI 316L), pump housing 1.4409 (AISI 316L), gasket type: FKM

Helix V	Pressure port	Gross weight, approx.	Rated power	Art. no. Cartridge me- chanical seal		
					m kg	P_2 kW
601	DN 32	27	0.37	4156062	C	1,372.-
602	DN 32	29	0.55	4156063	C	1,423.-
603	DN 32	32	0.55	4156064	C	1,553.-
604	DN 32	38	0.75	4156065	C	1,647.-
605	DN 32	40	1.10	4156066	C	1,714.-
606	DN 32	41	1.10	4156067	C	1,872.-
607	DN 32	49	1.50	4156068	C	2,040.-
608	DN 32	50	1.50	4156069	C	2,170.-
609	DN 32	53	2.20	4156070	C	2,374.-
610	DN 32	53	2.20	4156071	C	2,538.-
611	DN 32	68	2.20	4156072	C	2,688.-
612	DN 32	79	3.00	4156073	C	2,799.-
613	DN 32	80	3.00	4156074	C	2,959.-
614	DN 32	80	3.00	4156075	C	2,978.-
615	DN 32	82	3.00	4156076	C	3,070.-
616	DN 32	79	4.00	4156077	C	3,353.-
618	DN 32	81	4.00	4156078	C	3,490.-
620	DN 32	110	4.00	4156079	C	3,662.-
621	DN 32	124	5.50	4156080	C	3,878.-
623	DN 32	125	5.50	4156081	C	4,131.-
625	DN 32	126	5.50	4156082	C	4,248.-
627	DN 32	129	5.50	4156083	C	4,435.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact WiloSubject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG6

Ordering information PN 25


MEI ≥ 0.70; materials: Hydraulics 1.4307 (AISI 304L), pump housing 1.4301 (AISI 304), gasket type: EPDM

Helix V	Pressure port	Gross weight, approx.	Rated power	Art. no.	Cartridge me- chanical seal	
						EUR
		<i>m</i> kg	<i>P</i> ₂ kW			
1005	DN 40	48	2.20	4150545	C	2,117.-
1006	DN 40	49	2.20	4150547	C	2,228.-
1007	DN 40	60	3.00	4150549	C	2,560.-
1008	DN 40	61	3.00	4150551	C	2,672.-
1009	DN 40	72	4.00	4150553	C	2,883.-
1010	DN 40	76	4.00	4150555	C	3,018.-
1011	DN 40	77	4.00	4150557	C	3,225.-
1012	DN 40	90	5.50	4150559	C	3,585.-
1013	DN 40	91	5.50	4150561	C	4,188.-
1015	DN 40	93	5.50	4150563	C	4,283.-
1017	DN 40	123	7.50	4150565	C	4,472.-
1019	DN 40	125	7.50	4150567	C	4,733.-
1021	DN 40	127	7.50	4150569	C	5,105.-

Price group: PG6

Ordering information PN 25 1~230V


MEI ≥ 0.70; materials: Hydraulics 1.4307 (AISI 304L), pump housing 1.4301 (AISI 304), gasket type: EPDM

Helix V	Pressure port	Gross weight, approx.	Rated power	Art. no.	Standard me- chanical seal	
						EUR
		<i>m</i> kg	<i>P</i> ₂ kW			
1001	DN 40	29	0.55	4234632	C	1,104.-
1002	DN 40	30.5	0.75	4234633	C	1,211.-
1003	DN 40	32.3	1.10	4234634	C	1,313.-
1004	DN 40	43.2	1.50	4234635	C	1,490.-

Price group: PG6

Ordering information PN 25

MEI ≥ 0.70; materials: Hydraulics 1.4404 (AISI 316L), pump housing 1.4409 (AISI 316L), gasket type: FKM

Helix V	Pressure port	Gross weight, approx.	Rated power	Art. no.	Cartridge me- chanical seal	
						EUR
		<i>m</i> kg	<i>P</i> ₂ kW			
1001	DN 40	30	0.55	4150572	C	1,767.-
1002	DN 40	35	0.75	4150573	C	1,893.-
1003	DN 40	40	1.10	4150574	C	2,010.-
1004	DN 40	46	1.50	4150575	C	2,270.-
1005	DN 40	48	2.20	4150576	C	2,542.-
1006	DN 40	49	2.20	4150577	C	2,752.-
1007	DN 40	60	3.00	4150580	C	3,077.-
1008	DN 40	61	3.00	4150581	C	3,242.-
1009	DN 40	72	4.00	4150582	C	3,411.-
1010	DN 40	76	4.00	4150583	C	3,581.-
1011	DN 40	77	4.00	4150584	C	3,689.-
1012	DN 40	90	5.50	4150585	C	4,055.-
1013	DN 40	91	5.50	4150586	C	4,483.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG6

Ordering information PN 25

MEI ≥ 0.70; materials: Hydraulics 1.4404 (AISI 316L), pump housing 1.4409 (AISI 316L), gasket type: FKM

Helix V	Pressure port	Gross weight, approx.	Rated power	Art. no.	Cartridge me- chanical seal	
		<i>m</i> kg	<i>P</i> ₂ kW			EUR
1015	DN 40	93	5.50	4150588	C	4,930.-
1017	DN 40	123	7.50	4150590	C	5,174.-
1019	DN 40	125	7.50	4150592	C	5,476.-
1021	DN 40	127	7.50	4150594	C	5,829.-

Price group: PG6

Ordering information PN 25

MEI ≥ 0.50; materials: Hydraulics 1.4307 (AISI 304L), pump housing 1.4301 (AISI 304), gasket type: EPDM

Helix V		Gross weight, approx.	Rated power	Art. no.	Cartridge me- chanical seal	
		<i>m</i> kg	<i>P</i> ₂ kW			EUR
1605	-	61	4.00	4141149	C	2,527.-
1606	-	72	4.00	4141151	C	2,828.-
1607	-	86	5.50	4141153	C	3,098.-
1608	-	90	5.50	4141155	C	3,393.-
1609	-	92	7.50	4141157	C	3,732.-
1610	-	94	7.50	4141159	C	4,093.-
1611	-	95	7.50	4141161	C	4,716.-
1612	-	174	9.00	4141162	C	5,482.-
1613	-	177	9.00	4141163	C	5,638.-
1616	-	175	11.00	4141166	C	5,897.-

Price group: PG6

Ordering information PN 25

MEI ≥ 0.70; materials: Hydraulics 1.4307 (AISI 304L), pump housing 1.4301 (AISI 304), gasket type: EPDM

Helix V	Pressure port	Gross weight, approx.	Rated power	Art. no.	Cartridge me- chanical seal	
		<i>m</i> kg	<i>P</i> ₂ kW			EUR
2208	DN 50	141	11.00	4198463	C	5,577.-
2209	DN 50	143	11.00	4198464	C	5,996.-
2210	DN 50	231	15.00	4198465	C	7,091.-
2211	DN 50	233	15.00	4198466	C	7,557.-
2212	DN 50	235	15.00	4198467	C	8,176.-
2213	DN 50	248	18.50	4198468	C	8,768.-

Price group: PG6

Ordering information PN 40 (*P*_{max}: 30 bar)

MEI ≥ 0.70; materials: Hydraulics 1.4404 (AISI 316L), pump housing 1.4409 (AISI 316L), gasket type: FKM

Helix V	Pressure port	Gross weight, approx.	Rated power	Art. no.	Cartridge me- chanical seal	
		<i>m</i> kg	<i>P</i> ₂ kW			EUR
2214	DN 50	259	18.50	4165819	C	10,675.-
2215	DN 50	262	18.50	4165822	C	11,372.-
2216	DN 50	265	22.00	4165825	C	13,112.-

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☞ = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG6

Ordering information PN 25

MEI ≥ 0.70; materials: Hydraulics 1.4307 (AISI 304L), pump housing 1.4301 (AISI 304), gasket type: EPDM

Helix V	Pressure port	Gross weight, approx.	Rated power	Art. no.	Cartridge me- chanical seal	
		<i>m</i> kg	<i>P</i> ₂ kW			EUR
3606/2	DN 65	212	15.00	4198482	C	7,972.-
3606	DN 65	223	18.50	4198484	C	9,180.-
3607/2	DN 65	253	18.50	4198485	C	9,451.-
3607	DN 65	253	22.00	4198486	C	9,881.-
3608	DN 65	256	22.00	4198488	C	11,176.-
3608/2	DN 65	256	22.00	4198487	C	11,176.-
3609	DN 65	331	30.00	4198490	C	12,615.-
3609/2	DN 65	331	30.00	4198489	C	12,367.-
3610/2	DN 65	334	30.00	4198491	C	13,677.-

Price group: PG6

Ordering information PN 25

MEI ≥ 0.70; materials: Hydraulics 1.4307 (AISI 304L), pump housing 1.4301 (AISI 304), gasket type: EPDM

Helix V	Pressure port	Gross weight, approx.	Rated power	Art. no.	Cartridge me- chanical seal	
		<i>m</i> kg	<i>P</i> ₂ kW			EUR
5205	DN 80	261	18.50	4198502	C	9,811.-
5206	DN 80	263	22.00	4198505	C	10,896.-
5206/2	DN 80	263	22.00	4198504	C	10,896.-
5207	DN 80	341	30.00	4198507	C	12,405.-
5207/2	DN 80	341	30.00	4198506	C	12,405.-
5208	DN 80	345	30.00	4198509	C	13,293.-
5208/2	DN 80	345	30.00	4198508	C	13,293.-
5209/2	DN 80	351	37.00	4198510	C	14,359.-

Price group: PG6

Ordering information PN 25

MEI ≥ 0.50; materials: Hydraulics 1.4404 (AISI 316L), pump housing 1.4409 (AISI 316L), gasket type: FKM

Helix V	Pressure port	Gross weight, approx.	Rated power	Art. no.	Cartridge me- chanical seal	
		<i>m</i> kg	<i>P</i> ₂ kW			EUR
1601	DN 50	41	0.75	4150660	C	1,748.-
1602	DN 50	47	1.50	4150661	C	2,171.-
1603	DN 50	49	2.20	4150662	C	2,280.-
1604	DN 50	56	3.00	4150663	C	2,741.-
1605	DN 50	61	4.00	4150664	C	3,139.-
1606	DN 50	72	4.00	4150665	C	3,425.-
1607	DN 50	86	5.50	4150666	C	4,036.-
1608	DN 50	90	5.50	4150667	C	4,146.-
1609	DN 50	92	7.50	4150668	C	4,869.-
1610	DN 50	94	7.50	4150669	C	5,132.-
1611	DN 50	95	7.50	4150670	C	5,515.-
1612	DN 50	174	9.00	4150671	C	5,957.-
1613	DN 50	177	9.00	4150672	C	6,223.-


☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG6

Ordering information PN 25


MEI ≥ 0.50; materials: Hydraulics 1.4404 (AISI 316L), pump housing 1.4409 (AISI 316L), gasket type: FKM

Helix V	Pressure port	Gross weight, approx.	Rated power	Art. no.	Cartridge me- chanical seal		
		<i>m</i> kg	<i>P</i> ₂ kW				EUR
1616	DN 50	175	11.00	4150673		C	6,560.-

Price group: PG6

Ordering information PN 25


MEI ≥ 0.70; materials: Hydraulics 1.4404 (AISI 316L), pump housing 1.4409 (AISI 316L), gasket type: FKM

Helix V	Pressure port	Gross weight, approx.	Rated power	Art. no.	Cartridge me- chanical seal		
		<i>m</i> kg	<i>P</i> ₂ kW				EUR
2204	DN 50	110	5.50	4139778		C	4,552.-
2205	DN 50	124	7.50	4139780		C	5,039.-
2206	DN 50	126	7.50	4139782		C	5,482.-
2207	DN 50	144	9.00	4139784		C	6,222.-
2208	DN 50	162	11.00	4139786		C	7,248.-
2209	DN 50	164	11.00	4139787		C	7,573.-
2210	DN 50	238	15.00	4139788		C	8,353.-
2211	DN 50	240	15.00	4139789		C	8,584.-
2212	DN 50	242	15.00	4139790		C	8,816.-
2213	DN 50	255	18.50	4139791		C	10,093.-

Price group: PG6

Ordering information PN 25

MEI ≥ 0.70; materials: Hydraulics 1.4404 (AISI 316L), pump housing 1.4409 (AISI 316L), gasket type: FKM

Helix V	Pressure port	Gross weight, approx.	Rated power	Art. no.	Art. no.	Cartridge me- chanical seal		
		<i>m</i> kg	<i>P</i> ₂ kW					EUR
3603/1	DN 65	135	7.50	4155393	A	☞	4150752	C 6,478.-
3603/2	DN 65	135	7.50	4155392	A	☞	4150750	C 6,311.-
3603	DN 65	151	9.00	-	A	☞	4150754	C 6,984.-
3604	DN 65	171	11.00	-	A	☞	4150758	C 8,599.-
3604/2	DN 65	171	11.00	-	A	☞	4150756	C 7,816.-
3605	DN 65	224	15.00	-	A	☞	4150762	C 9,669.-
3605/2	DN 65	224	15.00	-	A	☞	4150760	C 9,220.-
3606/2	DN 65	256	15.00	-	A	☞	4150764	C 10,365.-
3606	DN 65	260	18.50	-	A	☞	4150766	C 11,933.-
3607/2	DN 65	263	18.50	-	A	☞	4150767	C 12,287.-
3607	DN 65	262	22.00	-	A	☞	4150768	C 12,845.-
3608	DN 65	265	22.00	-	A	☞	4150770	C 14,526.-
3608/2	DN 65	265	22.00	-	A	☞	4150769	C 14,526.-
3609	DN 65	339	30.00	-	A	☞	4150772	C 16,349.-
3609/2	DN 65	339	30.00	-	A	☞	4150771	C 16,081.-
3610/2	DN 65	342	30.00	-	A	☞	4150773	C 17,745.-

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☞ = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG6

Ordering information PN 40 (P_{max}: 30 bar)

MEI ≥ 0.70; materials: Hydraulics 1.4404 (AISI 316L), pump housing 1.4409 (AISI 316L), gasket type: FKM

Helix V	Pressure port	Gross weight, approx.	Rated power	Art. no.	Cartridge me- chanical seal	
		m kg	P ₂ kW			EUR
3610	DN 65	344	30.00	4165832	C	18,644.-
3611/2	DN 65	348	30.00	4165835	C	20,169.-
3611	DN 65	349	37.00	4165838	C	21,581.-

Price group: PG6

Ordering information PN 25

MEI ≥ 0.70; materials: Hydraulics 1.4404 (AISI 316L), pump housing 1.4409 (AISI 316L), gasket type: FKM

Helix V	Pressure port	Gross weight, approx.	Rated power	Art. no.	Cartridge me- chanical seal	
		m kg	P ₂ kW			EUR
5203	DN 80	182	11.00	4150911	C	7,080.-
5203/2	DN 80	182	11.00	4150910	C	6,848.-
5204	DN 80	264	15.00	4150913	C	8,474.-
5204/2	DN 80	264	15.00	4150912	C	7,777.-
5205	DN 80	275	18.50	4150915	C	13,019.-
5205/2	DN 80	275	18.50	4150914	C	12,689.-
5206	DN 80	275	22.00	4150918	C	15,551.-
5206/2	DN 80	275	22.00	4150917	C	15,263.-
5207	DN 80	350	30.00	4150920	C	17,642.-
5207/2	DN 80	350	30.00	4150919	C	17,294.-
5208	DN 80	354	30.00	4150922	C	17,323.-
5208/2	DN 80	354	30.00	4150921	C	17,323.-
5209/2	DN 80	360	37.00	4150923	C	19,133.-

Price group: PG6

Ordering information PN 40 (P_{max}: 30 bar)


MEI ≥ 0.70; materials: Hydraulics 1.4404 (AISI 316L), pump housing 1.4409 (AISI 316L), gasket type: FKM

Helix V	Pressure port	Gross weight, approx.	Rated power	Art. no.	Cartridge me- chanical seal	
		m kg	P ₂ kW			EUR
5209	DN 80	362	37.00	4165847	C	20,557.-
5210	DN 80	368	37.00	4165853	C	22,183.-
5210/2	DN 80	368	37.00	4165850	C	21,136.-

Wilo-Helix V

Type	Description	EUR
X-Care pump monitoring	Additional module with sensors for monitoring the pump. The supplied signals are transferred to the building automation system in order to permit targeted control of the pump (dry-running protection, pump monitoring) special version for all types of series Helix V on request.	☞

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☞ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

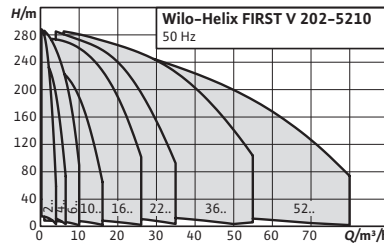

Accessories
Accessories

Page
357

Select 4 online
All information at www.wilo-select.com



Wilo-Helix FIRST V

Construction

Non-self-priming, high-efficiency multistage high-pressure centrifugal pump in vertical design with in-line connections

Application

- Water distribution and pressure boosting
- Industrial circulation systems
- Process water
- Closed cooling circuits
- Fire extinguishing systems
- Washing systems
- Irrigation

Scope of delivery

- Helix FIRST V high-pressure multistage centrifugal pump
- Installation and operating instructions
- Helix FIRST 2 – 16 (version PN16 with oval flanges): Cast iron counter flanges with the corresponding screws, nuts and gaskets

Your advantages

- Efficiency-optimised, laser-welded, optimised 2D/3D hydraulics
- Corrosion-resistant impellers, guide vanes and stage housings
- Flow and degassing-optimised hydraulic parts
- Reinforced pump housing, flow and NPSH optimised
- Space-saving and easy maintenance thanks to compact design
- Particularly sturdy coupling guard

General notes - ErP (Ecodesign) Directive

The following pages list the respective nominal flow rate within the series. Reference value MEI for water pumps with the best efficiency is ≥ 0.70 . For more detailed information on the MEI values of the individual pump types, see: Wilo Online Catalogue, available at www.wilo.com

Price group: PG6

Ordering information PN 16

MEI ≥ 0.70 ; materials: Monobloc pump housing EN-GJL-250 cataphoretic-coated, hydraulics 1.4307 (AISI 304L)


Helix FIRST V	Rated power	Pressure port	Gross weight, approx.	Art. no.		
	P_2 kW		m kg			EUR
202	0.37	G 1	21.7	4201016	L	732.-
203	0.37	G 1	22.2	4201019	L	781.-
204	0.37	G 1	22.7	4201022	L	813.-
205	0.55	G 1	24.2	4201025	C	854.-
206	0.55	G 1	24.7	4201028	C	926.-

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☞ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG6

Ordering information PN 16


MEI ≥ 0.70; materials: Monobloc pump housing EN-GJL-250 cataphoretic-coated, hydraulics 1.4307 (AISI 304L)

Helix FIRST V	Rated power	Pressure port	Gross weight, approx.	Art. no.		EUR
	P_2 kW		m kg			
207	0.55	G 1	29.7	4201031	C	972.-
208	0.75	G 1	35.9	4201034	C	1,065.-
209	0.75	G 1	36.4	4201037	C	1,114.-
210	0.75	G 1	36.9	4201040	C	1,207.-
211	1.10	G 1	38.2	4201043	C	1,214.-
212	1.10	G 1	38.6	4201046	C	1,312.-
213	1.10	G 1	39.5	4201049	C	1,408.-
214	1.10	G 1	39.6	4201052	C	1,503.-
216	1.50	G 1	46.1	4201055	C	1,591.-

Price group: PG6

Ordering information PN 16


MEI ≥ 0.70; materials: Monobloc pump housing EN-GJL-250 cataphoretic-coated, hydraulics 1.4307 (AISI 304L)



Helix FIRST V	Rated power	Pressure port	Gross weight, approx.	Art. no.		EUR
	P_2 kW		m kg			
402	0.37	G 1	22.8	4201073	L	829.-
403	0.37	G 1	23.8	4201076	L	877.-
404	0.55	G 1	25.9	4201079	L	921.-
405	0.75	G 1	32.7	4201082	L	972.-
406	0.75	G 1	33.7	4201085	C	1,083.-
407	1.10	G 1	40.1	4201088	C	1,126.-
408	1.10	G 1	41.1	4201091	C	1,245.-
409	1.10	G 1	42.1	4201094	C	1,293.-
410	1.50	G 1	48.6	4201097	C	1,383.-
411	1.50	G 1	49.7	4201100	C	1,486.-
412	1.50	G 1	51	4201103	C	1,588.-
413	2.20	G 1	53	4201106	C	1,679.-
414	2.20	G 1	54	4201109	C	1,741.-
416	2.20	G 1	56	4201112	C	1,835.-

Price group: PG6

Ordering information PN 16

MEI ≥ 0.70; materials: Monobloc pump housing EN-GJL-250 cataphoretic-coated, hydraulics 1.4307 (AISI 304L)


Helix FIRST V	Rated power	Pressure port	Gross weight, approx.	Art. no.		EUR
	P_2 kW		m kg			
601	0.37	G 1¼	22.3	4201123	C	924.-
602	0.55	G 1¼	23.5	4201125	C	959.-
603	0.55	G 1¼	24.2	4201128	L	1,005.-
604	0.75	G 1¼	30.7	4201131	L	1,069.-
605	1.10	G 1¼	36.8	4201134	L	1,161.-
606	1.10	G 1¼	37.6	4201137	L	1,210.-
607	1.50	G 1¼	43.8	4201140	L	1,419.-
608	1.50	G 1¼	44.6	4201143	C	1,617.-
609	2.20	G 1¼	46.4	4201146	C	1,660.-
610	2.20	G 1¼	47.2	4201149	C	1,710.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG6

Ordering information PN 16


MEI ≥ 0.70; materials: Monobloc pump housing EN-GJL-250 cataphoretic-coated, hydraulics 1.4307 (AISI 304L)

Helix FIRST V	Rated power	Pressure port	Gross weight, approx.	Art. no.		
	P_2 kW		m kg			EUR
611	2.20	G 1¼	48.5	4201152	C	1,754.-
612	3.00	G 1¼	67	4201155	C	1,846.-
613	3.00	G 1¼	71	4201158	C	1,955.-
614	3.00	G 1¼	71	4201160	C	2,063.-

Price group: PG6

Ordering information PN 16


MEI ≥ 0.70; materials: Monobloc pump housing EN-GJL-250 cataphoretic-coated, hydraulics 1.4307 (AISI 304L)

Helix FIRST V	Rated power	Pressure port	Gross weight, approx.	Art. no.		
	P_2 kW		m kg			EUR
1001	0.55	G ½	25.6	4200934	C	972.-
1002	0.75	G ½	31.6	4200936	C	1,029.-
1003	1.10	G ½	33.3	4200939	L	1,115.-
1004	1.50	G ½	50	4200942	L	1,265.-
1005	2.20	G ½	53	4200945	L	1,447.-
1006	2.20	G ½	53	4200948	L	1,536.-
1007	3.00	G ½	66	4200951	C	1,807.-
1008	3.00	G ½	67	4200954	C	1,895.-
1009	4.00	G ½	69	4200957	C	2,067.-
1010	4.00	G ½	69	4200960	C	2,178.-
1011	4.00	G ½	74	4200963	C	2,344.-
1012	5.50	G ½	79	4200966	C	2,713.-

Price group: PG6

Ordering information PN 16

MEI ≥ 0.50; materials: Monobloc pump housing EN-GJL-250 cataphoretic-coated, hydraulics 1.4307 (AISI 304L)


Helix FIRST V	Rated power	Pressure port	Gross weight, approx.	Art. no.		
	P_2 kW		m kg			EUR
1601	0.75	G 2	32	4200978	C	1,163.-
1602	1.50	G 2	43	4200980	C	1,218.-
1603	2.20	G 2	45.1	4200983	L	1,287.-
1604	3.00	G 2	64	4200986	L	1,579.-
1605	4.00	G 2	66	4200990	L	1,830.-
1606	4.00	G 2	67	4200993	L	2,074.-
1607	5.50	G 2	73	4200996	C	2,392.-
1608	5.50	G 2	75	4200999	C	2,637.-
1609	7.50	G 2	100	4215239	C	3,047.-
1610	7.50	G 2	102	4215240	C	3,176.-
1611	7.50	G 2	103	4215241	C	2,526.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact WiloSubject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG6

Ordering information PN 16


MEI ≥ 0.70; materials: Monobloc pump housing EN-GJL-250 cataphoretic-coated, hydraulics 1.4307 (AISI 304L)

Helix FIRST V	Rated power	Pressure port	Gross weight, approx.	Art. no.		
	P_2 kW		m kg			EUR
2201	1.50	DN 50	64	4200576	C	1,630.-
2202	3.00	DN 50	78	4183356	L	2,179.-
2203	4.00	DN 50	81	4183357	L	2,780.-
2204	5.50	DN 50	93	4183358	L	2,835.-
2205	7.50	DN 50	105	4183359	L	3,138.-
2206	7.50	DN 50	106	4183360	L	3,413.-
2207	9.00	DN 50	127	4183361	C	3,873.-
2208	11.00	DN 50	131	4183362	C	4,511.-

Price group: PG6

Ordering information PN 16


MEI ≥ 0.70; materials: Monobloc pump housing EN-GJL-250 cataphoretic-coated, hydraulics 1.4307 (AISI 304L)



Helix FIRST V	Rated power	Pressure port	Gross weight, approx.	Art. no.		
	P_2 kW		m kg			EUR
3601/1	2.20	DN 65	79	4200588	C	1,956.-
3601	3.00	DN 65	82	4183384	L	2,152.-
3602/2	4.00	DN 65	85	4183385	L	2,309.-
3602/1	5.50	DN 65	91	4183386	L	2,538.-
3602	5.50	DN 65	91	4183387	L	3,298.-
3603/2	7.50	DN 65	108	4183388	L	3,935.-
3603/1	7.50	DN 65	108	4183389	L	3,753.-
3603	9.00	DN 65	124	4183390	L	4,462.-
3604/2	11.00	DN 65	136	4183391	L	5,060.-
3604	11.00	DN 65	136	4183392	L	5,327.-
3605/2	15.00	DN 65	205	4215242	C	3,870.-
3605	15.00	DN 65	205	4215243	C	3,870.-
3606/2	15.00	DN 65	208	4215244	C	4,034.-
3606	15.00	DN 65	219	4215245	C	4,128.-

Price group: PG6

Ordering information PN 16

MEI ≥ 0.70; materials: Monobloc pump housing EN-GJL-250 cataphoretic-coated, hydraulics 1.4307 (AISI 304L)


Helix FIRST V	Rated power	Pressure port	Gross weight, approx.	Art. no.		
	P_2 kW		m kg			EUR
5201/1	3.00	DN 80	90	4183422	C	2,197.-
5201	4.00	DN 80	91	4183423	C	2,484.-
5202/2	5.50	DN 80	105	4183424	L	3,392.-
5202	7.50	DN 80	115	4183425	L	3,673.-
5203/2	11.00	DN 80	139	4183426	L	4,648.-
5203	11.00	DN 80	139	4183427	L	4,921.-
5204/2	15.00	DN 80	214	4215246	C	3,989.-
5204	15.00	DN 80	214	4215247	C	6,247.-
5205/2	15.00	DN 80	257	4215248	C	4,374.-
5205	15.00	DN 80	257	4215249	C	4,374.-
5206/2	15.00	DN 80	261	4215250	C	4,848.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG6

Ordering information PN 25


MEI ≥ 0.70; materials: Monobloc pump housing EN-GJL-250 cataphoretic-coated, hydraulics 1.4307 (AISI 304L)

Helix FIRST V	Rated power	Pressure port	Gross weight, approx.	Art. no.		
	P_2 kW		m kg			EUR
202	0.37	DN 25	27.6	4201018	C	788.-
203	0.37	DN 25	28	4201021	C	805.-
204	0.37	DN 25	28.5	4201024	C	821.-
205	0.55	DN 25	30	4201027	C	854.-
206	0.55	DN 25	30.5	4201030	C	926.-
207	0.55	DN 25	35.5	4201033	C	972.-
208	0.75	DN 25	41.8	4201036	C	1,065.-
209	0.75	DN 25	42.2	4201039	C	1,114.-
210	0.75	DN 25	42.7	4201042	C	1,207.-
211	1.10	DN 25	44	4201045	C	1,214.-
212	1.10	DN 25	44.5	4201048	C	1,312.-
213	1.10	DN 25	45.4	4201051	C	1,408.-
214	1.10	DN 25	45.5	4201054	C	1,503.-
216	1.50	DN 25	52	4201057	C	1,591.-
218	1.50	DN 25	70	4201058	C	2,037.-
220	2.20	DN 25	72	4201060	C	2,178.-
222	2.20	DN 25	74	4201062	C	2,454.-
224	2.20	DN 25	74	4201064	C	2,599.-
226	2.20	DN 25	75	4201066	C	2,599.-

Price group: PG6

Ordering information PN 25

MEI ≥ 0.70; materials: Monobloc pump housing EN-GJL-250 cataphoretic-coated, hydraulics 1.4307 (AISI 304L)


Helix FIRST V	Rated power	Pressure port	Gross weight, approx.	Art. no.		
	P_2 kW		m kg			EUR
402	0.37	DN 25	27.5	4201075	C	829.-
403	0.37	DN 25	27.7	4201078	C	877.-
404	0.55	DN 25	29.5	4201081	C	921.-
405	0.75	DN 25	35.8	4201084	C	972.-
406	0.75	DN 25	40.8	4201087	C	1,083.-
407	1.10	DN 25	42.1	4201090	C	1,126.-
408	1.10	DN 25	42.6	4201093	C	1,245.-
409	1.10	DN 25	43	4201096	C	1,293.-
410	1.50	DN 25	49	4201099	C	1,383.-
411	1.50	DN 25	49.5	4201102	C	1,486.-
412	1.50	DN 25	50	4201105	C	1,588.-
413	2.20	DN 25	52	4201108	C	1,679.-
414	2.20	DN 25	52	4201111	C	1,741.-
416	2.20	DN 25	53	4201114	C	1,835.-
418	2.20	DN 25	71	4201115	C	2,164.-
420	3.00	DN 25	79	4201117	C	2,257.-
422	3.00	DN 25	81	4201118	C	2,376.-
424	3.00	DN 25	81	4201119	C	2,471.-
426	4.00	DN 25	84	4201120	C	2,761.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact WiloSubject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG6

Ordering information PN 25

MEI ≥ 0.70; materials: Monobloc pump housing EN-GJL-250 cataphoretic-coated, hydraulics 1.4307 (AISI 304L)

Helix FIRST V	Rated power	Pressure port	Gross weight, approx.	Art. no.		
	P_2 kW		m kg			EUR
601	0.37	DN 32	29.6	4201124	C	924.-
602	0.55	DN 32	30.8	4201127	C	959.-
603	0.55	DN 32	31.5	4201130	C	1,005.-
604	0.75	DN 32	42.5	4201132	C	1,069.-
605	1.10	DN 32	44.1	4201136	C	1,161.-
606	1.10	DN 32	44.8	4201139	C	1,210.-
607	1.50	DN 32	51	4201142	C	1,419.-
608	1.50	DN 32	52	4201145	C	1,617.-
609	2.20	DN 32	54	4201148	C	1,660.-
610	2.20	DN 32	54	4201151	C	1,710.-
611	2.20	DN 32	56	4201154	C	1,754.-
612	3.00	DN 32	74	4201157	C	1,846.-
613	3.00	DN 32	78	4201159	C	1,955.-
614	3.00	DN 32	79	4201162	C	2,063.-
615	3.00	DN 32	83	4201163	C	2,302.-
616	4.00	DN 32	84	4201164	C	2,376.-
618	4.00	DN 32	85	4201167	C	2,471.-
620	4.00	DN 32	87	4201169	C	2,559.-
621	5.50	DN 32	122	4201170	C	2,702.-
623	5.50	DN 32	123	4201172	C	2,967.-

Price group: PG6

Ordering information PN 25

MEI ≥ 0.70; materials: Monobloc pump housing EN-GJL-250 cataphoretic-coated, hydraulics 1.4307 (AISI 304L)

Helix FIRST V	Rated power	Pressure port	Gross weight, approx.	Art. no.		
	P_2 kW		m kg			EUR
1001	0.55	DN 40	35.6	4200935	C	972.-
1002	0.75	DN 40	41.6	4200938	C	1,029.-
1003	1.10	DN 40	43.3	4200941	C	1,115.-
1004	1.50	DN 40	54	4200944	C	1,265.-
1005	2.20	DN 40	56	4200947	C	1,447.-
1006	2.20	DN 40	57	4200950	C	1,536.-
1007	3.00	DN 40	76	4200953	C	1,807.-
1008	3.00	DN 40	77	4200956	C	1,895.-
1009	4.00	DN 40	78	4200959	C	2,067.-
1010	4.00	DN 40	79	4200962	C	2,178.-
1011	4.00	DN 40	84	4200965	C	2,344.-
1012	5.50	DN 40	90	4200968	C	2,713.-
1013	5.50	DN 40	95	4200969	C	3,559.-
1015	5.50	DN 40	96	4200972	C	3,640.-
1017	7.50	DN 40	144	4200974	C	3,801.-
1019	7.50	DN 40	146	4200975	C	4,023.-


 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG6

Ordering information PN 25


MEI ≥ 0.50; materials: Monobloc pump housing EN-GJL-250 cataphoretic-coated, hydraulics 1.4307 (AISI 304L)

Helix FIRST V	Rated power	Pressure port	Gross weight, approx.	Art. no.		
	P_2 kW		m kg			EUR
1601	0.75	DN 50	43	4200979	C	1,163.-
1602	1.50	DN 50	54	4200982	C	1,218.-
1603	2.20	DN 50	56	4200985	C	1,287.-
1604	3.00	DN 50	75	4200988	C	1,579.-
1605	4.00	DN 50	77	4200991	C	1,830.-
1606	4.00	DN 50	78	4200994	C	2,074.-
1607	5.50	DN 50	84	4200997	C	2,392.-
1608	5.50	DN 50	86	4201000	C	2,637.-
1609	7.50	DN 50	112	4201001	C	3,171.-
1610	7.50	DN 50	114	4201003	C	3,479.-
1611	7.50	DN 50	115	4201005	C	4,007.-
1612	9.00	DN 50	158	4201007	C	4,659.-
1613	9.00	DN 50	161	4201009	C	4,793.-

Price group: PG6

Ordering information PN 25


MEI ≥ 0.70; materials: Monobloc pump housing EN-GJL-250 cataphoretic-coated, hydraulics 1.4307 (AISI 304L)

Helix FIRST V	Rated power	Pressure port	Gross weight, approx.	Art. no.		
	P_2 kW		m kg			EUR
2209	11.00	DN 50	135	4200577	C	5,097.-
2210	15.00	DN 50	223	4200578	C	6,026.-
2211	15.00	DN 50	225	4200579	C	6,424.-
2212	15.00	DN 50	226	4200580	C	6,948.-
2213	18.50	DN 50	239	4200581	C	7,453.-

Price group: PG6


Ordering information PN 25

MEI ≥ 0.70; materials: Monobloc pump housing EN-GJL-250 cataphoretic-coated, hydraulics 1.4307 (AISI 304L)


Helix FIRST V	Rated power	Pressure port	Gross weight, approx.	Art. no.		
	P_2 kW		m kg			EUR
3605/2	15.00	DN 65	205	4200589	C	5,828.-
3605	15.00	DN 65	205	4200590	C	6,021.-
3606/2	15.00	DN 65	208	4200591	C	6,722.-
3606	18.50	DN 65	219	4200592	C	7,738.-
3607/2	18.50	DN 65	250	4200593	C	8,033.-
3607	22.00	DN 65	250	4200594	C	8,399.-
3608/2	22.00	DN 65	253	4200595	C	9,500.-
3608	22.00	DN 65	253	4200596	C	9,500.-
3609/2	30.00	DN 65	330	4200597	C	10,513.-
3609	30.00	DN 65	330	4200598	C	10,722.-
3610/2	30.00	DN 65	333	4200599	C	11,624.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact WiloSubject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.


Price group: PG6

Ordering information PN 25						
MEI ≥ 0.70; materials: Monobloc pump housing EN-GJL-250 cataphoretic-coated, hydraulics 1.4307 (AISI 304L)						
Helix FIRST V	Rated power	Pressure port	Gross weight, approx.	Art. no.		
	P_2 kW		m kg			EUR
5204/2	15.00	DN 80	214	4200612	C	6,075.-
5204	15.00	DN 80	214	4200613	C	6,406.-
5205/2	18.50	DN 80	257	4200614	C	7,374.-
5205	18.50	DN 80	257	4200615	C	7,723.-
5206/2	22.00	DN 80	261	4200616	C	9,262.-
5206	22.00	DN 80	261	4200617	C	9,262.-
5207/2	30.00	DN 80	339	4200618	C	10,543.-
5207	30.00	DN 80	339	4200619	C	10,543.-
5208/2	30.00	DN 80	342	4200620	C	11,298.-
5208	30.00	DN 80	342	4200621	C	11,298.-
5209/2	37.00	DN 80	348	4200622	C	12,203.-


Price group: PG6



Ordering information PN 40						
MEI ≥ 0.70; materials: Monobloc pump housing EN-GJL-250 cataphoretic-coated, hydraulics 1.4307 (AISI 304L)						
Helix FIRST V	Rated power	Pressure port	Gross weight, approx.	Art. no.		
	P_2 kW		m kg			EUR
229	2.20	DN 25	77	4201068	C	2,734.-
231	3.00	DN 25	85	4201069	C	2,907.-
233	3.00	DN 25	114	4201070	C	2,949.-
236	3.00	DN 25	115	4201071	C	3,065.-
239	3.00	DN 25	117	4201072	C	3,182.-

Price group: PG6

Ordering information PN 40						
MEI ≥ 0.70; materials: Monobloc pump housing EN-GJL-250 cataphoretic-coated, hydraulics 1.4307 (AISI 304L)						
Helix FIRST V	Rated power	Pressure port	Gross weight, approx.	Art. no.		
	P_2 kW		m kg			EUR
429	4.00	DN 25	85	4201121	C	2,858.-
431	4.00	DN 25	114	4201122	C	2,892.-

Price group: PG6


Ordering information PN 40						
MEI ≥ 0.70; materials: Monobloc pump housing EN-GJL-250 cataphoretic-coated, hydraulics 1.4307 (AISI 304L)						
Helix FIRST V	Rated power	Pressure port	Gross weight, approx.	Art. no.		
	P_2 kW		m kg			EUR
625	5.50	DN 32	125	4201174	C	3,064.-
628	5.50	DN 32	126	4201175	C	3,238.-
630	7.50	DN 32	145	4201176	C	3,819.-
633	7.50	DN 32	147	4201177	C	4,040.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG6

Ordering information PN 40


MEI ≥ 0.70; materials: Monobloc pump housing EN-GJL-250 cataphoretic-coated, hydraulics 1.4307 (AISI 304L)

Helix FIRST V	Rated power	Pressure port	Gross weight, approx.	Art. no.		
	P_2 kW		m kg			EUR
1021	7.50	DN 40	147	4200976	C	4,339.-
1023	9.00	DN 40	165	4200977	C	4,675.-

Price group: PG6

Ordering information PN 40


MEI ≥ 0.50; materials: Monobloc pump housing EN-GJL-250 cataphoretic-coated, hydraulics 1.4307 (AISI 304L)

Helix FIRST V	Rated power	Pressure port	Gross weight, approx.	Art. no.		
	P_2 kW		m kg			EUR
1616	11.00	DN 50	167	4201013	C	5,011.-
1618	15.00	DN 50	220	4201014	C	5,243.-
1621	15.00	DN 50	225	4201015	C	5,417.-

Price group: PG6

Ordering information PN 40


MEI ≥ 0.50; materials: Monobloc pump housing EN-GJL-250 cataphoretic-coated, hydraulics 1.4307 (AISI 304L)

Helix FIRST V	Rated power	Pressure port	Gross weight, approx.	Art. no.		
	P_2 kW		m kg			EUR
2214	18.50	DN 50	241	4200634	C	7,628.-
2215	18.50	DN 50	243	4200635	C	7,801.-
2216	22.00	DN 50	244	4200636	C	7,975.-

Price group: PG6

Ordering information PN 40


MEI ≥ 0.70; materials: Monobloc pump housing EN-GJL-250 cataphoretic-coated, hydraulics 1.4307 (AISI 304L)

Helix FIRST V	Rated power	Pressure port	Gross weight, approx.	Art. no.		
	P_2 kW		m kg			EUR
3610	30.00	DN 65	333	4200637	C	11,857.-
3611/2	30.00	DN 65	336	4200638	C	12,147.-
3611	37.00	DN 65	339	4200639	C	12,729.-


Price group: PG6

Ordering information PN 40

MEI ≥ 0.70; materials: Monobloc pump housing EN-GJL-250 cataphoretic-coated, hydraulics 1.4307 (AISI 304L)

Helix FIRST V	Rated power	Pressure port	Gross weight, approx.	Art. no.		
	P_2 kW		m kg			EUR
5209	37.00	DN 80	348	4200640	C	12,320.-
5210/2	37.00	DN 80	352	4200641	C	12,494.-
5210	37.00	DN 80	352	4200642	C	12,728.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact WiloSubject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

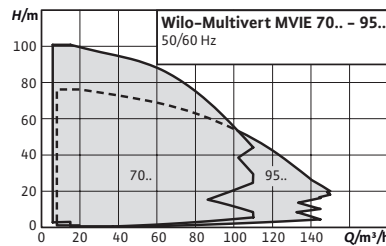

Accessories
Accessories

Page
357

IE4 **Select 4 online**
All information at www.wilo-select.com

Wilo-Multivert MVIE



Construction

Non-self-priming multistage pump with integrated frequency converter

Application

- Water supply and pressure boosting
- Industrial circulation systems
- Process engineering
- Cooling water circulation systems
- Washing and sprinkling systems

Scope of delivery

- MVIE high-pressure multistage centrifugal pump
- Installation and operating instructions

Your advantages

- Easy commissioning
- Integrated frequency converter with large control range
- Full motor protection

General notes - ErP (Ecodesign) Directive

The minimum efficiency index, MEI, of the pump series is ≥ 0.4 . For detailed information on the MEI values of the individual pump types, see: Wilo Online Catalogue, available at www.wilo.com

Price group: PG6

Ordering information PN 16


MEI ≥ 0.40 ; Materials: Hydraulics 1.4307, pump housing EN-GJL-250 cataphoretic coated, gasket type: EPDM

Multivert MVIE	Rated power P_2 kW	Pressure port	Gross weight, approx. m kg	Art. no.		EUR
7001	5.50	DN 100	148.9	4122317	C	8,774.-
7002/2	7.50	DN 100	131.9	4122318	C	10,912.-
7002	11.00	DN 100	237	4166155	C	13,397.-
7003/1	15.00	DN 100	237	4166156	C	16,167.-
7004/2	18.50	DN 100	333	4166157	C	17,965.-
7004	22.00	DN 100	332	4166158	C	19,273.-

Price group: PG6

Ordering information PN 16


MEI ≥ 0.40; Materials: Hydraulics 1.4307, pump housing EN-GJL-250 cataphoretic coated, gasket type: EPDM

Multivert MVIE	Rated power	Pressure port	Gross weight, approx.	Art. no.		
	P_2 kW		m kg			EUR
9501	11.00	DN 100	233	4166171	C	12,485.-
9501/1	7.50	DN 100	153.4	4122324	C	10,341.-
9502	18.50	DN 100	327	4166173	C	16,151.-
9502/1	15.00	DN 100	235	4166172	C	15,283.-
9503/2	22.00	DN 100	331	4166174	C	18,671.-

Price group: PG6

Ordering information PN 25


MEI ≥ 0.40; Materials: Hydraulics 1.4307, pump housing EN-GJL-250 cataphoretic coated, gasket type: EPDM


Multivert MVIE	Rated power	Pressure port	Gross weight, approx.	Art. no.		
	P_2 kW		m kg			EUR
7001	5.50	DN 100	148.9	4122319	C	8,830.-
7002/2	7.50	DN 100	156.9	4122320	C	10,967.-
7002	11.00	DN 100	237	4166159	C	13,545.-
7003/1	15.00	DN 100	237	4166160	C	16,218.-
7004/2	18.50	DN 100	333	4166161	C	18,132.-
7004	22.00	DN 100	332	4166162	C	19,321.-

Price group: PG6

Ordering information PN 25

MEI ≥ 0.40; Materials: Hydraulics 1.4307, pump housing EN-GJL-250 cataphoretic coated, gasket type: EPDM

Multivert MVIE	Rated power	Pressure port	Gross weight, approx.	Art. no.		
	P_2 kW		m kg			EUR
9501/1	7.50	DN 100	153.4	4122326	C	10,400.-
9501	11.00	DN 100	233	4166179	C	12,563.-
9502/1	15.00	DN 100	235	4166180	C	15,346.-
9502	18.50	DN 100	327	4166181	C	16,199.-
9503/2	22.00	DN 100	331	4166182	C	18,774.-

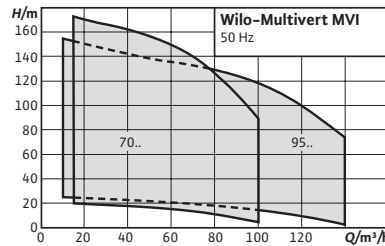

Accessories
Accessories

Page
357

Select 4 online

All information at www.wilo-select.com



Wilo-Multivert MVI

Construction

Non-self-priming, multistage high-pressure centrifugal pump in vertical design with in-line connections.

Application

- Water supply and pressure boosting
- Fire extinguishing systems
- Boiler feed
- Industrial circulation systems
- Process engineering
- Cooling water circulation systems
- Washing and sprinkling systems

Scope of delivery

- MVI high-pressure multistage centrifugal pump
- MVI 1.. – 8.: Oval counter flanges with corresponding screws and O-rings (PN16 variant)
- Installation and operating instructions

Your advantages

- Corrosion-resistant impellers, diffusors and stage housings
- Drinking water approval for all components that come in contact with the fluid (EPDM version)

Notice

Additional information about this series is available in the Online Catalogue (www.wilo.com) and on request.

General notes – ErP (Ecodesign) Directive

The minimum efficiency index, MEI, of the pump series is ≥ 0.4 . For detailed information on the MEI values of the individual pump types, see: Wilo Online Catalogue, available at www.wilo.com

Price group: PG6

Ordering information PN 16

Materials: Stainless steel 1.4301, pump housing EN-GJL-250, cataphoretic coated, gasket type: EPDM

Multivert MVI	Rated power P_2 kW	Pressure port	Mains connection	Gross weight, approx. m kg	Art. no.		EUR
7001/1	4.00	DN 100	3~400 V, 50 Hz	107	4071162	C	2,942.-
7001	5.50	DN 100	3~400 V, 50 Hz	112	4071163	C	3,474.-
7002/2	7.50	DN 100	3~400 V, 50 Hz	134	4071165	C	4,652.-
7002/1	9.00	DN 100	3~400 V, 50 Hz	149	4071166	C	5,174.-
7002	11.00	DN 100	3~400 V, 50 Hz	151	4071168	C	5,225.-
7003/2	15.00	DN 100	3~400 V, 50 Hz	218	4071170	C	6,587.-
7003/1	15.00	DN 100	3~400 V, 50 Hz	218	4071171	C	6,612.-
7003	18.50	DN 100	3~400 V, 50 Hz	246	4071172	C	6,903.-


☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG6

Ordering information PN 16


Materials: Stainless steel 1.4301, pump housing EN-GJL-250, cataphoretic coated, gasket type: EPDM

Multivert MVI	Rated power	Pressure port	Mains connection	Gross weight, approx.	Art. no.		
	P_2 kW			m kg			EUR
7004/2	18.50	DN 100	3~400 V, 50 Hz	251	4071173	C	7,973.-
7004/1	22.00	DN 100	3~400 V, 50 Hz	252	4071174	C	8,319.-
7004	22.00	DN 100	3~400 V, 50 Hz	252	4071175	C	8,755.-
7005/2	30.00	DN 100	3~400 V, 50 Hz	346	4071176	C	9,925.-
7005/1	30.00	DN 100	3~400 V, 50 Hz	346	4071177	C	9,943.-
7005	30.00	DN 100	3~400 V, 50 Hz	346	4071178	C	9,960.-

Price group: PG6

Ordering information PN 25


Materials: Stainless steel 1.4301, pump housing EN-GJL-250, cataphoretic coated, gasket type: EPDM

Multivert MVI	Rated power	Pressure port	Mains connection	Gross weight, approx.	Art. no.		
	P_2 kW			m kg			EUR
7001/1	4.00	DN 100	3~400 V, 50 Hz	107	4071179	C	3,036.-
7001	5.50	DN 100	3~400 V, 50 Hz	112	4071180	C	3,591.-
7002/2	7.50	DN 100	3~400 V, 50 Hz	134	4071182	C	4,808.-
7002/1	9.00	DN 100	3~400 V, 50 Hz	149	4071183	C	5,270.-
7002	11.00	DN 100	3~400 V, 50 Hz	151	4071185	C	5,396.-
7003/2	15.00	DN 100	3~400 V, 50 Hz	218	4071187	C	6,806.-
7003/1	15.00	DN 100	3~400 V, 50 Hz	218	4071188	C	6,830.-
7003	18.50	DN 100	3~400 V, 50 Hz	246	4071189	C	7,129.-
7004/2	18.50	DN 100	3~400 V, 50 Hz	251	4071190	C	8,237.-
7004/1	22.00	DN 100	3~400 V, 50 Hz	252	4071191	C	8,592.-
7004	22.00	DN 100	3~400 V, 50 Hz	252	4071192	C	9,044.-
7005/2	30.00	DN 100	3~400 V, 50 Hz	346	4071193	C	10,255.-
7005/1	30.00	DN 100	3~400 V, 50 Hz	346	4071194	C	10,270.-
7005	30.00	DN 100	3~400 V, 50 Hz	346	4071195	C	10,288.-
7006/2	30.00	DN 100	3~400 V, 50 Hz	350	4071196	C	10,724.-
7006/1	37.00	DN 100	3~400 V, 50 Hz	350	4071197	C	11,294.-
7006	37.00	DN 100	3~400 V, 50 Hz	350	4071198	C	11,918.-
7007/2	37.00	DN 100	3~400 V, 50 Hz	355	4071199	C	12,849.-
7007/1	37.00	DN 100	3~400 V, 50 Hz	355	4071200	C	12,882.-

Price group: PG6

Ordering information PN 16

Materials: Stainless steel 1.4301, pump housing EN-GJL-250, cataphoretic coated, gasket type: EPDM


Multivert MVI	Rated power	Pressure port	Mains connection	Gross weight, approx.	Art. no.		
	P_2 kW			m kg			EUR
9501/1	7.50	DN 100	3~400 V, 50 Hz	130	4082533	C	3,945.-
9501	9.00	DN 100	3~400 V, 50 Hz	145	4082534	C	4,175.-
9502/2	15.00	DN 100	3~400 V, 50 Hz	217	4082536	C	6,059.-
9502/1	15.00	DN 100	3~400 V, 50 Hz	217	4082537	C	6,732.-
9502	18.50	DN 100	3~400 V, 50 Hz	245	4082538	C	6,990.-
9503/2	22.00	DN 100	3~400 V, 50 Hz	250	4082539	C	8,815.-
9503/1	30.00	DN 100	3~400 V, 50 Hz	331	4082540	C	9,314.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact WiloSubject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG6

Ordering information PN 16


Materials: Stainless steel 1.4301, pump housing EN-GJL-250, cataphoretic coated, gasket type: EPDM


Multivert MVI	Rated power	Pressure port	Mains connection	Gross weight, approx.	Art. no.		
	P_2 kW			m kg			EUR
9503	30.00	DN 100	3~400 V, 50 Hz	331	4082541	C	9,539.-
9504/2	30.00	DN 100	3~400 V, 50 Hz	347	4082542	C	10,893.-
9504/1	37.00	DN 100	3~400 V, 50 Hz	347	4082543	C	11,016.-
9504	37.00	DN 100	3~400 V, 50 Hz	347	4082544	C	11,285.-

Price group: PG6

Ordering information PN 25

Materials: Stainless steel 1.4301, pump housing EN-GJL-250, cataphoretic coated, gasket type: EPDM

Multivert MVI	Rated power	Pressure port	Mains connection	Gross weight, approx.	Art. no.		
	P_2 kW			m kg			EUR
9501/1	7.50	DN 100	3~400 V, 50 Hz	130	4082560	C	4,064.-
9501	9.00	DN 100	3~400 V, 50 Hz	145	4082561	C	4,309.-
9502/2	15.00	DN 100	3~400 V, 50 Hz	217	4082563	C	6,250.-
9502/1	15.00	DN 100	3~400 V, 50 Hz	217	4082564	C	6,941.-
9502	18.50	DN 100	3~400 V, 50 Hz	245	4082565	C	7,207.-
9503/2	22.00	DN 100	3~400 V, 50 Hz	250	4082566	C	9,088.-
9503/1	30.00	DN 100	3~400 V, 50 Hz	331	4082567	C	9,603.-
9503	30.00	DN 100	3~400 V, 50 Hz	331	4082568	C	9,832.-
9504/2	30.00	DN 100	3~400 V, 50 Hz	347	4082569	C	11,231.-
9504/1	37.00	DN 100	3~400 V, 50 Hz	347	4082570	C	11,352.-
9504	37.00	DN 100	3~400 V, 50 Hz	347	4082571	C	11,636.-
9505/2	45.00	DN 100	3~400 V, 50 Hz	430	4082572	C	14,359.-
9505/1	45.00	DN 100	3~400 V, 50 Hz	430	4082573	C	14,694.-
9505	45.00	DN 100	3~400 V, 50 Hz	430	4082574	C	15,024.-

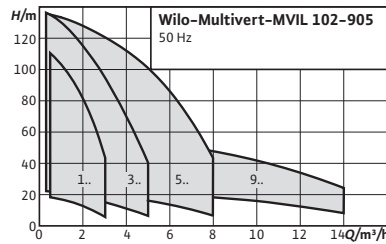

Accessories
Accessories

Page
357

Select 4 online

All information at www.wilo-select.com

Wilo-Multivert MVIL



Construction

Non-self-priming multistage pump

Application

- Water supply and pressure boosting
- Commerce and industry
- Washing and spraying systems
- Rainwater utilisation
- Cooling and cold water circuits

Scope of delivery

- Wilo-MVIL high-pressure multistage centrifugal pump
- Cast iron oval counter flanges Rp 1 to Rp 1 1/2 with the corresponding screws, nuts and gaskets

Your advantages

→ Space-saving, compact block design

- Installation and operating instructions

Notice

Connections with 2-hole oval flange:

MVIL 1... and MVIL 3...: Rp 1 / Rp 1

MVIL 5...: Rp 1 / Rp 1 1/4

MVIL 9...: Rp 1 1/4 / Rp 1 1/2



Versions with special seals or mechanical seals **on request**.


Price group: PG6

Ordering information										
Multivert MVIL	Rated power 1~230 V, 50 Hz	Gross weight, approx.	Art. no.		Rated power 3~400 V, 50 Hz	Gross weight, approx.	Art. no.			
	P_2 kW	m kg			EUR	P_2 kW	m kg			EUR
102	0.55	19.5	4087791	C	671.-	0.37	19.5	4087719	C	648.-
103	0.55	19.8	4087793	C	677.-	0.37	19.8	4087721	C	655.-
104	0.55	23.1	4087795	C	681.-	0.37	23.1	4087723	C	660.-
105	0.55	23.4	4087797	C	689.-	0.55	23.4	4087725	C	672.-
106	0.55	26.7	4087799	C	734.-	0.55	23.7	4087727	C	718.-
107	0.75	26.9	4087801	C	824.-	0.75	26.1	4211055	C	905.-
108	0.75	27.2	4087803	C	873.-	0.75	26.4	4211056	C	964.-
109	1.10	27.5	4087805	C	943.-	1.10	27.5	4211057	C	973.-
110	1.10	27.8	4087807	C	943.-	1.10	27.8	4211058	C	975.-
112	1.10	28.3	4087809	C	1,005.-	1.10	28.3	4211059	C	1,043.-
302	0.55	19.6	4087811	C	669.-	0.37	19.6	4087739	C	643.-

= ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG6

Ordering information										
Multivert MVIL	Rated power 1~230 V, 50 Hz	Gross weight, approx.	Art. no.			Rated power 3~400 V, 50 Hz	Gross weight, approx.	Art. no.		
	P_2 kW	m kg			EUR	P_2 kW	m kg			EUR
303	0.55	22.9	4087813	C	672.-	0.55	22.9	4087741	C	652.-
304	0.75	26.3	4087815	C	707.-	0.75	25.5	4211060	C	770.-
305	0.75	26.7	4087819	C	733.-	0.75	25.9	4211061	C	802.-
306	1.10	25.4	4087821	C	870.-	1.10	25.4	4211062	C	884.-
307	1.10	27.4	4087823	C	877.-	1.10	27.4	4211063	C	905.-
308	1.50	27.7	4087825	C	927.-	1.50	32.4	4211064	C	1,004.-
309	1.50	28.1	4087827	C	974.-	1.50	32.8	4211065	C	1,059.-
310	1.50	28.5	4087829	C	979.-	1.50	33.2	4211066	C	1,063.-
312	-	-	-	-	-	2.20	33.6	4211067	C	1,183.-
502	0.55	22.7	4087831	C	669.-	0.55	22.7	4087759	C	649.-
503	0.75	26.1	4087833	C	687.-	0.75	25.3	4211068	C	746.-
504	1.10	26.5	4087835	C	778.-	1.10	26.5	4211069	C	787.-
505	1.10	26.8	4087837	C	807.-	1.10	26.8	4211070	C	810.-
506	1.50	27.2	4087839	C	888.-	1.50	31.9	4211071	C	961.-
507	1.50	27.6	4087841	C	896.-	1.50	32.3	4211072	C	970.-
508	-	-	-	-	-	2.20	32.4	4211073	C	1,029.-
509	-	-	-	-	-	2.20	32.7	4211074	C	1,079.-
510	-	-	-	-	-	2.20	33	4211126	C	1,139.-
512	-	-	-	-	-	2.20	33.5	4211130	C	1,194.-
902	0.75	28.5	4087843	C	720.-	0.75	27.7	4211075	C	785.-
903	1.10	28.9	4087845	C	799.-	1.10	28.9	4211076	C	803.-
904	1.50	29.3	4087847	C	834.-	1.50	37	4211077	C	910.-
905	-	-	-	-	-	2.20	39.2	4211078	C	1,021.-
906	-	-	-	-	-	2.20	39.6	4211118	C	1,043.-
907	-	-	-	-	-	2.20	40	4211122	C	1,087.-

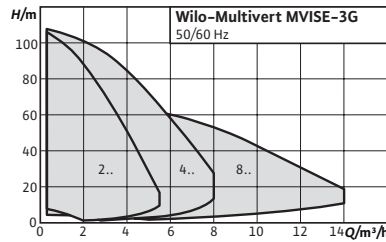

Accessories
Accessories

Page
357

Series modification

Select 4online
All information at www.wilo-select.com

Wilo-Multivert MVISE



Construction

Non-self-priming multistage pump with glandless pump motor and integrated frequency converter

Application

→ Water supply and pressure boosting

Scope of delivery


- Wilo-Multivert MVISE high-pressure multistage centrifugal pump
- Stainless steel oval counter flanges Rp 1 to Rp 1 1/2 with the corresponding screws, nuts and gaskets
- Installation and operating instructions

Your advantages

- Glandless pump technology
- Virtually noiseless operation (up to 20 dB [A] quieter than conventional pumps)
- Space-saving, compact design
- Virtually maintenance free thanks to a design which does not feature any mechanical seals
- Drinking water approval for all components that come in contact with the fluid (EPDM version)

Price group: PG6

Ordering information						
Multivert MVISE	Rated power P_2 kW	Pressure port	Gross weight, approx. m kg	Art. no.		EUR
206-3G	1.10	G 1	34	4225618	K	2,355.-
210-3G	2.00	G 1	40	4225620	K	2,676.-
404-3G	1.10	G 1¼	33	4225622	K	2,295.-
406-3G	1.10	G 1¼	34	4225624	K	2,537.-
410-3G	2.00	G 1¼	40	4225626	K	3,686.-
803-3G	1.10	G 1½	35	4225628	K	2,733.-
806-3G	2.00	G 1½	40	4225630	K	4,166.-

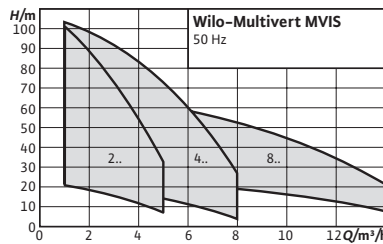

Accessories
Accessories

Page
357

Select 4 online

All information at www.wilo-select.com

Wilo-Multivert MVIS



Construction

Non-self-priming multistage pump with glandless pump motor

Application

→ Water supply and pressure boosting systems

Scope of delivery

- Wilo-Multivert MVIS high-pressure multistage centrifugal pump
- Stainless steel counter flanges Rp 1 to Rp 1½ with the corresponding screws, nuts and gaskets
- Installation and operating instructions

Your advantages

- Glandless pump technology
- Virtually noiseless operation (up to 20 dB [A] quieter than conventional pumps)
- Space-saving, compact design
- Virtually maintenance free thanks to a design which does not feature any mechanical seals
- Drinking water approval for all components that come in contact with the fluid (EPDM version)


Price group: PG6

Ordering information						
Multivert MVIS	Rated power	Pressure port	Gross weight, approx.	Art. no.		
	P_2 kW		m kg			EUR
202	0.35	G 1	17.5	2009033	K	936.-
203	0.45	G 1	18.5	2009034	K	971.-
204	0.45	G 1	19	2009035	K	1,043.-
205	1.10	G 1	24	2009036	K	1,108.-
206	1.10	G 1	25.5	2009037	K	1,133.-
207	1.10	G 1	26	2009038	K	1,142.-
208	1.10	G 1	26	2009039	K	1,334.-
209	2.20	G 1	31.5	2009040	K	1,370.-
210	2.20	G 1	32	2009041	K	1,406.-
402	0.45	G 1¼	18	2009042	K	940.-
403	1.10	G 1¼	23	2009043	K	998.-
404	1.10	G 1¼	23.5	2009044	K	1,074.-

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Ordering information						
Multivert MVIS	Rated power P_2 kW	Pressure port	Gross weight, approx. m kg	Art. no.		EUR
405	1.10	G 1¼	25	2009045	K	1,163.-
406	1.10	G 1¼	25.5	2009046	K	1,295.-
407	2.20	G 1¼	26	2009047	K	1,425.-
408	2.20	G 1¼	31	2009048	K	1,570.-
409	2.20	G 1¼	31.5	2009049	K	1,644.-
410	2.20	G 1¼	32	2009050	K	1,729.-
802	1.10	G 1½	26.5	2009051	K	1,366.-
803	1.10	G 1½	28	2009052	K	1,411.-
804	1.10	G 1½	28.5	2009053	K	1,690.-
805	2.20	G 1½	33.5	2009054	K	1,811.-
806	2.20	G 1½	34.5	2009055	K	1,977.-

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

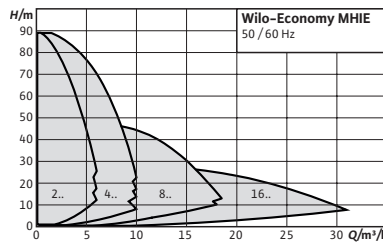

Accessories
Accessories

Page
357

Select 4 online

All information at www.wilo-select.com

Wilo-Economy MHIE



Construction

Non-self-priming multistage pump with integrated frequency converter

Application

- Water supply and pressure boosting
- Irrigation
- Heating
- In industrial systems: Cooling and washing system

Scope of delivery

- Pump
- Installation and operating instructions

Notice

Available on request

Combination with stainless steel 1.4301 and FKM gaskets or stainless steel 1.4404 and EPDM gaskets, supply availability +2 weeks.

Your advantages

- Easy operation and compact design
- All parts in contact with fluid are made of stainless steel
- IEC three-phase motor (level IE2) with integrated frequency converter (frequency converter for 3~motors have optional interfaces for bus communication using plug-in IF-Modules)
- Full motor protection
- Drinking water approval (ACS, KTW, WRAS) for all components in contact with the fluid (EPDM version)

M1 = manual speed control



M2 = automatic mode p = const.


M3 = control by means of external signal 0...10 V/4...20 mA

Price group: PG6

Ordering information 1~230 V							
Economy MHIE	Rated power	Gross weight, approx.	Art. no.		Art. no.		
	P_2 kW	m kg	1.4301		1.4404		
				🚚	EUR	🚚	EUR
205 M1, M3	1.10	18.2	4073100	L	1,961.-	4073104	C 2,141.-
205 M2	1.10	18.2	4073101	L	1,961.-	4073105	C 2,141.-
403 M1, M3	1.10	16.7	4073102	L	1,979.-	4073106	C 2,199.-
403 M2	1.10	16.7	4073103	L	1,979.-	4073107	C 2,199.-

🚚 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Ordering information (3~400 V)								
Economy MHIE	Rated power	Gross weight, approx.	Art. no. 1.4301			Art. no. 1.4404		
				EUR		EUR		
	P_2 kW	m kg						
203N	0.75	18.2	4171764	C	1,814.-	4171765	C	2,003.-
205N-2G	1.10	18.8	4148406	L	1,939.-	4148407	C	2,129.-
206N	1.50	25.5	4171770	C	2,192.-	4171771	C	2,314.-
402N	0.75	18.2	4171776	C	1,889.-	4171777	C	2,003.-
403N-2G	1.10	18.8	4148412	L	1,970.-	4148413	C	2,119.-
404N	1.50	23.8	4171782	C	2,223.-	4171783	C	2,322.-
406N-2G	2.20	26.6	4148418	L	3,049.-	4148419	C	3,330.-
802N	1.50	23.1	4171788	C	2,327.-	4171789	C	2,504.-
803N-2G	2.20	25.4	4148424	L	3,300.-	4148425	C	3,602.-
1602N-2G	2.20	27.5	4148430	L	3,203.-	-	-	-

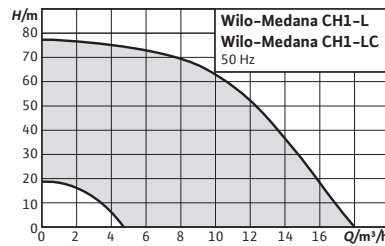

Accessories
Accessories

Page
357

Select 4 online

All information at www.wilo-select.com

Wilo-Medana CH1-L



Construction

Non self-priming horizontal multistage pump

Application

- Water distribution and boosting
- Irrigation
- Industrial process

Scope of delivery

- Pump
- Installation and operating instructions

Your advantages

- High efficiency thanks to high hydraulic output
- Quick and easy commissioning/maintenance thanks to large openings for filling and draining pumps
- Highly reliable and robust with low noise emissions thanks to neck ring and corrosion-resistant lantern with cataphoretic coating
- Suitable for use in ambient temperatures of up to 50 °C and expanded field of application especially for system integration
- Suitable for drinking water applications

Price group: PG6

Ordering information

Materials: Stainless steel 1.4301, gasket type: EPDM

Medana CH1-L	Rated power 1~230 V, 50 Hz	Gross weight, approx.	Art. no.		Rated power 3~400 V, 50 Hz	Gross weight, approx.	Art. no.			
	P_2 kW	m kg		EUR	P_2 kW	m kg		EUR		
202-1	0.37	10.2	4231462	L	485.-	0.37	10.5	4231463	L	429.-
203-1	0.37	10.6	4231464	L	528.-	0.37	10.9	4231465	L	471.-
204-1	0.55	11.6	4231466	L	596.-	0.55	11.2	4231467	L	519.-
205-1	0.55	14.4	4231468	L	617.-	0.55	13	4231469	L	540.-
206-1	0.75	14.8	4231470	L	624.-	0.75	13.4	4231471	L	547.-
207-1	0.75	15.9	4231472	L	700.-	0.75	13.8	4231473	L	619.-
402-1	0.37	10.2	4231474	L	501.-	0.37	10.5	4231475	L	444.-
403-1	0.55	11.2	4231476	L	551.-	0.37	10.9	4231477	L	476.-
404-1	0.55	11.6	4231478	L	585.-	0.55	11.2	4231479	L	509.-
405-1	0.75	14.4	4231480	L	624.-	0.75	13	4231481	L	547.-

= ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Ordering information

Materials: Stainless steel 1.4301, gasket type: EPDM

Medana CH1-L	Rated power 1~230 V, 50 Hz	Gross weight, approx.	Art. no.		EUR	Rated power 3~400 V, 50 Hz	Gross weight, approx.	Art. no.		EUR
	P_2 kW	m kg				P_2 kW	m kg			
406-1	1.10	15.5	4231482	L	739.-	0.75	15.2	4231483	L	608.-
407-1	1.10	15.9	4231484	L	868.-	1.10	15.7	4231485	L	665.-
602-1	0.55	11.4	4231486	L	511.-	0.55	11	4231487	L	437.-
603-1	1.10	15	4231488	L	739.-	1.10	14.8	4231489	L	608.-
604-1	1.10	19.1	4231490	L	808.-	1.10	15.5	4231491	L	720.-
605-1	1.50	19.8	4231492	L	1,075.-	1.50	19.4	4231493	L	833.-
1002-1	1.10	14.4	4231494	L	778.-	1.10	14.1	4231495	L	646.-
1003-1	1.50	18.4	4231496	L	810.-	1.50	18	4231497	L	692.-
1004-1	-	-	-	-	-	1.85	22	4231498	L	760.-
1005-1	-	-	-	-	-	2.50	22.7	4231499	L	1,034.-


Ordering information

Materials: Stainless steel 1.4404, gasket type: FKM

Medana CH1-L	Rated power 1~230 V, 50 Hz	Gross weight, approx.	Art. no.		EUR	Rated power 3~400 V, 50 Hz	Gross weight, approx.	Art. no.		EUR
	P_2 kW	m kg				P_2 kW	m kg			
202-2	0.37	10.2	4235324	C	553.-	0.37	10.5	4235325	C	495.-
203-2	0.37	10.6	4235326	C	608.-	0.37	10.9	4235327	C	548.-
204-2	0.55	11.6	4235328	C	682.-	0.55	11.2	4235329	C	603.-
205-2	0.55	14.4	4235330	C	698.-	0.55	13	4235331	C	618.-
206-2	0.75	14.8	4235332	C	714.-	0.75	13.4	4235333	C	634.-
207-2	0.75	15.9	4235334	C	769.-	0.75	13.8	4235335	C	686.-
402-2	0.37	10.2	4235336	C	574.-	0.37	10.5	4235337	C	515.-
403-2	0.55	11.2	4235338	C	628.-	0.37	10.9	4235339	C	551.-
404-2	0.55	11.6	4235340	C	668.-	0.55	11.2	4235341	C	589.-
405-2	0.75	14.4	4235342	C	716.-	0.75	13	4235343	C	636.-
406-2	1.10	15.5	4235344	C	823.-	0.75	15.2	4235345	C	689.-
407-2	1.10	15.9	4235346	C	926.-	1.10	15.7	4235347	C	720.-
602-2	0.55	11.4	4235348	C	600.-	0.55	11	4235349	C	523.-
603-2	1.10	15	4235350	C	854.-	1.10	14.8	4235351	C	720.-
604-2	1.10	19.1	4235352	C	942.-	1.10	14	4235353	C	869.-
605-2	1.50	19.8	4235354	C	1,210.-	1.50	19.4	4235355	C	962.-
1002-2	1.10	14.4	4235356	C	819.-	1.10	14.1	4235357	C	732.-
1003-2	1.50	18.4	4235358	C	920.-	1.50	18	4235359	C	818.-
1004-2	-	-	-	-	-	1.85	22	4235360	C	1,118.-
1005-2	-	-	-	-	-	2.50	22.7	4235361	C	1,169.-

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

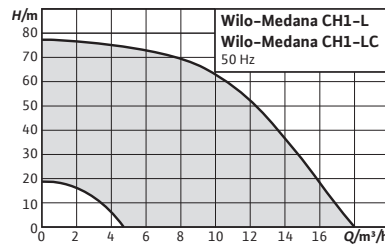

Accessories
Accessories

Page
357

Select 4 online

All information at www.wilo-select.com

Wilo-Medana CH1-LC



Construction

Non self-priming horizontal multistage pump.

Application

- Water distribution and boosting
- Irrigation
- Industrial process

Scope of delivery

- Pump
- Installation and operating instructions

Your advantages

- High efficiency thanks to high hydraulic output
- Highly reliable and robust with low noise emissions thanks to neck ring and corrosion-resistant lantern with cataphoretic coating
- Suitable for use in ambient temperatures of up to 50 °C – which means an expanded field of application for solar panels, especially for system integration

Price group: PG6

Ordering information

Materials: Stainless steel 1.4301, gasket type: EPDM



Medana CH1-LC	Rated power 1~230 V, 50 Hz	Gross weight, approx.	Art. no.		Rated power 3~400 V, 50 Hz	Gross weight, approx.	Art. no.		
	P_2 kW	m kg			P_2 kW	m kg			EUR
202-5	0.37	13.1	4233356	L	445.-	0.37	13.2	4233357	444.-
203-5	0.37	13.4	4233358	L	470.-	0.37	13.5	4233359	469.-
204-5	0.55	14.4	4233360	L	506.-	0.55	13.7	4233361	507.-
205-5	0.55	14.7	4233362	L	529.-	0.55	14.1	4233363	530.-
206-5	0.75	17.4	4233364	L	562.-	0.75	16	4233365	580.-
207-5	0.75	17.8	4233366	L	604.-	0.75	16.4	4233367	621.-
402-5	0.37	13.1	4233368	L	445.-	0.37	13.2	4233369	444.-
403-5	0.55	14	4233370	L	482.-	0.37	13.5	4231436	469.-
404-5	0.55	14.4	4231432	L	506.-	0.55	13.7	4233371	507.-
405-5	0.75	17.1	4233372	L	546.-	0.75	15.7	4233373	563.-
406-5	1.10	18.1	4233374	L	622.-	0.75	16	4233375	580.-
407-5	-	-	-	-	-	1.10	18.2	4233376	651.-



= ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, = please contact Wilo


Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Ordering information

Materials: Stainless steel 1.4301, gasket type: EPDM

Medana CH1-LC	Rated power 1~230 V, 50 Hz	Gross weight, approx.	Art. no.		Rated power 3~400 V, 50 Hz	Gross weight, approx.	Art. no.			
	P_2 kW	m kg			EUR	P_2 kW	m kg			EUR
602-5	0.55	14.7	4233377	L	482.-	0.55	14.1	4231437	L	482.-
603-5	1.10	18.3	4231433	L	590.-	1.10	18.1	4233378	L	576.-
604-5	1.10	18.9	4233379	L	612.-	1.10	18.6	4233380	L	600.-
605-5	1.50	22.8	4231434	L	745.-	1.50	22.4	4233381	L	699.-
606-5	-	-	-	-	-	1.85	26.6	4233382	L	768.-
1002-5	1.10	17.5	4231435	L	547.-	1.10	17.3	4233383	L	545.-
1003-5	1.50	21.5	4233384	L	655.-	1.50	21.1	4231438	L	634.-
1004-5	-	-	-	-	-	1.85	25.3	4231439	L	833.-
1005-5	-	-	-	-	-	2.50	26.4	4233385	L	940.-
1006-5	-	-	-	-	-	3.00	30	4233386	L	1,027.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

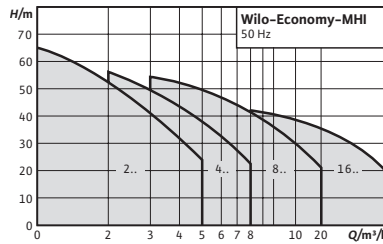

Accessories
Accessories

Page
357

Select 4 online

All information at www.wilo-select.com

Wilo-Economy MHI



Construction

Non self-priming multistage pump

Application

- Water supply and pressure boosting
- Irrigation
- Heating
- In industrial systems (foodstuff industry, renewable energies, shipbuilding): Cooling and washing system

Scope of delivery

- Pump
- Installation and operating instructions

Notice

Versions with other mechanical seals **on request**
Available on request (not MHI 16...):

Your advantages

- IE3 IEC three-phase AC motor (≥ 0.75 kW)
- All parts that come in contact with the fluid are made of stainless steel 1.4301 (AISI 304) or 1.4404 (AISI 316L)
- Space-saving, compact design
- Drinking water approval (ACS, KTW, WRAS) for all components in contact with the fluid (EPDM version)

Combination with 1.4301 stainless steel and FKM seals or 1.4404 stainless steel and EPDM seals, supply availability + 2 weeks.



Price group: PG6



Ordering information



Materials: Stainless steel 1.4301, gasket type: EPDM


Economy MHI	Rated power	Gross weight, approx.	Art. no.		EUR	Rated power	Gross weight, approx.	Art. no.		EUR
	1~230 V, 50 Hz	m kg				3~400 V, 50 Hz	m kg			
202	0.55	11.3	4024282	L	387.-	0.55	10.4	4024283	L	352.-
203	0.55	11.3	4024284	L	441.-	0.55	10.4	4024285	L	402.-
204	0.55	12.1	4024286	L	521.-	0.55	11.2	4024287	L	475.-
205	0.75	13.7	4024288	L	554.-	0.75	15.2	4210718	L	504.-
206	1.10	17.2	4024290	L	594.-	1.10	17.4	4210722	L	585.-
402	0.55	11.3	4024292	L	413.-	0.55	10.4	4024293	L	375.-
403	0.55	12.2	4024294	L	471.-	0.55	11.3	4024295	L	429.-

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Ordering information										
Materials: Stainless steel 1.4301, gasket type: EPDM										
Economy MHI	Rated power 1~230 V, 50 Hz	Gross weight, approx.	Art. no.		Rated power 3~400 V, 50 Hz	Gross weight, approx.	Art. no.			
	P_2 kW	m kg			EUR	P_2 kW	m kg			EUR
404	0.75	13.7	4024296	L	555.-	0.75	15.1	4210725	L	504.-
405	1.10	16.7	4024298	L	633.-	1.10	16.6	4210732	L	576.-
406	1.50	19.3	4024300	L	690.-	1.10	17.5	4210735	L	626.-
801	-	-	-	-	-	0.75	13.7	4210738	C	630.-
802	0.75	17.3	4024302	L	715.-	0.75	14.1	4210739	L	651.-
803	1.10	16	4024304	L	805.-	1.10	15.6	4210743	L	733.-
804	1.50	17.5	4024306	L	894.-	1.50	20.4	4210747	L	815.-
805	-	-	-	-	-	2.20	22.8	4210750	L	872.-
1602	-	-	-	-	-	1.50	19.7	4210710	L	881.-
1603	-	-	-	-	-	2.20	22.1	4210713	L	947.-
1604	-	-	-	-	-	2.20	23.1	4210715	L	1,128.-

Ordering information										
Materials: Stainless steel 1.4404, gasket type: FKM										
Economy MHI	Rated power 1~230 V, 50 Hz	Gross weight, approx.	Art. no.		Rated power 3~400 V, 50 Hz	Gross weight, approx.	Art. no.			
	P_2 kW	m kg			EUR	P_2 kW	m kg			EUR
202	0.55	11.3	4015676	C	558.-	0.55	10.4	4015677	C	497.-
203	0.55	11.3	4015678	C	634.-	0.55	10.4	4015679	C	567.-
204	0.55	12.1	4015680	C	750.-	0.55	11.2	4015681	C	662.-
205	0.75	13.7	4015682	C	794.-	0.75	15.2	4210721	C	703.-
206	1.10	17.2	4015684	C	856.-	1.10	17.4	4210724	C	818.-
402	0.55	11.3	4015686	C	591.-	0.55	10.4	4015687	C	521.-
403	0.55	12.2	4015688	C	679.-	0.55	11.3	4015689	C	600.-
404	0.75	13.7	4015690	C	795.-	0.75	15.1	4210731	C	706.-
405	1.10	16.7	4015692	C	914.-	1.10	16.6	4210734	C	804.-
406	1.50	19.3	4015694	C	995.-	1.10	17.5	4210737	C	880.-
802	0.75	17.3	4015696	C	1,032.-	0.75	14.1	4210742	C	932.-
803	1.10	16	4015698	C	1,159.-	1.10	15.6	4210746	C	1,024.-
804	1.50	17.5	4015700	C	1,286.-	1.50	20.4	4210749	C	1,136.-
805	-	-	-	-	-	2.20	22.8	4210752	C	1,237.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

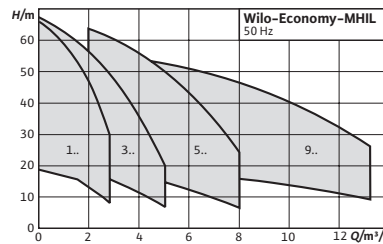

Accessories
Accessories

Page
357

Select 4 online

All information at www.wilo-select.com

Wilo-Economy MHIL



Construction

Non-self-priming, multistage pump

Application

- Water supply and pressure boosting
- Irrigation
- Heating
- In industrial systems (foodstuff industry, renewable energies): Cooling and washing system

Your advantages

- IE3 IEC three-phase AC motor (≥ 0.75 kW)
- Impellers and stage housing made of stainless steel
- Pump housing made of EN-GJL-250 cast iron, KTL coating
- Single-phase and three-phase versions available

Scope of delivery

- Pump
- Installation and operating instructions

Notice

Connections for suction and pressure side: MHIL 1... and MHIL 3...: Rp 1 / Rp 1 MHIL 5...: Rp 1½ / Rp 1 MHIL 9...: Rp 1½ / Rp 1¼ versions with special gaskets or mechanical seals on request.

Price group: PG5

Ordering information

Materials: 1.4301 stainless steel, EPDM seals, mechanical seal tungsten carbide/carbon



Economy MHIL	Rated power	Gross weight, approx.	Art. no.		EUR	Rated power	Gross weight, approx.	Art. no.		EUR
	1~230 V, 50 Hz	m kg				3~400 V, 50 Hz	m kg			
	P_2 kW	m kg				P_2 kW	m kg			
102	0.55	14.1	4083883	L	297.-	0.55	13.9	4083882	L	290.-
103	0.55	14.4	4083885	L	356.-	0.55	14.2	4083884	L	348.-
104	0.55	14.7	4083887	L	413.-	0.55	14.6	4083886	C	400.-
105	0.55	15	4083888	L	446.-	0.55	14.9	4083889	C	430.-
106	0.55	15.4	4083890	L	481.-	0.55	15.2	4083891	L	469.-
107	0.55	15.7	4083893	C	605.-	0.55	15.5	4083892	C	591.-
302	0.55	14.4	4083894	L	326.-	0.55	14.2	4083895	L	312.-
303	0.55	14.6	4083896	L	367.-	0.55	14.5	4083897	L	365.-
304	0.55	14.9	4083898	L	439.-	0.55	14.7	4083899	L	436.-

= ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.



Ordering information

Materials: 1.4301 stainless steel, EPDM seals, mechanical seal tungsten carbide/carbon

Economy MHIL	Rated power 1~230 V, 50 Hz	Gross weight, approx.	Art. no.			Rated power 3~400 V, 50 Hz	Gross weight, approx.	Art. no.		
	P_2 kW	m kg			EUR	P_2 kW	m kg			EUR
305	0.75	16.5	4083901	L	504.-	0.75	18.1	4210650	L	478.-
306	1.10	19.2	4083902	L	586.-	1.10	19.5	4210653	L	567.-
502	0.55	14.4	4083904	L	346.-	0.55	14.2	4083905	L	332.-
503	0.55	14.7	4083906	L	400.-	0.55	14.5	4083907	L	387.-
504	0.75	16.3	4083908	L	491.-	0.75	17.7	4210656	L	466.-
505	1.10	19	4083910	L	587.-	1.10	19.5	4210659	L	555.-
506	1.50	20.9	4083913	L	642.-	1.50	24	4210662	L	610.-
902	0.75	15.7	4083914	L	646.-	0.75	16.4	4210665	L	613.-
903	1.10	18.5	4083916	L	743.-	1.10	18.3	4210667	L	714.-
904	1.50	20.3	4083918	L	831.-	1.50	22.9	4210669	L	815.-
905	-	-	-	A	☎	2.20	25.7	4210671	L	861.-

☎ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

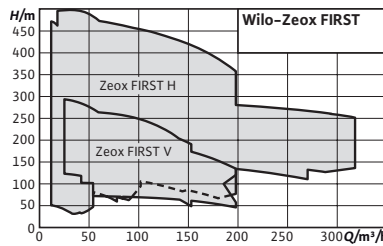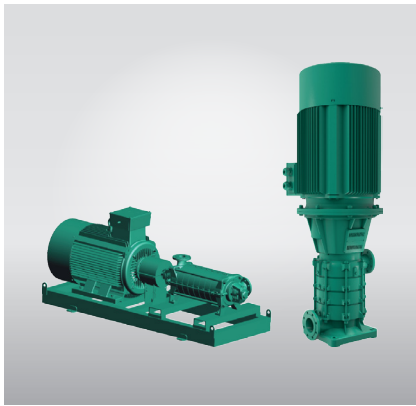

Accessories
Accessories

Page
357

Select 4 online

All information at www.wilo-select.com



Wilo-Zeox FIRST

Construction

Non self-priming, highly efficient high-pressure multi-stage centrifugal pump

Application

- Professional irrigation/agriculture
- Water supply/pressure boosting
- Fire fighting
- Heating, air-conditioning, cooling

Scope of delivery

- Horizontal pump system with motor, coupling, base-plate and pump or
- vertical pump system with motor, coupling and pump
- Installation and operating instructions

Your advantages


- Extremely efficient hydraulics and highly-efficient IE3 motor with standard-mounted PTC sensor
- Pump set standard mounted with rigid coupling between motor and hydraulics and with mechanical seal
- Standard-mounted bypass flushing device guarantees a long service life for the mechanical seal
- Clever flange positioning and stuffing box gland upon request
- Bronze impellers upon request for high reliability

Price group: PG6


Ordering information						
Zeox FIRST	Gross weight, approx.	Rated power	Art. no.			
	<i>m</i> kg	<i>P₂</i> kW				
						EUR
V 6003/A-30-2	416	30.00	4191940	A		10,197.-
V 6003/A-37-2	439	37.00	4191942	A		10,532.-
V 6003/A-45-2	608	45.00	4191943	A		12,987.-
V 6003/B-30-2	416	30.00	4191939	A		10,197.-
V 6003/B-37-2	439	37.00	4191941	A		10,532.-
V 6004/A-55-2	740	55.00	4191946	A		15,633.-
V 6004/B-45-2	631	45.00	4191944	A		13,510.-
V 6004/B-55-2	740	55.00	4191945	A		15,633.-
V 6005/A-55-2	762	55.00	4191947	A		16,392.-
V 6005/A-75-2	1070	75.00	4192962	A		19,006.-
V 9003/A-45-2	608	45.00	4191948	A		13,136.-
V 9003/B-45-2	608	45.00	4191949	A		13,136.-

= ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG6

Ordering information					
Zeox FIRST	Gross weight, approx.	Rated power	Art. no.		
	<i>m</i> kg	<i>P</i> ₂ kW			EUR
V 9003/B-55-2	684	55.00	4191950	A	15,277.-
V 9004/A-75-2	1007	75.00	4191951	A	18,056.-
V 12002-45-2	630	45.00	4191952	A	16,316.-
V 12002-55-2	706	55.00	4191953	A	18,455.-
V 12002-75-2	988	75.00	4191954	A	20,503.-
V 12003-90-2	1059	90.00	4191955	A	22,543.-
V 12003-110-2	1340	110.00	4191956	A	25,279.-
V 12004-110-2	1345	110.00	4191957	A	26,905.-
V 16001-37-2	428	37.00	4191958	A	12,920.-
V 16001-45-2	597	45.00	4191959	A	15,377.-
V 16002-55-2	706	55.00	4191960	A	18,566.-
V 16002-75-2	988	75.00	4191961	A	20,608.-
V 16002-90-2	1026	90.00	4191962	A	21,709.-
V 16003-110-2	1340	110.00	4191963	A	25,485.-


Price group: PG6



Ordering information					
Zeox FIRST	Gross weight, approx.	Rated power	Art. no.		
	<i>m</i> kg	<i>P</i> ₂ kW			EUR
H 3202-5,5-2	161	5.50	4191741	A	11,687.-
H 3202-7,5-2	161	7.50	4191740	A	11,793.-
H 3202-9-2	161	9.00	4191739	A	12,010.-
H 3203-7,5-2	173	7.50	4191745	A	12,295.-
H 3203-9-2	173	9.00	4191744	A	12,514.-
H 3203-11-2	178	11.00	4191743	A	12,924.-
H 3203-15-2	179	15.00	4191742	A	13,073.-
H 3204-9-2	192	9.00	4191749	A	13,017.-
H 3204-11-2	191	11.00	4191748	A	13,427.-
H 3204-15-2	191	15.00	4191747	A	13,576.-
H 3204-18,5-2	189	18.50	4191746	A	13,829.-
H 3205-11-2	207	11.00	4191753	A	14,071.-
H 3205-15-2	207	15.00	4191752	A	14,219.-
H 3205-18,5-2	207	18.50	4191751	A	14,472.-
H 3205-22-2	207	22.00	4191750	A	15,085.-
H 3206-15-2	344	15.00	4191757	A	14,240.-
H 3206-18,5-2	374	18.50	4191756	A	14,601.-
H 3206-22-2	415	22.00	4191755	A	15,193.-
H 3206-30-2	491	30.00	4191754	A	16,505.-
H 3207-15-2	368	15.00	4191761	A	14,849.-
H 3207-18,5-2	586	18.50	4191760	A	15,103.-
H 3207-22-2	427	22.00	4191759	A	15,697.-
H 3207-30-2	510	30.00	4191758	A	16,867.-
H 3208-18,5-2	405	18.50	4191765	A	15,660.-
H 3208-22-2	446	22.00	4191764	A	16,207.-
H 3208-30-2	521	30.00	4191763	A	17,368.-
H 3208-37-2	543	37.00	4191762	A	17,564.-


 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG6

Ordering information						
Zeox FIRST	Gross weight, approx.	Rated power	Art. no.			
	m kg	P_2 kW			EUR	
H 3209-18,5-2	388	18.50	4191769	A	16,163.-	
H 3209-22-2	457	22.00	4191768	A	16,710.-	
H 3209-30-2	533	30.00	4191767	A	17,870.-	
H 3209-37-2	555	37.00	4191766	A	18,066.-	
H 3210-22-2	469	22.00	4191773	A	17,212.-	
H 3210-30-2	552	30.00	4191772	A	18,943.-	
H 3210-37-2	574	37.00	4191771	A	19,139.-	
H 3210-45-2	685	45.00	4191770	A	21,208.-	
H 3211-22-2	488	22.00	4191777	A	18,135.-	
H 3211-30-2	545	30.00	4191776	A	19,447.-	
H 3211-37-2	585	37.00	4191775	A	19,643.-	
H 3211-45-2	746	45.00	4191774	A	21,710.-	
H 3212-30-2	575	30.00	4191781	A	19,951.-	
H 3212-37-2	597	37.00	4191780	A	20,146.-	
H 3212-45-2	758	45.00	4191779	A	22,850.-	
H 3212-55-2	838	55.00	4191778	A	23,230.-	
H 3213-30-2	586	30.00	4191785	A	20,453.-	
H 3213-37-2	608	37.00	4191784	A	20,649.-	
H 3213-45-2	769	45.00	4191783	A	22,716.-	
H 3213-55-2	851	55.00	4191782	A	24,372.-	
H 4202-7,5-2	161	7.50	4191789	A	11,830.-	
H 4202-9-2	161	9.00	4191788	A	12,049.-	
H 4202-11-2	160	11.00	4191787	A	12,457.-	
H 4202-15-2	160	15.00	4191786	A	12,606.-	
H 4203-9-2	173	9.00	4191793	A	12,568.-	
H 4203-11-2	178	11.00	4191792	A	12,977.-	
H 4203-15-2	179	15.00	4191791	A	13,127.-	
H 4203-18,5-2	179	18.50	4191790	A	13,379.-	
H 4204-15-2	353	15.00	4191797	A	13,649.-	
H 4204-18,5-2	374	18.50	4191796	A	13,902.-	
H 4204-22-2	410	22.00	4191795	A	14,515.-	
H 4204-30-2	484	30.00	4191794	A	15,952.-	
H 4205-15-2	372	15.00	4191801	A	14,309.-	
H 4205-18,5-2	397	18.50	4191800	A	14,563.-	
H 4205-22-2	433	22.00	4191799	A	15,177.-	
H 4205-30-2	514	30.00	4191798	A	16,578.-	
H 4206-18,5-2	374	18.50	4191805	A	15,190.-	
H 4206-22-2	415	22.00	4191804	A	15,783.-	
H 4206-30-2	491	30.00	4191803	A	17,095.-	
H 4206-37-2	513	37.00	4191802	A	17,291.-	
H 4207-22-2	427	22.00	4191809	A	15,821.-	
H 4207-30-2	510	30.00	4191808	A	17,007.-	
H 4207-37-2	532	37.00	4191807	A	17,187.-	
H 4207-45-2	691	45.00	4191806	A	19,418.-	
H 4208-30-2	543	30.00	4191813	A	17,531.-	
H 4208-37-2	543	37.00	4191812	A	17,711.-	


 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.



Ordering information						
Zeox FIRST	Gross weight, approx.	Rated power	Art. no.			
	<i>m</i> kg	<i>P₂</i> kW			EUR	
H 4208-45-2	703	45.00	4191811	A	19,942.-	
H 4208-55-2	791	55.00	4191810	A	21,365.-	
H 4209-30-2	533	30.00	4191817	A	18,052.-	
H 4209-37-2	555	37.00	4191816	A	18,230.-	
H 4209-45-2	722	45.00	4191815	A	20,868.-	
H 4209-55-2	803	55.00	4191814	A	21,887.-	
H 4210-37-2	574	37.00	4191821	A	19,320.-	
H 4210-45-2	685	45.00	4191820	A	21,388.-	
H 4210-55-2	814	55.00	4191819	A	22,406.-	
H 4210-75-2	1090	75.00	4191818	A	26,044.-	
H 4211-37-2	585	37.00	4191825	A	19,841.-	
H 4211-45-2	746	45.00	4191824	A	21,908.-	
H 4211-55-2	826	55.00	4191823	A	22,925.-	
H 4211-75-2	1122	75.00	4191822	A	26,564.-	
H 4212-37-2	597	37.00	4191829	A	20,364.-	
H 4212-45-2	758	45.00	4191828	A	23,067.-	
H 4212-55-2	838	55.00	4191827	A	23,448.-	
H 4212-75-2	1133	75.00	4191826	A	27,086.-	
H 6002-18,5-2	337	18.50	4191832	A	13,297.-	
H 6002-22-2	373	22.00	4191831	A	13,967.-	
H 6002-30-2	443	30.00	4191830	A	15,296.-	
H 6003-22-2	405	22.00	4191836	A	14,210.-	
H 6003-30-2	489	30.00	4191835	A	15,667.-	
H 6003-37-2	511	37.00	4191834	A	15,864.-	
H 6003-45-2	666	45.00	4191833	A	17,930.-	
H 6004-37-3	542	37.00	4191839	A	17,425.-	
H 6004-45-2	697	45.00	4191838	A	18,789.-	
H 6004-55-2	783	55.00	4191837	A	19,820.-	
H 6005-45-2	723	45.00	4191842	A	19,554.-	
H 6005-55-2	801	55.00	4191841	A	20,573.-	
H 6005-75-2	1075	75.00	4191840	A	23,886.-	
H 6006-55-2	831	55.00	4191845	A	21,745.-	
H 6006-75-2	1109	75.00	4191844	A	24,744.-	
H 6006-90-2	1142	90.00	4191843	A	25,439.-	
H 6007-75-2	1128	75.00	4191848	A	25,500.-	
H 6007-90-2	1160	90.00	4191847	A	26,192.-	
H 6007-110-2	1411	110.00	4191846	A	28,619.-	
H 6008-75-2	1147	75.00	4191851	A	26,254.-	
H 6008-90-2	1180	90.00	4191850	A	26,948.-	
H 6008-110-2	1430	110.00	4191849	A	29,376.-	
H 6009-75-2	1181	75.00	4191855	A	27,645.-	
H 6009-90-2	1213	90.00	4191854	A	28,340.-	
H 6009-110-2	1448	110.00	4191853	A	30,128.-	
H 6009-132-2	1541	132.00	4191852	A	31,912.-	
H 9002-22-2	373	22.00	4191858	A	14,089.-	
H 9002-30-2	443	30.00	4191857	A	15,418.-	


 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG6

Ordering information						
Zeox FIRST	Gross weight, approx.	Rated power	Art. no.			
	m kg	P_2 kW			EUR	
H 9002-37-2	459	37.00	4191856	A	15,597.-	
H 9003-30-2	489	30.00	4191862	A	15,866.-	
H 9003-37-2	511	37.00	4191861	A	16,045.-	
H 9003-45-2	666	45.00	4191860	A	18,111.-	
H 9003-55-2	755	55.00	4191859	A	19,235.-	
H 9004-37-2	542	37.00	4191866	A	16,963.-	
H 9004-45-2	697	45.00	4191865	A	19,029.-	
H 9004-55-2	783	55.00	4191864	A	20,060.-	
H 9004-75-2	1061	75.00	4191863	A	22,702.-	
H 9005-55-2	801	55.00	4191869	A	20,875.-	
H 9005-75-2	1075	75.00	4191868	A	24,187.-	
H 9005-90-2	1118	90.00	4191867	A	24,985.-	
H 9006-75-2	1109	75.00	4191872	A	25,106.-	
H 9006-90-2	1142	90.00	4191871	A	25,800.-	
H 9006-110-2	1392	110.00	4191870	A	27,593.-	
H 9007-75-2	1128	75.00	4191876	A	25,922.-	
H 9007-90-2	1160	90.00	4191875	A	26,615.-	
H 9007-110-2	1411	110.00	4191874	A	29,042.-	
H 9007-132-2	1503	132.00	4191873	A	30,825.-	
H 9008-90-2	1180	90.00	4191880	A	27,431.-	
H 9008-110-2	1430	110.00	4191879	A	29,860.-	
H 9008-132-2	1522	132.00	4191878	A	31,643.-	
H 9008-160-2	1647	160.00	4191877	A	36,052.-	
H 12002-45-2	627	45.00	4191883	A	19,761.-	
H 12002-55-2	853	55.00	4191882	A	20,639.-	
H 12002-75-2	1126	75.00	4191881	A	24,099.-	
H 12003-75-2	1172	75.00	4191886	A	25,254.-	
H 12003-90-2	1205	90.00	4191885	A	25,949.-	
H 12003-110-2	1438	110.00	4191884	A	27,733.-	
H 12004-90-2	1052	90.00	4191890	A	26,994.-	
H 12004-110-2	1475	110.00	4191889	A	29,416.-	
H 12004-132-2	1567	132.00	4191888	A	31,200.-	
H 12004-160-2	1689	160.00	4191887	A	35,616.-	
H 12005-110-2	1470	110.00	4191894	A	30,468.-	
H 12005-132-2	1604	132.00	4191893	A	32,324.-	
H 12005-160-2	1726	160.00	4191892	A	36,666.-	
H 12005-200-2	1962	200.00	4191891	A	48,405.-	
H 12006-132-2	1605	132.00	4191898	A	33,371.-	
H 12006-160-2	1775	160.00	4191897	A	37,713.-	
H 12006-200-2	1962	200.00	4191896	A	49,452.-	
H 12006-250-2	2340	250.00	4191895	A	56,946.-	
H 16002-55-2	853	55.00	4191902	A	20,812.-	
H 16002-75-2	1126	75.00	4191901	A	24,276.-	
H 16002-90-2	1159	90.00	4191900	A	24,969.-	
H 16002-110-2	1401	110.00	4191899	A	26,935.-	
H 16003-75-2	1172	75.00	4191907	A	25,452.-	

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Ordering information						
Zeox FIRST	Gross weight, approx.	Rated power		Art. no.		
	<i>m</i> kg		<i>P₂</i> kW			EUR
H 16003-90-2	1205		90.00	4191906	A	26,145.-
H 16003-110-2	1438		110.00	4191905	A	27,932.-
H 16003-132-2	1530		132.00	4191904	A	29,714.-
H 16003-160-2	1652		160.00	4191903	A	34,229.-
H 16004-110-2	1475		110.00	4191911	A	29,639.-
H 16004-132-2	1567		132.00	4191910	A	31,422.-
H 16004-160-2	1689		160.00	4191909	A	35,838.-
H 16004-200-2	1876		200.00	4191908	A	47,576.-
H 16005-132-2	1604		132.00	4191915	A	32,567.-
H 16005-160-2	1726		160.00	4191914	A	36,907.-
H 16005-200-2	1962		200.00	4191913	A	48,646.-
H 16005-250-2	2350		250.00	4191912	A	56,140.-
H 16006-160-2	1775		160.00	4191919	A	37,978.-
H 16006-200-2	1962		200.00	4191918	A	49,717.-
H 16006-250-2	2340		250.00	4191917	A	57,210.-
H 16006-315-2	2765		315.00	4191916	A	64,590.-
H 20002-90-2	630		90.00	4191923	A	36,475.-
H 20002-110-2	1827		110.00	4191922	A	41,084.-
H 20002-132-2	1925		132.00	4191921	A	42,884.-
H 20002-160-2	2011		160.00	4191920	A	47,113.-
H 20003-160-2	2085		160.00	4191926	A	50,563.-
H 20003-200-2	2272		200.00	4191925	A	62,304.-
H 20003-250-2	2497		250.00	4191924	A	67,163.-
H 24002-132-2	1925		132.00	4191929	A	43,515.-
H 24002-160-2	2011		160.00	4191928	A	47,716.-
H 24002-200-2	2198		200.00	4191927	A	59,456.-
H 24003-200-2	2272		200.00	4191932	A	63,209.-
H 24003-250-2	2497		250.00	4191931	A	68,069.-
H 24003-315-2	2870		315.00	4191930	A	75,447.-
H 28002-132-2	1925		132.00	4191935	A	44,092.-
H 28002-160-2	2011		160.00	4191934	A	48,320.-
H 28002-200-2	2198		200.00	4191933	A	60,058.-
H 28003-200-2	2272		200.00	4191938	A	64,114.-
H 28003-250-2	2497		250.00	4191937	A	68,974.-
H 28003-315-2	2870		315.00	4191936	A	76,351.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG14

Accessories for high-pressure multistage centrifugal pumps

Type	Description	Art. no.			EUR
Stainless steel counter flange (oval, 2 piece), PN16/DN25	Set comprising 2 counter flanges as oval flange with 1.4308 female thread for Helix V, MVI pump series in PN 16 including screws. Please order seals separately (in EPDM or FKM design depending on the pump use)!	PN 16/DN 25	4016168	A	73.-
Stainless steel counter flange (oval, 2 piece), PN16/DN32	Set comprising 2 counter flanges as oval flange with 1.4308 female thread for Helix V, MVI pump series in PN 16 including screws. Please order seals separately (in EPDM or FKM design depending on the pump use)!	PN 16/DN 32	4016169	K	77.-
Stainless steel counter flange (oval, 2 piece), PN16/DN40	Set comprising 2 counter flanges as oval flange with 1.4308 female thread for Helix V, MVI pump series in PN 16 including screws. Please order seals separately (in EPDM or FKM design depending on the pump use)!	PN 16/DN 40	4016170	K	106.-
Stainless steel counter flange (oval, 2 piece), PN16/DN50	Set comprising 2 counter flanges as oval flange with 1.4308 female thread for Helix V, MVI pump series in PN 16 including screws. Please order seals separately (in EPDM or FKM design depending on the pump use)!	PN 16/DN 50	4055063	A	431.-
Stainless steel-counter flange (round, 2 pieces), PN 25/PN 40 DN 25	Kit comprising 2 counter flanges in material version AISI316L (1.4404), screws, nuts and flat gaskets for pump series Helix FIRST/V/VE/EXCEL, MVI/MVIE	PN 25/PN 40 DN 25	4016165	C	364.-
Stainless steel-counter flange (round, 2 pieces), PN 25/PN 40 DN 32	Kit comprising 2 counter flanges in material version AISI316L (1.4404), screws, nuts and flat gaskets for pump series Helix FIRST/V/VE/EXCEL, MVI/MVIE	PN 25/PN 40 DN 32	4016166	A	487.-
Stainless steel-counter flange (round, 2 pieces), PN 25/PN 40 DN 40	Kit comprising 2 counter flanges in material version AISI316L (1.4404), screws, nuts and flat gaskets for pump series Helix FIRST/V/VE/EXCEL, MVI/MVIE	PN 25/PN 40 DN 40	4016167	C	533.-
Stainless steel counter flange (round, 2 piece), PN 16 DN 50	Kit comprising 2 counter flanges in material version AISI316L (1.4404), screws, nuts and flat gaskets for pump series Helix FIRST/V/VE/EXCEL, MVI/MVIE	PN 16 DN 50	4038587	C	635.-
Stainless steel-counter flange (round, 2 pieces), PN 25/PN 40 DN 50	Kit comprising 2 counter flanges in material version AISI316L (1.4404), screws, nuts and flat gaskets for pump series Helix FIRST/V/VE/EXCEL, MVI/MVIE	PN 25/PN 40 DN 50	4038589	C	811.-
Stainless steel counter flange (round, 2 piece), PN 16 DN 65	Kit comprising 2 counter flanges in material version AISI316L (1.4404), screws, nuts and flat gaskets for pump series Helix FIRST/V/VE/EXCEL, MVI/MVIE	PN 16 DN 65	4038592	C	976.-
Stainless steel-counter flange (round, 2 pieces), PN 25/PN 40 DN 65	Kit comprising 2 counter flanges in material version AISI316L (1.4404), screws, nuts and flat gaskets for pump series Helix FIRST/V/VE/EXCEL, MVI/MVIE	PN 25/PN 40 DN 65	4038594	C	1,035.-
Stainless steel counter flange (round, 2 piece), PN 16 DN 80	Kit comprising 2 counter flanges in material version AISI316L (1.4404), screws, nuts and flat gaskets for pump series Helix FIRST/V/VE/EXCEL, MVI/MVIE	PN 16 DN 80	4073797	A	1,492.-
Stainless steel-counter flange (round, 2 pieces), PN 25/PN 40 DN 80	Kit comprising 2 counter flanges in material version AISI316L (1.4404), screws, nuts and flat gaskets for pump series Helix FIRST/V/VE/EXCEL, MVI/MVIE	PN 25/PN 40 DN 80	4073799	C	1,677.-
Stainless steel counter flange (round, 2 piece), PN 16 DN 100	Kit comprising 2 counter flanges in material version AISI316L (1.4404), screws, nuts and flat gaskets for pump series Helix FIRST/V/VE/EXCEL, MVI/MVIE	PN 16 DN 100	4073801	C	1,694.-
Stainless steel-counter flange (round, 2 pieces), PN 25/PN 40 DN 100	Kit comprising 2 counter flanges in material version AISI316L (1.4404), screws, nuts and flat gaskets for pump series Helix FIRST/V/VE/EXCEL, MVI/MVIE	PN 25/PN 40 DN 100	4073803	C	1,941.-
Steel counter flange (round, 2 pieces), PN 25/PN 40 DN 25	Set comprising 2 counter flanges in steel material version for pump series HELIX FIRST/V/VE/EXCEL, MVI/MVIE	PN 25/PN 40 DN 25	4016162	C	131.-

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Accessories for high-pressure multistage centrifugal pumps					
Type	Description	Art. no.			EUR
Steel counter flange (round, 2 pieces), PN 25/PN 40 DN 32	Set comprising 2 counter flanges in steel material version for pump series HELIX FIRST/V/VE/EXCEL, MVI/MVIE	PN 25/PN 40 DN 32	4016163	 K	152.-
Steel counter flange (round, 2 pieces), PN 25/PN 40 DN 40	Set comprising 2 counter flanges in steel material version for pump series HELIX FIRST/V/VE/EXCEL, MVI/MVIE	PN 25/PN 40 DN 40	4016164	C	185.-
Steel counter flange (round, 2 pieces), PN 16 DN 50	Set comprising 2 counter flanges in steel material version for pump series HELIX FIRST/V/VE/EXCEL, MVI/MVIE	PN 16 DN 50	4038585	C	222.-
Steel counter flange (round, 2 pieces), PN 25/PN 40 DN 50	Set comprising 2 counter flanges in steel material version for pump series HELIX FIRST/V/VE/EXCEL, MVI/MVIE	PN 25/PN 40 DN 50	4038588	C	216.-
Steel counter flange (round, 2 pieces), PN 25/PN 40 DN 65	Set comprising 2 counter flanges in steel material version for pump series HELIX FIRST/V/VE/EXCEL, MVI/MVIE	PN 25/PN 40 DN 65	4038591	C	207.-
Steel counter flange (round, 2 pieces), PN 25/PN 40 DN 65	Set comprising 2 counter flanges in steel material version for pump series HELIX FIRST/V/VE/EXCEL, MVI/MVIE	PN 25/PN 40 DN 65	4038593	C	247.-
Steel counter flange (round, 2 pieces), PN 16 DN 80	Set comprising 2 counter flanges in steel material version for pump series HELIX FIRST/V/VE/EXCEL, MVI/MVIE	PN 16 DN 80	4072534	A	238.-
Steel counter flange (round, 2 pieces), PN 25/PN 40 DN 80	Set comprising 2 counter flanges in steel material version for pump series HELIX FIRST/V/VE/EXCEL, MVI/MVIE	PN 25/PN 40 DN 80	4072536	C	347.-
Steel counter flange (round, 2 pieces), PN 16/DN 100	Set comprising 2 counter flanges in steel material version for pump series HELIX FIRST/V/VE/EXCEL, MVI/MVIE	PN 16/DN 100	4073131	C	440.-
Steel counter flange (round, 2 pieces), PN 25/PN 40 DN 100	Set comprising 2 counter flanges in steel material version for pump series HELIX FIRST/V/VE/EXCEL, MVI/MVIE	PN 25/PN 40 DN 100	4073716	C	607.-
Victaulic coupling EPDM, R 1¼	Kit comprising 2 quick couplings including seals, screws and union inserts made of 1.4435 stainless steel for MVI series pumps with Victaulic connection.	EPDM; R 1¼	4055279	L	124.-
Victaulic coupling Viton, R 1¼	Kit comprising 2 quick couplings including seals, screws and union inserts made of 1.4435 stainless steel for MVI series pumps with Victaulic connection.	Viton; R 1¼	4055280	K	286.-
Victaulic coupling EPDM, R 2	Kit comprising 2 quick couplings including seals, screws and union inserts made of 1.4435 stainless steel for MVI series pumps with Victaulic connection.	EPDM; R 2	4055281	K	138.-
Victaulic coupling Viton, R 2	Kit comprising 2 quick couplings including seals, screws and union inserts made of 1.4435 stainless steel for MVI series pumps with Victaulic connection.	Viton; R 2	4055282	K	472.-
Bypass line for MVI 70../95..	Bypass line kit with all required components for Helix and MVI series pumps up to 25 bar	MVI/MVIE 70, 95	4076811	C	189.-
Bypass line kit for Helix V/VE/EXCEL 2../4../6../10../16 in 1.4409 (AISI316L)	Bypass line kit with all required components for Helix series pumps up to 25 bar	Helix V/VE/EXCEL 2../4../6../10../16	4230350	K	☎
Bypass line kit Helix V/VE/EXCEL 22../36../52 in 1.4409 (AISI316L)	Bypass line kit with all required components for Helix series pumps up to 25 bar	Helix V/VE/EXCEL 22../36../52 in 1.4409 (AISI316L)	4230274	K	☎
Bypass line kit Helix V/VE/EXCEL 22../36../52 in 1.4301 (AISI304)	Bypass line kit with all required components for Helix series pumps up to 25 bar	Helix V/VE/EXCEL 22../36../52 in 1.4301 (AISI304)	4230275	K	☎

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG14

Accessories for high-pressure multistage centrifugal pumps

Type	Description	Art. no.			EUR
Bypass line for kit Helix FIRST 2../4../6 with oval flange connection in 1.4409 (AISI316L)	Bypass line kit with all required components for Helix series pumps up to 25 bar	Helix FIRST 2../4../6 with oval flange connection	4231006	K	☎
Bypass line for kit Helix FIRST 10../16 with oval flange connection in 1.4409 (AISI316L)	Bypass line kit with all required components for Helix series pumps up to 25 bar	Helix FIRST 10../16 with oval flange connection	4230351	K	☎
Bypass line for kit Helix FIRST 2../4../6../10../16 with oval flange connection in 1.4409 (AISI316L)	Bypass line kit with all required components for Helix series pumps up to 25 bar	Helix FIRST 2../4../6../10../16 with DIN round flange connection	4230352	K	☎
Bypass line kit Helix FIRST 22../36../52 in 1.4301 (AISI304)	Bypass line kit with all required components for Helix series pumps up to 25 bar	Helix FIRST 22../36../52 in 1.4301 (AISI304)	4230276	K	☎
Bypass line and pressure gauge MVI 70../95..	Bypass line kit with all required components and manometers for Helix and MVI series pumps up to 25 bar	MVI/MVIE 70, 95	4077089	A	239.-
Pressure sensor, 0 – 6 bar	Sensor for fully automatic control of Helix EXCEL, Helix VE, MVIE, MWISE and MHIE pumps, control signal 4 – 20 mA	0 – 6 bar	2541618	L	☎
Pressure sensor, 0 – 10 bar	Sensor for fully automatic control of Helix EXCEL, Helix VE, MVIE, MWISE and MHIE pumps, control signal 4 – 20 mA	0 – 10 bar	2541619	L	☎
Pressure sensor, 0 – 16 bar	Sensor for fully automatic control of Helix EXCEL, Helix VE, MVIE, MWISE and MHIE pumps, control signal 4 – 20 mA	0 – 16 bar	2541620	L	☎
Pressure sensor, 0 – 25 bar	Sensor for fully automatic control of Helix EXCEL, Helix VE, MVIE, MWISE and MHIE pumps, control signal 4 – 20 mA	0 – 25 bar	2541621	K	☎
Pressure sensor, 0 – 40 bar	Sensor for fully automatic control of Helix EXCEL, Helix VE, MVIE, MWISE and MHIE pumps, control signal 4 – 20 mA	0 – 40 bar	2541622	K	☎
Kit pressure sensor 25 BAR	Kit comprising pressure sensor, pressure gauge, connection cable for the fully automatic control of Helix EXCEL, Helix VE, MVIE, MWISE and MHIE pumps, control signal 4 – 20 mA	0 – 25 bar	4048066	A	485.-
Differential pressure sensor kit 0 – 16 bar (for vertical pumps)	Bypass line kit consisting of differential pressure sensor, connection cable, copper spiral and fixation material for dp-c and dp-v control of frequency-controlled high-pressure centrifugal pumps, control signal 4 – 20 mA	0 – 16 bar	4194670	L	490.-
Differential pressure sensor kit 0 – 25 bar (for vertical pumps)	Bypass line kit consisting of differential pressure sensor, connection cable, copper spiral and fixation material for dp-c and dp-v control of frequency-controlled high-pressure centrifugal pumps, control signal 4 – 20 mA	0 – 25 bar	4194671	A	490.-
Differential pressure sensor kit 0 – 16 bar (for horizontal pumps)	Bypass line kit consisting of differential pressure sensor, connection cable, copper spiral and fixation material for dp-c and dp-v control of frequency-controlled high-pressure centrifugal pumps, control signal 4 – 20 mA	0 – 16 bar	4194672	K	490.-
Base plate	Baseplate for vibration damping for pumps of the series Helix FIRST/V/VE/EXCEL to 5.5 kW motor power	-	4157154	L	168.-

☎ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG14

PTC thermistor tripping unit for glanded pumps

Type	Description	Art. no.		EUR
PTC thermistor tripping unit	Tripping unit for switch cabinet installation for all IPL/DPL, IL/DL, IPH-O/W, IPS, IP-Z, BAC, BL, Helix and MVI series pumps equipped with PTC thermistor sensors.	509275993	L	434.-
Surcharge for thermistor sensor (high-pressure centrifugal pumps)	For pumps of the Helix V, MVI series with three-phase AC motor (3 pieces)	HDK_KLF	A	☎


Price group: PG14

IF module for glanded pumps

Type	Description	Art. no.		EUR
IF-Modul CANopen	Retrofittable plug-in module for pump types Wilo-Stratos GIGA, Stratos GIGA B, Stratos GIGA-D, VeroLine-IP-E, VeroTwin-DP-E, CronoLine-IL-E, CronoTwin-DL-E, CronoBloc-BL-E, Wilo-Helix EXCEL, Wilo-Economy MHIE, Wilo-Multivert MVIE, Wilo-Helix VE. Serial, digital CAN interface for connection to building automation (BA) via CAN bus system protocol according to CANopen standard (EN 50325-4). Note: The pump software must be compatible (for information, see Wilo homepage or consult the nearest Wilo branch).	2085044	L	170.-
IF-Modul Modbus RTU	Retrofittable plug-in module for pump types Wilo-Stratos GIGA, Stratos GIGA B, Stratos GIGA-D, VeroLine-IP-E, VeroTwin-DP-E, CronoLine-IL-E, CronoTwin-DL-E, CronoBloc-BL-E, Wilo-Helix EXCEL, Wilo-Economy MHIE, Wilo-Multivert MVIE, Wilo-Helix VE. Serial, digital Modbus RTU interface for connection to building automation (BA) via RS485 bus system. Protocol „Modbus over Serial Line“ in accordance with Modbus-IDA V 1.02. Notice: The pump software must be compatible (for information, see Wilo homepage or consult the nearest Wilo branch).	2097809	L	259.-
IF-Modul BACnet MS/TP	Retrofittable plug-in module for pump types Wilo-Stratos GIGA, Stratos GIGA B, Stratos GIGA-D, VeroLine-IP-E, VeroTwin-DP-E, CronoLine-IL-E, CronoTwin-DL-E, CronoBloc-BL-E, Wilo-Helix EXCEL, Wilo-Economy MHIE, Wilo-Multivert MVIE, Wilo-Helix VE. Serial, digital interface BACnet MS/TP master for connection to building automation (BA) via RS485 bus system. Protocol in accordance with the BACnet standard (ISO 16484-5) Notice: The pump software must be compatible (for information, see Wilo homepage or consult the nearest Wilo branch).	2097811	L	281.-
IF-Modul LON	Retrofittable plug-in module for pump types Wilo-Stratos GIGA, Stratos GIGA B, Stratos GIGA-D, VeroLine-IP-E, VeroTwin-DP-E, CronoLine-IL-E, CronoTwin-DL-E, CronoBloc-BL-E, Wilo-Helix EXCEL, Wilo-Economy MHIE, Wilo-Multivert MVIE, Wilo-Helix VE. Serial/digital LON interface for connection to building automation (BA) via LONWorks networks: LONTalk protocol, LONMark conformity. Notice: The pump software must be compatible (for information, see Wilo homepage or consult the nearest Wilo branch).	2022530	L	250.-
IF-Modul PLR	Retrofittable plug-in module for pump types Wilo-Stratos GIGA, Stratos GIGA B, Stratos GIGA-D, VeroLine-IP-E, VeroTwin-DP-E, CronoLine-IL-E, CronoTwin-DL-E, CronoBloc-BL-E, Wilo-Helix EXCEL, Wilo-Economy MHIE, Wilo-Multivert MVIE, Wilo-Helix VE. Serial, digital PLR interface for connection to building automation (BA) via Wilo interface converter or company-specific coupling modules. Notice: The pump software must be compatible (for information, see Wilo homepage or consult the nearest Wilo branch).	2035069	L	110.-

☎ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

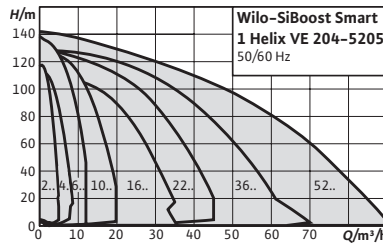

Accessories	Page
Accessories	454
Commissioning/maintenance	683

IE4 Select 4 online
All information at www.wilo-select.com

Wilo-SiBoost Smart 1 Helix VE



Construction

Highly efficient water-supply unit ready for connection with one vertically arranged non-self-priming high-pressure multistage centrifugal pump of the Helix VE series with integrated air-cooled frequency inverters.

Application

Fully automatic water supply and pressure boosting in inlet mode, either from the public water supply network or from a tank, for domestic, commercial, industrial and municipal applications (a standby pump to be provided to comply with DIN 1988 and DIN EN 806).

Approved fluids are generally waters which do not attack the materials used, neither chemically nor mechanically, and do not contain any abrasive or long-fiber constituents like:

- Drinking water (check drinking water approvals in materials section)
- Cooling water
- Process water
- Firefighting water (apart from fire-extinguishing systems in accordance with DIN 14462 and with the approval of the local fire safety authorities)

Your advantages

- Heavy-duty system with stainless steel high-pressure multistage centrifugal pumps of the Helix VE series and air-cooled integrated frequency converter
- High-efficiency pump hydraulics
- Disproportionately large frequency converter control range from 25 Hz up to a maximum of 60 Hz (version dependent)
- Integrated full motor protection via PTC

Scope of delivery

- Factory-mounted, ready-for-connection pressure-boosting system checked for functionality and impermeability
- Packaging
- Installation and operating instructions


Options


Other mains connections on request

Price group: PG6


Ordering information						
SiBoost Smart 1 Helix VE	System output	Max. operating pressure	Gross weight, approx.	Art. no.		
	Q m ³ /h	p bar	m kg			EUR
204	4.5	16	75	2541580	K	4,014.-
206	4.5	16	77	2541581	K	4,095.-


☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.



Ordering information						
SiBoost Smart 1 Helix VE	System output	Max. operating pressure	Gross weight, approx.	Art. no.		
	Q m ³ /h	p bar	m kg			EUR
208	4.5	16	78	2541582	K	4,258.-
211	4.5	16	89	2541583	K	4,710.-
403	8	16	64	2537322	K	4,313.-
404	8	16	67	2537357	K	4,404.-
405	8	16	69	2537626	K	4,558.-
407	8	16	76	2537323	K	4,981.-
410	8	16	78	2537627	K	5,243.-
602	12	16	65	2537324	K	4,387.-
603	12	16	67	2537628	K	4,589.-
604	12	16	74	2537325	K	4,879.-
606	12	16	75	2537629	K	5,278.-
608	12	16	86	2537326	K	5,373.-
611	12	16	97	2537630	K	5,783.-
1002	20	16	83	2537652	K	4,705.-
1003	20	16	92	2537327	K	5,001.-
1004	20	16	93	2537653	K	5,427.-
1005	20	16	85	2537328	K	5,765.-
1006	20	16	116	2537654	K	6,031.-
1009	20	16	156	2537655	K	8,247.-
1602	31	16	101	2537656	K	6,196.-
1603-3	31	16	104	2537329	K	6,488.-
1603-4	31	16	105	2537657	K	7,028.-
1605	31	16	149	2537658	K	7,374.-
1606	31	16	154	2537659	K	8,257.-
2202-3	40	16	154	2540873	K	8,226.-
2202-3	40	16	135	2547320	A	☞
2202-4	40	16	154	2540874	K	8,658.-
2202-4	40	16	148	2547321	A	☞
2203	40	16	173	2540875	K	9,421.-
2203	40	16	172	2547322	A	☞
2204	40	16	179	2540876	K	12,486.-
2204	40	16	179	2547323	A	☞
2205	40	16	317	2540877	K	14,547.-
2205	40	16	300	2547324	A	☞
3602-5,5	55	16	183	2547325	A	☞
3602-5.5	55	16	184	2540878	K	9,461.-
3602-7,5	55	16	188	2540879	K	10,380.-
3602-7,5	55	16	187	2547326	A	☞
3604	55	16	351	2540880	K	13,162.-
3604	55	16	339	2547327	A	☞
3605	55	16	356	2540881	K	15,431.-
3605	55	16	353	2547328	A	☞
5202	80	16	215	2540882	K	11,653.-
5202	80	16	214	2547329	A	☞
5203	80	16	370	2540883	K	16,665.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☞ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG6

Ordering information						
SiBoost Smart 1 Helix VE	System output	Max. operating pressure	Gross weight, approx.	Art. no.		
	Q m ³ /h	p bar	m kg			EUR
5203	80	16	363	2547330	A	📞
5204	80	16	385	2540884	K	19,811.-
5204	80	16	383	2547331	A	📞
5205	80	16	402	2540885	K	22,374.-
5205	80	16	393	2547332	A	📞

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, 📞 = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

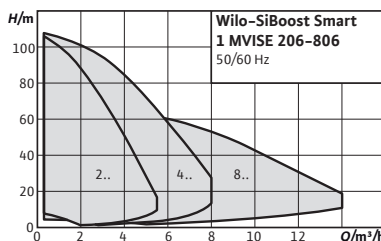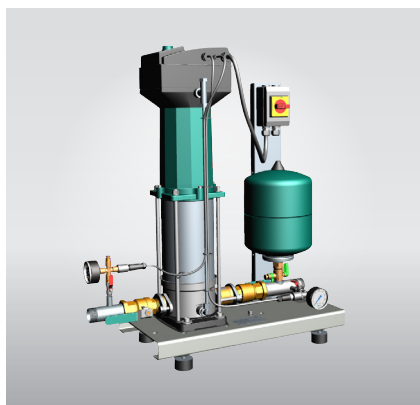

Accessories	Page
Accessories	454
Commissioning/maintenance	683

Select 4 online

All information at www.wilo-select.com

Wilo-SiBoost Smart 1 MVISE



Construction

Low noise water-supply unit ready for connection with a vertically arranged non-self-priming glandless stainless steel high-pressure multistage centrifugal pump of MVISE series with an integrated water-cooled frequency inverter.

Application

Fully automatic water supply and pressure boosting in inlet mode, either from the public water supply network or from a tank at least 0.5 meter above the pump, for domestic, commercial, industrial and municipal applications (a standby pump to be provided to comply with DIN 1988 and DIN EN 806).

Approved fluids are generally waters which do not attack the materials used, neither chemically nor mechanically, and do not contain any abrasive or long-fiber constituents like:

- Drinking water
- Cooling water
- Process water
- Firefighting water (apart from fire-extinguishing systems in accordance with DIN 14462 and with the approval of the local fire safety authorities)

Your advantages

- Virtually noiseless system due to glandless stainless steel high-pressure multistage centrifugal pumps with integrated frequency converter
- Up to 20 dB[A] quieter than conventional systems with comparable hydraulic output
- Easily adjustable and operationally reliable due to the MVISE pump series used with integrated dry-running detection and automatic cut-out in event of low water

Scope of delivery

- Factory-mounted, ready-for-connection pressure-boosting system checked for functionality and impermeability
- Packaging
- Installation and operating instructions

Options


Other mains connections on request



Additional charge


Type	Description		
Signal board VR-HVAC EBM/ESM 1-4	Signal board		
		A	

= ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, = please contact Wilo
 Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG6

Ordering information PN 16						
SiBoost Smart 1 MVICE	System output	Max. operating pressure	Gross weight, approx.	Art. no.		
	Q m ³ /h	p bar	m kg			EUR
206	4	16	71	2550736	K	4,058.-
210	4	16	77	2550737	K	4,171.-
404	8	16	71	2550738	K	4,309.-
406	8	16	72	2550739	K	4,390.-
410	8	16	78	2550740	K	4,867.-
803	14	16	74	2550741	K	5,057.-
806	14	16	79	2550742	K	5,780.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

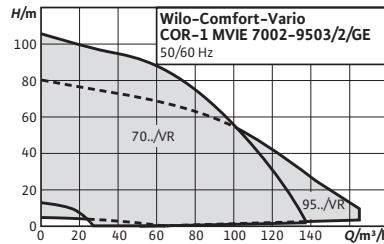

Accessories	Page
Accessories	454
Commissioning/maintenance	683

Select 4 online

All information at www.wilo-select.com

Wilo-Comfort-Vario COR-1 MVIE...-GE



Construction

Water-supply unit ready for connection with one vertically arranged non-self-priming high-pressure multistage centrifugal pump of the MVIE 70 or 95 series equipped with an integrated air-cooled frequency converter.

Application

Fully automatic water supply and pressure boosting system in inlet mode or from a tank, for domestic, commercial, industrial and municipal applications (a standby pump to be provided to comply with DIN 1988 and DIN EN 806).

Approved fluids are generally waters which do not attack the materials used, neither chemically nor mechanically, and do not contain any abrasive or long-fiber constituents like:

- Drinking water (depends on required drinking water approvals, check material section)
- Pure water
- Cooling water
- Process water
- Firefighting water (apart from fire-extinguishing systems in accordance with DIN 14462 and with the approval of the local fire safety authorities)

Scope of delivery

- Factory-mounted, connection-ready pressure boosting system checked for functionality and impermeability
- Packaging
- Installation and operating instructions

Your advantages

- Sturdy system due to MVIE series stainless-steel high-pressure centrifugal pumps with air-cooled integrated frequency converter
- Frequency converter with superproportionally large control range
- Integrated full motor protection via PTC
- Integrated dry-running detection with automatic cut-out in event of low water via performance characteristics of the motor control electronics


Options



Other mains connections on request


Notice

Additional information about this series is available in the Online Catalogue (www.wilo.com) and on request.

Price group: PG6

Ordering information						
Comfort-Vario COR-1 MVIE...-GE	System output	Max. operating pressure	Gross weight, approx.	Art. no.		
	Q m ³ /h	p bar	m kg			EUR
7002-GE	105	16	384	2551690	K	25,689.-
7003/1-GE	105	16	384	2551691	K	28,593.-
7004-GE	105	16	445	2551693	K	37,915.-
7004/2-GE	105	16	445	2551692	K	31,134.-
9501-GE	140	16	380	2551694	K	26,890.-
9502-GE	140	16	439	2551696	K	32,335.-
9502/1-GE	140	16	382	2551695	K	29,794.-
9503/2-GE	140	16	443	2551697	K	39,117.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

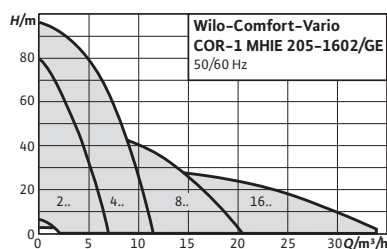

Accessories	Page
Accessories	454
Commissioning/maintenance	683

Select 4 online

All information at www.wilo-select.com

Wilo-Comfort-Vario COR-1 MHE...-GE



Construction

Water-supply unit with a non-self-priming high-pressure multistage centrifugal pump and integrated speed control

Application

- Fully automatic water supply and pressure boosting in residential, commercial and public buildings, hotels, hospitals, department stores and for industrial systems.
- Pumping of drinking water and process water, cooling water, fire water (apart from fire-extinguishing systems in accordance with DIN 14462 and with the approval of the local fire safety authorities) or other types of industrial water that do not attack the materials either chemically or mechanically and do not contain abrasive or long-fibre constituents.

Your advantages

- Sturdy system due to MHE series stainless steel high-pressure multistage centrifugal pumps with air-cooled integrated frequency converter
- Frequency converter with superproportionally large control range
- Integrated full motor protection via PTC
- Integrated dry-running detection with automatic cut-out in event of low water via performance characteristics of the motor control electronics

Options

Other mains connections on request

Scope of delivery

- Factory-mounted, connection-ready pressure boosting system checked for functionality and impermeability
- Packaging
- Installation and operating instructions


Price group: PG6


Ordering information 1-230 V



Comfort-Vario COR-1 MHE...-GE	System output Q m ³ /h	Max. operating pressure p bar	Gross weight, approx. m kg	Art. no.		EUR
205 EM-GE	7	16	63	2521450	K	3,867.-
403 EM-GE	11	16	61	2522275	K	3,948.-


☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG6

Ordering information (3~400 V)						
Comfort-Vario COR-1 MHE...-GE	System output	Max. operating pressure	Gross weight, approx.	Art. no.		
	Q m ³ /h	p bar	m kg			EUR
205-GE	7	16	58	2523126	K	3,502.-
403-GE	11	16	60	2523127	K	3,637.-
406-GE	11	16	59	2523128	K	4,057.-
803-GE	20	16	63	2523129	K	4,788.-
1602-GE	34	16	64	2523130	K	4,969.-

Additional charge					
Type	Description	Art. no.		Price group	
					EUR
Main switch	Main switch retrofit kit for COR-1 (up to max. 7.5 kW) comprising: Main switch, tension bands and bracket for fixation to diaphragm pressure vessel.	2515962	L	PG14	163.-
low-water cut-out switchgear kit WMS R ¼	WMS R ¼ kit, pressure switch as low-water signal transmitter for direct connection to the suction-side pipe.	2521150	L	PG14	174.-
low-water cut-out switchgear kit WMS R ¾	WMS R ¾ kit, pressure switch as low-water signal transmitter for direct connection to the supply pressure-side pipe.	2000424	L	PG14	174.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

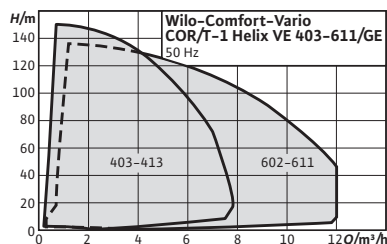

Accessories	Page
Accessories	454
Commissioning/maintenance	683

Select 4 online

All information at www.wilo-select.com

Wilo-Comfort-Vario COR/T-1 Helix VE...-GE



Construction

Water-supply unit with system separation and a non self-priming high-pressure multistage centrifugal pump with speed-controlled motor

Application

- Fully automatic water supply and pressure boosting in residential, commercial and public buildings, hotels, hospitals, department stores and for industrial systems.
- Pumping of drinking water and process water, cooling water, fire water (apart from fire-extinguishing systems in accordance with DIN 14462 and with the approval of the local fire safety authorities) or other types of industrial water that do not attack the materials either chemically or mechanically and do not contain abrasive or long-fibre constituents.

Scope of delivery

- factory-mounted, ready for connection pressure-boosting system checked for functionality and impermeability
- Packaging
- Installation and operating instructions

Your advantages

- Compact ready for connection system for all applications which make a system separation necessary by means of safety device "Free drain", type AB according to EN 13077
- Heavy-duty system due to Helix VE series stainless steel high-pressure multistage centrifugal pumps with air-cooled integrated frequency converters
- Lower life cycle costs due to new Helix design
- User-friendly display with Green Button Technology and full text menu
- IF plug-in module for quick communication with the BMS

Options


Other mains connections on request
 Overflow boxes & dust protection
 Wilo Smart Controller SCe control device for easy adjustment of parameters, communication-capable control device to control the system operation

Price group: PG6


Ordering information						
Comfort-Vario COR/T-1 Helix VE...-GE	System output	Max. operating pressure	Gross weight, approx.	Art. no.		
	Q m³/h	p bar	m kg			EUR
403-GE	8	16	123	2547961	K	6,146.-
404-GE	8	16	126	2547962	K	6,177.-



= ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, = please contact Wilo
 Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.


Price group: PG6

Ordering information						
Comfort-Vario COR/T-1 Helix VE...- GE	System output	Max. operating pressure	Gross weight, approx.	Art. no.		
	Q m ³ /h	p bar	m kg			EUR
405-GE	8	16	128	2547963	K	6,252.-
407-GE	8	16	136	2547964	K	6,286.-
410-GE	8	16	138	2547965	K	6,343.-
413-GE	8	16	147	2547966	K	6,454.-
602-GE	12	16	126	2547967	K	6,509.-
603-GE	12	16	128	2547968	K	6,615.-
604-GE	12	16	135	2547969	K	6,207.-
606-GE	12	16	137	2547970	K	6,246.-
608-GE	12	16	147	2547971	K	6,291.-
611-GE	12	16	158	2547972	K	6,332.-

Price group: PG14

Additional charge						
Type	Description	Art. no.		Price group		
						EUR
Overflow tank CO/T	-	2547713	L	PG14		382.-
low-water cut-out switchgear kit WMS R ¼	WMS R ¼ kit, pressure switch as low-water signal transmitter for direct connection to the suction-side pipe.	2521150	L	PG14		174.-
low-water cut-out switchgear kit WMS R ¾	WMS R ¾ kit, pressure switch as low-water signal transmitter for direct connection to the supply pressure-side pipe.	2000424	L	PG14		174.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

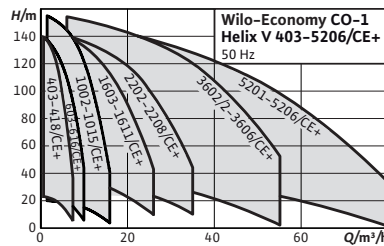

Accessories	Page
Accessories	454
Commissioning/maintenance	683

Select 4 online

All information at www.wilo-select.com

Wilo-Economy CO-1 Helix V.../CE+



Construction

High-efficiency, connection-ready water-supply unit. With multistage, vertical stainless steel high-pressure multistage centrifugal pump in glanded version, incl. Economy controller CE+.

Application

- Fully automatic water supply and pressure boosting in residential, commercial and public buildings, hotels, hospitals, department stores and for industrial systems.
- Pumping of drinking water and process water, cooling water, fire water (apart from fire-extinguishing systems in accordance with DIN 14462 and with the approval of the local fire safety authorities) or other types of industrial water that do not attack the materials either chemically or mechanically and do not contain abrasive or long-fibre constituents.

Your advantages

- Heavy-duty system due to stainless steel high-pressure multi-stage centrifugal pumps of the Helix V series
- High-efficiency pump hydraulics
- Easily adjustable and operationally reliable due to the CE+ switchgear used

Scope of delivery

- Factory-mounted, ready-to-connect pressure boosting system checked for proper functioning and impermeability
- Packaging
- Installation and operating instructions

Options


Other mains connections on request


Price group: PG6

Ordering information						
Economy CO-1 Helix V.../CE+	System output	Max. operating pressure	Gross weight, approx.	Art. no.		
	Q m³/h	p bar	m kg			EUR
403/CE+	6.5	16	75	2536505	K	3,387.-
404/CE+	6.5	16	76	2536506	K	3,422.-
406/CE+	6.5	16	79	2536507	K	3,459.-
407/CE+	6.5	16	81	2536508	K	3,525.-
409/CE+	6.5	16	82	2536509	K	3,593.-
410/CE+	6.5	16	87	2536510	K	3,733.-
412/CE+	6.5	16	88	2536511	K	3,975.-
414/CE+	6.5	16	102	2536512	K	4,355.-


= ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG6

Ordering information						
Economy CO-1 Helix V.../CE+	System output	Max. operating pressure	Gross weight, approx.	Art. no.		
	Q m ³ /h	p bar	m kg			EUR
416/CE+	6.5	16	103	2536513	K	4,494.-
418/CE+	6.5	16	104	2536514	K	4,667.-
603/CE+	10	16	77	2535296	K	2,876.-
604/CE+	10	16	80	2535297	K	2,939.-
605/CE+	10	16	82	2535298	K	2,972.-
606/CE+	10	16	83	2535299	K	3,066.-
607/CE+	10	16	88	2535300	K	3,130.-
608/CE+	10	16	89	2535301	K	3,194.-
609/CE+	10	16	92	2535302	K	3,258.-
610/CE+	10	16	93	2535303	K	3,321.-
611/CE+	10	16	104	2535304	K	3,352.-
612/CE+	10	16	108	2535305	K	3,419.-
613/CE+	10	16	109	2535306	K	3,449.-
614/CE+	10	16	110	2535307	K	3,609.-
615/CE+	10	16	111	2535308	K	3,674.-
616/CE+	10	16	122	2535309	K	3,866.-
1002/CE+	16	16	86	2534076	K	3,234.-
1003/CE+	16	16	88	2534077	K	3,436.-
1004/CE+	16	16	94	2534078	K	3,719.-
1005/CE+	16	16	45	2534079	K	3,962.-
1006/CE+	16	16	98	2534080	K	4,042.-
1007/CE+	16	16	102	2534081	K	4,163.-
1008/CE+	16	16	103	2534082	K	4,204.-
1009/CE+	16	16	126	2534083	K	4,650.-
1010/CE+	16	16	127	2534084	K	5,054.-
1011/CE+	16	16	128	2534085	K	5,215.-
1012/CE+	16	16	157	2534086	K	5,457.-
1013/CE+	16	16	158	2534087	K	5,658.-
1015/CE+	16	16	160	2534089	K	5,863.-
1603/CE+	26	16	109	2532187	K	5,118.-
1604/CE+	26	16	114	2532188	K	5,599.-
1605/CE+	26	16	113	2532189	K	6,024.-
1606/CE+	26	16	114	2532190	K	6,340.-
1607/CE+	26	16	167	2532191	K	6,973.-
1608/CE+	26	16	169	2532192	K	7,293.-
1609/K/CE+	26	16	181	2532193	K	7,670.-
1610/K/CE+	26	16	183	2532194	K	8,242.-
1611/K/CE+	26	16	184	2532195	K	8,557.-
2202/K/CE+	34	16	151	2530173	K	5,372.-
2203/K/CE+	34	16	158	2530174	K	6,041.-
2204/K/CE+	34	16	192	2530175	K	6,745.-
2205/K/CE+	34	16	200	2530176	K	7,566.-
2206/K/CE+	34	16	202	2530177	K	8,161.-
2207/K/CE+	34	16	203	2530178	K	8,984.-
2208/K/CE+	34	16	237	2530232	K	9,590.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG6



Ordering information						
Economy CO-1 Helix V.../CE+	System output	Max. operating pressure	Gross weight, approx.	Art. no.		
	Q m ³ /h	p bar	m kg			EUR
3602/2/K/CE+	55	16	169	2530180	K	5,713.-
3602/K/CE+	55	16	197	2530181	K	7,681.-
3603/1/K/CE+	55	16	231	2530182	K	8,301.-
3603/K/CE+	55	16	231	2530183	K	8,811.-
3604/2/K/CE+	55	16	267	2532352	K	9,361.-
3604/K/CE+	55	16	267	2530184	K	9,878.-
3605/2/K/CE+	55	16	281	2532353	K	10,644.-
3605/K/CE+	55	16	281	2530185	K	11,152.-
3606/2/K/CE+	55	16	284	2530186	K	11,540.-
3606/K/CE+	55	16	294	2532354	K	11,974.-
5202/2/K/CE+	80	16	217	2530188	K	7,898.-
5202/K/CE+	80	16	224	2530189	K	8,887.-
5203/2/K/CE+	80	16	260	2530190	K	9,871.-
5203/K/CE+	80	16	260	2530191	K	10,487.-
5204/2/K/CE+	80	16	276	2530192	K	11,453.-
5204/K/CE+	80	16	276	2530193	K	11,847.-
5205/2/K/CE+	80	16	314	2530194	K	12,835.-
5205/K/CE+	80	16	314	2530195	K	13,330.-
5206/2/K/CE+	80	16	340	2532385	K	14,318.-

Price group: PG14

Additional charge		
Type	Description	EUR
low-water cut-out switchgear kit WMS R ¼	WMS R ¼ kit, pressure switch as low-water signal transmitter for direct connection to the suction-side pipe.	174.-
low-water cut-out switchgear kit WMS R ¾	WMS R ¾ kit, pressure switch as low-water signal transmitter for direct connection to the supply pressure-side pipe.	174.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

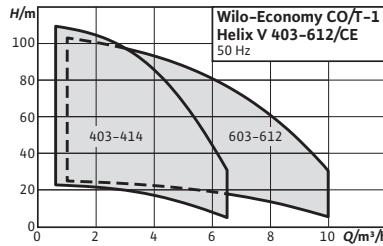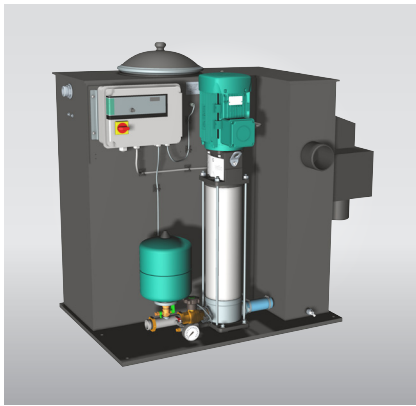

Accessories	Page
Accessories	454
Commissioning/maintenance	683

Select 4 online

All information at www.wilo-select.com

Wilo-Economy CO/T-1 Helix V



Construction

Water-supply unit with system separation and a non-self-priming high-pressure multistage centrifugal pump

Application

- Fully automatic water supply and pressure boosting in residential, commercial and public buildings, hotels, hospitals, department stores and for industrial systems.
- Pumping of drinking water and process water, cooling water, fire water (apart from fire-extinguishing systems in accordance with DIN 14462 and with the approval of the local fire safety authorities) or other types of industrial water that do not attack the materials either chemically or mechanically and do not contain abrasive or long-fibre constituents.

Your advantages

- Compact system, ready for connection, for all applications that require system separation
- Heavy-duty system due to stainless steel high-pressure multistage centrifugal pumps of the Helix V series
- Easily adjustable and operationally reliable due to the CE control device used

- Packaging
- Installation and operating instructions

Options

Other mains connections on request


Scope of delivery


- factory-mounted, ready for connection pressure boosting system checked for functionality and impermeability


Price group: PG6

Ordering information						
Economy CO/T-1 Helix V	System output	Max. operating pressure	Gross weight, approx.	Art. no.		
	Q m³/h	p bar	m kg			EUR
403/CE	6.5	16	120	2545680	K	5,278.-
404/CE	6.5	16	121	2545681	K	5,298.-
406/CE	6.5	16	124	2545682	K	5,363.-
407/CE	6.5	16	126	2545683	K	5,387.-
409/CE	6.5	16	127	2545684	K	5,419.-

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
 Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Ordering information						
Economy CO/T-1 Helix V	System output	Max. operating pressure	Gross weight, approx.	Art. no.		
	Q m ³ /h	p bar	m kg			EUR
410/CE	6.5	16	132	2545685	K	5,442.-
412/CE	6.5	16	133	2545686	K	5,573.-
414/CE	6.5	16	137	2545687	K	5,639.-
603/CE	10	16	122	2545688	K	5,334.-
604/CE	10	16	125	2545689	K	5,336.-
605/CE	10	16	127	2545690	K	5,401.-
606/CE	10	16	128	2545691	K	5,397.-
608/CE	10	16	134	2545692	K	5,546.-
609/CE	10	16	137	2545693	K	5,571.-
610/CE	10	16	138	2545694	K	5,622.-
612/CE	10	16	148	2545695	K	5,686.-

Additional charge						
Type	Description	Art. no.		Price group		
						EUR
low-water cut-out switchgear kit WMS R ¼	WMS R ¼ kit, pressure switch as low-water signal transmitter for direct connection to the suction-side pipe.	2521150	L	PG14		174.-
low-water cut-out switchgear kit WMS R ¾	WMS R ¾ kit, pressure switch as low-water signal transmitter for direct connection to the supply pressure-side pipe.	2000424	L	PG14		174.-
Overflow tank CO/T	-	2547713	L	PG14		382.-

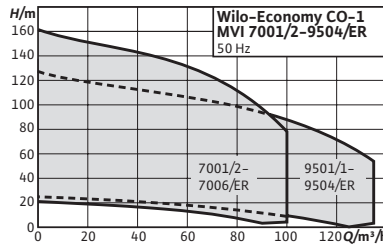

Accessories	Page
Accessories	454
Commissioning/maintenance	683

Select 4 online

All information at www.wilo-select.com

Wilo-Economy CO-1 MVI.../ER



Construction

Water-supply unit with a non-self-priming high-pressure multistage centrifugal pump

Application

- Fully automatic water supply and pressure boosting in residential, commercial and public buildings, hotels, hospitals, department stores and for industrial systems.
- Pumping of drinking water and process water, cooling water, fire water (apart from fire-extinguishing systems in accordance with DIN 14462 and with the approval of the local fire safety authorities) or other types of industrial water that do not attack the materials either chemically or mechanically and do not contain abrasive or long-fibre constituents.

Scope of delivery

- Factory-mounted, connection-ready pressure boosting system checked for functionality and impermeability

Your advantages

- Sturdy system due to stainless steel high-pressure multistage centrifugal pumps of the MVI series
- Wide hydraulic range through the use of all pumps in the MVI series
- Easily adjustable and operationally reliable due to the ER-1 control unit used

- Packaging
- Installation and operating instructions

Options

Other mains connections on request


Notice


Additional information about this series is available in the Online Catalogue (www.wilo.com) and on request.


Price group: PG6


Ordering information						
Economy CO-1 MVI.../ER	System output	Max. operating pressure	Gross weight, approx.	Art. no.		
	Q m³/h	p bar	m kg			EUR
7001/1/ER	100	16	247	2523173	K	6,915.-
7001/ER	100	16	270	2523174	K	7,651.-
7002/2/ER	100	16	295	2523175	K	8,739.-
7002/ER	100	16	305	2523176	K	8,900.-
7003/2/ER	100	16	338	2523177	K	10,482.-

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Ordering information						
Economy CO-1 MVI.../ER	System output	Max. operating pressure	Gross weight, approx.	Art. no.		
	Q m ³ /h	p bar	m kg			EUR
7003/ER	100	16	353	2523178	K	11,026.-
7004/2/ER	100	16	357	2523179	K	11,896.-
7004/ER	100	16	380	2523180	K	12,766.-
7005/2/ER	100	16	437	2523181	K	14,246.-
7005/ER	100	16	437	2523182	K	14,171.-
7006/2/ER	100	25	447	2523183	K	15,931.-
7006/ER	100	25	473	2523184	K	16,396.-
9501/1/ER	135	16	274	CO1MVI95011ERP16	A	☎
9501/ER	135	16	284	CO1MVI9501ERP16	A	☎
9502/2/ER	135	16	330	2538330	A	☎
9502/ER	135	16	345	CO1MVI9502ERP16	A	☎
9503/1/ER	135	16	429	CO1MVI95031ERP16	A	☎
9503/2/ER	135	16	372	CO1MVI95032ERP16	A	☎
9503/ER	135	16	429	CO1MVI9503ERP16	A	☎
9504/1/ER	135	16	456	2530886	A	☎
9504/2/ER	135	16	434	2548770	A	☎
9504/ER	135	16	456	2541524	A	☎

Additional charge						
Type	Description	Art. no.		Price group		
						EUR
low-water cut-out switchgear kit WMS R ¼	WMS R ¼ kit, pressure switch as low-water signal transmitter for direct connection to the suction-side pipe.	2521150	L	PG14		174.-
low-water cut-out switchgear kit WMS R ¾	WMS R ¾ kit, pressure switch as low-water signal transmitter for direct connection to the supply pressure-side pipe.	2000424	L	PG14		174.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

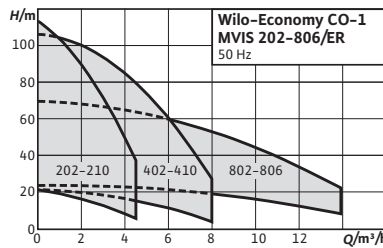

Accessories	Page
Accessories	454
Commissioning/maintenance	683

Select 4 online

All information at www.wilo-select.com

Wilo-Economy CO-1 MVIS.../ER



Construction

Water-supply unit with a glandless, non-self-priming high-pressure multistage centrifugal pump

Application

- Fully automatic water supply and pressure boosting in residential, commercial and public buildings, hotels, hospitals, department stores and for industrial systems.
- Pumping of drinking water and process water, cooling water, fire water (apart from fire-extinguishing systems in accordance with DIN 14462 and with the approval of the local fire safety authorities) or other types of industrial water that do not attack the materials either chemically or mechanically and do not contain abrasive or long-fibre constituents.

Your advantages

- Virtually noiseless system due to a glandless stainless-steel high-pressure multistage centrifugal pump
- Up to 20 dB[A] quieter than conventional systems with comparable hydraulic output
- Operationally reliable due to combination of MVIS pump series with ER-1 switchgear

Scope of delivery

- Factory-mounted, connection-ready pressure boosting system checked for functionality and impermeability
- Packaging
- Installation and operating instructions


Options

Other mains connections on request


Additional charge					
Type	Description	Art. no.		Price group	
					EUR
low-water cut-out switchgear kit WMS R ¼	WMS R ¼ kit, pressure switch as low-water signal transmitter for direct connection to the suction-side pipe.	2521150	L	PG14	174.-
low-water cut-out switchgear kit WMS R ¾	WMS R ¾ kit, pressure switch as low-water signal transmitter for direct connection to the supply pressure-side pipe.	2000424	L	PG14	174.-

= ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, = please contact Wilo
 Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.


Price group: PG6

Ordering information				
Economy CO-1 MVIS.../ER	Max. operating pressure	Art. no.		
	p bar			EUR
202/ER	6	2504166	K	2,705.-
202/ER	10	2504659	K	2,705.-
203/ER	6	2504167	K	2,740.-
203/ER	10	2504660	K	2,740.-
204/ER	6	2504168	K	2,813.-
204/ER	10	2504661	K	2,813.-
205/ER	6	2504169	K	2,878.-
205/ER	10	2504662	K	2,878.-
206/ER	10	2504170	K	2,902.-
206/ER	16	2504324	K	2,904.-
207/ER	10	2504171	K	2,902.-
207/ER	16	2504325	K	2,904.-
208/ER	10	2504172	K	2,939.-
208/ER	16	2504326	K	2,941.-
209/ER	16	2504327	K	3,076.-
210/ER	16	2504173	K	3,129.-

Price group: PG6

Ordering information				
Economy CO-1 MVIS.../ER	Max. operating pressure	Art. no.		
	p bar			EUR
402/ER	6	2504174	K	2,719.-
402/ER	10	2504328	K	2,719.-
403/ER	6	2504175	K	2,778.-
403/ER	10	2504329	K	2,778.-
404/ER	6	2503836	K	2,856.-
404/ER	10	2504330	K	2,856.-
405/ER	6	2503995	K	2,877.-
405/ER	10	2504331	K	2,877.-
406/ER	10	2504176	K	2,906.-
406/ER	16	2504332	K	2,908.-
407/ER	10	2504177	K	3,054.-
407/ER	16	2504333	K	3,056.-
408/ER	10	2504178	K	3,065.-
408/ER	16	2504334	K	3,067.-
409/ER	16	2504335	K	3,110.-
410/ER	16	2504179	K	3,246.-


Price group: PG6



Ordering information				
Economy CO-1 MVIS.../ER	Max. operating pressure	Art. no.		
	p bar			EUR
802/ER	6	2504180	K	3,138.-
802/ER	10	2504336	K	3,138.-


 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG6

Ordering information				
Economy CO-1 MVIS.../ER	Max. operating pressure	Art. no.		
	<i>p</i> bar			EUR
803/ER	6	2504181	K	3,316.-
803/ER	10	2504337	K	3,316.-
804/ER	6	2504182	K	3,540.-
804/ER	10	2504338	K	3,540.-
805/ER	6	2504183	K	3,801.-
805/ER	10	2504339	K	3,801.-
806/ER	10	2504184	K	3,949.-
806/ER	16	2504340	K	3,949.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

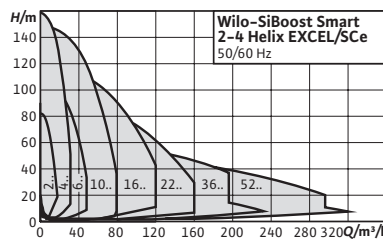

Accessories	Page
Accessories	454
Commissioning/maintenance	683

IE5 Select 4 online
All information at www.wilo-select.com

Wilo-SiBoost Smart Helix EXCEL



Construction

Highly efficient water-supply unit ready for connection with 2 to 4 vertically arranged non-self-priming stainless steel high-pressure centrifugal pumps of the Helix EXCEL series switched in parallel. Each pump is equipped with EC motor driven by integrated air-cooled, high-efficiency frequency inverter. Valves and sensors are protected for safe and reliable operation. The system features a Smart Controller SCe.

Application

Fully automatic water supply and pressure boosting in inlet mode, either from the public water supply network or from a tank, for domestic, commercial, industrial and municipal applications (e.g. residential, office, administration buildings, hotels, hospitals, trades, industry, water supply companies). Standby pump included in accordance with DIN 1988 and DIN EN 806.

Approved fluids are generally waters which do not attack the materials used, neither chemically nor mechanically, and do not contain any abrasive or long-fiber constituents like:

- Drinking water
- Cooling water
- Process water
- Firefighting water (apart from fire-extinguishing systems in accordance with DIN 14462 and with the approval of the local fire safety authorities)

Your advantages

- Heavy-duty system featuring stainless steel high-pressure multistage centrifugal pump from the Helix EXCEL series with integrated frequency converter from 25 Hz to a maximum of 60 Hz
- High-efficiency EC motor (energy efficiency class IE5 in accordance with IEC 60034-30-2)
- Pressure-loss optimised overall system with highly efficient pump hydraulics
- Optimum load adjustment of the system to the overall system through the extra control mode $\Delta p-v$
- Improved monitoring and leakage detection via optional interface with SCADA connection
- Maximum degree of control thanks to use of an SCe control device with LCD display, simple navigation and adjustment using rotary knob
- Integrated dry-running detection with automatic deactivation via the motor control electronics

Scope of delivery

- Factory-mounted, ready-for-connection pressure-boosting system checked for functionality and impermeability
- Packaging
- Installation and operating instructions

Options

Other mains connections on request


☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG6

Ordering information									
SiBoost Smart Helix EXCEL	Art. no.			Art. no.			Art. no.		
	2 pumps			3 pumps			4 pumps		
		🚚	EUR		🚚	EUR		🚚	EUR
208	2542651	K	🕒	2542652	K	🕒	2542653	K	🕒
405	2537631	K	18,505.-	2537634	K	24,062.-	2537637	K	29,572.-
410	2537632	K	18,968.-	2537635	K	24,663.-	2537638	K	30,311.-
414	2537633	K	21,812.-	2537636	K	28,361.-	2537639	K	34,856.-
603	2537640	K	18,779.-	2537644	K	24,002.-	2537648	K	29,125.-
606	2537641	K	19,250.-	2537645	K	24,602.-	2537649	K	29,851.-
609	2537642	K	22,135.-	2537646	K	28,292.-	2537650	K	34,328.-
611	2537643	K	19,829.-	2537647	K	25,122.-	2537651	K	29,757.-
1002	2536381	K	18,803.-	2536387	K	23,923.-	2536393	K	28,469.-
1004	2536382	K	20,288.-	2536388	K	25,811.-	2536394	K	30,086.-
1005	2536383	K	21,300.-	2536389	K	27,103.-	2536395	K	31,587.-
1007	2536384	K	22,336.-	2536390	K	28,419.-	2536396	K	33,126.-
1009	2536385	K	23,639.-	2536391	K	29,653.-	2536397	K	34,304.-
1010	2536386	K	24,617.-	2536392	K	30,720.-	2536398	K	35,568.-
1602	2536399	K	26,574.-	2541596	K	30,642.-	2541602	K	36,186.-
1603	2536400	K	27,901.-	2541597	K	31,932.-	2541603	K	37,116.-
1604	2536401	K	27,901.-	2541598	K	33,390.-	2541604	K	39,436.-
1605	2536402	K	29,367.-	2541599	K	38,196.-	2541605	K	47,594.-
1606	2536403	K	30,762.-	2541600	K	40,035.-	2541606	K	49,892.-
1607	2536404	K	32,147.-	2541601	K	41,859.-	2541607	K	52,121.-
2201	2542588	K	29,153.-	2542594	K	40,869.-	2542600	K	46,656.-
2202	2542589	K	29,257.-	2542595	K	41,743.-	2542601	K	51,768.-
2203-4.2	2542590	K	30,795.-	2542596	K	42,672.-	2542602	K	54,490.-
2203-5.5	2542591	K	34,639.-	2542597	K	48,865.-	2542603	K	63,590.-
2203-6.5	2542592	K	38,657.-	2542598	K	52,017.-	2542604	K	70,561.-
2204	2542593	K	40,544.-	2542599	K	54,313.-	2542605	K	77,564.-
3601	2542606	K	32,513.-	2542610	K	46,657.-	2542614	K	61,404.-
3602-5.5	2542608	K	34,838.-	2542612	K	49,302.-	2542616	K	64,100.-
3602-7.5	2542609	K	35,471.-	2542613	K	50,963.-	2542617	K	66,444.-
3602/2	2542646	K	🕒	2542647	K	🕒	2542648	K	🕒
5201	2542618	K	34,573.-	2542621	K	53,414.-	2542624	K	58,068.-
5202	2542620	K	38,510.-	2542623	K	58,032.-	2542626	K	70,222.-
5202/1	2542619	K	36,280.-	2542622	K	55,724.-	2542625	K	63,898.-

Water supply

🚚 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, 🕒 = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

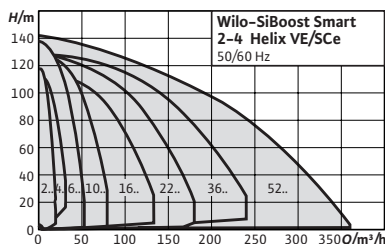

Accessories	Page
Accessories	454
Commissioning/maintenance	683

IE4 Select 4 online
All information at www.wilo-select.com

Wilo-SiBoost Smart Helix VE



Construction

Highly efficient water-supply unit ready for connection with 2 to 4 vertically arranged non-self-priming stainless steel high-pressure multistage centrifugal pumps of the Helix VE series switched in parallel, each pump is equipped with an integrated air-cooled frequency inverter. The system features a Smart Controller SCe.

Application

Fully automatic water supply and pressure boosting in inlet mode, either from the public water supply network or from a tank, for domestic, commercial, industrial and municipal applications (e.g. residential, office, administration buildings, hotels, hospitals, trades, industry, water supply companies). Standby pump included in accordance with DIN 1988 and DIN EN 806.

Approved fluids are generally waters which do not attack the materials used, neither chemically nor mechanically, and do not contain any abrasive or long-fiber constituents like:

- Drinking water (check drinking water approvals in materials section)
- Cooling water
- Process water
- Firefighting water (apart from fire-extinguishing systems in accordance with DIN 14462 and with the approval of the local fire safety authorities)

Your advantages

- Sturdy system with stainless steel high-pressure multistage centrifugal pumps of the Helix VE series with integrated frequency converter
- Over-proportionally wide control range from 25 Hz up to a maximum of 60 Hz
- Pressure-loss optimised entire system
- Integrated dry-run detection with automatic deactivation via the motor control electronics
- Maximum degree of control using the SCe control device with LCD display, simple navigation and adjustment using rotary knob

Scope of delivery

- Factory-mounted, ready-for-connection pressure-boosting system checked for functionality and impermeability
- Packaging
- Installation and operating instructions

Options

Other mains connections on request




Additional charge					
Type	Description	Art. no.	Price group		
					EUR
low-water cut-out switchgear kit WMS R ¼	WMS R ¼ kit, pressure switch as low-water signal transmitter for direct connection to the suction-side pipe.	2521150	L	PG14	174.-
low-water cut-out switchgear kit WMS R ¾	WMS R ¾ kit, pressure switch as low-water signal transmitter for direct connection to the supply pressure-side pipe.	2000424	L	PG14	174.-
SC-HVAC signal board	Signal board	2119646	L	PG15	179.-


Price group: PG6


Ordering information									
SiBoost Smart Helix VE	Art. no.			Art. no.			Art. no.		
	2 pumps			3 pumps			4 pumps		
			EUR		EUR			EUR	
204	2541584	K	10,376.-	2541588	K	14,005.-	2541592	K	17,677.-
206	2541585	K	10,482.-	2541589	K	14,497.-	2541593	K	18,081.-
208	2541586	K	10,751.-	2541590	K	14,637.-	2541594	K	19,197.-
211	2541587	K	12,219.-	2541591	K	15,857.-	2541595	K	19,439.-
403	2537330	K	11,287.-	2537338	K	14,300.-	2537346	K	17,884.-
404	2537358	K	11,519.-	2537359	K	14,596.-	2537360	K	18,251.-
405	2537620	K	11,928.-	2537622	K	15,112.-	2537624	K	18,897.-
407	2537331	K	13,035.-	2537339	K	16,513.-	2537347	K	20,649.-
410	2537621	K	13,599.-	2537623	K	17,682.-	2537625	K	21,732.-
602	2537332	K	11,574.-	2537340	K	14,665.-	2537348	K	17,793.-
603	2536372	K	12,106.-	2536375	K	15,337.-	2536378	K	18,611.-
604	2537333	K	12,991.-	2537341	K	16,459.-	2537349	K	19,971.-
606	2536373	K	13,799.-	2536376	K	17,639.-	2536379	K	21,403.-
608	2537334	K	14,525.-	2537342	K	18,405.-	2537350	K	22,331.-
611	2536374	K	15,253.-	2536377	K	19,325.-	2536380	K	22,889.-
1002	2536345	K	14,860.-	2536349	K	18,907.-	2536353	K	22,035.-
1003	2537335	K	14,162.-	2537343	K	18,019.-	2537351	K	21,000.-
1004	2536346	K	15,346.-	2536350	K	19,523.-	2536354	K	22,754.-
1005	2537336	K	14,763.-	2537344	K	18,784.-	2537352	K	21,893.-
1006	2536347	K	16,151.-	2536351	K	20,549.-	2536355	K	23,952.-
1009	2536348	K	17,092.-	2536352	K	21,441.-	2536356	K	24,803.-
1602	2536333	K	16,817.-	2536337	K	22,157.-	2536341	K	26,167.-
1603/3kW	2537337	K	16,490.-	2537345	K	21,726.-	2537353	K	26,837.-
1603/4kW	2536334	K	18,327.-	2536338	K	24,144.-	2536342	K	28,514.-
1605	2536335	K	21,234.-	2536339	K	27,618.-	2536343	K	34,415.-
1606	2536336	K	23,244.-	2536340	K	30,268.-	2536344	K	37,687.-
2202-3	2540937	K	22,505.-	2540938	K	31,185.-	2540939	K	39,822.-
2202-3-ES	2547333	A	☞	2547338	A	☞	2547343	A	☞
2202-4	2540901	K	23,689.-	2540905	K	32,826.-	2540909	K	41,916.-
2202-4-ES	2547334	A	☞	2547339	A	☞	2547344	A	☞
2203	2540902	K	26,645.-	2540906	K	37,588.-	2540910	K	48,916.-
2203-ES	2547335	A	☞	2547340	A	☞	2547345	A	☞
2204	2540903	K	31,188.-	2540907	K	41,779.-	2540911	K	59,664.-
2204-ES	2547336	A	☞	2547341	A	☞	2547346	A	☞

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☞ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.



Ordering information									
SiBoost Smart Helix VE	Art. no.			Art. no.			Art. no.		
	2 pumps			3 pumps			4 pumps		
			EUR			EUR			EUR
2205	2540904	K	33,809.-	2540908	K	50,024.-	2540912	K	64,637.-
2205-ES	2547337	A	☞	2547342	A	☞	2547347	A	☞
3602-5.5	2540913	K	26,798.-	2540917	K	37,924.-	2540921	K	49,308.-
3602-5.5-ES	2547348	A	☞	2547352	A	☞	2547356	A	☞
3602-7.5	2540914	K	27,286.-	2540918	K	39,203.-	2540922	K	51,110.-
3602-7.5-ES	2547349	A	☞	2547353	A	☞	2547357	A	☞
3604	2540915	K	32,200.-	2540919	K	46,840.-	2540923	K	66,538.-
3604-ES	2547350	A	☞	2547354	A	☞	2547358	A	☞
3605	2540916	K	36,707.-	2540920	K	53,400.-	2540924	K	74,472.-
3605-ES	2547351	A	☞	2547355	A	☞	2547359	A	☞
5202	2540925	K	29,623.-	2540929	K	44,639.-	2540933	K	54,016.-
5202-ES	2547360	A	☞	2547364	A	☞	2547368	A	☞
5203	2540926	K	32,288.-	2540930	K	48,659.-	2540934	K	58,876.-
5203-ES	2547361	A	☞	2547365	A	☞	2547369	A	☞
5204	2540927	K	38,425.-	2540931	K	58,388.-	2540935	K	75,361.-
5204-ES	2547362	A	☞	2547366	A	☞	2547370	A	☞
5205	2540928	K	64,813.-	2540932	K	64,813.-	2540936	K	84,403.-
5205-ES	2547363	A	☞	2547367	A	☞	2547371	A	☞

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☞ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

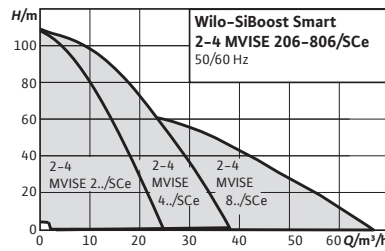

Accessories	Page
Accessories	454
Commissioning/maintenance	683

Select4online
All information at www.wilo-select.com

Wilo-SiBoost Smart MVISE



Construction

Low noise water-supply unit ready for connection with 2 to 4 vertically arranged, non-self-priming glandless stainless steel high-pressure multistage centrifugal pumps of MVISE series switched in parallel. Each pump is equipped with integrated water-cooled frequency inverter. The system features a Smart Controller SCe.

Application

Fully automatic water supply and pressure boosting in inlet mode, either from the public water supply network or from a tank at least 0.5 meter above the pump, for domestic, commercial, industrial and municipal applications (e.g. residential, office, administration buildings, hotels, hospitals, trades, industry, water supply companies). Standby pump included in accordance with DIN 1988 and DIN EN 806.

Approved fluids are generally waters which do not attack the materials used, neither chemically nor mechanically, and do not contain any abrasive or long-fiber constituents like:

- Drinking water
- Cooling water
- Process water
- Firefighting water (apart from fire-extinguishing systems in accordance with DIN 14462 and with the approval of the local fire safety authorities).

Scope of delivery

- Factory-mounted, ready-for-connection pressure-boosting system checked for functionality and impermeability
- Packaging

Your advantages

- Optimum pump load adjustment due to pressure variable (pv) control mode and parallel synchronous speed control for higher energy savings
- Up to 20 dB[A] quieter operation than conventional systems with comparable hydraulic output
- Disproportionately large frequency converter control range from 20 to a maximum of 50 Hz
- Maintenance-free pumps design without mechanical seals
- High reliability thanks to various protective features including overload protection, dry-running protection and automatic deactivation
- Easy setting and operation with the SCe control panel thanks to LCD display, and green knob for adjustment
- Drinking water approvals for all components in contact with the fluid
- Ready for building automation integration with the SCe control panel via Modbus

- Installation and operating instructions

Options


Other mains connections on request

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Additional charge					
Type	Description	Art. no.	Price group		
					EUR
low-water cut-out switchgear kit WMS R ¼	WMS R ¼ kit, pressure switch as low-water signal transmitter for direct connection to the suction-side pipe.	2521150	L	PG14	174.-
low-water cut-out switchgear kit WMS R ¾	WMS R ¾ kit, pressure switch as low-water signal transmitter for direct connection to the supply pressure-side pipe.	2000424	L	PG14	174.-

Price group: PG6

Ordering information									
SiBoost Smart MWISE	Art. no.		Art. no.		Art. no.		Art. no.		
	2 pumps		3 pumps		4 pumps				
			EUR		EUR		EUR		EUR
206	2550743	K	13,837.-	2550750	K	16,712.-	2550757	K	20,170.-
210	2550744	K	14,523.-	2550751	K	18,275.-	2550758	K	21,129.-
404	2550745	K	13,908.-	2550752	K	18,492.-	2550759	K	22,124.-
406	2550746	K	14,073.-	2550753	K	18,649.-	2550760	K	22,219.-
410	2550747	K	15,905.-	2550754	K	20,102.-	2550761	K	23,545.-
803	2550748	K	15,683.-	2550755	K	20,355.-	2550762	K	24,133.-
806	2550749	K	17,314.-	2550756	K	22,030.-	2550763	K	25,680.-

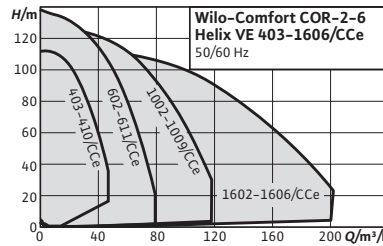

Accessories	Page
Accessories	454
Commissioning/maintenance	683

IE4 Select 4 online
All information at www.wilo-select.com

Wilo-Comfort COR Helix VE.../CCe



Construction

Highly efficient water-supply unit ready for connection (non self-priming). With 2 to 6 vertically arranged Helix VE series stainless steel high-pressure centrifugal pumps in glanded version switched in parallel; every pump is equipped with an integrated air-cooled frequency converter, including Comfort Controller CCe

Application

- Fully automatic water supply and pressure boosting in residential, commercial and public buildings, hotels, hospitals, department stores and for industrial systems.
- Pumping of drinking water and process water, cooling water, fire water (apart from fire-extinguishing systems in accordance with DIN 14462 and with the approval of the local fire safety authorities) or other types of industrial water that do not attack the materials either chemically or mechanically and do not contain abrasive or long-fibre constituents.

Your advantages

- Sturdy system with Helix VE stainless steel high-pressure centrifugal pumps with integrated frequency converter that can be controlled from 25 Hz to 60 Hz
- High-efficiency pump hydraulics
- Entire system is pressure-loss optimised
- Integrated dry-running detection with automatic deactivation via the motor control electronics
- Maximum degree of control using the CCe control device with additional functions, micro-computer control and touch display




Scope of delivery

- Factory-mounted, connection-ready pressure boosting system checked for functionality and impermeability
- Packaging
- Installation and operating instructions
- Transport eyes for self-assembly



Additional charge					
Type	Description	Art. no.		Price group	
					EUR
low-water cut-out switchgear kit WMS R ¼	WMS R ¼ kit, pressure switch as low-water signal transmitter for direct connection to the suction-side pipe.	2521150	L	PG14	174.-
low-water cut-out switchgear kit WMS R ¾	WMS R ¾ kit, pressure switch as low-water signal transmitter for direct connection to the supply pressure-side pipe.	2000424	L	PG14	174.-

= ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG6

Ordering information									
Comfort COR Helix VE.../CCe	Art. no.			Art. no.			Art. no.		
	2 pumps			3 pumps			4 pumps		
			EUR			EUR			EUR
403/K/CCe	2539314	K	14,248.-	2539323	K	18,053.-	2539332	K	22,574.-
404/K/CCe	2539315	K	14,544.-	2539324	K	18,424.-	2539333	K	23,039.-
405/K/CCe	2537610	K	15,058.-	2537612	K	19,077.-	2537614	K	23,853.-
407/K/CCe	2539316	K	16,452.-	2539325	K	20,844.-	2539334	K	26,064.-
410/K/CCe	2537611	K	17,166.-	2537613	K	22,318.-	2537615	K	27,430.-
602/K/CCe	2539317	K	14,609.-	2539326	K	18,510.-	2539335	K	22,459.-
603/K/CCe	2536357	K	15,281.-	2536360	K	19,361.-	2536363	K	23,490.-
604/K/CCe	2539318	K	16,397.-	2539327	K	20,776.-	2539336	K	25,210.-
606/K/CCe	2536358	K	17,420.-	2536361	K	22,265.-	2536364	K	27,015.-
608/K/CCe	2539319	K	18,337.-	2539328	K	23,231.-	2539337	K	28,189.-
611/K/CCe	2536359	K	19,255.-	2536362	K	24,394.-	2536365	K	28,894.-
1002/K/CCe	2535967	K	18,598.-	2535971	K	23,665.-	2535975	K	27,579.-
1003/K/CCe	2539320	K	18,556.-	2539329	K	22,549.-	2539338	K	26,282.-
1004/K/CCe	2535968	K	19,204.-	2535972	K	24,434.-	2535976	K	28,478.-
1005/K/CCe	2539321	K	19,347.-	2539330	K	23,510.-	2539339	K	27,399.-
1006/K/CCe	2535969	K	20,215.-	2535973	K	25,721.-	2535977	K	29,975.-
1009/K/CCe	2535970	K	21,429.-	2535974	K	27,264.-	2535978	K	31,774.-
1602/K/CCe	2532327	K	20,123.-	2532332	K	27,732.-	2532337	K	34,255.-
1603/K-3kw/CCe	2539322	K	21,608.-	2539331	K	27,190.-	2539340	K	33,590.-
1603/K/CCe	2532328	K	21,928.-	2532333	K	30,219.-	2532338	K	37,328.-
1605/K/CCe	2532329	K	26,985.-	2532334	K	35,551.-	2532339	K	43,919.-
1606/K/CCe	2532330	K	29,683.-	2532335	K	39,107.-	2532340	K	48,308.-



Price group: PG6


Ordering information												
Comfort COR Helix VE.../CCe				Art. no.				Art. no.				
				5 pumps				6 pumps				
					EUR					EUR		
403/K/CCe				2539341	K	27,505.-				2539350	K	31,205.-
404/K/CCe				2539342	K	28,073.-				2539351	K	31,849.-
405/K/CCe				2537616	K	29,066.-				2537618	K	32,972.-
407/K/CCe				2539343	K	31,760.-				2539352	K	36,030.-
410/K/CCe				2537617	K	31,972.-				2537619	K	36,929.-
602/K/CCe				2539344	K	26,759.-				2539353	K	30,713.-
603/K/CCe				2536366	K	27,990.-				2536369	K	32,122.-
604/K/CCe				2539345	K	30,036.-				2539354	K	34,474.-
606/K/CCe				2536367	K	30,787.-				2536370	K	35,336.-
608/K/CCe				2539346	K	33,586.-				2539355	K	38,547.-
611/K/CCe				2536368	K	34,988.-				2536371	K	40,152.-
1002/K/CCe				2535979	K	34,147.-				2535983	K	40,056.-
1003/K/CCe				2539347	K	32,542.-				2539356	K	38,173.-
1004/K/CCe				2535980	K	35,261.-				2535984	K	41,362.-
1005/K/CCe				2539348	K	33,925.-				2539357	K	39,795.-
1006/K/CCe				2535981	K	37,117.-				2535985	K	43,537.-
1009/K/CCe				2535982	K	39,343.-				2535986	K	46,150.-
1602/K/CCe				2532342	K	38,766.-				2532347	K	44,648.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG6

Ordering information						
Comfort COR Helix VE.../CCe	Art. no. 5 pumps		Art. no. 6 pumps			
			EUR			EUR
1603/k-3kw/CCe	2539349	K	38,013.-	2539358	K	43,778.-
1603/k/CCe	2532343	K	42,246.-	2532348	K	48,657.-
1605/k/CCe	2532344	K	49,700.-	2532349	K	57,242.-
1606/k/CCe	2532345	K	54,670.-	2532350	K	62,966.-

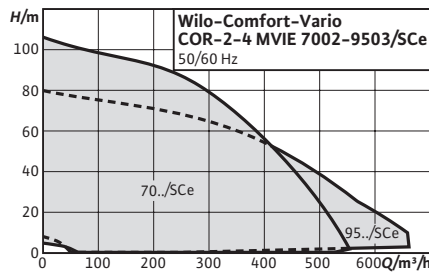

Accessories	Page
Accessories	454
Commissioning/maintenance	683

Select 4 online

All information at www.wilo-select.com

Wilo-Comfort-Vario COR MVIE.../SCe



Construction

Pressure boosting system ready for connection with 2 to 4 vertically arranged non-self-priming high-pressure multistage centrifugal pumps of the MVIE 70 or 95 series switched in parallel. Each pump is equipped with integrated air-cooled frequency inverters. The system features a Smart Controller SCe.

Application

Fully automatic water supply and pressure boosting system in inlet mode or from a tank, for domestic, commercial, industrial and municipal applications (e.g. residential, office, administration buildings, hotels, hospitals, trades, industry or water supply companies). Standby pump included in accordance with DIN 1988 and DIN EN 806.

Approved fluids are generally waters which do not attack the materials used, neither chemically nor mechanically, and do not contain any abrasive or long-fiber constituents like:

- Drinking water (depends on required drinking water approvals, please check materials section)
- Pure water
- Cooling water
- Process water
- Firefighting water (apart from fire-extinguishing systems in accordance with DIN 14462 and with the approval of the local fire safety authorities)

Your advantages

- High energy system efficiency thanks to IE4 motor and optimised hydraulics
- Disproportionately large frequency converter control range from 25 Hz up to a maximum of 60 Hz for a large field of application
- High reliability thanks to various protective features including overload protection, dry-running protection and automatic deactivation.
- Easy setting and operation with the SCe control panel thanks to LCD display, and green knob for adjustment.
- Ready for building automation integration with the SCe control panel via Modbus

Scope of delivery




- Factory-mounted, ready-for-connection pressure-boosting system checked for functionality and impermeability
- Packaging
- Installation and operating instructions


Options



Other mains connections on request


☑ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
 Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG6

Ordering information									
Comfort-Vario COR MVIE.../SCe	Art. no. 2 pumps			Art. no. 3 pumps			Art. no. 4 pumps		
			EUR			EUR			EUR
7002/SCe	2552080	K	53,405.-	2552084	K	60,574.-	2552088	K	78,082.-
7003/1/SCe	2552081	K	50,161.-	2552085	K	66,882.-	2552089	K	82,454.-
7004/2/SCe	2552082	K	55,452.-	2552086	K	67,017.-	2552090	K	84,649.-
7004/SCe	2552083	K	59,899.-	2552087	K	72,658.-	2552091	K	121,297.-
9501/SCe	2552092	K	54,529.-	2552096	K	62,749.-	2552100	K	79,861.-
9502/1/SCe	2552093	K	57,214.-	2552097	K	67,484.-	2552101	K	85,304.-
9502/SCe	2552094	K	55,423.-	2552098	K	67,652.-	2552102	K	85,098.-
9503/2/SCe	2552095	K	56,524.-	2552099	K	72,906.-	2552103	K	91,236.-

Additional charge					
Type	Description	Art. no.		Price group	EUR
low-water cut-out switchgear kit WMS R ¼	WMS R ¼ kit, pressure switch as low-water signal transmitter for direct connection to the suction-side pipe.	2521150	L	PG14	174.-
low-water cut-out switchgear kit WMS R ¾	WMS R ¾ kit, pressure switch as low-water signal transmitter for direct connection to the supply pressure-side pipe.	2000424	L	PG14	174.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

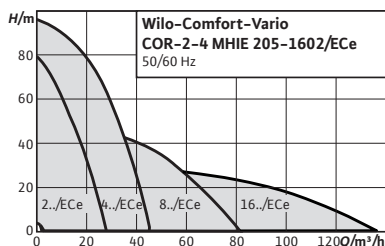

Accessories	Page
Accessories	454
Commissioning/maintenance	683

Select 4 online

All information at www.wilo-select.com

Wilo-Comfort-Vario COR MHIE.../ECe



Construction

Pressure-boosting system with 2 to 3 non self-priming stainless steel high-pressure multistage centrifugal pumps switched in parallel with integrated frequency converter

Application

- Fully automatic water supply and pressure boosting in inlet mode, either from the public water supply network or from a tank, for domestic, commercial, industrial and municipal applications (e.g. residential, office, administration buildings, hotels, hospitals, trades, industry, water supply companies).
- Pumping of drinking water and process water, cooling water or other service water, which do not affect the materials used, neither chemically nor mechanically, and do not contain any abrasive or long-fibre constituents

Scope of delivery

- factory-mounted, ready for connection pressure-boosting system checked for functionality and impermeability

Your advantages

- Compact system with outstanding price/performance ratio due to MHIE series stainless steel high-pressure multistage centrifugal pumps with integrated air-cooled frequency converters
- Super proportionally large control range
- Integrated full motor protection with thermistor sensor (PTC)
- Integrated dry-running detection with automatic deactivation in the event of low water via the motor control electronics
- Potable drinking water approval (ACS, KTW, WRAS) for all components in contact with the fluid (EPDM version)

- Packaging
- Installation and operating instructions

Options

Other mains connections on request

Additional charge					
Type	Description	Art. no.	Price group		
					EUR
low-water cut-out switchgear kit WMS R ¼	WMS R ¼ kit, pressure switch as low-water signal transmitter for direct connection to the suction-side pipe.	2521150	L	PG14	174.-
low-water cut-out switchgear kit WMS R ¾	WMS R ¾ kit, pressure switch as low-water signal transmitter for direct connection to the supply pressure-side pipe.	2000424	L	PG14	174.-

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.


Price group: PG6

Ordering information 1~230 V							
Comfort-Vario COR MHIE.../ECe	Mains connection	Art. no. 2 pumps		Art. no. 3 pumps			
205EM/ECe	1~230 V, 50/60 Hz	2551681	A	2551683	A		
403EM/ECe	1~230 V, 50/60 Hz	2551682	A	2551684	A		

Price group: PG6

Ordering information (3~400 V)							
Comfort-Vario COR MHIE.../ECe	Mains connection	Art. no. 2 pumps		Art. no. 3 pumps			
205/ECe	3~400 V, 50/60 Hz	2551651	A	2551656	A		
403/ECe	3~400 V, 50/60 Hz	2551652	A	2551657	A		
406/ECe	3~400 V, 50/60 Hz	2551653	A	2551658	A		
803/ECe	3~400 V, 50/60 Hz	2551654	A	2551659	A		
1602/ECe	3~400 V, 50/60 Hz	2551655	A	2551660	A		

☺ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

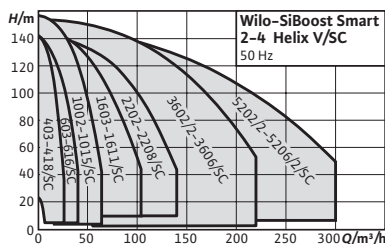

Accessories	Page
Accessories	454
Commissioning/maintenance	683

Select 4 online

All information at www.wilo-select.com

Wilo-SiBoost Smart (FC) Helix V



Construction

Highly efficient water-supply unit ready for connection (non self-priming) with 2 to 4 vertically arranged stainless steel high-pressure multistage centrifugal pumps in glanded version from the Helix V series switched in parallel, including Smart Controller SC (available with and without frequency converter FC)

Application

- Fully automatic water supply and pressure boosting in inlet mode, either from the public water supply network or from a tank, for domestic, commercial, industrial and municipal applications (e.g. residential, office, administration buildings, hotels, hospitals, trades, industry, water supply companies).
- Pumping of drinking water and process water, cooling water, fire water (apart from fire-extinguishing systems in accordance with DIN 14462 and with the approval of the local fire safety authorities) or other types of industrial water that do not attack the materials either chemically or mechanically and do not contain abrasive or long-fibre constituents.

Scope of delivery

- Factory-mounted, ready-for-connection pressure-boosting system checked for functionality and impermeability
- Packaging
- Installation and operating instructions


Your advantages

- Heavy-duty system in accordance with DIN 1988 (EN 806)
- 2 to 4 vertical Helix V series stainless steel high-pressure multistage centrifugal pumps switched in parallel
- High-efficiency pump hydraulics
- Pressure-loss optimised entire system
- Control device SC, communication-capable for the monitoring of the system, LC display, simple navigation and adjustment via rotary knob without or with frequency converter for stepless control of the base-load pump




Options

Other mains connections on request

☒ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☒ = please contact Wilo
 Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.




Additional charge					
Type	Description	Art. no.		Price group	
					EUR
low-water cut-out switchgear kit WMS R ¼	WMS R ¼ kit, pressure switch as low-water signal transmitter for direct connection to the suction-side pipe.	2521150	 L	PG14	174.-
low-water cut-out switchgear kit WMS R ¾	WMS R ¾ kit, pressure switch as low-water signal transmitter for direct connection to the supply pressure-side pipe.	2000424	L	PG14	174.-


Price group: PG6

Ordering information									
SiBoost Smart (FC) Helix V	Art. no.			Art. no.			Art. no.		
	2 pumps			3 pumps			4 pumps		
			EUR			EUR			EUR
403	2537580	K	11,771.-	2537590	K	14,813.-	2537600	K	18,415.-
404	2537581	K	12,022.-	2537591	K	15,131.-	2537601	K	18,807.-
406	2537582	K	12,523.-	2537592	K	15,758.-	2537602	K	19,588.-
407	2537583	K	12,648.-	2537593	K	15,918.-	2537603	K	19,787.-
409	2537584	K	12,899.-	2537594	K	16,232.-	2537604	K	20,180.-
410	2537585	K	13,148.-	2537595	K	16,548.-	2537605	K	20,569.-
412	2537586	K	13,398.-	2537596	K	16,862.-	2537606	K	20,962.-
414	2537587	K	13,649.-	2537597	K	17,179.-	2537607	K	21,355.-
416	2537588	K	13,899.-	2537598	K	17,493.-	2537608	K	21,745.-
418	2537589	K	14,402.-	2537599	K	18,124.-	2537609	K	22,529.-
603	2536033	K	12,940.-	2536047	K	16,675.-	2536061	K	19,024.-
604	2536034	K	13,231.-	2536048	K	17,053.-	2536062	K	19,453.-
605	2536035	K	13,522.-	2536049	K	17,424.-	2536063	K	19,879.-
606	2536036	K	13,958.-	2536050	K	17,988.-	2536064	K	20,523.-
607	2536037	K	14,248.-	2536051	K	18,364.-	2536065	K	20,950.-
608	2536038	K	14,540.-	2536052	K	18,737.-	2536066	K	21,377.-
609	2536039	K	14,685.-	2536053	K	18,926.-	2536067	K	21,590.-
610	2536040	K	14,831.-	2536054	K	19,112.-	2536068	K	21,804.-
611	2536041	K	14,975.-	2536055	K	19,299.-	2536069	K	22,018.-
612	2536042	K	15,266.-	2536056	K	19,675.-	2536070	K	22,446.-
613	2536043	K	15,412.-	2536057	K	19,862.-	2536071	K	22,659.-
614	2536044	K	15,703.-	2536058	K	20,238.-	2536072	K	23,088.-
615	2536045	K	15,848.-	2536059	K	20,424.-	2536073	K	23,299.-
616	2536046	K	16,285.-	2536060	K	20,986.-	2536074	K	23,942.-
1002	2536114	K	13,925.-	2536127	K	17,397.-	2536140	K	20,425.-
1003	2536115	K	14,737.-	2536128	K	18,408.-	2536141	K	21,850.-
1004	2536116	K	15,383.-	2536129	K	19,219.-	2536142	K	22,562.-
1005	2536117	K	15,869.-	2536130	K	19,824.-	2536143	K	23,275.-
1006	2536118	K	16,193.-	2536131	K	20,228.-	2536144	K	23,748.-
1007	2536119	K	16,678.-	2536132	K	20,836.-	2536145	K	24,938.-
1008	2536120	K	17,003.-	2536133	K	21,242.-	2536146	K	25,176.-
1009	2536121	K	17,649.-	2536134	K	22,051.-	2536147	K	25,887.-
1010	2536122	K	17,975.-	2536135	K	22,455.-	2536148	K	26,125.-
1011	2536123	K	18,136.-	2536136	K	22,657.-	2536149	K	26,361.-
1012	2536124	K	18,784.-	2536137	K	23,467.-	2536150	K	27,311.-




 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Ordering information									
SiBoost Smart (FC) Helix V	Art. no. 2 pumps		EUR	Art. no. 3 pumps		EUR	Art. no. 4 pumps		EUR
									
1013	2536125	K	18,943.-	2536138	K	23,669.-	2536151	K	27,787.-
1015	2536126	K	19,270.-	2536139	K	24,073.-	2536152	K	28,261.-
1603	2536180	K	17,256.-	2536189	K	21,751.-	2536198	K	23,884.-
1604	2536181	K	17,830.-	2536190	K	22,476.-	2536199	K	24,679.-
1605	2536182	K	18,214.-	2536191	K	22,957.-	2536200	K	25,211.-
1606	2536183	K	19,174.-	2536192	K	24,166.-	2536201	K	26,537.-
1607	2536184	K	21,090.-	2536193	K	26,583.-	2536202	K	29,191.-
1608	2536185	K	22,050.-	2536194	K	27,791.-	2536203	K	30,518.-
1609	2536186	K	22,634.-	2536195	K	28,528.-	2536204	K	31,327.-
1610	2536187	K	24,317.-	2536196	K	30,650.-	2536205	K	33,658.-
1611	2536188	K	25,253.-	2536197	K	31,827.-	2536206	K	34,952.-
2202	2540738	K	20,885.-	2540745	K	28,085.-	2540752	K	33,064.-
2203	2540739	K	22,197.-	2540746	K	29,991.-	2540753	K	35,688.-
2204	2540740	K	23,584.-	2540747	K	32,034.-	2540754	K	37,725.-
2205	2540741	K	25,926.-	2540748	K	34,015.-	2540755	K	43,727.-
2206	2540742	K	28,045.-	2540749	K	36,237.-	2540756	K	45,127.-
2207	2540743	K	30,941.-	2540750	K	40,106.-	2540757	K	51,201.-
2208	2540744	K	32,935.-	2540751	K	42,122.-	2540758	K	53,433.-
3602	2540790	K	28,081.-	2540800	K	35,045.-	2540810	K	40,790.-
3602/2	2540789	K	25,855.-	2540799	K	32,263.-	2540809	K	37,554.-
3603	2540792	K	31,671.-	2540802	K	39,520.-	2540812	K	46,001.-
3603/1	2540791	K	29,592.-	2540801	K	36,928.-	2540811	K	42,981.-
3604	2540794	K	34,710.-	2540804	K	43,314.-	2540814	K	50,415.-
3604/2	2540793	K	34,206.-	2540803	K	42,685.-	2540813	K	49,682.-
3605	2540796	K	40,133.-	2540806	K	50,083.-	2540816	K	58,294.-
3605/2	2540795	K	38,589.-	2540805	K	48,153.-	2540815	K	56,049.-
3606	2540798	K	45,092.-	2540808	K	56,269.-	2540818	K	65,493.-
3606/2	2540797	K	42,142.-	2540807	K	52,588.-	2540817	K	61,208.-
5202	2540847	K	35,199.-	2540856	K	45,854.-	2540865	K	53,880.-
5202/2	2540846	K	32,505.-	2540855	K	42,342.-	2540864	K	49,752.-
5203	2540849	K	40,621.-	2540858	K	52,914.-	2540867	K	62,176.-
5203/2	2540848	K	38,241.-	2540857	K	49,815.-	2540866	K	58,529.-
5204	2540851	K	45,508.-	2540860	K	59,279.-	2540869	K	69,651.-
5204/2	2540850	K	43,596.-	2540859	K	56,291.-	2540868	K	66,723.-
5205	2540853	K	50,477.-	2540862	K	65,754.-	2540871	K	79,016.-
5205/2	2540852	K	48,948.-	2540861	K	61,770.-	2540870	K	76,089.-
5206/2	2540854	K	53,921.-	2540863	K	70,239.-	2540872	K	82,527.-




 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.



Price group: PG6


Ordering information										
SiBoost Smart (FC) Helix V		Art. no. 2 pumps			Art. no. 3 pumps			Art. no. 4 pumps		
			EUR			EUR			EUR	
403	2537550	K	10,493.-	2537560	K	13,461.-	2537570	K	16,171.-	
404	2537551	K	10,718.-	2537561	K	13,746.-	2537571	K	16,514.-	
406	2537552	K	11,163.-	2537562	K	14,320.-	2537572	K	17,202.-	
407	2537553	K	11,277.-	2537563	K	14,462.-	2537573	K	17,373.-	
409	2537554	K	11,500.-	2537564	K	14,749.-	2537574	K	17,717.-	
410	2537555	K	11,722.-	2537565	K	15,034.-	2537575	K	18,062.-	
412	2537556	K	11,946.-	2537566	K	15,321.-	2537576	K	18,406.-	
414	2537557	K	12,169.-	2537567	K	15,609.-	2537577	K	18,749.-	
416	2537558	K	12,392.-	2537568	K	15,894.-	2537578	K	19,094.-	
418	2537559	K	12,839.-	2537569	K	16,469.-	2537579	K	19,782.-	
603	2535991	K	9,672.-	2536005	K	12,159.-	2536019	K	14,443.-	
604	2535992	K	9,889.-	2536006	K	12,407.-	2536020	K	14,766.-	
605	2535993	K	10,107.-	2536007	K	12,654.-	2536021	K	15,093.-	
606	2535994	K	10,432.-	2536008	K	12,904.-	2536022	K	15,579.-	
607	2535995	K	10,648.-	2536009	K	13,398.-	2536023	K	15,904.-	
608	2535996	K	10,868.-	2536010	K	13,648.-	2536024	K	16,228.-	
609	2535997	K	10,976.-	2536011	K	13,896.-	2536025	K	16,390.-	
610	2535998	K	11,084.-	2536012	K	14,145.-	2536026	K	16,554.-	
611	2535999	K	11,194.-	2536013	K	14,391.-	2536027	K	16,715.-	
612	2536000	K	11,410.-	2536014	K	13,996.-	2536028	K	17,039.-	
613	2536001	K	11,517.-	2536015	K	14,116.-	2536029	K	17,202.-	
614	2536002	K	11,735.-	2536016	K	14,351.-	2536030	K	17,526.-	
615	2536003	K	11,845.-	2536017	K	15,261.-	2536031	K	17,691.-	
616	2536004	K	12,171.-	2536018	K	15,633.-	2536032	K	18,175.-	
1002	2536075	K	10,346.-	2536088	K	13,154.-	2536101	K	15,090.-	
1003	2536076	K	10,570.-	2536089	K	13,739.-	2536102	K	15,776.-	
1004	2536077	K	10,906.-	2536090	K	14,178.-	2536103	K	16,289.-	
1005	2536078	K	11,020.-	2536091	K	14,324.-	2536104	K	16,803.-	
1006	2536079	K	11,244.-	2536092	K	14,617.-	2536105	K	17,146.-	
1007	2536080	K	11,584.-	2536093	K	15,055.-	2536106	K	18,003.-	
1008	2536081	K	11,694.-	2536094	K	15,200.-	2536107	K	18,175.-	
1009	2536082	K	11,806.-	2536095	K	15,638.-	2536108	K	18,690.-	
1010	2536083	K	12,030.-	2536096	K	15,785.-	2536109	K	18,861.-	
1011	2536084	K	12,256.-	2536097	K	15,932.-	2536110	K	19,032.-	
1012	2536085	K	12,931.-	2536098	K	16,371.-	2536111	K	19,718.-	
1013	2536086	K	13,155.-	2536099	K	16,808.-	2536112	K	20,061.-	
1015	2536087	K	13,491.-	2536100	K	17,099.-	2536113	K	20,403.-	
1603	2536153	K	12,288.-	2536162	K	16,156.-	2536171	K	18,929.-	
1604	2536154	K	12,699.-	2536163	K	16,695.-	2536172	K	19,559.-	
1605	2536155	K	12,970.-	2536164	K	17,056.-	2536173	K	19,978.-	
1606	2536156	K	13,654.-	2536165	K	17,950.-	2536174	K	21,033.-	
1607	2536157	K	15,021.-	2536166	K	19,746.-	2536175	K	23,907.-	
1608	2536158	K	15,700.-	2536167	K	20,645.-	2536176	K	24,993.-	
1609	2536159	K	15,409.-	2536168	K	20,260.-	2536177	K	24,525.-	
1610	2536160	K	16,555.-	2536169	K	21,766.-	2536178	K	26,350.-	

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Ordering information									
SiBoost Smart (FC) Helix V	Art. no. 2 pumps		EUR	Art. no. 3 pumps		EUR	Art. no. 4 pumps		EUR
									
1611	2536161	K	17,193.-	2536170	K	22,603.-	2536179	K	27,361.-
2202	2540717	K	14,397.-	2540724	K	19,344.-	2540731	K	23,813.-
2203	2540718	K	15,030.-	2540725	K	20,059.-	2540732	K	24,848.-
2204	2540719	K	15,787.-	2540726	K	21,276.-	2540733	K	26,311.-
2205	2540720	K	16,945.-	2540727	K	23,583.-	2540734	K	30,141.-
2206	2540721	K	17,758.-	2540728	K	24,370.-	2540735	K	31,133.-
2207	2540722	K	19,436.-	2540729	K	26,475.-	2540736	K	33,940.-
2208	2540723	K	20,921.-	2540730	K	28,352.-	2540737	K	36,510.-
3602	2540760	K	17,035.-	2540770	K	23,412.-	2540780	K	30,130.-
3602/2	2540759	K	16,088.-	2540769	K	22,558.-	2540779	K	29,030.-
3603	2540762	K	19,659.-	2540772	K	27,569.-	2540782	K	35,478.-
3603/1	2540761	K	18,507.-	2540771	K	25,954.-	2540781	K	33,400.-
3604	2540764	K	21,555.-	2540774	K	30,532.-	2540784	K	39,290.-
3604/2	2540763	K	20,848.-	2540773	K	29,236.-	2540783	K	37,625.-
3605	2540766	K	24,995.-	2540776	K	35,752.-	2540786	K	46,011.-
3605/2	2540765	K	24,284.-	2540775	K	34,392.-	2540785	K	44,262.-
3606	2540768	K	29,021.-	2540778	K	41,511.-	2540788	K	53,421.-
3606/2	2540767	K	26,989.-	2540777	K	38,602.-	2540787	K	49,678.-
5202	2540820	K	22,007.-	2540829	K	32,247.-	2540838	K	40,482.-
5202/2	2540819	K	20,322.-	2540828	K	29,775.-	2540837	K	37,382.-
5203	2540822	K	25,395.-	2540831	K	37,211.-	2540840	K	46,716.-
5203/2	2540821	K	23,909.-	2540830	K	35,032.-	2540839	K	43,979.-
5204	2540824	K	27,849.-	2540833	K	40,801.-	2540842	K	51,221.-
5204/2	2540823	K	26,301.-	2540832	K	38,535.-	2540841	K	48,377.-
5205	2540826	K	30,496.-	2540835	K	44,684.-	2540844	K	56,095.-
5205/2	2540825	K	29,627.-	2540834	K	43,410.-	2540843	K	54,499.-
5206/2	2540827	K	32,928.-	2540836	K	48,245.-	2540845	K	60,566.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

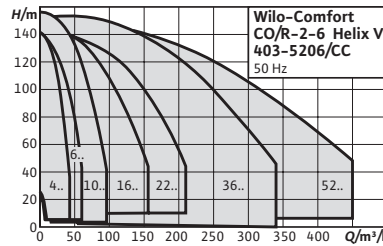

Accessories	Page
Accessories	454
Commissioning/maintenance	683

Select 4 online

All information at www.wilo-select.com

Wilo-Comfort CO-/COR-Helix V.../CC



Construction

Highly efficient, ready for connection water-supply unit (non self-priming) with 2 to 6 vertically arranged glanded stainless steel high-pressure multistage centrifugal pumps from the Helix V series switched in parallel, including Comfort Controller CC (available with and without frequency converter)

Application

- Fully automatic water supply and pressure boosting in inlet mode, either from the public water supply network or from a tank, for domestic, commercial, industrial and municipal applications (e.g. residential, office, administration buildings, hotels, hospitals, trades, industry, water supply companies).
- Pumping of drinking water and process water, cooling water, fire water (apart from fire-extinguishing systems in accordance with DIN 14462 and with the approval of the local fire safety authorities) or other types of industrial water that do not attack the materials either chemically or mechanically and do not contain abrasive or long-fibre constituents.

Your advantages

- Heavy-duty system in accordance with DIN 1988 (EN 806)
- High-efficiency pump hydraulics
- Pressure-loss optimised entire system
- 2 to 6 vertical Helix V series stainless steel high-pressure multistage centrifugal pumps switched in parallel
- Comfort CC control / regulation unit with extended functions, microcomputer and touchscreen, with or without frequency converter for infinitely variable control of the base-load pump

- Factory-mounted, ready-for-connection pressure-boosting system checked for functionality and impermeability
- Packaging
- Installation and operating instructions
- Transport eyes for self-assembly

Options

Other mains connections on request

Scope of delivery

Additional charge					
Type	Description	Art. no.	Price group		
low-water cut-out switchgear kit WMS R ¼	WMS R ¼ kit, pressure switch as low-water signal transmitter for direct connection to the suction-side pipe.	2521150	L	PG14	EUR 174.-

= ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.





Additional charge						
Type	Description	Art. no.	Price group		EUR	
low-water cut-out switchgear kit WMS R ¾	WMS R ¾ kit, pressure switch as low-water signal transmitter for direct connection to the supply pressure-side pipe.	2000424	L	PG14	174.-	

Price group: PG6





Ordering information									
Comfort CO-/COR-Helix V.../CC	Art. no.			Art. no.			Art. no.		
	2 pumps			3 pumps			4 pumps		
			EUR		EUR		EUR		EUR
403/K/CC	2536405	K	12,348.-	2536415	K	15,835.-	2536425	K	19,023.-
404/K/CC	2536406	K	12,609.-	2536416	K	16,174.-	2536426	K	19,427.-
406/K/CC	2536407	K	13,134.-	2536417	K	16,846.-	2536427	K	20,240.-
407/K/CC	2536408	K	13,267.-	2536418	K	17,015.-	2536428	K	20,441.-
409/K/CC	2536409	K	13,528.-	2536419	K	17,351.-	2536429	K	20,845.-
410/K/CC	2536410	K	13,791.-	2536420	K	17,690.-	2536430	K	21,249.-
412/K/CC	2536411	K	14,055.-	2536421	K	18,027.-	2536431	K	21,653.-
414/K/CC	2536412	K	14,318.-	2536422	K	18,364.-	2536432	K	22,059.-
416/K/CC	2536413	K	14,579.-	2536423	K	18,700.-	2536433	K	22,463.-
418/K/CC	2536414	K	15,104.-	2536424	K	19,373.-	2536434	K	23,274.-
603/K/CC	2535310	K	11,378.-	2535324	K	14,304.-	2535338	K	16,994.-
604/K/CC	2535311	K	11,632.-	2535325	K	14,597.-	2535339	K	17,373.-
605/K/CC	2535312	K	11,891.-	2535326	K	14,888.-	2535340	K	17,756.-
606/K/CC	2535313	K	12,273.-	2535327	K	15,183.-	2535341	K	18,329.-
607/K/CC	2535314	K	12,528.-	2535328	K	15,765.-	2535342	K	18,710.-
608/K/CC	2535315	K	12,786.-	2535329	K	16,056.-	2535343	K	19,092.-
609/K/CC	2535316	K	12,911.-	2535330	K	16,349.-	2535344	K	19,283.-
610/K/CC	2535317	K	13,040.-	2535331	K	16,639.-	2535345	K	19,475.-
611/K/CC	2535318	K	13,168.-	2535332	K	16,931.-	2535346	K	19,666.-
612/K/CC	2535319	K	13,424.-	2535333	K	17,224.-	2535347	K	20,046.-
613/K/CC	2535320	K	13,551.-	2535334	K	17,370.-	2535348	K	20,240.-
614/K/CC	2535321	K	13,807.-	2535335	K	17,661.-	2535349	K	20,619.-
615/K/CC	2535322	K	13,936.-	2535336	K	17,952.-	2535350	K	20,810.-
616/K/CC	2535323	K	14,320.-	2535337	K	18,390.-	2535351	K	21,383.-
1002/K/CC	2534090	K	12,171.-	2534104	K	15,476.-	2534118	K	17,752.-
1003/K/CC	2534091	K	12,435.-	2534105	K	16,163.-	2534119	K	18,559.-
1004/K/CC	2534092	K	12,831.-	2534106	K	16,678.-	2534120	K	19,164.-
1005/K/CC	2534093	K	12,964.-	2534107	K	16,853.-	2534121	K	19,769.-
1006/K/CC	2534094	K	13,229.-	2534108	K	17,195.-	2534122	K	20,171.-
1007/K/CC	2534095	K	13,625.-	2534109	K	17,710.-	2534123	K	21,180.-
1008/K/CC	2534096	K	13,760.-	2534110	K	17,885.-	2534124	K	21,381.-
1009/K/CC	2534097	K	13,890.-	2534111	K	18,398.-	2534125	K	21,988.-
1010/K/CC	2534098	K	14,156.-	2534112	K	18,571.-	2534126	K	22,191.-
1011/K/CC	2534099	K	14,419.-	2534113	K	18,741.-	2534127	K	22,392.-
1012/K/CC	2534100	K	15,213.-	2534114	K	19,258.-	2534128	K	23,198.-
1013/K/CC	2534101	K	15,478.-	2534115	K	19,774.-	2534129	K	23,603.-
1015/K/CC	2534103	K	15,873.-	2534117	K	20,119.-	2534131	K	24,006.-
1603/K/CC	2532198	K	14,062.-	2532209	K	18,489.-	2532220	K	21,662.-

= ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG6




Ordering information									
Comfort CO-/COR-Helix V.../CC	Art. no.			Art. no.			Art. no.		
	2 pumps			3 pumps			4 pumps		
			EUR		EUR		EUR		EUR
1604/K/CC	2532199	K	14,531.-	2532210	K	19,106.-	2532221	K	22,381.-
1605/K/CC	2532200	K	14,845.-	2532211	K	19,518.-	2532222	K	22,865.-
1606/K/CC	2532201	K	15,628.-	2532212	K	20,545.-	2532223	K	24,071.-
1607/K/CC	2532202	K	17,188.-	2532213	K	22,600.-	2532224	K	26,475.-
1608/K/CC	2532203	K	17,970.-	2532214	K	23,627.-	2532225	K	27,679.-
1609/K/CC	2532204	K	18,906.-	2532215	K	24,860.-	2532226	K	29,126.-
1610/K/CC	2532205	K	20,313.-	2532216	K	26,707.-	2532227	K	31,288.-
1611/K/CC	2532206	K	21,094.-	2532217	K	27,735.-	2532228	K	32,493.-
2202/K/CC	2530513	K	15,998.-	2530519	K	21,493.-	2530526	K	26,462.-
2203/K/CC	2530514	K	16,700.-	2530520	K	22,289.-	2530527	K	27,609.-
2204/K/CC	2530515	K	17,541.-	2530521	K	23,640.-	2530528	K	29,234.-
2205/K/CC	2530516	K	18,828.-	2530522	K	26,202.-	2530529	K	32,409.-
2206/K/CC	2530517	K	19,732.-	2530523	K	27,077.-	2530530	K	33,478.-
2207/K/CC	2530518	K	21,595.-	2530524	K	29,417.-	2530531	K	36,495.-
2208/K/CC	2530233	K	23,245.-	2530525	K	31,502.-	2530532	K	39,258.-
3602/2/K/CC	2530583	K	18,927.-	2530591	K	26,538.-	2530599	K	34,155.-
3602/K/CC	2530584	K	20,042.-	2530592	K	27,545.-	2530600	K	35,448.-
3603/1/K/CC	2530585	K	21,773.-	2530593	K	30,534.-	2530601	K	39,294.-
3603/K/CC	2530586	K	23,127.-	2530594	K	32,435.-	2530602	K	41,738.-
3604/2/K/CC	2532355	K	24,527.-	2532358	K	34,393.-	2532361	K	44,262.-
3604/K/CC	2530587	K	25,360.-	2530595	K	35,920.-	2530603	K	46,224.-
3605/2/K/CC	2532356	K	26,983.-	2532359	K	38,214.-	2532362	K	49,182.-
3605/K/CC	2530588	K	27,772.-	2530596	K	39,723.-	2530604	K	51,123.-
3606/2/K/CC	2530589	K	29,988.-	2530597	K	42,893.-	2530605	K	55,200.-
3606/K/CC	2532357	K	32,245.-	2532360	K	46,125.-	2532363	K	59,357.-
5202/2/K/CC	2530663	K	22,580.-	2530672	K	35,029.-	2530681	K	43,979.-
5202/K/CC	2530664	K	24,452.-	2530673	K	37,937.-	2530682	K	47,627.-
5203/2/K/CC	2530665	K	26,566.-	2530674	K	41,214.-	2530683	K	51,738.-
5203/K/CC	2530666	K	28,217.-	2530675	K	43,777.-	2530684	K	54,959.-
5204/2/K/CC	2530667	K	29,221.-	2530676	K	45,335.-	2530685	K	56,913.-
5204/K/CC	2530668	K	30,941.-	2530677	K	47,999.-	2530686	K	60,262.-
5205/2/K/CC	2530669	K	32,919.-	2530678	K	51,071.-	2530687	K	64,113.-
5205/K/CC	2530670	K	33,884.-	2530679	K	52,570.-	2530688	K	65,992.-
5206/2/K/CC	2532386	K	36,585.-	2532387	K	56,759.-	2532388	K	71,253.-



Price group: PG6

Ordering information									
Comfort CO-/COR-Helix V.../CC	Art. no.			Art. no.			Art. no.		
	2 pumps			3 pumps			4 pumps		
			EUR		EUR		EUR		EUR
403/K/CC	2536455	K	13,847.-	2536465	K	17,427.-	2536475	K	21,665.-
404/K/CC	2536456	K	14,145.-	2536466	K	17,800.-	2536476	K	22,125.-
406/K/CC	2536457	K	14,732.-	2536467	K	18,540.-	2536477	K	23,048.-
407/K/CC	2536458	K	14,878.-	2536468	K	18,727.-	2536478	K	23,279.-
409/K/CC	2536459	K	15,175.-	2536469	K	19,097.-	2536479	K	23,740.-





 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.





Ordering information									
Comfort CO-/COR-Helix V.../CC	Art. no. 2 pumps		EUR	Art. no. 3 pumps		EUR	Art. no. 4 pumps		EUR
									
410/K/CC	2536460	K	15,468.-	2536470	K	19,468.-	2536480	K	24,200.-
412/K/CC	2536461	K	15,765.-	2536471	K	19,840.-	2536481	K	24,662.-
414/K/CC	2536462	K	16,059.-	2536472	K	20,210.-	2536482	K	25,121.-
416/K/CC	2536463	K	16,353.-	2536473	K	20,581.-	2536483	K	25,584.-
418/K/CC	2536464	K	16,943.-	2536474	K	21,323.-	2536484	K	26,507.-
603/K/CC	2535380	K	15,925.-	2535394	K	20,523.-	2535408	K	23,410.-
604/K/CC	2535381	K	16,281.-	2535395	K	20,983.-	2535409	K	23,939.-
605/K/CC	2535382	K	16,640.-	2535396	K	21,444.-	2535410	K	24,466.-
606/K/CC	2535383	K	17,177.-	2535397	K	22,134.-	2535411	K	25,253.-
607/K/CC	2535384	K	17,537.-	2535398	K	22,597.-	2535412	K	25,781.-
608/K/CC	2535385	K	17,893.-	2535399	K	23,057.-	2535413	K	26,307.-
609/K/CC	2535386	K	18,071.-	2535400	K	23,289.-	2535414	K	26,569.-
610/K/CC	2535387	K	18,251.-	2535401	K	23,519.-	2535415	K	26,831.-
611/K/CC	2535388	K	18,428.-	2535402	K	23,748.-	2535416	K	27,096.-
612/K/CC	2535389	K	18,788.-	2535403	K	24,211.-	2535417	K	27,621.-
613/K/CC	2535390	K	18,967.-	2535404	K	24,440.-	2535418	K	27,884.-
614/K/CC	2535391	K	19,324.-	2535405	K	24,902.-	2535419	K	28,409.-
615/K/CC	2535392	K	19,504.-	2535406	K	25,134.-	2535420	K	28,675.-
616/K/CC	2535393	K	20,040.-	2535407	K	25,826.-	2535421	K	29,464.-
1002/K/CC	2534160	K	17,137.-	2534174	K	21,410.-	2534188	K	25,136.-
1003/K/CC	2534161	K	18,133.-	2534175	K	22,654.-	2534189	K	26,887.-
1004/K/CC	2534162	K	18,931.-	2534176	K	23,647.-	2534190	K	27,764.-
1005/K/CC	2534163	K	19,528.-	2534177	K	24,396.-	2534191	K	28,640.-
1006/K/CC	2534164	K	19,926.-	2534178	K	24,894.-	2534192	K	29,224.-
1007/K/CC	2534165	K	20,525.-	2534179	K	25,641.-	2534193	K	30,689.-
1008/K/CC	2534166	K	20,924.-	2534180	K	26,140.-	2534194	K	30,980.-
1009/K/CC	2534167	K	21,719.-	2534181	K	27,133.-	2534195	K	31,858.-
1010/K/CC	2534168	K	22,119.-	2534182	K	27,634.-	2534196	K	32,148.-
1011/K/CC	2534169	K	22,318.-	2534183	K	27,882.-	2534197	K	32,442.-
1012/K/CC	2534170	K	23,113.-	2534184	K	28,876.-	2534198	K	33,610.-
1013/K/CC	2534171	K	23,314.-	2534185	K	29,128.-	2534199	K	34,195.-
1015/K/CC	2534173	K	23,712.-	2534187	K	29,624.-	2534201	K	34,778.-
1603/K/CC	2532253	K	21,873.-	2532264	K	27,568.-	2532275	K	30,272.-
1604/K/CC	2532254	K	22,601.-	2532265	K	28,488.-	2532276	K	31,283.-
1605/K/CC	2532255	K	23,087.-	2532266	K	29,098.-	2532277	K	31,954.-
1606/K/CC	2532256	K	24,304.-	2532267	K	30,632.-	2532278	K	33,637.-
1607/K/CC	2532257	K	26,732.-	2532268	K	33,694.-	2532279	K	36,999.-
1608/K/CC	2532258	K	27,947.-	2532269	K	35,226.-	2532280	K	38,681.-
1609/K/CC	2532259	K	29,407.-	2532270	K	37,063.-	2532281	K	40,701.-
1610/K/CC	2532260	K	31,591.-	2532271	K	39,822.-	2532282	K	43,728.-
1611/K/CC	2532261	K	32,807.-	2532272	K	41,348.-	2532283	K	45,408.-
2202/K/CC	2530547	K	24,569.-	2530554	K	33,042.-	2530561	K	38,899.-
2203/K/CC	2530548	K	26,114.-	2530555	K	35,283.-	2530562	K	41,985.-
2204/K/CC	2530549	K	27,746.-	2530556	K	37,687.-	2530563	K	44,381.-
2205/K/CC	2530550	K	30,501.-	2530557	K	40,017.-	2530564	K	47,017.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
 Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG6



Ordering information									
Comfort CO-/COR-Helix V.../CC	Art. no.			Art. no.			Art. no.		
	2 pumps			3 pumps			4 pumps		
			EUR		EUR		EUR		EUR
2206/K/CC	2530551	K	32,994.-	2530558	K	42,630.-	2530565	K	48,526.-
2207/K/CC	2530552	K	36,402.-	2530559	K	47,183.-	2530566	K	55,053.-
2208/K/CC	2530553	K	38,749.-	2530560	K	49,556.-	2530567	K	57,455.-
3602/2/K/CC	2530623	K	30,417.-	2530631	K	37,956.-	2530639	K	44,180.-
3602/K/CC	2530624	K	33,037.-	2530632	K	41,227.-	2530640	K	47,988.-
3603/1/K/CC	2530625	K	34,815.-	2530633	K	43,445.-	2530641	K	50,565.-
3603/K/CC	2530626	K	37,261.-	2530634	K	46,495.-	2530642	K	54,120.-
3604/2/K/CC	2532370	K	40,242.-	2532373	K	50,217.-	2532376	K	58,450.-
3604/K/CC	2530627	K	40,833.-	2530635	K	50,957.-	2530643	K	59,312.-
3605/2/K/CC	2532371	K	42,877.-	2532374	K	53,503.-	2532377	K	62,276.-
3605/K/CC	2530628	K	44,595.-	2530636	K	55,649.-	2530644	K	64,772.-
3606/2/K/CC	2530629	K	46,826.-	2530637	K	58,431.-	2530645	K	68,009.-
3606/K/CC	2532372	K	50,101.-	2532375	K	62,521.-	2532378	K	72,769.-
5202/2/K/CC	2530708	K	36,117.-	2530717	K	49,816.-	2530726	K	58,531.-
5202/K/CC	2530709	K	39,112.-	2530718	K	53,946.-	2530727	K	63,388.-
5203/2/K/CC	2530710	K	42,491.-	2530719	K	58,603.-	2530728	K	68,857.-
5203/K/CC	2530711	K	45,132.-	2530720	K	62,251.-	2530729	K	73,146.-
5204/2/K/CC	2530712	K	48,438.-	2530721	K	66,226.-	2530730	K	78,499.-
5204/K/CC	2530713	K	50,563.-	2530722	K	69,738.-	2530731	K	81,942.-
5205/2/K/CC	2530714	K	54,387.-	2530723	K	72,671.-	2530732	K	89,518.-
5205/K/CC	2530715	K	56,086.-	2530724	K	77,359.-	2530733	K	92,960.-
5206/2/K/CC	2532391	K	59,913.-	2532392	K	82,633.-	2532393	K	97,091.-



Price group: PG6

Ordering information									
Comfort CO-/COR-Helix V.../CC	Art. no.			Art. no.			Art. no.		
	5 pumps			6 pumps			6 pumps		
			EUR		EUR		EUR		EUR
403/K/CC	2536435	K	22,332.-	2536445	K	24,666.-			
404/K/CC	2536436	K	22,808.-	2536446	K	25,191.-			
406/K/CC	2536437	K	23,760.-	2536447	K	26,239.-			
407/K/CC	2536438	K	23,996.-	2536448	K	26,501.-			
409/K/CC	2536439	K	24,473.-	2536449	K	27,027.-			
410/K/CC	2536440	K	24,947.-	2536450	K	27,552.-			
412/K/CC	2536441	K	25,422.-	2536451	K	28,077.-			
414/K/CC	2536442	K	25,897.-	2536452	K	28,601.-			
416/K/CC	2536443	K	26,372.-	2536453	K	29,127.-			
418/K/CC	2536444	K	27,322.-	2536454	K	30,175.-			
603/K/CC	2535352	K	18,628.-	2535366	K	20,756.-			
604/K/CC	2535353	K	19,047.-	2535367	K	21,219.-			
605/K/CC	2535354	K	19,462.-	2535368	K	21,686.-			
606/K/CC	2535355	K	20,092.-	2535369	K	22,387.-			
607/K/CC	2535356	K	20,511.-	2535370	K	22,852.-			
608/K/CC	2535357	K	20,931.-	2535371	K	23,320.-			
609/K/CC	2535358	K	21,136.-	2535372	K	23,552.-			

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Ordering information						
Comfort CO-/COR-Helix V.../CC	Art. no. 5 pumps		EUR	Art. no. 6 pumps		EUR
						
610/K/CC	2535359	K	21,349.-	2535373	K	23,786.-
611/K/CC	2535360	K	21,557.-	2535374	K	24,020.-
612/K/CC	2535361	K	21,975.-	2535375	K	24,482.-
613/K/CC	2535362	K	22,185.-	2535376	K	24,717.-
614/K/CC	2535363	K	22,604.-	2535377	K	25,184.-
615/K/CC	2535364	K	22,811.-	2535378	K	25,418.-
616/K/CC	2535365	K	23,442.-	2535379	K	26,117.-
1002/K/CC	2534132	K	20,851.-	2534146	K	23,063.-
1003/K/CC	2534133	K	21,800.-	2534147	K	24,114.-
1004/K/CC	2534134	K	22,512.-	2534148	K	24,899.-
1005/K/CC	2534135	K	23,222.-	2534149	K	25,683.-
1006/K/CC	2534136	K	23,694.-	2534150	K	26,209.-
1007/K/CC	2534137	K	24,880.-	2534151	K	27,519.-
1008/K/CC	2534138	K	25,117.-	2534152	K	27,784.-
1009/K/CC	2534139	K	25,829.-	2534153	K	28,570.-
1010/K/CC	2534140	K	26,065.-	2534154	K	28,831.-
1011/K/CC	2534141	K	26,303.-	2534155	K	29,093.-
1012/K/CC	2534142	K	27,251.-	2534156	K	30,141.-
1013/K/CC	2534143	K	27,723.-	2534157	K	30,664.-
1015/K/CC	2534145	K	28,197.-	2534159	K	31,189.-
1603/K/CC	2532231	K	27,301.-	2532242	K	31,705.-
1604/K/CC	2532232	K	28,212.-	2532243	K	32,762.-
1605/K/CC	2532233	K	28,818.-	2532244	K	33,470.-
1606/K/CC	2532234	K	30,336.-	2532245	K	35,229.-
1607/K/CC	2532235	K	33,368.-	2532246	K	38,753.-
1608/K/CC	2532236	K	34,884.-	2532247	K	40,512.-
1609/K/CC	2532237	K	36,705.-	2532248	K	42,626.-
1610/K/CC	2532238	K	39,436.-	2532249	K	45,799.-
1611/K/CC	2532239	K	40,950.-	2532250	K	47,560.-
2202/K/CC	2530533	K	32,749.-	2530540	K	37,305.-
2203/K/CC	2530534	K	34,114.-	2530541	K	39,980.-
2204/K/CC	2530535	K	37,165.-	2530542	K	42,689.-
2205/K/CC	2530536	K	40,736.-	2530543	K	47,290.-
2206/K/CC	2530537	K	42,392.-	2530544	K	49,076.-
2207/K/CC	2530538	K	46,896.-	2530545	K	54,063.-
2208/K/CC	2530539	K	50,227.-	2530546	K	58,411.-
3602/2/K/CC	2530607	K	41,773.-	2530615	K	49,387.-
3602/K/CC	2530608	K	43,353.-	2530616	K	51,255.-
3603/1/K/CC	2530609	K	48,058.-	2530617	K	56,818.-
3603/K/CC	2530610	K	51,048.-	2530618	K	60,353.-
3604/2/K/CC	2532364	K	54,134.-	2532367	K	64,003.-
3604/K/CC	2530611	K	56,531.-	2530619	K	66,836.-
3605/2/K/CC	2532365	K	60,148.-	2532368	K	71,112.-
3605/K/CC	2530612	K	62,524.-	2530620	K	73,921.-
3606/2/K/CC	2530613	K	67,507.-	2530621	K	79,813.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG6



Ordering information						
Comfort CO-/COR-Helix V.../CC	Art. no.		EUR	Art. no.		EUR
	5 pumps			6 pumps		
			EUR			EUR
3606/K/CC	2532366	K	72,591.-	2532369	K	85,826.-
5202/2/K/CC	2530690	K	57,554.-	2530699	K	68,814.-
5202/K/CC	2530691	K	62,330.-	2530700	K	74,525.-
5203/2/K/CC	2530692	K	67,712.-	2530701	K	80,958.-
5203/K/CC	2530693	K	71,926.-	2530702	K	85,999.-
5204/2/K/CC	2530694	K	74,483.-	2530703	K	89,056.-
5204/K/CC	2530695	K	78,861.-	2530704	K	94,294.-
5205/2/K/CC	2530696	K	83,908.-	2530705	K	100,327.-
5205/K/CC	2530697	K	86,367.-	2530706	K	103,267.-
5206/2/K/CC	2532389	K	93,249.-	2532390	K	111,499.-

Price group: PG6

Ordering information						
Comfort CO-/COR-Helix V.../CC	Art. no.		EUR	Art. no.		EUR
	5 pumps			6 pumps		
			EUR			EUR
403/K/CC	2536485	K	27,104.-	2536495	K	29,758.-
404/K/CC	2536486	K	27,680.-	2536496	K	30,392.-
406/K/CC	2536487	K	28,834.-	2536497	K	31,659.-
407/K/CC	2536488	K	29,123.-	2536498	K	31,974.-
409/K/CC	2536489	K	29,699.-	2536499	K	32,609.-
410/K/CC	2536490	K	30,274.-	2536500	K	33,241.-
412/K/CC	2536491	K	30,852.-	2536501	K	33,875.-
414/K/CC	2536492	K	31,427.-	2536502	K	34,507.-
416/K/CC	2536493	K	32,005.-	2536503	K	35,142.-
418/K/CC	2536494	K	33,159.-	2536504	K	36,407.-
603/K/CC	2535422	K	25,124.-	2535436	K	27,494.-
604/K/CC	2535423	K	25,691.-	2535437	K	28,109.-
605/K/CC	2535424	K	26,254.-	2535438	K	28,729.-
606/K/CC	2535425	K	27,101.-	2535439	K	29,655.-
607/K/CC	2535426	K	27,668.-	2535440	K	30,271.-
608/K/CC	2535427	K	28,232.-	2535441	K	30,891.-
609/K/CC	2535428	K	28,514.-	2535442	K	31,817.-
610/K/CC	2535429	K	28,796.-	2535443	K	32,125.-
611/K/CC	2535430	K	29,078.-	2535444	K	32,744.-
612/K/CC	2535431	K	29,644.-	2535445	K	33,360.-
613/K/CC	2535432	K	29,926.-	2535446	K	33,671.-
614/K/CC	2535433	K	30,490.-	2535447	K	34,598.-
615/K/CC	2535434	K	30,773.-	2535448	K	35,524.-
616/K/CC	2535435	K	31,620.-	2535449	K	36,143.-
1002/K/CC	2534202	K	26,933.-	2534216	K	28,725.-
1003/K/CC	2534203	K	28,158.-	2534217	K	30,729.-
1004/K/CC	2534204	K	29,076.-	2534218	K	31,729.-
1005/K/CC	2534205	K	29,995.-	2534219	K	32,732.-
1006/K/CC	2534206	K	30,608.-	2534220	K	33,399.-


= ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Ordering information						
Comfort CO-/COR-Helix V.../CC	Art. no. 5 pumps		EUR	Art. no. 6 pumps		EUR
						
1007/K/CC	2534207	K	32,138.-	2534221	K	35,069.-
1008/K/CC	2534208	K	32,445.-	2534222	K	35,404.-
1009/K/CC	2534209	K	33,361.-	2534223	K	36,405.-
1010/K/CC	2534210	K	33,670.-	2534224	K	36,740.-
1011/K/CC	2534211	K	33,973.-	2534225	K	37,075.-
1012/K/CC	2534212	K	35,197.-	2534226	K	38,411.-
1013/K/CC	2534213	K	35,810.-	2534227	K	39,078.-
1015/K/CC	2534215	K	36,423.-	2534229	K	39,746.-
1603/K/CC	2532286	K	35,252.-	2532297	K	41,010.-
1604/K/CC	2532287	K	36,428.-	2532298	K	42,376.-
1605/K/CC	2532288	K	37,211.-	2532299	K	43,289.-
1606/K/CC	2532289	K	39,173.-	2532300	K	45,566.-
1607/K/CC	2532290	K	43,088.-	2532301	K	50,122.-
1608/K/CC	2532291	K	45,045.-	2532302	K	52,400.-
1609/K/CC	2532292	K	47,396.-	2532303	K	55,134.-
1610/K/CC	2532293	K	50,922.-	2532304	K	59,236.-
1611/K/CC	2532294	K	52,879.-	2532305	K	61,514.-
2202/K/CC	2530568	K	42,056.-	2530575	K	49,420.-
2203/K/CC	2530569	K	45,438.-	2530576	K	56,538.-
2204/K/CC	2530570	K	49,346.-	2530577	K	60,935.-
2205/K/CC	2530571	K	54,452.-	2530578	K	68,753.-
2206/K/CC	2530572	K	57,592.-	2530579	K	72,506.-
2207/K/CC	2530573	K	64,607.-	2530580	K	82,635.-
2208/K/CC	2530574	K	68,065.-	2530581	K	88,062.-
3602/2/K/CC	2530647	K	52,356.-	2530655	K	59,297.-
3602/K/CC	2530648	K	56,868.-	2530656	K	64,410.-
3603/1/K/CC	2530649	K	59,925.-	2530657	K	67,869.-
3603/K/CC	2530650	K	64,137.-	2530658	K	72,637.-
3604/2/K/CC	2532379	K	69,268.-	2532382	K	78,450.-
3604/K/CC	2530651	K	70,291.-	2530659	K	79,606.-
3605/2/K/CC	2532380	K	73,801.-	2532383	K	83,589.-
3605/K/CC	2530652	K	76,760.-	2530660	K	86,937.-
3606/2/K/CC	2530653	K	80,599.-	2530661	K	91,286.-
3606/K/CC	2532381	K	86,238.-	2532384	K	97,672.-
5202/2/K/CC	2530735	K	70,472.-	2530744	K	79,240.-
5202/K/CC	2530736	K	76,318.-	2530745	K	85,814.-
5203/2/K/CC	2530737	K	82,909.-	2530746	K	93,225.-
5203/K/CC	2530738	K	88,069.-	2530747	K	99,027.-
5204/2/K/CC	2530739	K	94,517.-	2530748	K	106,275.-
5204/K/CC	2530740	K	98,661.-	2530749	K	110,939.-
5205/2/K/CC	2530741	K	106,122.-	2530750	K	119,328.-
5205/K/CC	2530742	K	109,439.-	2530751	K	123,057.-
5206/2/K/CC	2532394	K	116,900.-	2532395	K	131,446.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

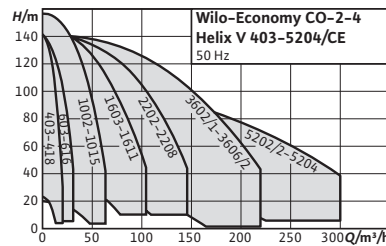

Accessories	Page
Accessories	454
Commissioning/maintenance	683

Select 4 online

All information at www.wilo-select.com

Wilo-Economy CO-Helix V.../CE



Construction

Pressure-boosting system with 2 to 4 parallel-switched, non self-priming, vertical high-pressure multistage centrifugal pumps made of stainless steel. Ready for connection with stainless steel pipework, mounted on a base frame, including control device with all necessary measurement and adjustment equipment.

Application

- Fully automatic water supply and pressure boosting in inlet mode, either from the public water supply network or from a tank, for domestic, commercial, industrial and municipal applications (e.g. residential, office, administration buildings, hotels, hospitals, trades, industry, water supply companies).
- Pumping of drinking water and process water, cooling water, fire water (apart from fire-extinguishing systems in accordance with DIN 14462 and with the approval of the local fire safety authorities) or other types of industrial water that do not attack the materials either chemically or mechanically and do not contain abrasive or long-fibre constituents.

Scope of delivery

- Factory-mounted, ready-for-connection pressure-boosting system checked for functionality and impermeability




Your advantages



- Heavy-duty system which satisfies all the requirements of DIN 1988 (EN 806)
- WRAS/KTW/ACS approval of the pumps for all parts that come in contact with the fluid (EPDM version)
- High-efficiency pump hydraulics of the Helix V series in conjunction with IE3 IEC standard motors
- The spacer coupling enables the mechanical seal to be replaced without dismantling the motor (from 7.5 kW)
- Parts that come in contact with the fluid are corrosion-resistant
- Easily adjustable and operationally reliable due to the CE control device used
- Factory inspection and default setting at optimum operating range (incl. inspection certificate in accordance with EN 10204-3.1)

- Packaging
- Installation and operating instructions





Options

Diaphragm pressure vessel
Protection against low water level on the suction side

Ordering information									
Economy CO-Helix V.../CE	Art. no. 2 pumps		EUR	Art. no. 3 pumps		EUR	Art. no. 4 pumps		EUR
									
403/CE	4163473	K	3,682.-	4163483	K	5,276.-	4163493	K	6,603.-
404/CE	4163474	K	3,726.-	4163484	K	5,340.-	4163494	K	6,687.-
406/CE	4163475	K	3,828.-	4163485	K	5,494.-	4163495	K	6,895.-
407/CE	4163476	K	3,879.-	4163486	K	5,572.-	4163496	K	6,997.-
409/CE	4163477	K	3,959.-	4163487	K	5,689.-	4163497	K	7,156.-
410/CE	4163478	K	4,161.-	4163488	K	5,992.-	4163498	K	7,585.-
412/CE	4163479	K	4,233.-	4163489	K	6,127.-	4163499	K	7,755.-
414/CE	4163480	K	4,389.-	4163490	K	6,361.-	4163500	K	8,066.-
416/CE	4163481	K	4,485.-	4163491	K	6,465.-	4163501	K	8,206.-
418/CE	4163482	K	4,576.-	4163492	K	6,607.-	4163502	K	8,394.-
603/CE	4162945	K	3,775.-	4162959	K	5,454.-	4162973	K	6,938.-
604/CE	4162946	K	3,826.-	4162960	K	5,530.-	4162974	K	7,038.-
605/CE	4162947	K	3,892.-	4162961	K	5,631.-	4162975	K	7,173.-
606/CE	4162948	K	3,950.-	4162962	K	5,717.-	4162976	K	7,290.-
607/CE	4162949	K	4,133.-	4162963	K	5,992.-	4162977	K	7,656.-
608/CE	4162950	K	4,182.-	4162964	K	6,088.-	4162978	K	7,787.-
609/CE	4162951	K	4,318.-	4162965	K	6,293.-	4162979	K	8,060.-
610/CE	4162952	K	4,444.-	4162966	K	6,443.-	4162980	K	8,275.-
611/CE	4162953	K	4,555.-	4162967	K	6,613.-	4162981	K	8,497.-
612/CE	4162954	K	4,709.-	4162968	K	6,838.-	4162982	K	8,799.-
613/CE	4162955	K	4,800.-	4162969	K	6,977.-	4162983	K	8,988.-
614/CE	4162956	K	4,807.-	4162970	K	6,987.-	4162984	K	9,000.-
615/CE	4162957	K	4,929.-	4162971	K	7,169.-	4162985	K	9,247.-
616/CE	4162958	K	5,110.-	4162972	K	7,444.-	4162986	K	9,611.-
1002/CE	4154084	K	3,981.-	4154097	K	5,704.-	4154110	K	7,298.-
1003/CE	4154085	K	4,052.-	4154098	K	5,812.-	4154111	K	7,445.-
1004/CE	4154086	K	4,231.-	4154099	K	6,081.-	4154112	K	7,802.-
1005/CE	4154087	C	4,328.-	4154100	K	6,226.-	4154113	K	7,996.-
1006/CE	4154088	K	4,391.-	4154101	K	6,320.-	4154114	K	8,121.-
1007/CE	4154089	K	4,627.-	4154102	K	6,661.-	4154115	K	8,566.-
1008/CE	4154090	K	4,679.-	4154103	K	6,739.-	4154116	K	8,669.-
1009/CE	4154091	K	4,957.-	4154104	K	7,154.-	4154117	K	9,224.-
1010/CE	4154092	K	5,024.-	4154105	K	7,256.-	4154118	K	9,360.-
1011/CE	4154093	K	5,138.-	4154106	K	7,422.-	4154119	K	9,584.-
1012/CE	4154094	K	5,391.-	4154107	K	7,793.-	4154120	K	10,075.-
1013/CE	4154095	K	5,484.-	4154108	K	7,937.-	4154121	K	10,269.-
1015/CE	4154096	K	5,619.-	4154109	K	8,141.-	4154122	K	10,540.-
1603/CE	4142458	K	4,232.-	4142467	K	6,150.-	4142476	K	8,467.-
1604/CE	4142459	K	4,441.-	4142468	K	6,464.-	4142477	K	8,886.-
1605/CE	4142460	K	4,715.-	4142469	K	6,858.-	4142478	K	9,403.-
1606/CE	4142461	K	4,779.-	4142470	K	6,957.-	4142479	K	9,534.-
1607/CE	4142462	K	5,118.-	4142471	K	7,470.-	4142480	K	10,225.-
1608/CE	4142463	K	5,183.-	4142472	K	7,568.-	4142481	K	10,355.-
2202/CE	4122698	K	6,997.-	4122705	K	11,420.-	4122712	K	14,757.-
2203/CE	4122699	K	7,345.-	4122706	K	11,964.-	4122713	K	15,170.-


 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG6

Ordering information									
Economy CO-Helix V.../CE	Art. no.			Art. no.			Art. no.		
	2 pumps			3 pumps			4 pumps		
			EUR		EUR		EUR		EUR
2204/CE	4122700	K	7,770.-	4122707	K	12,641.-	4122714	K	16,355.-
2205/CE	4122701	K	9,030.-	4122708	K	14,339.-	4122715	K	18,909.-
2206/CE	4122702	K	9,189.-	4122709	K	14,576.-	4122716	K	19,227.-
2207/CE	4122703	K	9,857.-	4122710	K	15,578.-	4122717	K	20,563.-
2208/CE	4122704	K	10,015.-	4122711	K	15,818.-	4122718	K	20,883.-
3602/1/CE	4138977	K	9,620.-	4138988	K	14,075.-	4138999	K	18,835.-
3602/2/CE	4138976	K	9,364.-	4138987	K	13,652.-	4138998	K	18,288.-
3602/CE	4138978	K	9,620.-	4138989	K	14,075.-	4139000	K	18,834.-
3603/1/CE	4138980	K	10,987.-	4138991	K	15,932.-	4139002	K	21,599.-
3603/2/CE	4138979	K	11,086.-	4138990	K	16,082.-	4139001	K	21,801.-
3603/CE	4138981	K	11,442.-	4138992	K	16,614.-	4139003	K	22,508.-
3604/2/CE	4138982	K	11,762.-	4138993	K	17,094.-	4139004	K	23,147.-
3604/CE	4138983	K	11,761.-	4138994	K	17,093.-	4139005	K	23,146.-
3605/2/K/CE	4138984	K	13,946.-	4138995	K	20,343.-	4139006	K	27,374.-
3605/K/CE	4138985	K	13,945.-	4138996	K	20,342.-	4139007	K	27,373.-
3606/2/K/CE	4138986	K	14,285.-	4138997	K	20,849.-	4139008	K	28,052.-
5202/2/CE	4142812	K	11,822.-	4142818	K	17,339.-	4142824	K	23,393.-
5202/CE	4142813	K	12,876.-	4142819	K	18,732.-	4142825	K	25,537.-
5203/2/CE	4142814	K	13,500.-	4142820	K	19,667.-	4142826	K	26,783.-
5203/CE	4142815	K	13,504.-	4142821	K	19,672.-	4142827	K	26,788.-
5204/2/K/CE	4142816	K	15,788.-	4142822	K	23,068.-	4142828	K	31,300.-
5204/K/CE	4142817	K	15,788.-	4142823	K	23,068.-	4142829	K	31,300.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

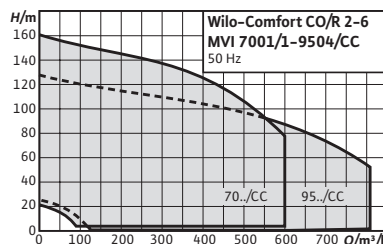

Accessories	Page
Accessories	454
Commissioning/maintenance	683

Select 4 online

All information at www.wilo-select.com

Wilo-Comfort CO-/COR-MVI.../CC



Construction

Pressure boosting system with 2 to 6 parallel-switched, non self-priming stainless steel high-pressure multistage centrifugal pumps

Application

- Fully automatic water supply and pressure boosting in residential, commercial and public buildings, hotels, hospitals, department stores and for industrial systems.
- Pumping of drinking water and process water, cooling water, fire water (apart from fire-extinguishing systems in accordance with DIN 14462 and with the approval of the local fire safety authorities) or other types of industrial water that do not attack the materials either chemically or mechanically and do not contain abrasive or long-fibre constituents.

Scope of delivery

- Factory-mounted, connection-ready pressure boosting system checked for functionality and impermeability
- Packaging
- Installation and operating instructions

Your advantages

- Easy-to-operate system in accordance with DIN 1988
- 2-6 vertical stainless steel high-pressure centrifugal pumps, switched in parallel, of the MVI series
- Easy-to-use „CC“ control device, with memory-programmable microcomputer control and completely graphics-capable touch display, menu-prompted input of operating parameters, available with frequency converter for infinitely variable control of the base-load pump with COR systems

Options

Series design without casing. Noise-attenuation casing on request.

Notice




Additional information about this series is available in the Online Catalogue (www.wilo.com) and on request.

Price group: PG6



Ordering information		Art. no. 2 pumps		Art. no. 3 pumps		Art. no. 4 pumps			
Comfort CO-/COR-MVI.../CC									
7001/1/CC	2523185	K	EUR 18,471.-	2523197	K	EUR 29,270.-	2523209	K	EUR 36,621.-
7001/CC	2523186	K	EUR 20,250.-	2523198	K	EUR 32,095.-	2523210	K	EUR 40,141.-

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
 Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.



Price group: PG6


Ordering information									
Comfort CO-/COR-MVI.../CC	Art. no. 2 pumps			Art. no. 3 pumps			Art. no. 4 pumps		
			EUR			EUR			EUR
7002/2/CC	2523187	K	22,076.-	2523199	K	33,762.-	2523211	K	42,082.-
7002/CC	2523188	K	22,809.-	2523200	K	36,706.-	2523212	K	45,380.-
7003/2/CC	2523189	K	25,680.-	2523201	K	38,456.-	2523213	K	47,583.-
7003/CC	2523190	K	26,128.-	2523202	K	41,030.-	2523214	K	50,989.-
7004/2/CC	2523191	K	27,451.-	2523203	K	42,445.-	2523215	K	53,055.-
7004/CC	2523192	K	29,101.-	2523204	K	45,068.-	2523216	K	56,284.-
7005/2/CC	2523193	K	32,725.-	2523205	K	48,088.-	2523217	K	59,933.-
7005/CC	2523194	K	34,133.-	2523206	K	52,200.-	2523218	K	65,985.-
7006/2/CC	2523195	K	39,529.-	2523207	K	53,281.-	2523219	K	69,449.-
7006/CC	2523196	K	40,272.-	2523208	K	54,311.-	2523220	K	72,914.-

Price group: PG6

Ordering information									
Comfort CO-/COR-MVI.../CC	Art. no. 2 pumps			Art. no. 3 pumps			Art. no. 4 pumps		
			EUR			EUR			EUR
7001/1/CC	2523245	K	28,342.-	2523257	K	37,298.-	2523269	K	42,797.-
7001/CC	2523246	K	30,122.-	2523258	K	40,121.-	2523270	K	46,323.-
7002/2/CC	2523247	K	31,142.-	2523259	K	41,788.-	2523271	K	48,260.-
7002/CC	2523248	K	32,681.-	2523260	K	44,732.-	2523272	K	51,559.-
7003/2/CC	2523249	K	33,831.-	2523261	K	46,482.-	2523273	K	53,761.-
7003/CC	2523250	K	35,797.-	2523262	K	49,056.-	2523274	K	57,170.-
7004/2/CC	2523251	K	37,193.-	2523263	K	50,470.-	2523275	K	59,236.-
7004/CC	2523252	K	38,972.-	2523264	K	53,096.-	2523276	K	62,463.-
7005/2/CC	2523253	K	41,085.-	2523265	K	56,114.-	2523277	K	66,116.-
7005/CC	2523254	K	44,006.-	2523266	K	60,228.-	2523278	K	72,164.-
7006/2/CC	2523255	K	45,409.-	2523267	K	60,392.-	2523279	K	75,628.-
7006/CC	2523256	K	47,373.-	2523268	K	63,218.-	2523280	K	79,096.-

Price group: PG6

Ordering information									
Comfort CO-/COR-MVI.../CC	Art. no. 5 pumps			Art. no. 6 pumps					
			EUR			EUR			
7001/1/CC			2523221	K	46,503.-	2523233	K	54,720.-	
7001/CC			2523222	K	52,659.-	2523234	K	61,351.-	
7002/2/CC			2523223	K	58,246.-	2523235	K	64,658.-	
7002/CC			2523224	K	60,626.-	2523236	K	69,347.-	
7003/2/CC			2523225	K	63,682.-	2523237	K	72,682.-	
7003/CC			2523226	K	68,395.-	2523238	K	78,050.-	
7004/2/CC			2523227	K	71,242.-	2523239	K	81,536.-	
7004/CC			2523228	K	75,252.-	2523240	K	86,367.-	
7005/2/CC			2523229	K	79,691.-	2523241	K	91,346.-	
7005/CC			2523230	K	87,099.-	2523242	K	99,395.-	
7006/2/CC			2523231	K	91,584.-	2523243	K	104,222.-	
7006/CC			2523232	K	96,066.-	2523244	K	109,045.-	

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
 Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Water supply

Pressure Boosting


414 Multi-pump systems with fixed speed or speed-controlled base-load pump

Price group: PG6

Ordering information						
Comfort CO-/COR-MVI.../CC	Art. no. 5 pumps		EUR	Art. no. 6 pumps		EUR
						
7001/1/CC	2523281	K	53,868.-	2523293	K	61,787.-
7001/CC	2523282	K	62,971.-	2523294	K	63,722.-
7002/2/CC	2523283	K	66,461.-	2523295	K	74,693.-
7002/CC	2523284	K	72,999.-	2523296	K	81,551.-
7003/2/CC	2523285	K	79,453.-	2523297	K	88,659.-
7003/CC	2523286	K	89,838.-	2523298	K	99,795.-
7004/2/CC	2523287	K	96,575.-	2523299	K	106,704.-
7004/CC	2523288	K	103,236.-	2523300	K	115,531.-
7005/2/CC	2523289	K	108,210.-	2523301	K	121,187.-
7005/CC	2523290	K	115,132.-	2523302	K	128,139.-
7006/2/CC	2523291	K	119,486.-	2523303	K	132,828.-
7006/CC	2523292	K	123,842.-	2523304	K	137,517.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

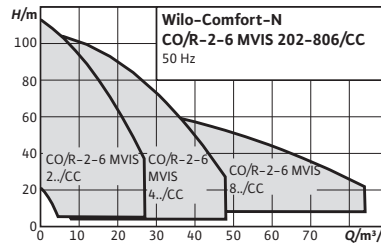

Accessories	Page
Accessories	454
Commissioning/maintenance	683

Select 4 online

All information at www.wilo-select.com

Wilo-Comfort-N CO-/COR-MVIS.../CC



Construction

Pressure-boosting system with 2 to 6 non self-priming stainless steel high-pressure multistage centrifugal pumps connected in parallel with glandless motor

Application

- Fully automatic water supply and pressure boosting in inlet mode, either from the public water supply network or from a tank, for domestic, commercial, industrial and municipal applications (e.g. residential, office, administration buildings, hotels, hospitals, trades, industry, water supply companies).
- Pumping of drinking water and process water, cooling water, fire water (apart from fire-extinguishing systems in accordance with DIN 14462 and with the approval of the local fire safety authorities) or other types of industrial water that do not attack the materials either chemically or mechanically and do not contain abrasive or long-fibre constituents.

Your advantages

- Easy-to-use system in accordance with all requirements of DIN 1988
- 2 – 6 vertical MVIS series full stainless steel high-pressure multistage centrifugal pumps switched in parallel
- Virtually noiseless system thanks to glandless stainless steel high-pressure centrifugal pump of the MVIS series
- Up to 20 dB[A] quieter than conventional systems with comparable hydraulic output

Scope of delivery

- factory-mounted, ready for connection pressure-boosting system checked for functionality and impermeability
- Packaging
- Installation and operating instructions

Options

Other mains connections on request




Additional charge

Type	Description	Art. no.	Price group
low-water cut-out switchgear kit WMS R ¼	WMS R ¼ kit, pressure switch as low-water signal transmitter for direct connection to the suction-side pipe.	2521150	EUR
low-water cut-out switchgear kit WMS R ¾	WMS R ¾ kit, pressure switch as low-water signal transmitter for direct connection to the supply pressure-side pipe.	2000424	EUR




☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☞ = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG6

Ordering information without Frequency Converter									
Comfort-N CO-/COR-MVIS.../CC	Art. no. 2 pumps		EUR	Art. no. 3 pumps		EUR	Art. no. 4 pumps		EUR
									
202/CC	2524292	K	9,909.-	2524301	K	12,963.-	2524310	K	15,317.-
203/CC	2524293	K	10,060.-	2524302	K	13,109.-	2524311	K	15,503.-
204/CC	2524294	K	10,269.-	2524303	K	13,349.-	2524312	K	15,861.-
205/CC	2524295	K	10,343.-	2524304	K	13,443.-	2524313	K	15,925.-
206/CC	2524296	K	10,446.-	2524305	K	13,513.-	2524314	K	16,146.-
207/CC	2524297	K	10,552.-	2524306	K	13,675.-	2524315	K	16,363.-
208/CC	2524298	K	10,598.-	2524307	K	13,878.-	2524316	K	16,478.-
209/CC	2524299	K	10,787.-	2524308	K	14,193.-	2524317	K	16,982.-
210/CC	2524300	K	10,974.-	2524309	K	14,544.-	2524318	K	17,485.-
402/CC	2524382	K	10,331.-	2524391	K	13,092.-	2524400	K	15,478.-
403/CC	2524383	K	10,394.-	2524392	K	13,287.-	2524401	K	15,745.-
404/CC	2524384	K	10,598.-	2524393	K	13,419.-	2524402	K	16,008.-
405/CC	2524385	K	10,825.-	2524394	K	13,885.-	2524403	K	16,275.-
406/CC	2524386	K	10,977.-	2524395	K	13,982.-	2524404	K	16,667.-
407/CC	2524387	K	11,055.-	2524396	K	14,261.-	2524405	K	16,896.-
408/CC	2524388	K	11,166.-	2524397	K	14,322.-	2524406	K	17,097.-
409/CC	2524389	K	11,222.-	2524398	K	14,502.-	2524407	K	17,352.-
410/CC	2524390	K	11,278.-	2524399	K	14,680.-	2524408	K	17,605.-
802/CC	2524472	K	11,255.-	2524477	K	14,466.-	2524482	K	17,787.-
803/CC	2524473	K	11,679.-	2524478	K	15,081.-	2524483	K	18,333.-
804/CC	2524474	K	12,105.-	2524479	K	15,697.-	2524484	K	18,878.-
805/CC	2524475	K	12,359.-	2524480	K	16,066.-	2524485	K	19,407.-
806/CC	2524476	K	12,507.-	2524481	K	16,275.-	2524486	K	19,927.-

Price group: PG6

Ordering information with Frequency Converter (FC)									
Comfort-N CO-/COR-MVIS.../CC	Art. no. 2 pumps		EUR	Art. no. 3 pumps		EUR	Art. no. 4 pumps		EUR
									
202/CC	2524337	K	15,808.-	2524346	K	18,503.-	2524355	K	22,563.-
203/CC	2524338	K	15,993.-	2524347	K	18,626.-	2524356	K	22,716.-
204/CC	2524339	K	16,102.-	2524348	K	18,869.-	2524357	K	23,004.-
205/CC	2524340	K	16,197.-	2524349	K	19,021.-	2524358	K	23,233.-
206/CC	2524341	K	16,369.-	2524350	K	19,723.-	2524359	K	24,125.-
207/CC	2524342	K	16,512.-	2524351	K	21,988.-	2524360	K	24,714.-
208/CC	2524343	K	16,581.-	2524352	K	22,502.-	2524361	K	25,119.-
209/CC	2524344	K	16,892.-	2524353	K	22,683.-	2524362	K	25,384.-
210/CC	2524345	K	17,199.-	2524354	K	22,741.-	2524363	K	25,937.-
402/CC	2524427	K	16,103.-	2524436	K	20,331.-	2524445	K	24,043.-
403/CC	2524428	K	16,271.-	2524437	K	20,618.-	2524446	K	24,280.-
404/CC	2524429	K	16,423.-	2524438	K	20,874.-	2524447	K	24,298.-
405/CC	2524430	K	16,821.-	2524439	K	21,134.-	2524448	K	24,721.-
406/CC	2524431	K	17,344.-	2524440	K	22,350.-	2524449	K	25,495.-
407/CC	2524432	K	17,715.-	2524441	K	22,421.-	2524450	K	25,700.-
408/CC	2524433	K	17,881.-	2524442	K	22,778.-	2524451	K	26,340.-
409/CC	2524434	K	18,027.-	2524443	K	22,939.-	2524452	K	26,491.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG6

Ordering information with Frequency Converter (FC)

Comfort-N CO-/COR-MVIS.../CC	Art. no. 2 pumps			Art. no. 3 pumps			Art. no. 4 pumps		
			EUR		EUR		EUR		
410/CC	2524435	K	18,168.-	2524444	K	23,098.-	2524453	K	26,652.-
802/CC	2524497	K	16,791.-	2524502	K	21,984.-	2524507	K	25,325.-
803/CC	2524498	K	18,246.-	2524503	K	22,549.-	2524508	K	26,462.-
804/CC	2524499	K	19,259.-	2524504	K	23,795.-	2524509	K	27,511.-
805/CC	2524500	K	19,500.-	2524505	K	24,326.-	2524510	K	28,625.-
806/CC	2524501	K	20,038.-	2524506	K	25,036.-	2524511	K	29,390.-

Price group: PG6

Ordering information without Frequency Converter

Comfort-N CO-/COR-MVIS.../CC	Art. no. 5 pumps			Art. no. 6 pumps		
			EUR			EUR
202/CC	2524319	K	17,807.-	2524328	K	19,484.-
203/CC	2524320	K	18,130.-	2524329	K	19,942.-
204/CC	2524321	K	18,403.-	2524330	K	20,322.-
205/CC	2524322	K	18,632.-	2524331	K	20,489.-
206/CC	2524323	K	18,900.-	2524332	K	20,804.-
207/CC	2524324	K	19,164.-	2524333	K	21,118.-
208/CC	2524325	K	19,316.-	2524334	K	21,300.-
209/CC	2524326	K	19,441.-	2524335	K	21,444.-
210/CC	2524327	K	19,564.-	2524336	K	21,589.-
402/CC	2524409	K	17,990.-	2524418	K	19,605.-
403/CC	2524410	K	18,330.-	2524419	K	20,112.-
404/CC	2524411	K	18,487.-	2524420	K	20,542.-
405/CC	2524412	K	18,897.-	2524421	K	21,084.-
406/CC	2524413	K	19,401.-	2524422	K	21,617.-
407/CC	2524414	K	19,558.-	2524423	K	21,792.-
408/CC	2524415	K	20,124.-	2524424	K	22,199.-
409/CC	2524416	K	20,558.-	2524425	K	22,603.-
410/CC	2524417	K	20,992.-	2524426	K	23,005.-
802/CC	2524487	K	20,443.-	2524492	K	22,800.-
803/CC	2524488	K	21,017.-	2524493	K	23,496.-
804/CC	2524489	K	21,587.-	2524494	K	24,189.-
805/CC	2524490	K	22,603.-	2524495	K	25,362.-
806/CC	2524491	K	22,922.-	2524496	K	25,736.-

Price group: PG6


Ordering information with Frequency Converter (FC)

Comfort-N CO-/COR-MVIS.../CC	Art. no. 6 pumps		
			EUR
202/CC	2524373	K	27,577.-
203/CC	2524374	K	27,695.-
204/CC	2524375	K	28,455.-
205/CC	2524376	K	28,862.-
206/CC	2524377	K	28,973.-

☛ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Ordering information with Frequency Converter (FC)			
Comfort-N CO-/COR-MVIS.../CC	Art. no. 6 pumps		
			EUR
207/CC	2524378	K	29,089.-
208/CC	2524379	K	29,404.-
209/CC	2524380	K	31,217.-
210/CC	2524381	K	33,031.-
402/CC	2524463	K	27,992.-
403/CC	2524464	K	28,386.-
404/CC	2524465	K	28,677.-
405/CC	2524466	K	29,231.-
406/CC	2524467	K	29,936.-
407/CC	2524468	K	30,642.-
408/CC	2524469	K	31,602.-
409/CC	2524470	K	33,305.-
410/CC	2524471	K	35,010.-
802/CC	2524517	K	28,450.-
803/CC	2524518	K	30,244.-
804/CC	2524519	K	32,141.-
805/CC	2524520	K	33,237.-
806/CC	2524521	K	34,076.-

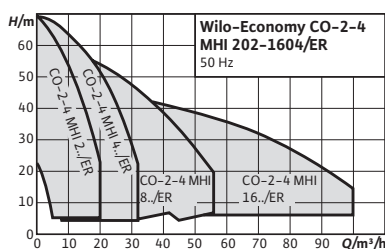

Accessories	Page
Accessories	454
Commissioning/maintenance	683

Select 4 online

All information at www.wilo-select.com

Wilo-Economy CO-MHI.../ER



Construction

Pressure boosting system with 2 to 4 parallel-switched, non-self-priming, horizontal high-pressure multistage centrifugal pumps made of stainless steel

Application

- Fully automatic water supply and pressure boosting in residential, commercial and public buildings, hotels, hospitals, department stores and for industrial systems.
- Pumping of drinking water and process water, cooling water or other types of industrial water that do not attack the materials either chemically or mechanically and do not contain abrasive or long-fibre constituents.

Scope of delivery

- Factory-mounted, connection-ready pressure boosting system checked for functionality and impermeability
- Packaging

Your advantages

- Compact system with outstanding price/performance ratio in compliance with the requirements of DIN 1988
- 2 - 4 horizontal MHI series full stainless steel high-pressure multistage centrifugal pumps switched in parallel
- Easily adjustable and operationally reliable thanks to integrated ER 2 to ER 4 switchgears




- Installation and operating instructions


Options


Other mains connections on request

Additional charge					
Description	Art. no.	Price group			
low-water cut-out switchgear kit WMS R ¼	2521150	PG14	EUR		
WMS R ¼ kit, pressure switch as low-water signal transmitter for direct connection to the suction-side pipe.		L			174.-
low-water cut-out switchgear kit WMS R ¾	2000424	PG14	EUR		
WMS R ¾ kit, pressure switch as low-water signal transmitter for direct connection to the supply pressure-side pipe.		L			174.-

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Ordering information									
Economy CO-MHI.../ER	Art. no. 2 pumps			Art. no. 3 pumps			Art. no. 4 pumps		
			EUR			EUR			EUR
202/ER	2520777	K	7,392.-	2520782	K	9,863.-	2520787	K	12,613.-
203/ER	2520778	K	7,413.-	2520783	K	9,932.-	2520788	K	12,712.-
204/ER	2520779	K	7,458.-	2520784	K	9,999.-	2520789	K	12,813.-
205/ER	2520780	K	7,577.-	2520785	K	10,177.-	2520790	K	13,066.-
206/ER	2520781	K	7,605.-	2520786	K	10,232.-	2520791	K	13,147.-
402/ER	2520792	K	7,536.-	2520797	K	10,098.-	2520802	K	12,966.-
403/ER	2520793	K	7,548.-	2520798	K	10,149.-	2520803	K	13,040.-
404/ER	2534338	K	7,626.-	2534339	K	10,253.-	2534340	K	13,187.-
405/ER	2520795	K	7,766.-	2520800	K	10,473.-	2520805	K	13,504.-
406/ER	2534341	K	7,835.-	2534342	K	10,597.-	2534343	K	13,545.-
802/ER	2520807	K	7,770.-	2520811	K	10,235.-	2520815	K	13,392.-
803/ER	2520808	K	7,814.-	2520812	K	10,785.-	2520816	K	13,745.-
804/ER	2520809	K	8,003.-	2520813	K	10,920.-	2520817	K	14,166.-
805/ER	2534344	K	8,160.-	2534345	K	11,092.-	2534346	K	14,478.-
1602/ER	2520819	K	8,496.-	2520822	K	11,176.-	2520825	K	13,373.-
1603/ER	2534332	K	9,427.-	2534333	K	11,760.-	2534334	K	14,095.-
1604/ER	2534335	K	10,242.-	2534336	K	12,883.-	2534337	K	16,312.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

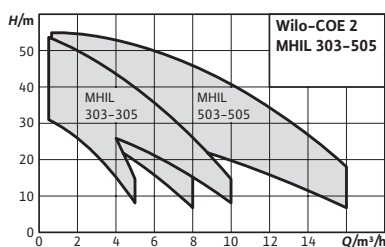

Accessories	Page
Accessories	454
Commissioning/maintenance	683

Select 4 online

All information at www.wilo-select.com

Wilo-COE-2 MHIL BC



Construction

Ready for connection, non self-priming water-supply unit with 2 parallel-switched, horizontally arranged high-pressure multistage centrifugal pumps with fixed speed in glanded design of the MHIL series, equipped with BC switchgear.

Application

- Fully automatic water supply and pressure boosting in residential buildings and small commercial locations.
- Pumping of drinking water and clean process water and other water mixtures that do not chemically or mechanically attack the materials used and do not contain any abrasive or long-fibre constituents.

Your advantages

- High operational reliability, thanks to system with two horizontal multistage MHIL pumps with stainless steel hydraulics
- Highly efficient EC motor with IE3 class for three phase motors from 0.75 kW and larger
- Drinking water approval (ACS) for pumps with components made of stainless steel that come into contact with the fluid
- Simple operation thanks to Basic Control switch-gear with all necessary functions

Scope of delivery

- Factory-mounted, ready for connection pressure boosting system checked for functionality and impermeability
- Packaging
- Installation and operating instructions

Price group: PG6

Ordering information 1-230 V

COE-2 MHIL BC	Max. operating pressure	Gross weight, approx.	Art. no.		
	<i>p</i> bar	<i>m</i> kg			
303-EM/BC	10	73	4164933	A	☎
304-EM/BC	10	75	4164934	A	☎
305-EM/BC	10	83	4164935	A	☎
503-EM/BC	10	73	4164936	A	☎
504-EM/BC	10	85	4164937	A	☎
505-EM/BC	10	83	4164938	A	☎

☎ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Pressure Boosting

422 Multi pump system with fixed speed


Price group: PG6

Ordering information (3~400 V)

COE-2 MHIL BC	Max. operating pressure	Gross weight, approx.	Art. no.		
	<i>p</i> bar	<i>m</i> kg			
304/BC	10	75	4164939	A	☎
305/BC	10	86	4164940	A	☎
503/BC	10	73	4164941	A	☎
504/BC	10	85	4164942	A	☎
505/BC	10	86	4164943	A	☎

☎ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

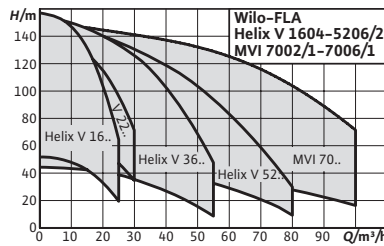

Accessories
Accessories

Page
454

Select 4 online

All information at www.wilo-select.com

Wilo-FLA-1



Construction

Pressure boosting system for fire extinguishing systems with indirect connection in accordance with DIN 14462. With a vertical stainless steel high-pressure multistage centrifugal pump in glanded version

Application

Fully automatic water supply for fire extinguishing systems with wall hydrants of the type „F“ in domestic, commercial and public buildings, hotels, hospitals, shopping centres and also offices and industrial buildings

Scope of delivery

→ Factory-mounted, connection-ready pressure boosting system checked for functionality and impermeability

Your advantages

- Sturdy system with one Helix FIRST V or MVI stainless steel high-pressure multistage centrifugal pump, in accordance with DIN 1988 and DIN 14462
- Absolute operational reliability
- Easy adjustment and operational reliability due to the FLA control unit
- Pre-set throttle valve on the pressure side of the pump to protect the pump at low volume flows


- Packaging
- Installation and operating instructions

Price group: PG13

Ordering information						
FLA-1 Helix V	System output	Max. operating pressure	Gross weight, approx.	Art. no.		
	Q m ³ /h	p bar	m kg			
1604 PN10	18	10	140	2534419	K	8,279.-
1605 PN10	18	10	154	2534420	K	8,414.-
1606 PN10	18	10	156	2534421	K	8,802.-
1607 PN10	18	10	196	2534422	K	9,954.-
1608 PN16	18	16	198	2534423	K	10,263.-
1609 PN16	18	16	212	2534424	K	10,726.-
1610 PN16	18	16	215	2534425	K	11,095.-
1611 PN16	18	16	216	2534426	K	11,425.-
1612 PN16	18	16	229	2534427	K	11,917.-
2204 PN10	24	10	225	2534428	K	11,084.-
2205 PN10	24	10	235	2534429	K	11,728.-

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG13


Ordering information						
FLA-1 Helix V	System output	Max. operating pressure	Gross weight, approx.	Art. no.		
	Q m ³ /h	p bar	m kg			EUR
2206 PN16	24	16	255	2534430	K	12,141.-
2207 PN16	24	16	239	2534431	K	12,837.-
2208 PN16	24	16	279	2534432	K	13,979.-
3602/1 PN10	36	10	223	2534368	K	11,461.-
3602 PN10	36	10	223	2534369	K	11,897.-
3603/1 PN10	36	10	233	2534371	K	12,362.-
3603/2 PN10	36	10	233	2534370	K	12,105.-
3603 PN10	36	10	239	2534372	K	12,832.-
3604/2 PN10	36	10	275	2534373	K	13,038.-
3604 PN16	36	16	275	2534374	K	13,282.-
3605/2 PN16	36	16	291	2534375	K	14,036.-
3605 PN16	36	16	291	2534376	K	14,626.-
3606/2 PN16	36	16	295	2534377	K	14,867.-
3606 PN16	36	16	306	2534378	K	15,010.-
5202 PN10	48	10	244	2534392	K	13,820.-
5203/2 PN10	48	10	283	2534393	K	14,358.-
5203 PN10	48	10	283	2534394	K	14,503.-
5204/2 PN10	48	10	301	2534395	K	14,963.-
5204 PN16	48	16	301	2534396	K	16,328.-
5205/2 PN16	48	16	343	2534397	K	16,620.-
5205 PN16	48	16	343	2534398	K	16,902.-
5206/2 PN16	48	16	371	2534399	K	18,202.-

Price group: PG13

Ordering information						
FLA-1MVI	System output	Max. operating pressure	Gross weight, approx.	Art. no.		
	Q m ³ /h	p bar	m kg			EUR
7002/1 PN10	48	10	332	2536577	K	14,471.-
7002 PN10	48	10	333	2536578	K	15,423.-
7003/1 PN10	48	10	369	2536580	K	17,275.-
7003/2 PN10	48	10	369	2536579	K	17,018.-
7003 PN10	48	10	386	2536581	K	17,480.-
7004/1 PN16	48	16	416	2536583	K	19,543.-
7004/2 PN10	48	10	390	2536582	K	18,718.-
7004 PN16	48	16	416	2536584	K	20,221.-
7005/1 PN16	48	16	499	2536586	K	22,516.-
7005/2 PN16	48	16	499	2536585	K	22,028.-
7005 PN16	48	16	499	2536587	K	22,906.-
7006/1 PN16	48	16	540	2536589	K	26,102.-
7006/2 PN16	48	16	510	2536588	K	24,986.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

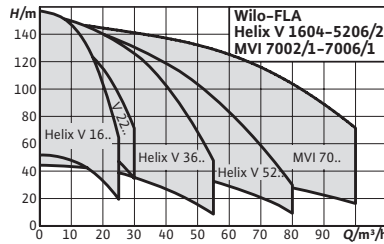

Accessories
Accessories

Page
454

Select 4 online

All information at www.wilo-select.com

Wilo-FLA-2



Construction

Pressure boosting system for fire extinguishing systems with indirect connection in accordance with DIN 14462. With 2 vertical stainless steel high-pressure multistage centrifugal pumps in glanded version

Application

Fully automatic water supply for fire extinguishing systems with wall hydrants of the type „F“ in domestic, commercial and public buildings, hotels, hospitals, shopping centres and also offices and industrial buildings

Scope of delivery

- Factory-mounted, connection-ready pressure boosting system checked for functionality and impermeability

Your advantages

- Sturdy system with 2 Helix FIRST V or MVI stainless steel high-pressure multistage centrifugal pumps, in accordance with DIN 1988 and DIN 14462
- Absolute operational reliability for 2-pump systems with 100 % redundancy
- Easy adjustment and operational reliability due to the FLA control unit
- Pre-set throttle valve on the pressure side of the pump to protect the pump at low volume flows


- Packaging
- Installation and operating instructions

Price group: PG13


Ordering information							
FLA-2 Helix FIRST V	System output	Max. operating pressure	Gross weight, approx.	Art. no.			
	Q m ³ /h	p bar	m kg				
1604 PN10	18	10	246	2534358	K		18,239.-
1605 PN10	18	10	272	2534359	K		18,380.-
1606 PN10	18	10	274	2534360	K		18,982.-
1607 PN10	18	10	360	2534361	K		21,040.-
1608 PN16	18	16	365	2534362	K		21,267.-
1609 PN16	18	16	417	2534363	K		21,905.-
1610 PN16	18	16	421	2534364	K		22,240.-
1611 PN16	18	16	424	2534365	K		23,273.-
1612 PN16	18	16	597	2534366	K		25,367.-
2204 PN10	24	10	601	2534433	K		23,290.-
2205 PN10	24	10	623	2534434	K		23,968.-



☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.


Price group: PG13

Ordering information						
FLA-2 Helix FIRST V	System output	Max. operating pressure	Gross weight, approx.	Art. no.		
	Q m ³ /h	p bar	m kg			EUR
2206 PN16	24	16	627	2534435	K	24,742.-
2207 PN16	24	16	648	2534436	K	25,741.-
2208 PN16	24	16	728	2534437	K	27,470.-
3602/1 PN10	36	10	437	2534380	K	24,431.-
3602 PN10	36	10	437	2534381	K	25,273.-
3603/1 PN10	36	10	440	2534383	K	26,999.-
3603/2 PN10	36	10	440	2534382	K	26,141.-
3603 PN10	36	10	450	2534384	K	28,162.-
3604/2 PN10	36	10	475	2534385	K	28,581.-
3604 PN16	36	16	475	2534386	K	29,161.-
3605/2 PN16	36	16	635	2534387	K	30,057.-
3605 PN16	36	16	635	2534388	K	31,104.-
3606/2 PN16	36	16	657	2534389	K	44,330.-
3606 PN16	36	16	670	2534390	K	33,570.-
5202 PN10	48	10	503	2534401	K	31,090.-
5203/2 PN10	48	10	545	2534402	K	32,856.-
5203 PN10	48	10	545	2534403	K	33,461.-
5204/2 PN10	48	10	696	2534404	K	35,739.-
5204 PN16	48	16	696	2534405	K	36,275.-
5205/2 PN16	48	16	719	2534406	K	37,276.-
5205 PN16	48	16	719	2534407	K	38,617.-
5206/2 PN16	48	16	735	2534408	K	39,017.-

Price group: PG13

Ordering information						
FLA-2 MVI	System output	Max. operating pressure	Gross weight, approx.	Art. no.		
	Q m ³ /h	p bar	m kg			EUR
7002/1 PN10	48	10	841	2536590	K	32,944.-
7002 PN10	48	10	842	2536591	K	35,521.-
7003/1 PN10	48	10	923	2536593	K	38,610.-
7003/2 PN10	48	10	923	2536592	K	38,076.-
7003 PN10	48	10	989	2536594	K	39,978.-
7004/1 PN16	48	16	1072	2536596	K	44,462.-
7004/2 PN10	48	10	997	2536595	K	41,986.-
7004 PN16	48	16	836	2536597	K	45,948.-
7005/1 PN16	48	16	1323	2536599	K	49,142.-
7005/2 PN16	48	16	1323	2536598	K	48,936.-
7005 PN16	48	16	1323	2536600	K	51,814.-
7006/1 PN16	48	16	1448	2536602	K	54,530.-
7006/2 PN16	48	16	1397	2536601	K	52,467.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

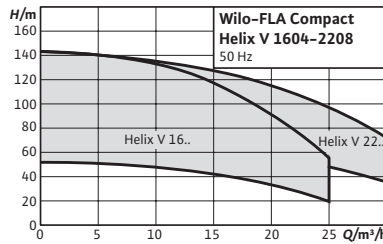

Accessories
Accessories

Page
454

Select 4 online

All information at www.wilo-select.com

Wilo-FLA Compact-1 Helix V



Construction

Pressure boosting system for fire fighting in accordance with DIN 14462 for indirect connection.

With a vertical, stainless steel high-pressure multistage centrifugal pump in glanded version and break tank.

Application

Fully automatic water supply for fire extinguishing systems with type „F“ fire hose reels in domestic, commercial and public buildings, hotels, hospitals, shopping centres and industrial systems

Scope of delivery

- Factory-mounted, connection-ready pressure boosting system checked for functionality and impermeability
- Break tank ready for connection
- Packaging

Your advantages


- Compact system with one Helix FIRST V series stainless steel high-pressure multistage centrifugal pump, in accordance with DIN 1988 and DIN 14462 (redundancy for 2-pump systems)
- Complete system which is supplied with a round tank (approved for drinking water) connected directly to the suction connection of the pump
- Hydraulic power within the series of up to 18 m³/h for 100 m delivery head
- Easily adjustable and operationally reliable due to the FLA operating unit (TÜV tested)
- Preconfigured bypass flow, for pump protection with low flow



- Installation and operating instructions


Price group: PG13

Ordering information						
FLA Compact-1 Helix V	System output	Max. operating pressure	Gross weight, approx.	Art. no.		
	Q m ³ /h	p bar	m kg			EUR
1604 DS8	18	10	222	2540107	K	12,947.-
1605 DS8	18	10	236	2540108	K	13,416.-
1606 DS8	18	10	238	2540109	K	13,708.-
1607 DS10	18	10	278	2540110	K	13,975.-
1608 DS16	18	16	280	2540111	K	15,030.-
1609 DS16	18	16	294	2540112	K	15,489.-
1610 DS16	18	16	297	2540113	K	15,752.-
1611 DS16	18	16	298	2540114	K	16,022.-
2204 DS8	18	10	286	2540116	K	15,407.-

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Ordering information						
FLA Compact-1 Helix V	System output	Max. operating pressure	Gross weight, approx.	Art. no.		
	Q m ³ /h	p bar	m kg			EUR
2205 DS10	18	10	303	2540117	K	15,847.-
2206 DS16	18	16	304	2540118	K	16,348.-
2207 DS16	18	16	319	2540119	K	17,042.-
2208 DS16	18	16	359	2540120	K	18,115.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

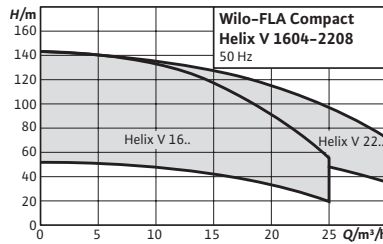

Accessories
Accessories

Page
454

Select 4 online

All information at www.wilo-select.com

Wilo-FLA Compact-2 Helix V



Construction

Pressure boosting system for fire fighting in accordance with DIN 14462 for indirect connection.

With 2 vertical, stainless steel high-pressure multistage centrifugal pumps in glanded version and break tank.

Application

Fully automatic water supply for fire extinguishing systems with type „F“ fire hose reels in domestic, commercial and public buildings, hotels, hospitals, shopping centres and industrial systems

Scope of delivery

- Factory-mounted, connection-ready pressure boosting system checked for functionality and impermeability
- Break tank ready for connection
- Packaging

Your advantages


- Compact system with 2 Helix FIRST V series stainless steel high-pressure multistage centrifugal pumps, in accordance with DIN 1988 and DIN 14462 (redundancy for 2-pump systems)
- Complete system which is supplied with a round tank (approved for drinking water) connected directly to the suction connection of the pump
- Hydraulic power within the series of up to 18 m³/h for 100 m delivery head
- Easily adjustable and operationally reliable due to the FLA operating unit (TÜV tested)
- Preconfigured bypass flow, for pump protection with low flow


- Installation and operating instructions

Price group: PG13

Ordering information						
FLA Compact-2 Helix V	System output	Max. operating pressure	Gross weight, approx.	Art. no.		
	Q m ³ /h	p bar	m kg			EUR
1604 DS8	18	10	389	2540130	K	23,954.-
1605 DS8	18	10	393	2540131	K	24,981.-
1606 DS8	18	10	395	2540132	K	26,097.-
1607 DS10	18	10	406	2540133	K	27,045.-
1608 DS16	18	16	410	2540134	K	27,867.-
1609 DS16	18	16	460	2540135	K	28,837.-
1610 DS16	18	16	464	2540136	K	30,031.-
1611 DS16	18	16	466	2540137	K	30,022.-
2204 DS8	18	8	453	2540139	K	28,335.-

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Ordering information						
FLA Compact-2 Helix V	System output	Max. operating pressure	Gross weight, approx.	Art. no.		
	Q m ³ /h	p bar	m kg			EUR
2205 DS10	18	10	473	2540140	K	29,347.-
2206 DS16	18	16	475	2540141	K	30,043.-
2207 DS16	18	16	509	2540142	K	31,888.-
2208 DS16	18	16	579	2540143	K	32,903.-

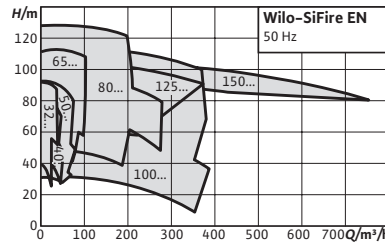

Accessories
Accessories

Page
454

Select 4 online

All information at www.wilo-select.com

Wilo-SiFire EN



Construction

Pressure boosting systems for fire fighting according to EN 12845.

Consists of 1 or 2 pumps, depending on the module, with horizontal base plate – EN 733 – with spacer coupling, electric or diesel motor and a multistage, vertical electric jockey pump.

Application

Fully automatic water supply of fire extinguishing systems with a sprinkler system in residential, commercial, public and industrial buildings, as well as hotels, hospitals and department stores.

Scope of delivery

- Factory-mounted, ready-for-installation pressure boosting system, which has been checked for functionality and impermeability
- Packaging
- Installation and operating instructions

Your advantages


- Pressure-loss optimised system designed in accordance with the EN 12845 Standard with electrical or diesel drive, jockey pump for maintaining system pressure
- Flexible, modular and solid construction for safe transport and simple installation
- Bypass volume flow for the protection of the pump with spacer coupling for simple maintenance
- High-quality SC-Fire control prepared for BACnet and Modbus building management system integration
- Special base plate for minimal vibrations, cable laid in the construction in such a way as to ensure maximum reliability and service life

→ Required accessories on request

Price group: PG13

Ordering information		Art. no.	
SiFire EN			
32/200-177-4 E		4183650	K 10,661.-
32/200-193-5.5 E		4183651	K 10,753.-
32/200-205-7.5 E		4183652	K 11,318.-
32/200-210-7.5 E		4183653	K 11,367.-
32/250-210-15 E		4183654	K 12,134.-
32/250-225-18.5 E		4183655	K 12,575.-
32/250-235-22 E		4183656	K 13,120.-


☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Ordering information			
SiFire EN	Art. no.		
			EUR
32/250-257-30 E	4183657	K	15,339.-
40/200-180-7.5 E	4183658	K	10,859.-
40/200-195-11 E	4183659	K	11,508.-
40/200-200-11 E	4183660	K	11,519.-
40/200-210-15 E	4183661	K	11,803.-
40/250-198-11 E	4183662	K	12,606.-
40/250-205-15 E	4183663	K	12,993.-
40/250-219-15 E	4183664	K	13,305.-
40/250-230-18.5 E	4183665	K	13,586.-
40/250-235-18.5 E	4183666	K	13,586.-
40/250-248-22 E	4183667	K	14,305.-
50/160-150-7.5 E	4183668	K	11,169.-
50/160-154-7.5 E	4183669	K	11,355.-
50/160-170-11 E	4183670	K	11,994.-
50/200-175-11 E	4183671	K	12,299.-
50/200-185-15 E	4183672	K	12,850.-
50/200-195-15 E	4183673	K	12,910.-
50/200-204-18.5 E	4183674	K	13,780.-
50/200-208-18.5 E	4183675	K	13,865.-
50/200-215-22 E	4183676	K	14,057.-
50/250-230-22 E	4183677	K	14,723.-
50/250-243-30 E	4183678	K	16,594.-
50/250-257-30 E	4183679	K	16,746.-
65/200-185-18.5 E	4183680	K	14,497.-
65/200-197-22 E	4183681	K	14,862.-
65/200-209-30 E	4183682	K	17,581.-
65/200-214-30 E	4183683	K	17,977.-
65/250-223-30 E	4183684	K	18,448.-
65/250-240-37 E	4183685	K	18,533.-
65/250-252-45 E	4183686	K	20,412.-
65/250-259-55 E	4183687	K	22,411.-
65/315-292-75 E	4183688	A	41,956.-
80/200-192R-30 E	4183689	K	19,726.-
80/200-203-37 E	4183690	K	20,438.-
80/200-215.5-45 E	4183691	K	22,250.-
80/250-235-55 E	4183692	K	24,730.-
80/250-243-75 E	4183693	A	35,513.-
80/250-253-75 E	4183694	A	34,925.-
80/250-266-90 E	4183695	A	37,903.-
80/315-290-110 E	4183696	A	47,194.-
80/315-311-132 E	4183697	A	45,415.-
100/200-168R-22 E	4183698	K	19,549.-
100/200-183-30 E	4183699	K	20,602.-
100/200-194-37 E	4183700	K	21,282.-
100/200-205-45 E	4183701	K	27,714.-
100/200-219-55 E	4183702	K	31,856.-


 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo



Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG13


Ordering information			
SiFire EN	Art. no.		
			EUR
100/250-233-55 E	4183703	K	32,594.-
100/250-247-75 E	4183704	A	36,351.-
100/250-256-90 E	4183705	A	38,548.-
100/250-269-110 E	4183706	A	42,706.-
100/315-272-132 E	4183709	A	52,294.-
100/315-294-160 E	4183710	A	58,780.-
125/250-224-90 E	4183711	A	47,372.-
125/250-237-110 E	4183712	A	50,403.-
125/250-251-132 E	4183713	A	55,208.-
125/250-267-160 E	4183714	A	63,279.-
125/315-290-160 E	4183715	A	59,470.-
150/315-273-200 E	4183716	A	75,885.-
150/315-279-250 E	4183717	A	80,733.-
150/315-291-250 E	4183718	A	82,201.-

Price group: PG13

Ordering information			
SiFire EN	Art. no.		
			EUR
32/200-177-4.25 D	4183788	K	18,312.-
32/200-193-6.8 D	4183789	K	18,584.-
32/200-205-6.8 D	4183790	K	21,790.-
32/200-210-10.5 D	4183791	K	22,689.-
32/250-210-17.7 D	4183792	K	23,580.-
32/250-225-26.5 D	4183793	K	27,047.-
32/250-235-26.5 D	4183794	K	27,113.-
32/250-257-31.5 D	4183795	K	31,584.-
40/200-180-10.5 D	4183796	K	21,941.-
40/200-195-10.5 D	4183797	K	21,903.-
40/200-200-12.9 D	4183798	K	22,010.-
40/200-210-12.9 D	4183799	K	22,179.-
40/250-198-12.9 D	4183800	K	23,497.-
40/250-205-12.9 D	4183801	K	24,038.-
40/250-219-17.7 D	4183802	K	24,610.-
40/250-230-17.7 D	4183803	K	24,656.-
40/250-235-26.5 D	4183804	K	27,846.-
40/250-248-26.5 D	4183805	K	28,052.-
50/160-150-6.8 D	4183806	K	19,946.-
50/160-154-10.5 D	4183807	K	21,737.-
50/160-170-12.9 D	4183808	K	22,523.-
50/200-175-12.9 D	4183809	K	23,032.-
50/200-185-12.9 D	4183810	K	23,000.-
50/200-195-17.7 D	4183811	K	24,270.-
50/200-204-17.7 D	4183812	K	24,403.-
50/200-208-26.5 D	4183813	K	27,696.-
50/200-215-26.5 D	4183814	K	27,696.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG13

Ordering information			
SiFire EN	Art. no.		
			EUR
50/250-230-26.5 D	4183815	K	28,408.-
50/250-243-26.5 D	4183816	K	30,233.-
50/250-257-31.5 D	4183817	K	32,672.-
65/200-185-17.7 D	4183818	K	28,898.-
65/200-197-26.5 D	4183819	K	29,140.-
65/200-209-26.5 D	4183820	K	30,871.-
65/200-214-31.5 D	4183821	K	33,272.-
65/250-223-31.5 D	4183822	K	33,757.-
65/250-240-47.7 D	4183823	K	35,963.-
65/250-252-47.7 D	4183824	K	36,047.-
65/250-259-66 D	4183825	K	37,951.-
65/315-292-100 D	4183826	A	55,138.-
80/200-192R-31.5 D	4183827	K	35,039.-
80/200-203-47.7 D	4183828	K	37,184.-
80/200-215.5-47.7 D	4183829	K	37,308.-
80/250-235-66 D	4183830	K	40,028.-
80/250-243-66 D	4183831	A	44,667.-
80/250-253-100 D	4183832	A	46,863.-
80/250-266-100 D	4183833	A	47,087.-
80/315-290-109 D	4183834	A	55,667.-
80/315-311-145 D	4183835	A	61,759.-
100/200-168R-26.5 D	4183836	K	37,560.-
100/200-183-31.5 D	4183837	K	38,227.-
100/200-194-47.7 D	4183838	K	40,116.-
100/200-205-47.7 D	4183839	K	40,204.-
100/200-219-66 D	4183840	K	42,045.-
100/250-233-66 D	4183841	K	42,698.-
100/250-247-100 D	4183842	A	47,062.-
100/250-256-100 D	4183843	A	50,944.-
100/250-269-109 D	4183844	A	52,051.-
100/315-272-145 D	4183847	A	65,758.-
100/315-294-197 D	4183848	A	85,690.-
125/250-224-100 D	4183849	A	60,190.-
125/250-237-109 D	4183850	A	66,233.-
125/250-251-145 D	4183851	A	69,442.-
125/250-267-197 D	4183852	A	75,811.-
125/315-290-197 D	4183853	A	67,634.-
150/315-273-222 D	4183854	A	89,761.-
150/315-279-222 D	4183855	A	87,877.-
150/315-291-246 D	4183856	A	93,434.-


Price group: PG13



Ordering information			
SiFire EN	Art. no.		
			EUR
32/200-177-4.25/0.55 DJ	4183857	K	20,515.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ⚡ = please contact Wilo


Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG13

Ordering information		Art. no.	
SiFire EN			
			EUR
32/200-193-6.8/0.55 DJ	4183858	K	20,719.-
32/200-205-6.8/0.75 DJ	4183859	K	24,340.-
32/200-210-10.5/0.75 DJ	4183860	K	25,158.-
32/250-210-17.7/1.1 DJ	4183861	K	25,899.-
32/250-225-26.5/1.1 DJ	4183862	K	29,393.-
32/250-235-26.5/1.1 DJ	4183863	K	29,467.-
32/250-257-31.5/1.1 DJ	4183864	K	32,174.-
40/200-180-10.5/0.55 DJ	4183865	K	24,200.-
40/200-195-10.5/0.75 DJ	4183866	K	24,200.-
40/200-200-12.9/0.75 DJ	4183867	K	24,239.-
40/200-210-12.9/1.1 DJ	4183868	K	24,493.-
40/250-198-12.9/0.75 DJ	4183869	K	25,819.-
40/250-205-12.9/1.1 DJ	4183870	K	26,484.-
40/250-219-17.7/1.1 DJ	4183871	K	27,022.-
40/250-230-17.7/1.1 DJ	4183872	K	27,058.-
40/250-235-26.5/1.1 DJ	4183873	K	30,341.-
40/250-248-26.5/1.1 DJ	4183874	K	30,567.-
50/160-150-6.8/0.55 DJ	4183875	K	22,226.-
50/160-154-10.5/0.55 DJ	4183876	K	23,975.-
50/160-170-12.9/0.55 DJ	4183877	K	24,765.-
50/200-175-12.9/0.55 DJ	4183878	K	25,275.-
50/200-185-12.9/0.75 DJ	4183879	K	25,282.-
50/200-195-17.7/1.1 DJ	4183880	K	26,647.-
50/200-204-17.7/1.1 DJ	4183881	K	26,793.-
50/200-208-26.5/1.1 DJ	4183882	K	30,092.-
50/200-215-26.5/1.1 DJ	4183883	K	30,092.-
50/250-230-26.5/1.1 DJ	4183884	K	30,829.-
50/250-243-26.5/1.1 DJ	4183885	K	32,649.-
50/250-257-31.5/1.1 DJ	4183886	K	35,166.-
65/200-185-17.7/0.55 DJ	4183887	K	31,552.-
65/200-197-26.5/0.75 DJ	4183888	K	31,552.-
65/200-209-26.5/1.1 DJ	4183889	K	33,339.-
65/200-214-31.5/1.1 DJ	4183890	K	35,714.-
65/250-223-31.5/1.1 DJ	4183891	K	36,132.-
65/250-240-47.7/1.1 DJ	4183892	K	38,380.-
65/250-252-47.7/1.1 DJ	4183893	K	38,567.-
65/250-259-66/1.1 DJ	4183894	K	40,439.-
65/315-292-100/1,5 DJ	4183895	A	58,299.-
80/200-192R-31.5/0.75 DJ	4183896	K	37,443.-
80/200-203-47.7/1.1 DJ	4183897	K	39,691.-
80/200-215.5-47.7/1.1 DJ	4183898	K	39,816.-
80/250-235-66/1.1 DJ	4183899	K	42,500.-
80/250-243-66/1,1 DJ	4183900	A	47,309.-
80/250-253-100/1,1 DJ	4183901	A	49,270.-
80/250-266-100/1,1 DJ	4183902	A	49,506.-
80/315-290-109/1,5 DJ	4183903	A	58,827.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG13

Ordering information			
SiFire EN	Art. no.		
			EUR
80/315-311-145/1,5 DJ	4183904	A	64,913.-
100/200-168R-26.5/0.55 DJ	4183905	K	35,966.-
100/200-183-31.5/0.55 DJ	4183906	K	40,709.-
100/200-194-47.7/0.75 DJ	4183907	K	42,654.-
100/200-205-47.7/0.75 DJ	4183908	K	42,749.-
100/200-219-66/1.1 DJ	4183909	K	44,621.-
100/250-233-66/1.1 DJ	4183910	K	45,243.-
100/250-247-100/1,1 DJ	4183911	A	51,415.-
100/250-256-100/1,1 DJ	4183912	A	53,497.-
100/250-269-109/1,1 DJ	4183913	A	54,626.-
100/315-272-145/1,5 DJ	4183916	A	68,625.-
100/315-294-197/1,5 DJ	4183917	A	88,580.-
125/250-224-100/1,1 DJ	4183918	A	62,629.-
125/250-237-109/1,1 DJ	4183919	A	70,388.-
125/250-251-145/1,1 DJ	4183920	A	72,861.-
125/250-267-197/1,1 DJ	4183921	A	79,591.-
125/315-290-197/1,5 DJ	4183922	A	88,884.-
150/315-273-222/1,1 DJ	4183923	A	92,134.-
150/315-279-222/1,1 DJ	4183924	A	90,998.-
150/315-291-246/1,5 DJ	4183925	A	96,443.-


Price group: PG13

Ordering information			
SiFire EN	Art. no.		
			EUR
32/200-177-4/4/0.55 EEJ	4183926	K	21,905.-
32/200-193-5.5/5.5/0.55 EEJ	4183927	K	23,065.-
32/200-205-7.5/7.5/0.75 EEJ	4183928	K	24,464.-
32/200-210-7.5/7.5/0.75 EEJ	4183929	K	24,685.-
32/250-210-15/15/1.1 EEJ	4183930	K	25,438.-
32/250-225-18.5/18.5/1.1 EEJ	4183931	K	26,336.-
32/250-235-22/22/1.1 EEJ	4183932	K	27,269.-
32/250-257-30/30/1.1 EEJ	4183933	K	32,134.-
40/200-180-7.5/7.5/0.55 EEJ	4183934	K	23,027.-
40/200-195-11/11/0.75 EEJ	4183935	K	24,502.-
40/200-200-11/11/0.75 EEJ	4183936	K	24,513.-
40/200-210-15/15/1.1 EEJ	4183937	K	24,885.-
40/250-198-11/11/0.75 EEJ	4183938	K	25,671.-
40/250-205-15/15/1.1 EEJ	4183939	K	27,334.-
40/250-219-15/15/1.1 EEJ	4183940	K	27,994.-
40/250-230-18.5/18.5/1.1 EEJ	4183941	K	30,430.-
40/250-235-18.5/18.5/1.1 EEJ	4183942	K	30,503.-
40/250-248-22/22/1.1 EEJ	4183943	K	30,107.-
50/160-150-7.5/7.5/0.55 EEJ	4183944	K	24,079.-
50/160-154-7.5/7.5/0.55 EEJ	4183945	K	24,151.-
50/160-170-11/11/0.55 EEJ	4183946	K	25,428.-


 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo



Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.


Price group: PG13

Ordering information			
SiFire EN	Art. no.		
			EUR
50/200-175-11/11/0.55 EEJ	4183947	K	25,960.-
50/200-185-15/15/0.75 EEJ	4183948	K	26,514.-
50/200-195-15/15/1.1 EEJ	4183949	K	26,591.-
50/200-204-18.5/18.5/1.1 EEJ	4183950	K	27,309.-
50/200-208-18.5/18.5/1.1 EEJ	4183951	K	27,459.-
50/200-215-22/22/1.1 EEJ	4183952	K	29,830.-
50/250-230-22/22/1.1 EEJ	4183953	K	30,678.-
50/250-243-30/30/1.1 EEJ	4183954	K	34,584.-
50/250-257-30/30/1.1 EEJ	4183955	K	34,747.-
65/200-185-18.5/18.5/0.55 EEJ	4183956	K	30,268.-
65/200-197-22/22/0.75 EEJ	4183957	K	30,903.-
65/200-209-30/30/1.1 EEJ	4183958	K	36,961.-
65/200-214-30/30/1.1 EEJ	4183959	K	37,443.-
65/250-223-30/30/1.1 EEJ	4183960	K	37,694.-
65/250-240-37/37/1.1 EEJ	4183961	K	38,880.-
65/250-252-45/45/1.1 EEJ	4183962	K	41,375.-
65/250-259-55/55/1.1 EEJ	4183963	K	45,370.-
80/200-192R-30/30/0.75 EEJ	4183965	K	40,764.-
80/200-203-37/37/1.1 EEJ	4183966	K	42,331.-
80/200-215.5-45/45/1.1 EEJ	4183967	K	45,893.-
80/250-235-55/55/1.1 EEJ	4183968	K	55,442.-
100/200-168R-22/22/0.55 EEJ	4183974	K	42,561.-
100/200-183-30/30/0.55 EEJ	4183975	K	47,019.-
100/200-194-37/37/0.75 EEJ	4183976	K	50,032.-
100/200-205-45/45/0.75 EEJ	4183977	K	57,476.-
100/200-219-55/55/1.1 EEJ	4183978	K	66,312.-
100/250-233-55/55/1.1 EEJ	4183979	K	68,365.-

Price group: PG13


Ordering information			
SiFire EN	Art. no.		
			EUR
32/200-177-4/4.25/0.55 EDJ	4183995	K	28,596.-
32/200-193-5.5/6.8/0.55 EDJ	4183996	K	30,866.-
32/200-205-7.5/6.8/0.75 EDJ	4183997	K	32,702.-
32/200-210-7.5/10.5/0.75 EDJ	4183998	K	34,214.-
32/250-210-15/17.7/1.1 EDJ	4183999	K	36,914.-
32/250-225-18.5/26.5/1.1 EDJ	4184000	K	40,814.-
32/250-235-22/26.5/1.1 EDJ	4184001	K	41,497.-
32/250-257-30/31.5/1.1 EDJ	4184002	K	45,467.-
40/200-180-7.5/10.5/0.55 EDJ	4184003	K	34,286.-
40/200-195-11/10.5/0.75 EDJ	4184004	K	35,023.-
40/200-200-11/12.9/0.75 EDJ	4184005	K	35,034.-
40/200-210-15/12.9/1.1 EDJ	4184006	K	35,368.-
40/250-198-11/12.9/0.75 EDJ	4184007	K	37,454.-
40/250-205-15/12.9/1.1 EDJ	4184008	K	38,416.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Ordering information			
SiFire EN	Art. no.		
			EUR
40/250-219-15/17.7/1.1 EDJ	4184009	K	39,266.-
40/250-230-18.5/17.7/1.1 EDJ	4184010	K	40,489.-
40/250-235-18.5/26.5/1.1 EDJ	4184011	K	42,595.-
40/250-248-22/26.5/1.1 EDJ	4184012	K	43,785.-
50/160-150-7.5/6.8/0.55 EDJ	4184013	K	31,915.-
50/160-154-7.5/10.5/0.55 EDJ	4184014	K	34,329.-
50/160-170-11/12.9/0.55 EDJ	4184015	K	35,623.-
50/200-175-11/12.9/0.55 EDJ	4184016	K	36,695.-
50/200-185-15/12.9/0.75 EDJ	4184017	K	37,416.-
50/200-195-15/17.7/1.1 EDJ	4184018	K	38,829.-
50/200-204-18.5/17.7/1.1 EDJ	4184019	K	39,114.-
50/200-208-18.5/26.5/1.1 EDJ	4184020	K	42,243.-
50/200-215-22/26.5/1.1 EDJ	4184021	K	43,421.-
50/250-230-22/26.5/1.1 EDJ	4184022	K	43,437.-
50/250-243-30/26.5/1.1 EDJ	4184023	K	47,711.-
50/250-257-30/31.5/1.1 EDJ	4184024	K	49,699.-
65/200-185-18.5/17.7/0.55 EDJ	4184025	K	42,124.-
65/200-197-22/26.5/0.75 EDJ	4184026	K	45,146.-
65/200-209-30/26.5/1.1 EDJ	4184027	K	50,446.-
65/200-214-30/31.5/1.1 EDJ	4184028	K	52,633.-
65/250-223-30/31.5/1.1 EDJ	4184029	K	52,684.-
65/250-240-37/47.7/1.1 EDJ	4184030	K	54,936.-
65/250-252-45/47.7/1.1 EDJ	4184031	K	56,966.-
65/250-259-55/66/1.1 EDJ	4184032	K	60,758.-
80/200-192R-30/31.5/0.75 EDJ	4184034	K	55,866.-
80/200-203-37/47.7/1.1 EDJ	4184035	K	58,913.-
80/200-215.5-45/47.7/1.1 EDJ	4184036	K	60,741.-
80/250-235-55/66/1.1 EDJ	4184037	K	67,918.-
100/200-168R-22/26.5/0.55 EDJ	4184043	K	50,079.-
100/200-183-30/31.5/0.55 EDJ	4184044	K	57,501.-
100/200-194-37/47.7/0.75 EDJ	4184045	K	63,595.-
100/200-205-45/47.7/0.75 EDJ	4184046	K	69,396.-
100/200-219-55/66/1.1 EDJ	4184047	K	75,636.-
100/250-233-55/66/1.1 EDJ	4184048	K	77,781.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

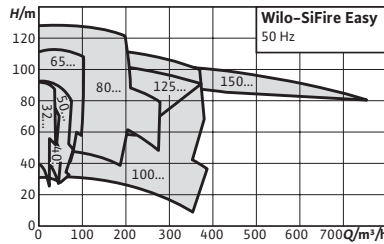

Accessories
Accessories

Page
454

Series extension

Select 4online
All information at www.wilo-select.com

Wilo-SiFire Easy



Construction

Pressure boosting systems for fire fighting according to EN 12845.

Consists of 1 or 2 pumps, depending on the module, with horizontal base plate – EN 733 – with spacer coupling, electric or diesel motor and a multistage, vertical electric jockey pump.

Application

Fully automatic water supply for fire extinguishing systems with sprinklers in domestic, commercial and public buildings, hotels, hospitals, shopping centres and industrial buildings.

Scope of delivery

- Factory-mounted, ready-for-installation pressure boosting system, which has been checked for functionality and impermeability
- Packaging
- Installation and operating instructions

Your advantages

- Pressure-loss optimised system designed in accordance with the EN 12845 Standard with electrical or diesel drive, jockey pump for maintaining system pressure
- Flexible, modular and solid construction for safe transport and simple installation
- Bypass volume flow for the protection of the pump with spacer coupling for simple maintenance
- Optimum regulation and ease of use via EC-Fire control with direct display of the current operating status
- Special base plate for minimal vibrations, cable laid in the construction in such a way as to ensure maximum reliability and service life


→ Required accessories on request



Price group: PG13


Ordering information

SiFire Easy

Art. no.

			EUR
32/200-177-4 E	4205075	K	9,062.-
32/200-193-5,5 E	4205076	K	9,140.-
32/200-205-7,5 E	4205077	K	9,620.-
32/200-210-7,5 E	4205078	K	9,663.-
32/250-210-15 E	4205079	K	10,315.-
32/250-225-18,5 E	4205080	K	10,688.-
32/250-235-22 E	4205081	K	11,153.-


 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Ordering information			
SiFire Easy	Art. no.		
			EUR
32/250-257-30 E	4205082	K	13,038.-
40/200-180-7,5 E	4205083	K	9,231.-
40/200-195-11 E	4205084	K	9,781.-
40/200-200-11 E	4205085	K	9,792.-
40/200-210-15 E	4205086	K	10,033.-
40/250-198-11 E	4205087	K	10,715.-
40/250-205-15 E	4205088	K	11,044.-
40/250-219-15 E	4205089	K	11,309.-
40/250-230-18,5 E	4205090	K	11,548.-
40/250-235-18,5 E	4205091	K	11,548.-
40/250-248-22 E	4205092	K	12,159.-
50/160-150-7,5 E	4205093	K	9,494.-
50/160-154-7,5 E	4205094	K	9,653.-
50/160-170-11 E	4205095	K	10,195.-
50/200-175-11 E	4205096	K	10,456.-
50/200-185-15 E	4205097	K	10,923.-
50/200-195-15 E	4205098	K	10,974.-
50/200-204-18,5 E	4205099	K	11,715.-
50/200-208-18,5 E	4205100	K	11,785.-
50/200-215-22 E	4205101	K	11,948.-
50/250-230-22 E	4205102	K	12,514.-
50/250-243-30 E	4205103	K	14,105.-
50/250-257-30 E	4205104	K	14,236.-
65/200-185-18,5 E	4205105	K	12,323.-
65/200-197-22 E	4205106	K	12,633.-
65/200-209-30 E	4205107	K	14,944.-
65/200-214-30 E	4205108	K	15,282.-
65/250-223-30 E	4205109	K	15,680.-
65/250-240-37 E	4205110	K	15,755.-
65/250-252-45 E	4205111	K	17,350.-
65/250-259-55 E	4205112	K	19,051.-
65/315-292-75 E	4225085	A	35,454.-
80/200-192R-30 E	4205113	K	16,769.-
80/200-203-37 E	4205114	K	17,374.-
80/200-215,5-45 E	4205115	K	18,912.-
80/250-235-55 E	4205116	K	21,021.-
80/250-243-75 E	4225086	A	30,010.-
80/250-253-75 E	4225087	A	29,512.-
80/250-266-90 E	4225088	A	32,030.-
80/315-290-110 E	4225089	A	39,881.-
80/315-311-132 E	4225090	A	38,377.-
100/200-168R-22 E	4205117	K	16,617.-
100/200-183-30 E	4205118	K	17,511.-
100/200-194-37 E	4205119	K	18,090.-
100/200-205-45 E	4205120	K	23,556.-
100/200-219-55 E	4205121	K	27,078.-


 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo



Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG13


Ordering information			
SiFire Easy	Art. no.		
			EUR
100/250-233-55 E	4205122	K	27,704.-
100/250-247-75 E	4225091	A	30,719.-
100/250-256-90 E	4225092	A	32,574.-
100/250-269-110 E	4225093	A	36,089.-
100/315-272-132 E	4225094	A	44,191.-
100/315-294-160 E	4225095	A	49,671.-
125/250-224-90 E	4225096	A	40,031.-
125/250-237-110 E	4225097	A	42,593.-
125/250-251-132 E	4225098	A	46,654.-
125/250-267-160 E	4225099	A	53,473.-
125/315-290-160 E	4225100	A	50,255.-
150/315-273-200 E	4225101	A	64,126.-
150/315-279-250 E	4225102	A	68,223.-
150/315-291-250 E	4225103	A	69,464.-

Price group: PG13

Ordering information			
SiFire Easy	Art. no.		
			EUR
32/200-177-4,25 D	4205171	K	15,566.-
32/200-193-6,8 D	4205172	K	15,799.-
32/200-205-6,8 D	4205173	K	18,521.-
32/200-210-10,5 D	4205174	K	19,286.-
32/250-210-17,7 D	4205175	K	20,044.-
32/250-225-26,5 D	4205176	K	22,991.-
32/250-235-26,5 D	4205177	K	23,047.-
32/250-257-31,5 D	4205178	K	26,846.-
40/200-180-10,5 D	4205179	K	18,650.-
40/200-195-10,5 D	4205180	K	18,617.-
40/200-200-12,9 D	4205181	K	18,708.-
40/200-210-12,9 D	4205182	K	18,852.-
40/250-198-12,9 D	4205183	K	19,972.-
40/250-205-12,9 D	4205184	K	20,434.-
40/250-219-17,7 D	4205185	K	20,919.-
40/250-230-17,7 D	4205186	K	20,958.-
40/250-235-26,5 D	4205187	K	23,669.-
40/250-248-26,5 D	4205188	K	23,846.-
50/160-150-6,8 D	4205189	K	16,955.-
50/160-154-10,5 D	4205190	K	18,476.-
50/160-170-12,9 D	4205191	K	19,146.-
50/200-175-12,9 D	4205192	K	19,578.-
50/200-185-12,9 D	4205193	K	19,550.-
50/200-195-17,7 D	4205194	K	20,630.-
50/200-204-17,7 D	4205195	K	20,742.-
50/200-208-26,5 D	4205196	K	23,542.-
50/200-215-26,5 D	4205197	K	23,542.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG13

Ordering information			
SiFire Easy	Art. no.		
			EUR
50/250-230-26,5 D	4205198	K	24,147.-
50/250-243-26,5 D	4205199	K	25,699.-
50/250-257-31,5 D	4205200	K	27,772.-
65/200-185-17,7 D	4205201	K	24,564.-
65/200-197-26,5 D	4205202	K	24,769.-
65/200-209-26,5 D	4205203	K	26,241.-
65/200-214-31,5 D	4205204	K	28,282.-
65/250-223-31,5 D	4205205	K	28,694.-
65/250-240-47,7 D	4205206	K	30,570.-
65/250-252-47,7 D	4205207	K	30,639.-
65/250-259-66 D	4205208	K	32,258.-
65/315-292-100 D	4225123	A	48,725.-
80/200-192R-31,5 D	4205209	K	29,785.-
80/200-203-47,7 D	4205210	K	31,606.-
80/200-215,5-47,7 D	4205211	K	31,712.-
80/250-235-66 D	4205212	K	34,024.-
80/250-243-66 D	4225124	A	39,472.-
80/250-253-100 D	4225125	A	41,412.-
80/250-266-100 D	4225126	A	41,610.-
80/315-290-109 D	4225127	A	49,192.-
80/315-311-145 D	4225128	A	54,575.-
100/200-168R-26,5 D	4205213	K	31,926.-
100/200-183-31,5 D	4205214	K	32,494.-
100/200-194-47,7 D	4205215	K	34,098.-
100/200-205-47,7 D	4205216	K	34,174.-
100/200-219-66 D	4205217	K	35,739.-
100/250-233-66 D	4205218	K	36,293.-
100/250-247-100 D	4225129	A	41,589.-
100/250-256-100 D	4225130	A	45,019.-
100/250-269-109 D	4225131	A	45,997.-
100/315-272-145 D	4225132	A	58,110.-
100/315-294-197 D	4225133	A	75,723.-
125/250-224-100 D	4225134	A	53,189.-
125/250-237-109 D	4225135	A	58,530.-
125/250-251-145 D	4225136	A	61,365.-
125/250-267-197 D	4225137	A	66,993.-
125/315-290-197 D	4225138	A	68,942.-
150/315-273-222 D	4225139	A	79,321.-
150/315-279-222 D	4225140	A	77,657.-
150/315-291-246 D	4225141	A	82,567.-


Price group: PG13



Ordering information			
SiFire Easy	Art. no.		
			EUR
32/200-177-4 EJ	4205123	K	11,011.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo


Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG13


Ordering information		Art. no.	
SiFire Easy			
			EUR
32/200-193-5,5 EJ	4205124	K	11,055.-
32/200-205-7,5 EJ	4205125	K	11,649.-
32/200-210-7,5 EJ	4205126	K	11,760.-
32/250-210-15 EJ	4205127	K	12,349.-
32/250-225-18,5 EJ	4205128	K	12,769.-
32/250-235-22 EJ	4205129	K	13,194.-
32/250-257-30 EJ	4205130	K	15,194.-
40/200-180-7,5 EJ	4205131	K	11,119.-
40/200-195-11 EJ	4205132	K	11,743.-
40/200-200-11 EJ	4205133	K	11,757.-
40/200-210-15 EJ	4205134	K	12,076.-
40/250-198-11 EJ	4205135	K	12,765.-
40/250-205-15 EJ	4205136	K	13,189.-
40/250-219-15 EJ	4205137	K	13,506.-
40/250-230-18,5 EJ	4205138	K	13,762.-
40/250-235-18,5 EJ	4205139	K	13,847.-
40/250-248-22 EJ	4205140	K	14,440.-
50/160-150-7,5 EJ	4205141	K	11,443.-
50/160-154-7,5 EJ	4205142	K	11,634.-
50/160-170-11 EJ	4205143	K	12,209.-
50/200-175-11 EJ	4205144	K	12,440.-
50/200-185-15 EJ	4205145	K	13,007.-
50/200-195-15 EJ	4205146	K	13,129.-
50/200-204-18,5 EJ	4205147	K	13,982.-
50/200-208-18,5 EJ	4205148	K	14,064.-
50/200-215-22 EJ	4205149	K	14,127.-
50/250-230-22 EJ	4205150	K	14,727.-
50/250-243-30 EJ	4205151	K	16,285.-
50/250-257-30 EJ	4205152	K	16,519.-
65/200-185-18,5 EJ	4205153	K	14,535.-
65/200-197-22 EJ	4205154	K	14,811.-
65/200-209-30 EJ	4205155	K	17,258.-
65/200-214-30 EJ	4205156	K	17,649.-
65/250-223-30 EJ	4205157	K	17,914.-
65/250-240-37 EJ	4205158	K	17,914.-
65/250-252-45 EJ	4205159	K	19,638.-
65/250-259-55 EJ	4205160	K	21,378.-
65/315-292-75 EJ	4225104	A	38,298.-
80/200-192R-30 EJ	4205161	K	19,087.-
80/200-203-37 EJ	4205162	K	19,755.-
80/200-215,5-45 EJ	4205163	K	21,314.-
80/250-235-55 EJ	4205164	K	23,401.-
80/250-243-75 EJ	4225105	A	32,135.-
80/250-253-75 EJ	4225106	A	31,857.-
80/250-266-90 EJ	4225107	A	34,370.-
80/315-290-110 EJ	4225108	A	42,609.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG13

Ordering information			
SiFire Easy	Art. no.		
			EUR
80/315-311-132 EJ	4225109	A	40,908.-
100/200-168R-22 EJ	4205165	K	27,607.-
100/200-183-30 EJ	4205166	K	19,751.-
100/200-194-37 EJ	4205167	K	20,363.-
100/200-205-45 EJ	4205168	K	26,310.-
100/200-219-55 EJ	4205169	K	30,110.-
100/250-233-55 EJ	4205170	K	30,662.-
100/250-247-75 EJ	4225110	A	32,830.-
100/250-256-90 EJ	4225111	A	34,754.-
100/250-269-110 EJ	4225112	A	38,341.-
100/315-272-132 EJ	4225113	A	47,075.-
100/315-294-160 EJ	4225114	A	52,556.-
125/250-224-90 EJ	4225115	A	42,403.-
125/250-237-110 EJ	4225116	A	44,963.-
125/250-251-132 EJ	4225117	A	50,320.-
125/250-267-160 EJ	4225118	A	59,470.-
125/315-290-160 EJ	4225119	A	52,983.-
150/315-273-200 EJ	4225120	A	66,417.-
150/315-279-250 EJ	4225121	A	70,903.-
150/315-291-250 EJ	4225122	A	72,191.-


Price group: PG13



Ordering information			
SiFire Easy	Art. no.		
			EUR
32/200-177-4,25 DJ	4205219	K	17,439.-
32/200-193-6,8 DJ	4205220	K	17,611.-
32/200-205-6,8 DJ	4205221	K	20,689.-
32/200-210-10,5 DJ	4205222	K	21,384.-
32/250-210-17,7 DJ	4205223	K	22,016.-
32/250-225-26,5 DJ	4205224	K	24,986.-
32/250-235-26,5 DJ	4205225	K	25,047.-
32/250-257-31,5 DJ	4205226	K	27,348.-
40/200-180-10,5 DJ	4205227	K	20,572.-
40/200-195-10,5 DJ	4205228	K	20,572.-
40/200-200-12,9 DJ	4205229	K	20,604.-
40/200-210-12,9 DJ	4205230	K	20,820.-
40/250-198-12,9 DJ	4205231	K	21,945.-
40/250-205-12,9 DJ	4205232	K	22,513.-
40/250-219-17,7 DJ	4205233	K	22,968.-
40/250-230-17,7 DJ	4205234	K	23,001.-
40/250-235-26,5 DJ	4205235	K	25,790.-
40/250-248-26,5 DJ	4205236	K	25,982.-
50/160-150-6,8 DJ	4205237	K	18,892.-
50/160-154-10,5 DJ	4205238	K	20,379.-
50/160-170-12,9 DJ	4205239	K	21,051.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG13

Ordering information			
SiFire Easy	Art. no.		
			EUR
50/200-175-12,9 DJ	4205240	K	21,484.-
50/200-185-12,9 DJ	4205241	K	21,490.-
50/200-195-17,7 DJ	4205242	K	22,650.-
50/200-204-17,7 DJ	4205243	K	22,775.-
50/200-208-26,5 DJ	4205244	K	25,579.-
50/200-215-26,5 DJ	4205245	K	25,579.-
50/250-230-26,5 DJ	4205246	K	26,204.-
50/250-243-26,5 DJ	4205247	K	27,752.-
50/250-257-31,5 DJ	4205248	K	29,893.-
65/200-185-17,7 DJ	4205249	K	26,821.-
65/200-197-26,5 DJ	4205250	K	26,821.-
65/200-209-26,5 DJ	4205251	K	28,339.-
65/200-214-31,5 DJ	4205252	K	30,358.-
65/250-223-31,5 DJ	4205253	K	30,713.-
65/250-240-47,7 DJ	4205254	K	32,624.-
65/250-252-47,7 DJ	4205255	K	32,783.-
65/250-259-66 DJ	4205256	K	34,374.-
65/315-292-100 DJ	4225142	A	51,517.-
80/200-192R-31,5 DJ	4205257	K	31,828.-
80/200-203-47,7 DJ	4205258	K	33,737.-
80/200-215,5-47,7 DJ	4205259	K	33,843.-
80/250-235-66 DJ	4205260	K	36,124.-
80/250-243-66 DJ	4225143	A	41,806.-
80/250-253-100 DJ	4225144	A	43,539.-
80/250-266-100 DJ	4225145	A	43,748.-
80/315-290-109 DJ	4225146	A	51,985.-
80/315-311-145 DJ	4225147	A	57,363.-
100/200-168R-26,5 DJ	4205261	K	30,572.-
100/200-183-31,5 DJ	4205262	K	34,604.-
100/200-194-47,7 DJ	4205263	K	36,256.-
100/200-205-47,7 DJ	4205264	K	36,336.-
100/200-219-66 DJ	4205265	K	37,927.-
100/250-233-66 DJ	4205266	K	38,456.-
100/250-247-100 DJ	4225148	A	45,436.-
100/250-256-100 DJ	4225149	A	47,274.-
100/250-269-109 DJ	4225150	A	48,272.-
100/315-272-145 DJ	4225151	A	60,643.-
100/315-294-197 DJ	4225152	A	78,278.-
125/250-224-100 DJ	4225153	A	55,344.-
125/250-237-109 DJ	4225154	A	62,202.-
125/250-251-145 DJ	4225155	A	64,386.-
125/250-267-197 DJ	4225156	A	70,334.-
125/315-290-197 DJ	4225157	A	78,546.-
150/315-273-222 DJ	4225158	A	81,418.-
150/315-279-222 DJ	4225159	A	80,414.-
150/315-291-246 DJ	4225160	A	85,227.-


 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Ordering information		Art. no.	
SiFire Easy			
			EUR
32/200-177-4/4 EEJ	4205267	K	18,619.-
32/200-193-5,5/5,5 EEJ	4205268	K	19,606.-
32/200-205-7,5/7,5 EEJ	4205269	K	20,795.-
32/200-210-7,5/7,5 EEJ	4205270	K	20,984.-
32/250-210-15/15 EEJ	4205271	K	21,621.-
32/250-225-18,5/18,5 EEJ	4205272	K	22,386.-
32/250-235-22/22 EEJ	4205273	K	23,178.-
32/250-257-30/30 EEJ	4205274	K	27,316.-
40/200-180-7,5/7,5 EEJ	4205275	K	19,574.-
40/200-195-11/11 EEJ	4205276	K	20,826.-
40/200-200-11/11 EEJ	4205277	K	20,837.-
40/200-210-15/15 EEJ	4205278	K	21,152.-
40/250-198-11/11 EEJ	4205279	K	21,822.-
40/250-205-15/15 EEJ	4205280	K	23,234.-
40/250-219-15/15 EEJ	4205281	K	23,797.-
40/250-230-18,5/18,5 EEJ	4205282	K	25,866.-
40/250-235-18,5/18,5 EEJ	4205283	K	25,928.-
40/250-248-22/22 EEJ	4205284	K	25,591.-
50/160-150-7,5/7,5 EEJ	4205285	K	20,468.-
50/160-154-7,5/7,5 EEJ	4205286	K	20,530.-
50/160-170-11/11 EEJ	4205287	K	21,614.-
50/200-175-11/11 EEJ	4205288	K	22,067.-
50/200-185-15/15 EEJ	4205289	K	22,537.-
50/200-195-15/15 EEJ	4205290	K	22,603.-
50/200-204-18,5/18,5 EEJ	4205291	K	23,213.-
50/200-208-18,5/18,5 EEJ	4205292	K	23,340.-
50/200-215-22/22 EEJ	4205293	K	25,357.-
50/250-230-22/22 EEJ	4205294	K	26,078.-
50/250-243-30/30 EEJ	4205295	K	29,398.-
50/250-257-30/30 EEJ	4205296	K	29,536.-
65/200-185-18,5/18,5 EEJ	4205297	K	25,727.-
65/200-197-22/22 EEJ	4205298	K	26,267.-
65/200-209-30/30 EEJ	4205299	K	31,417.-
65/200-214-30/30 EEJ	4205300	K	31,828.-
65/250-223-30/30 EEJ	4205301	K	32,041.-
65/250-240-37/37 EEJ	4205302	K	33,049.-
65/250-252-45/45 EEJ	4205303	K	35,170.-
65/250-259-55/55 EEJ	4205304	K	38,565.-
80/200-192R-30/30 EEJ	4205305	K	34,650.-
80/200-203-37/37 EEJ	4205306	K	35,982.-
80/200-215,5-45/45 EEJ	4205307	K	39,010.-
80/250-235-55/55 EEJ	4205308	K	47,126.-
100/200-168R-22/22 EEJ	4205309	K	36,177.-
100/200-183-30/30 EEJ	4205310	K	39,965.-
100/200-194-37/37 EEJ	4205311	K	42,528.-
100/200-205-45/45 EEJ	4205312	K	48,856.-


 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo



Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG13

Ordering information			
SiFire Easy	Art. no.		
			EUR
100/200-219-55/55 EEJ	4205313	K	56,366.-
100/250-233-55/55 EEJ	4205314	K	58,111.-

Price group: PG13


Ordering information			
SiFire Easy	Art. no.		
			EUR
32/200-177-4/4,25 EDJ	4205315	K	24,307.-
32/200-193-5,5/6,8 EDJ	4205316	K	26,237.-
32/200-205-7,5/6,8 EDJ	4205317	K	27,797.-
32/200-210-7,5/10,5 EDJ	4205318	K	29,083.-
32/250-210-15/17,7 EDJ	4205319	K	31,377.-
32/250-225-18,5/26,5 EDJ	4205320	K	34,692.-
32/250-235-22/26,5 EDJ	4205321	K	35,273.-
32/250-257-30/31,5 EDJ	4205322	K	38,648.-
40/200-180-7,5/10,5 EDJ	4205323	K	29,145.-
40/200-195-11/10,5 EDJ	4205324	K	29,769.-
40/200-200-11/12,9 EDJ	4205325	K	29,779.-
40/200-210-15/12,9 EDJ	4205326	K	30,063.-
40/250-198-11/12,9 EDJ	4205327	K	31,837.-
40/250-205-15/12,9 EDJ	4205328	K	32,656.-
40/250-219-15/17,7 EDJ	4205329	K	33,377.-
40/250-230-18,5/17,7 EDJ	4205330	K	34,416.-
40/250-235-18,5/26,5 EDJ	4205331	K	36,206.-
40/250-248-22/26,5 EDJ	4205332	K	37,217.-
50/160-150-7,5/6,8 EDJ	4205333	K	27,127.-
50/160-154-7,5/10,5 EDJ	4205334	K	29,181.-
50/160-170-11/12,9 EDJ	4205335	K	30,280.-
50/200-175-11/12,9 EDJ	4205336	K	31,191.-
50/200-185-15/12,9 EDJ	4205337	K	31,804.-
50/200-195-15/17,7 EDJ	4205338	K	33,005.-
50/200-204-18,5/17,7 EDJ	4205339	K	33,248.-
50/200-208-18,5/26,5 EDJ	4205340	K	35,907.-
50/200-215-22/26,5 EDJ	4205341	K	36,909.-
50/250-230-22/26,5 EDJ	4205342	K	36,922.-
50/250-243-30/26,5 EDJ	4205343	K	40,555.-
50/250-257-30/31,5 EDJ	4205344	K	42,245.-
65/200-185-18,5/17,7 EDJ	4205345	K	35,806.-
65/200-197-22/26,5 EDJ	4205346	K	38,374.-
65/200-209-30/26,5 EDJ	4205347	K	42,880.-
65/200-214-30/31,5 EDJ	4205348	K	44,738.-
65/250-223-30/31,5 EDJ	4205349	K	44,782.-
65/250-240-37/47,7 EDJ	4205350	K	46,698.-
65/250-252-45/47,7 EDJ	4205351	K	48,422.-
65/250-259-55/66 EDJ	4205352	K	51,644.-
80/200-192R-30/31,5 EDJ	4205353	K	47,486.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Ordering information

SiFire Easy

Art. no.

			EUR
80/200-203-37/47,7 EDJ	4205354	K	50,076.-
80/200-215,5-45/47,7 EDJ	4205355	K	51,630.-
80/250-235-55/66 EDJ	4205356	K	57,731.-
100/200-168R-22/26,5 EDJ	4205357	K	42,567.-
100/200-183-30/31,5 EDJ	4205358	K	48,876.-
100/200-194-37/47,7 EDJ	4205359	K	54,055.-
100/200-205-45/47,7 EDJ	4205360	K	58,986.-
100/200-219-55/66 EDJ	4205361	K	64,293.-
100/250-233-55/66 EDJ	4205362	K	66,114.-



Accessories
Accessories

Page
454

Select 4 online

All information at www.wilo-select.com

Wilo-EMU sprinkler pumps D..., K... and KM...



Construction

Multistage submersible pump in sectional construction with VdS approval for vertical or horizontal installation for supplying sprinkler systems

Application

For pumping water without long-fibre and abrasive constituents for supplying sprinkler systems

Scope of delivery

- Hydraulics + motor completely assembled
- Connection cable in accordance with VDE/KTW, cable cross-section and length per customer request
- Installation and operating instructions

Options

Your advantages

- VdS certified
- Heavy-duty version made of cast iron or bronze
- Pressure shroud in corrosion-free and hygienic stainless steel version with rubber bearings for reducing noise and vibration
- VdS-certified non-return valve available as an accessory

- Standard versions available from stock with 25 m cable (supply availability indicated by „L”)

Notice

Other pump types are available as configurable units on request. Also in „bronze” special material.

Price group:

Ordering information		Art. no.	
All types on request	On Request	A	



Application

Type-tested diaphragm pressure vessels for use in conjunction with drinking water, water-supply or pressure boosting systems. The vessels are for the purpose of avoiding pressure surges in the system and reduce the switching frequency of the pumps/system.

Diaphragm pressure vessel DT5 junior, PN 10								
Type	Max. inlet pressure	Break tank volume	Height without packaging	Dimensions	Art. no.	Price group		
	H bar	V l	H mm	L mm				EUR
DT5 junior 60, PN 10	10	60	766	409	2515527	L	PG14	567.-
DT5 junior 80, PN 10	10	80	765	480	2515528	L	PG14	682.-
DT5 junior 100, PN 10	10	100	870	480	2515529	L	PG14	977.-
DT5 junior 200, PN 10	10	200	975	634	2515530	L	PG14	1,129.-
DT5 junior 300, PN 10	10	300	1275	634	2515531	L	PG14	1,166.-
DT5 junior 500, PN 10	10	500	1490	740	2515532	L	PG14	2,726.-
DT5 junior 400, PN 10	10	400	1256	750	2524232	C	PG14	1,321.-

Diaphragm pressure vessel DT5 Duo, PN 10 with PN 10 Duo connection								
Type	Max. inlet pressure	Break tank volume	Height without packaging	Dimensions	Art. no.	Price group		
	H bar	V l	H mm	L mm				EUR
DT5 Duo 80, PN 10	10	80	765	480	2521290	L	PG14	654.-
DT5 Duo 100, PN 10	10	100	870	480	2521291	L	PG14	691.-
DT5 Duo 200, PN 10	10	200	975	634	2521292	L	PG14	801.-
DT5 Duo 300, PN 10	10	300	1275	634	2521293	L	PG14	1,245.-
DT5 Duo 400, PN 10	10	400	1256	740	2524222	K	PG14	1,404.-
DT5 Duo 500, PN 10	10	500	1490	740	2521294	L	PG14	1,473.-
DT5 Duo 600, PN 10	10	600	1860	740	2524210	C	PG14	3,205.-
DT5 Duo 800, PN 10	10	800	2324	740	2524211	L	PG14	3,729.-
DT5 Duo 1000, PN 10	10	1000	2805	740	2524212	C	PG14	4,212.-
DT5 Duo 1500, PN 10	10	1500	2001	1200	2521621	K	PG14	8,845.-
DT5 Duo 2000, PN 10	10	2000	2461	1200	2518132	K	PG14	8,848.-
DT5 Duo 3000, PN 10	10	3000	2520	1500	2528374	A	PG14	13,245.-


☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo



Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.




Application

Type-tested diaphragm pressure vessels for use in conjunction with drinking water, water-supply or pressure boosting systems. The vessels are for the purpose of avoiding pressure surges in the system and reduce the switching frequency of the pumps/system.


Diaphragm pressure vessel DT5 Duo, PN 16 with PN 16 Duo connection								
Type	Max. inlet pressure	Break tank volume	Height without packaging	Dimensions	Art. no.	Price group		
	H bar	V l	H mm	L mm				EUR
DT5 Duo 80, PN 16	16	80	765	480	2524213	L	PG14	955.-
DT5 Duo 100, PN 16	16	100	870	480	2524214	L	PG14	1,040.-
DT5 Duo 200, PN 16	16	200	975	634	2524215	K	PG14	1,374.-
DT5 Duo 300, PN 16	16	300	1275	634	2524216	L	PG14	1,616.-
DT5 Duo 400, PN 16	16	400	1394	740	2524217	K	PG14	2,243.-
DT5 Duo 500, PN 16	16	500	1394	740	2524218	L	PG14	2,341.-
DT5 Duo 600, PN 16	16	600	1860	740	2524219	C	PG14	3,463.-
DT5 Duo 800, PN 16	16	800	2324	740	2524220	K	PG14	4,250.-
DT5 Duo 1000, PN 16	16	1000	2804	740	2524221	A	PG14	4,937.-
DT5 Duo 1000, PN 16	16	1000	2001	1000	2528376	K	PG14	9,009.-
DT5 Duo 1500, PN 16	16	1500	2220	1200	2525744	K	PG14	12,850.-
DT5 Duo 2000, PN 16	16	2000	2480	1200	2528430	A	PG14	15,779.-
DT5 Duo 3000, PN 16	16	3000	2580	1500	2528375	K	PG14	17,980.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.



Wilo break tank for process water application (rectangular version)


Type	Overflow	Art. no.	Price group		EUR
Break tank for process water applications (rectangular design), 150 l	1 x HT 70	2523778	L	PG14	2,223.-
Break tank for process water applications (rectangular design), 300 l	1 x HT 100	2523779	L	PG14	2,518.-
Break tank for process water applications (rectangular design), 500 l	1 x HT 100	2523780	L	PG14	3,101.-
Break tank for process water applications (rectangular design), 800 l	1 X HT 150	2523781	L	PG14	3,820.-
Break tank for process water applications (rectangular design), 1000 l	1 X HT 150	2523782	L	PG14	4,287.-
Break tank for process water applications (rectangular design), 1500 l	2 x HT 150	2523783	L	PG14	4,839.-
Break tank for process water applications (rectangular design), 2000 l	2 x HT 150	2523784	L	PG14	5,331.-
Break tank for process water applications (rectangular design), 3000 l	2 x HT 150	2523785	L	PG14	8,372.-





Wilo break tanks for drinking water and fire water applications


Type	Overflow	Art. no.	Price group		EUR
Break tank for drinking water and firefighting water applications (round design), 150 l	1 x HT 100	2546140	L	PG14	☞
Break tank for drinking water and firefighting water applications (round design), 300 l	1 x HT 100	2546141	L	PG14	☞
Break tank for drinking water and firefighting water applications (round design), 600 l	1 x HT 100	2528244	L	PG14	2,708.-
Break tank for drinking water and firefighting water applications (round design), 800 l	1 x HT 125	2528245	L	PG14	2,952.-
Break tank for drinking water and firefighting water applications (round design), 1000 l	1 x HT 125	2528243	L	PG14	4,288.-



= ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☞ = please contact Wilo
 Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.


Wilo break tanks for drinking water and fire water applications

Type	Overflow	Art. no.		Price group	
					EUR
Break tank for drinking water and firefighting water applications (rectangular design), 600 l	1 x HT 100	2528248	L	PG14	4,581.-
Break tank for drinking water and firefighting water applications (rectangular design), 800 l	1 x HT 125	2528268	L	PG14	4,846.-
Break tank for drinking water and firefighting water applications (rectangular design), 1000 l	1 x HT 125	2528258	L	PG14	5,313.-
Break tank for drinking water and firefighting water applications (rectangular design), 1500 l	1 x HT 125	2528269	L	PG14	6,045.-
Break tank for drinking water and firefighting water applications (rectangular design), 2000 l	1 x HT 125	2528270	L	PG14	8,174.-
Break tank for drinking water and firefighting water applications (rectangular design), 3000 l	1 x HT 125	2528271	L	PG14	10,410.-


Wilo break tank for process water applications

Type	Overflow	Art. no.		Price group	
					EUR
Break tank for process water applications (round design), 150 l	1 x HT 100	2516542	L	PG14	1,279.-
Break tank for process water applications (round design), 300 l	1 x HT 100	2516543	L	PG14	1,513.-
Break tank for process water applications (round design), 500 l	1 x HT 100	2516544	L	PG14	1,708.-
Break tank for process water applications (round design), 800 l	2 x HT 100	2516545	L	PG14	2,249.-
Break tank for process water applications (round design), 1000 l	2 x HT 100	2516546	L	PG14	3,343.-


 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
 Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.



Mechanical accessories						
Type	Description	Pipe connection	Art. no.	Price group		
						EUR
Flushing apparatus kit in acc. with DIN 1988-6 Rp 1¼	For prevention of stagnating water in the supply line to FLA break tank	G 1¼	2528392	L	PG14	991.-
Flushing apparatus kit in acc. with DIN 1988-6 Rp ½	For prevention of stagnating water in the supply line to FLA break tank	G ½	2527701	L	PG14	647.-
Flushing apparatus kit in acc. with DIN 1988-6 Rp 1	For prevention of stagnating water in the supply line to FLA break tank	G 1	2527709	L	PG14	918.-

Float/diaphragm valve for break tank						
Type	Description	Art. no.	Price group			
						EUR
Diaphragm valve DN 65, PN 16	DN 65/PN 16	2526770	C	PG14		1,815.-
Diaphragm valve DN 80, PN 16	DN 80/PN 16	2526771	C	PG14		2,572.-
Diaphragm valve DN 100, PN 16	DN 100/PN 16	2526772	C	PG14		2,841.-
Diaphragm valve DN 125, PN 16	DN 125/PN 16	2526773	K	PG14		5,218.-
Float valve G 1	G 1	2521895	L	PG14		125.-
Float valve G 1¼	G 1¼	2521896	L	PG14		248.-
Float valve G 1¼ slowflow	G 1¼	2546137	C	PG14		☺
Float valve G 1½	G 1½	2521897	L	PG14		301.-
Float valve G 2	G 2	2515550	L	PG14		660.-
Pilot valve as control valve for diaphragm valve, R ½	R ½	501334690	L	PG14		225.-


Mechanical accessories						
Type	Description	Art. no.	Price group			
						EUR
Flexible connection line Rp 1¼ / R 1¼	Made of stainless steel, 400 mm long, with screwed connection, rated pressure PN 16. For connection of system pipework to the mains supply line.	Rp 1¼ / R 1¼	2526774	L	PG14	291.-
Flexible connection line Rp 1½ / R 1½	Made of stainless steel, 400 mm long, with screwed connection, rated pressure PN 16. For connection of system pipework to the mains supply line.	Rp 1½ / R 1½	2012362	L	PG14	332.-
Flexible connection line Rp 2 / R 2	Made of stainless steel, 400 mm long, with screwed connection, rated pressure PN 16. For connection of system pipework to the mains supply line.	Rp 2 / R 2	180592096	L	PG14	393.-
Flexible connection line Rp 2½ / R 2½	Made of stainless steel, 400 mm long, with screwed connection, rated pressure PN 16. For connection of system pipework to the mains supply line.	Rp 2½ / R 2½	2012363	L	PG14	639.-
Foot valve R 1¼	High-quality foot valve made of red brass with integrated non-return valve. Strainer made of stainless steel 1.4301.	R 1¼	2502408	C	PG14	137.-
Foot valve R 1½	High-quality foot valve made of red brass with integrated non-return valve. Strainer made of stainless steel 1.4301.	R 1½	2502236	C	PG14	194.-



☺ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☺ = please contact Wilo
 Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Mechanical accessories						
Type	Description		Art. no.		Price group	
						EUR
Foot valve R 2	High-quality foot valve made of red brass with integrated non-return valve. Strainer made of stainless steel 1.4301.	R 2	2502011	C	PG14	344.-
Foot valve R 2½	High-quality foot valve made of red brass with integrated non-return valve. Strainer made of stainless steel 1.4301.	R 2½	2500711	C	PG14	511.-
Foot valve R 3	High-quality foot valve made of red brass with integrated non-return valve. Strainer made of stainless steel 1.4301.	R 3	2519816	A	PG14	608.-
Full-stroke safety valve R 1, PN 6	Blow-off pressure 6 bar, red brass	R 1	2007136	L	PG14	133.-
Full-stroke safety valve R 1, PN 10	Blow-off pressure 10 bar, red brass	R 1	500814799	L	PG14	125.-
Full-stroke safety valve R 1, PN 16	Blow-off pressure 16 bar, red brass	R 1	2007146	C	PG14	606.-
Full-stroke safety valve R 1¼, PN 6	Blow-off pressure 6 bar, red brass	R 1¼	2007137	L	PG14	170.-
Full-stroke safety valve R 1¼, PN 10	Blow-off pressure 10 bar, red brass	R 1¼	2007138	L	PG14	169.-
Full-stroke safety valve R 1¼, PN 16	Blow-off pressure 16 bar, red brass	R 1¼	500814891	L	PG14	682.-
Full-stroke safety valve R ¾, PN 6	Blow-off pressure 6 bar, red brass	R ¾	2007135	L	PG14	282.-
Full-stroke safety valve R ¾, PN 10	Blow-off pressure 10 bar, red brass	R ¾	500814696	L	PG14	290.-
Full-stroke safety valve R ¾, PN 16	Blow-off pressure 16 bar, red brass	R ¾	2007147	C	PG14	454.-
Stainless steel compensator DN 40, PN 16	With loose flanges and noise-damping external bracing, for degrading vibrations, working temperature max. 120 °C (with damper discs made of steel up to 200 °C), port-to-port length 130 mm, flange PN 16	DN 40	2515508	C	PG14	540.-
Stainless steel compensator DN 50, PN 16	With loose flanges and noise-damping external bracing, for degrading vibrations, working temperature max. 120 °C (with damper discs made of steel up to 200 °C), port-to-port length 130 mm, flange PN 16	DN 50	2514241	L	PG14	666.-
Stainless steel compensator DN 65, PN 16	With loose flanges and noise-damping external bracing, for degrading vibrations, working temperature max. 120 °C (with damper discs made of steel up to 200 °C), port-to-port length 130 mm, flange PN 16	DN 65	2514242	L	PG14	750.-
Stainless steel compensator DN 80, PN 16	With loose flanges and noise-damping external bracing, for degrading vibrations, working temperature max. 120 °C (with damper discs made of steel up to 200 °C), port-to-port length 130 mm, flange PN 16	DN 80	2514243	L	PG14	947.-
Stainless steel compensator DN 100, PN 16	With loose flanges and noise-damping external bracing, for degrading vibrations, working temperature max. 120 °C (with damper discs made of steel up to 200 °C), port-to-port length 130 mm, flange PN 16	DN 100	2514244	L	PG14	1,096.-
Stainless steel compensator DN 125, PN 16	With loose flanges and noise-damping external bracing, for degrading vibrations, working temperature max. 120 °C (with damper discs made of steel up to 200 °C), port-to-port length 130 mm, flange PN 16	DN 125	2514245	C	PG14	1,159.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Mechanical accessories

Type	Description		Art. no.		Price group		
							EUR
Stainless steel compensator DN 150, PN 16	With loose flanges and noise-damping external bracing, for degrading vibrations, working temperature max. 120 °C (with damper discs made of steel up to 200 °C), port-to-port length 130 mm, flange PN 16	DN 150	2514246	C	PG14		1,483.-
Stainless steel compensator DN 200, PN 16	With loose flanges and noise-damping external bracing, for degrading vibrations, working temperature max. 120 °C (with damper discs made of steel up to 200 °C), port-to-port length 130 mm, flange PN 16	DN 200	2525811	C	PG14		2,233.-
Stainless steel compensator DN 250, PN 16	With loose flanges and noise-damping external bracing, for degrading vibrations, working temperature max. 120 °C (with damper discs made of steel up to 200 °C), port-to-port length 130 mm, flange PN 16	DN 250	2525812	K	PG14		3,743.-
Threaded cap R 1½	1.4571 stainless steel, for sealing one side of the suction and pressure pipe on pressure-boosting systems.	1 1/2" F	2508120	L	PG14		65.-
Threaded cap R 2	1.4571 stainless steel, for sealing one side of the suction and pressure pipe on pressure-boosting systems.	2" F	2501216	L	PG14		73.-
Threaded cap R 2½	1.4571 stainless steel, for sealing one side of the suction and pressure pipe on pressure-boosting systems.	2 1/2" F	2508119	L	PG14		168.-
Threaded cap R 3	Stainless steel for sealing one suction side and the pressure side manifold of the pressure-boosting pump sets	3" F	2521156	L	PG14		182.-
Threaded flange DN 40, Rp 1½, Galvanized steel	Suitable for compensators and distributor/collector pipe according to EN 1092-1, PN 16, thread according to EN 10226, steel, zinc-coated	DN 40, RP 1½	2515504	L	PG14		35.-
Threaded flange DN 40, Rp 1½, Stainless steel	Suitable for compensators and distributor/collector pipe according to EN 1092-1, PN 16, thread according to EN 10226, stainless steel	DN 40, RP 1½	2502268	L	PG14		97.-
Threaded flange DN 50, Rp 2, Galvanized steel	Suitable for compensators and distributor/collector pipe according to EN 1092-1, PN 16, thread according to EN 10226, steel, zinc-coated	DN 50, RP 2	2515505	L	PG14		40.-
Threaded flange DN 50, Rp 2, Stainless steel	Suitable for compensators and distributor/collector pipe according to EN 1092-1, PN 16, thread according to EN 10226, stainless steel	DN 50, RP 2	2507438	L	PG14		140.-
Threaded flange DN 65, Rp 2½, Galvanized steel	Suitable for compensators and distributor/collector pipe according to EN 1092-1, PN 16, thread according to EN 10226, steel, zinc-coated	DN 65, RP 2½	2515506	L	PG14		51.-
Threaded flange DN 65, Rp 2½, Stainless steel	Suitable for compensators and distributor/collector pipe according to EN 1092-1, PN 16, thread according to EN 10226, stainless steel	DN 65, RP 2½	2506380	L	PG14		182.-
Threaded flange DN 80, Rp 3, Galvanized steel	Suitable for compensators and distributor/collector pipe according to EN 1092-1, PN 16, thread according to EN 10226, steel, zinc-coated	DN 80, RP 3	2521286	L	PG14		106.-


 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
 Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.



Mechanical accessories						
Type	Description		Art. no.		Price group	
						EUR
Threaded flange DN 80, Rp 3, Stainless steel	Suitable for compensators and distributor/collector pipe according to EN 1092-1, PN 16, thread according to EN 10226, stainless steel	DN 80, RP 3	2521287	L	PG14	228.-

Mechanical accessories						
Type	Description		Art. no.		Price group	
						EUR
Connection kit low-water cut-out switchgear for single-pump systems Helix VE 22../36../52.. ES	Connector sets additionally required for CO-1 systems	For Helix VE 22../36../52.. single-pump systems ES	2546080	K	PG14	131.-
low-water cut-out switchgear kit WMS R ¼	WMS R ¼ kit, pressure switch as low-water signal transmitter for direct connection to the suction-side pipe.	R ¼	2521150	L	PG14	174.-
low-water cut-out switchgear kit WMS R ¾	WMS R ¾ kit , pressure switch as low-water signal transmitter for direct connection to the supply pressure-side pipe.	R ¾	2000424	L	PG14	174.-
low-water cut-out switchgear kit WMS G 1¼	WMS G 1¼ kit, pressure switch as low-water signal transmitter to enhance a 1-phase AC pump with a maximum of 250 V, 16 A.	G 1¼ for HiPeri 1, Jet WJ/HWJ, MultiCargo MC/HMC, MultiPress MP/HMP, HiMulti 3/3 P/3H/3H P, MHI 2/4, Helix-V 2-4-6	4204510	L	PG14	115.-
low-water cut-out switchgear kit WMS G2	WMS G 2 kit, pressure switch as low-water signal transmitter to enhance a 1-phase AC pump with a maximum of 250 V, 16 A.	G 2 for MHI 8/16, Helix-V 10-16	4204512	A	PG14	146.-
Connection kit low-water cut-out switchgear for single-pump systems MVI (E) 70../95..	Connector sets additionally required for CO-1 systems	for single-pump systems MVI (E) 70../95..	2525810	C	PG14	187.-
Connection kit low-water cut-out switchgear for single-pump systems Helix V (E) 22../36../52..	Connector sets additionally required for CO-1 systems	for single-pump systems Helix V (E) 22../36../52..	2510976	C	PG14	176.-
Connection kit low-water cut-out switchgear for single-pump systems Helix V (E) 2../4../6../10../16..	Connector sets additionally required for CO-1 systems	for single-pump systems Helix V (E) 2../4../6../10../16..	2504386	C	PG14	125.-
Connection kit low-water cut-out switchgear for single-pump systems MVI (E) 70../95..	Connector sets additionally required for CO-1 systems	for single-pump systems MVI (E) 70../95..	2525810	C	PG14	187.-
Connection kit low-water cut-out switchgear for single-pump systems Helix V (E) 22../36../52..	Connector sets additionally required for CO-1 systems	for single-pump systems Helix V (E) 22../36../52..	2510976	C	PG14	176.-
Submersible electrode SET	3 submersible electrodes, each with 3 m cable, for break tanks to be set up on-site	-	2006771	C	PG14	239.-
Main switch	Main switch retrofit kit for COR-1 (up to max. 7.5 kW) comprising: Main switch, tension bands and bracket for fixation to diaphragm pressure vessel.	-	2515962	L	PG14	163.-

🚚 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, 📞 = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Water supply

Mechanical accessories						
Type	Description		Art. no.	Price group		
						EUR
Signalling module pump 1-2	Relay module with operating status LEDs, secured on 35 mm DIN rail	-	2533812	K	PG14	322.-
Control module pump 5-6	Double row terminal block with status LED for the supply voltage, secured on 35 mm DIN rail	-	2533756	K	PG14	221.-
Control module pump 3-4	Double row terminal block with status LED for the supply voltage, secured on 35 mm DIN rail	-	2533734	K	PG14	231.-
Control module pump 1-2	Double row terminal block with status LED for the supply voltage, secured on 35 mm DIN rail	-	2533712	K	PG14	231.-
GSM/GPRS aerial with cable 15 m	Antenna with plastic coating, including bracket for outdoor installation and shielded antenna cable with FME plug.	-	2533864	A	PG14	438.-
GSM/GPRS aerial with cable 10 m	Antenna with plastic coating, including bracket for outdoor installation and shielded antenna cable with FME plug.	-	2533863	A	PG14	395.-
GSM/GPRS aerial with cable 2.5 m	Flexible antenna with plastic coating, magnetic stand and shielded aerial cable with FEM plug.	-	2533862	A	PG14	131.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
 Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG14

Wilo-CC/CCe system – Required accessories				
Type	Description	Art. no.		EUR
DDG transducer	(Amplifier) incl. power supply unit for differential pressure sensor (DDG)	501771990	K	2,198.-
DDG power supply unit	For DDG together with impulse selector	501865293	L	238.-
PTC thermistor tripping unit	Tripping unit for switch cabinet installation for all IPL/DPL, IL/DL, IPH-O/W, IPS, IP-Z, BAC, BL, Helix and MVI series pumps equipped with PTC thermistor sensors.	509275993	L	434.-
DDC control module	Double row terminal block with status LED for the supply voltage, secured on 35 mm DIN rail	2533795	K	231.-
BMS base module	Series module in a plastic housing with LEDs for status display of inputs, fixation on a 35 mm DIN rail	2533800	A	527.-
Signalling modules connecting cable	Connection cable for connecting up to 4 signalling modules with the BMS base module. The number of connection cables required for signalling modules per CC switchgear is always 1.	2533890	K	141.-
Signalling module pump 3-6	Relay module with operating status LEDs, secured on 35 mm DIN rail	2533836	K	311.-
Control module pump 5-6	Double row terminal block with status LED for the supply voltage, secured on 35 mm DIN rail	2533756	K	221.-
Signal converter 0-10 V/0-20 mA	Additional module for equipping the switchgear area Wilo-CC system for conversion of 0 – 10 V signals to 0 – 20 V signals	2534992	K	193.-
CC communication module	Plug-in cartridge for installation in the CPU for connecting the CC switchgear to communication systems (GSM, Modbus, web server, LON etc.), if no frequency converter is installed.	2533850	K	204.-
GPRS module	Insulating housing for switch cabinet installation, secured on 35 mm DIN rail. SIM cards are not within the scope of delivery, they must be procured by the customer!	2533860	K	1,117.-
GSM module	Insulant housing for installation in a switch cabinet, fixation by means of the supplied accessories kit (adapter plate). SIM cards are not within the scope of delivery, they must be procured by the customer!	2533861	K	883.-
GSM/GPRS aerial with cable 15 m	Antenna with plastic coating, including bracket for outdoor installation and shielded antenna cable with FME plug.	2533864	A	438.-
Communication module WebServer	Additional module for internet connection.	2533865	K	1,076.-
Communication module Profibus DP	Additional module for equipping the switchgear series Wilo-CC system for communication in Profibus DP networks (slave).	2533866	K	905.-
CANopen communication module	Additional module for equipping the switchgear series Wilo-CC system for communication in CanOpen networks (slave).	2533867	K	1,447.-
Communication module LON	Additional module for equipping the switchgear series Wilo-CC system for communication in LON networks.	2533868	K	2,382.-
Communication module Modbus RTU	Additional module for equipping the Wilo-CC system switchgear series for communication in Modbus RTU networks.	2533869	A	448.-
GSM/GPRS aerial with cable 10 m	Antenna with plastic coating, including bracket for outdoor installation and shielded antenna cable with FME plug.	2533863	A	395.-
Control module pump 3-4	Double row terminal block with status LED for the supply voltage, secured on 35 mm DIN rail	2533734	K	231.-
Signalling module pump 1-2	Relay module with operating status LEDs, secured on 35 mm DIN rail	2533812	K	322.-
Control modules connecting cable	Connection cable for connecting up to 4 control modules with the GLT base module. The number of connection cables required for control modules per CC-switchgear is always 1.	2533790	K	141.-
Control module pump 1-2	Double row terminal block with status LED for the supply voltage, secured on 35 mm DIN rail	2533712	K	231.-
GSM/GPRS aerial with cable 2.5 m	Flexible antenna with plastic coating, magnetic stand and shielded aerial cable with FEM plug.	2533862	A	131.-

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo


Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.



Wilo-SC system – Required accessories					
Type	Description	Art. no.			
					EUR
Communication module BACnet (SC)	For connection of Wilo-Control SC series with BACnet MSTP networks.	2538242		L	503.-
Communication module ModBus RTU (SC)	For connection of Wilo-Control SC series with Modbus RTU networks.	2538241		L	473.-
Communication module LON (SC)	For connection of Wilo-Control SC series with Modbus LON networks.	2538243		K	489.-

Wilo-SiFire – Accessories					
Type	Description	Art. no.		Price group	
					EUR
Alarm switchgear type A & B	Alarm activation in the event of a system fault and in the event of fire extinguishing	4177484		A PG14	492.-
Battery acid tester	Checking the battery for the diesel pump	4177491		A PG14	52.-
DN 65 rubber compensator	Damping of the vibrations on the pipework provided by the customer	4015745		A PG14	75.-
DN 80 rubber compensator	Damping of the vibrations on the pipework provided by the customer	4015461		A PG14	89.-
DN 100 rubber compensator	Damping of the vibrations on the pipework provided by the customer	4015746		A PG14	111.-
DN 125 rubber compensator	Damping of the vibrations on the pipework provided by the customer	4015747		A PG14	190.-
DN 150 rubber compensator	Damping of the vibrations on the pipework provided by the customer	4015748		A PG14	187.-
DN 200 rubber compensator	Damping of the vibrations on the pipework provided by the customer	4015749		A PG14	281.-
DN 250 rubber compensator	Damping of the vibrations on the pipework provided by the customer	4177482		A PG14	519.-
DN 300 rubber compensator	Damping of the vibrations on the pipework provided by the customer	4177483		A PG14	659.-
Diesel motor accessory set, 4.2 kW	Spare parts kit (timing belt, filter, gaskets, hoses) for the diesel motor	4177492		A PG14	317.-
Diesel motor accessory set, 6.9 kW	Spare parts kit (timing belt, filter, gaskets, hoses) for the diesel motor	4177493		A PG14	320.-
Diesel motor accessory set, 10.5/12.8 kW	Spare parts kit (timing belt, filter, gaskets, hoses) for the diesel motor	4177494		A PG14	346.-
Diesel motor accessory set, 17.7 kW	Spare parts kit (timing belt, filter, gaskets, hoses) for the diesel motor	4177495		A PG14	288.-
Diesel motor accessory set, 26.5 kW	Spare parts kit (timing belt, filter, gaskets, hoses) for the diesel motor	4177496		A PG14	350.-
Diesel motor accessory set, 47.7 kW	Spare parts kit (timing belt, filter, gaskets, hoses) for the diesel motor	4177497		A PG14	643.-
Diesel motor accessory set, 66 kW	Spare parts kit (timing belt, filter, gaskets, hoses) for the diesel motor	4177498		A PG14	672.-
Diesel motor accessory set, 100 kW	Spare parts kit (timing belt, filter, gaskets, hoses) for the diesel motor	4177499		A PG14	672.-
Diesel motor accessory set, 109/145 kW	Spare parts kit (timing belt, filter, gaskets, hoses) for the diesel motor	4177500		A PG14	2,282.-
Diesel motor accessory set, 197/246 kW	Spare parts kit (timing belt, filter, gaskets, hoses) for the diesel motor	4177501		A PG14	2,819.-
Diesel pump test 4.25 – 26.5 kW	Testing and certification of the diesel pump	4177485		A PG14	427.-

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.


Wilo-SiFire – Accessories					
Type	Description	Art. no.		Price group	
					EUR
Diesel pump test 31.5 – 47.7 kW	Testing and certification of the diesel pump	4177486	A	PG14	552.-
Diesel pump test 66 – 109 kW	Testing and certification of the diesel pump	4177487	A	PG14	704.-
Diesel pump test 130 – 177 kW	Testing and certification of the diesel pump	4177488	A	PG14	1,010.-
Diesel pump test 200 – 222 kW	Testing and certification of the diesel pump	4177489	A	PG14	1,271.-
Flange connection eccentric cone DN 50 x 65	Flange reducer on the suction side of the pump and for holding the shutting gate	4177430	A	PG14	178.-
Flange connection eccentric cone DN 50 x 80	Flange reducer on the suction side of the pump and for holding the shutting gate	4177431	A	PG14	296.-
Flange connection eccentric cone DN 50 x 100	Flange reducer on the suction side of the pump and for holding the shutting gate	4177432	A	PG14	303.-
Flange connection eccentric cone DN 65 x 80	Flange reducer on the suction side of the pump and for holding the shutting gate	4177433	A	PG14	189.-
Flange connection eccentric cone DN 65 x 100	Flange reducer on the suction side of the pump and for holding the shutting gate	4177434	A	PG14	308.-
Flange connection eccentric cone DN 65 x 125	Flange reducer on the suction side of the pump and for holding the shutting gate	4177435	A	PG14	355.-
Flange connection eccentric cone DN 65 x 150	Flange reducer on the suction side of the pump and for holding the shutting gate	4177436	A	PG14	389.-
Flange connection eccentric cone DN 80 x 100	Flange reducer on the suction side of the pump and for holding the shutting gate	4177437	A	PG14	206.-
Flange connection eccentric cone DN 80 x 125	Flange reducer on the suction side of the pump and for holding the shutting gate	4177438	A	PG14	377.-
Flange connection eccentric cone DN 80 x 150	Flange reducer on the suction side of the pump and for holding the shutting gate	4177439	A	PG14	395.-
Flange connection eccentric cone DN 80 x 200	Flange reducer on the suction side of the pump and for holding the shutting gate	4177440	A	PG14	507.-
Flange connection eccentric cone DN 100 x 125	Flange reducer on the suction side of the pump and for holding the shutting gate	4177441	A	PG14	323.-
Flange connection eccentric cone DN 100 x 150	Flange reducer on the suction side of the pump and for holding the shutting gate	4177442	A	PG14	416.-
Flange connection eccentric cone DN 100 x 200	Flange reducer on the suction side of the pump and for holding the shutting gate	4177443	A	PG14	526.-
Flange connection eccentric cone DN 100 x 250	Flange reducer on the suction side of the pump and for holding the shutting gate	4177444	A	PG14	605.-
Flange connection eccentric cone DN 125 x 150	Flange reducer on the suction side of the pump and for holding the shutting gate	4177445	A	PG14	368.-
Flange connection eccentric cone DN 125 x 200	Flange reducer on the suction side of the pump and for holding the shutting gate	4177446	A	PG14	499.-



 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
 Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Wilo-SiFire – Accessories					
Type	Description	Art. no.	Price group		
					EUR
Flange connection eccentric cone DN 125 x 250	Flange reducer on the suction side of the pump and for holding the shutting gate	4177447	A	PG14	614.-
Flange connection eccentric cone DN 150 x 200	Flange reducer on the suction side of the pump and for holding the shutting gate	4177448	A	PG14	614.-
Flange connection eccentric cone DN 150 x 250	Flange reducer on the suction side of the pump and for holding the shutting gate	4177449	A	PG14	559.-
Flange connection eccentric cone DN 150 x 300	Flange reducer on the suction side of the pump and for holding the shutting gate	4177450	A	PG14	587.-
Flange connection eccentric cone DN 150 x 350	Flange reducer on the suction side of the pump and for holding the shutting gate	4177451	A	PG14	697.-
Flange connection eccentric cone DN 200 x 300	Flange reducer on the suction side of the pump and for holding the shutting gate	4177452	A	PG14	728.-
Flange connection eccentric cone DN 200 x 350	Flange reducer on the suction side of the pump and for holding the shutting gate	4177453	A	PG14	791.-
Flow meter DN 40	is used to check the volume flow	4177472	A	PG14	455.-
Flow meter DN 50	is used to check the volume flow	4177473	A	PG14	470.-
Flow meter DN 65	is used to check the volume flow	4177474	A	PG14	488.-
Flow meter DN 80	is used to check the volume flow	4177475	A	PG14	519.-
Flow meter DN 100	is used to check the volume flow	4177476	A	PG14	525.-
Flow meter DN 125	is used to check the volume flow	4177477	A	PG14	608.-
Flow meter DN 150	is used to check the volume flow	4177478	A	PG14	668.-
Flow meter DN 200	is used to check the volume flow	4177479	A	PG14	712.-
Hydraul. heat exchanger 31.5 – 47.7 kW	Heat exchanger for cooling the diesel motor	4177512	A	PG14	3,862.-
Hydraul. heat exchanger 66 – 109 kW	Heat exchanger for cooling the diesel motor	4177511	A	PG14	3,104.-
Hydraul. heat exchanger >109 kW	Heat exchanger for cooling the diesel motor	4177510	A	PG14	2,847.-
Limit switch for handle/worm drive	Limit switches for the shutting gates	4177481	A	PG14	121.-
Silencer for 31.5/47.7 kW diesel motor	Silencer (30dBA) for the noise damping of the diesel motor	4177502	A	PG14	275.-
Silencer for 66 kW diesel motor	Silencer (30dBA) for the noise damping of the diesel motor	4177503	A	PG14	487.-
Silencer for 100/109 kW diesel motor	Silencer (30dBA) for the noise damping of the diesel motor	4177504	A	PG14	683.-
Silencer for 145 kW diesel motor	Silencer (30dBA) for the noise damping of the diesel motor	4177505	A	PG14	843.-
Silencer for 197/222 kW diesel motor	Silencer (30dBA) for the noise damping of the diesel motor	4177506	A	PG14	1,241.-
Silencer for 246 kW diesel motor	Silencer (30dBA) for the noise damping of the diesel motor	4177507	A	PG14	1,437.-
Supply tank, 500L	Horizontal supply tank (500L) with float valve and pressure switch for alarm in the event of a water shortage	4177480	A	PG14	643.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Wilo-SiFire – Accessories					
Type	Description	Art. no.	Price group		
					EUR
Throttle shut-off valve DN 65, PN 10	Shutting gate for suction and pressure side	4177454	A	PG14	94.-
Throttle shut-off valve DN 65, PN 10	Shutting gate for suction and pressure side	4177463	A	PG14	364.-
Throttle shut-off valve DN 80, PN 10	Shutting gate for suction and pressure side	4177455	A	PG14	107.-
Throttle shut-off valve DN 80, PN 10	Shutting gate for suction and pressure side	4177464	A	PG14	378.-
Throttle shut-off valve DN 100, PN 10	Shutting gate for suction and pressure side	4177456	A	PG14	147.-
Throttle shut-off valve DN 100, PN 10	Shutting gate for suction and pressure side	4177465	A	PG14	417.-
Throttle shut-off valve DN 125, PN 10	Shutting gate for suction and pressure side	4177457	A	PG14	178.-
Throttle shut-off valve DN 125, PN 10	Shutting gate for suction and pressure side	4177466	A	PG14	558.-
Throttle shut-off valve DN 150, PN 10	Shutting gate for suction and pressure side	4177458	A	PG14	213.-
Throttle shut-off valve DN 150, PN 10	Shutting gate for suction and pressure side	4177467	A	PG14	590.-
Throttle shut-off valve DN 200, PN 10	Shutting gate for suction and pressure side	4177459	A	PG14	531.-
Throttle shut-off valve DN 200, PN 10	Shutting gate for suction and pressure side	4177468	A	PG14	911.-
Throttle shut-off valve DN 250, PN 10	Shutting gate for suction and pressure side	4177460	A	PG14	766.-
Throttle shut-off valve DN 250, PN 10	Shutting gate for suction and pressure side	4177469	A	PG14	1,162.-
Throttle shut-off valve DN 300, PN 10	Shutting gate for suction and pressure side	4177470	A	PG14	1,316.-
Throttle shut-off valve DN 300, PN 10	Shutting gate for suction and pressure side	4177461	A	PG14	948.-
Throttle shut-off valve DN 350, PN 10	Shutting gate for suction and pressure side	4177471	A	PG14	1,475.-
Throttle shut-off valve DN 350, PN 10	Shutting gate for suction and pressure side	4177462	A	PG14	1,107.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
 Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.



Mechanical accessories

Type	Art. no.		Price group		
					EUR
Voda Air Separator DN50	2198808	C	PG6		904.-
Voda Air Separator DN65	2198809	C	PG6		944.-
Voda Air Separator DN80	2198810	C	PG6		1,032.-
Voda Air Separator DN100	2198811	C	PG6		1,201.-
Voda Air Separator DN125	2198812	C	PG6		1,296.-
Voda Air Separator DN150	2198813	C	PG6		1,987.-
Voda Air Separator DN200	2198814	C	PG6		2,322.-
Voda Air Separator 22mm for Horizontal Installation	2198831	C	PG6		107.-
Voda Air Separator 3/4" for Horizontal Installation	2198832	C	PG6		120.-
Voda Air Separator 1" for Horizontal Installation	2198833	C	PG6		138.-
Voda Air Separator 1 1/4" for Horizontal Installation	2198834	C	PG6		173.-
Voda Air Separator 1 1/2" for Horizontal Installation	2198835	C	PG6		185.-
Voda Air Separator 2" for Horizontal Installation	2198836	C	PG6		203.-
Voda Air Separator 22mm for Vertical Installation	2198837	C	PG6		84.-
Voda Air Separator 3/4" for Vertical Installation	2198838	C	PG6		82.-
Voda Air Separator 1" for Vertical Installation	2198839	K	PG6		152.-
Voda Air Separator 1 1/4" for Vertical Installation	2198840	K	PG6		173.-

Mechanical accessories


Type	Art. no.		Price group		
					EUR
Voda Dirt Separator DN50	2198815	C	PG6		972.-
Voda Dirt Separator DN65	2198816	C	PG6		1,019.-
Voda Dirt Separator DN80	2198817	C	PG6		1,276.-
Voda Dirt Separator DN100	2198818	C	PG6		1,346.-
Voda Dirt Separator DN125	2198819	C	PG6		1,946.-
Voda Dirt Separator DN150	2198820	C	PG6		2,193.-
Voda Dirt Separator DN200	2198821	C	PG6		3,685.-
Voda Dirt Separator 22mm for Horizontal Installation	2198841	C	PG6		108.-
Voda Dirt Separator 3/4" for Horizontal Installation	2198842	C	PG6		120.-
Voda Dirt Separator 1" for Horizontal Installation	2198843	C	PG6		136.-
Voda Dirt Separator 1 1/4" for Horizontal Installation	2198844	C	PG6		158.-
Voda Dirt Separator 1 1/2" for Horizontal Installation	2198845	C	PG6		172.-

= ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Mechanical accessories				
Type	Art. no.	Price group		
				EUR
Voda Dirt Separator 2" for Horizontal Installation	2198846	C	PG6	196.-
Voda Dirt Separator 22mm for Vertical Installation	2198847	C	PG6	122.-
Voda Dirt Separator 3/4" for Vertical Installation	2198848	C	PG6	153.-
Voda Dirt Separator 1" for Vertical Installation	2198849	K	PG6	209.-
Voda Dirt Separator 1 1/4" for Vertical Installation	2198850	K	PG6	220.-

Mechanical accessories				
Type	Art. no.	Price group		
				EUR
Voda Air & Dirt Separator DN50	2198822	C	PG6	930.-
Voda Air & Dirt Separator DN65	2198823	C	PG6	979.-
Voda Air & Dirt Separator DN80	2198824	C	PG6	1,280.-
Voda Air & Dirt Separator DN100	2198825	C	PG6	1,376.-
Voda Air & Dirt Separator DN125	2198826	C	PG6	2,233.-
Voda Air & Dirt Separator DN150	2198827	C	PG6	2,393.-
Voda Air & Dirt Separator DN200	2198828	C	PG6	3,452.-
Voda Air & Dirt Separator 22mm for Horizontal Installation	2198851	C	PG6	153.-
Voda Air & Dirt Separator 3/4" for Horizontal Installation	2198852	C	PG6	176.-
Voda Air & Dirt Separator 1" for Horizontal Installation	2198853	C	PG6	203.-
Voda Air & Dirt Separator 1 1/4" for Horizontal Installation	2198854	C	PG6	220.-
Voda Air & Dirt Separator 1 1/2" for Horizontal Installation	2198855	C	PG6	237.-

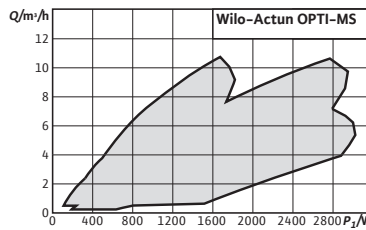

Accessories
Accessories

Page
503

Select 4 online

All information at www.wilo-select.com

Wilo-Actun OPTI-MS



Construction

Multistage submersible pump in tie strap version (MSI) or as a progressive cavity pump (MSH) for vertical or horizontal installation

Application

- Specially designed for operation with photovoltaic modules
- For water supply and drinking water supply from boreholes and rainwater storage tanks
- Process water supply
- Sprinkling and irrigation
- Pressure boosting
- For pumping water without long-fibre and abrasive constituents

Scope of delivery

- Submersible pump with connection cable (2.5 m)
- Casting resin cable connector with integrated water level sensor
- Installation and operating instructions
- Hydraulics for self-assembly (MSH only), incl. installation instructions and installation accessories
- Adapter for pressure connection 1½" on 2" (only types OPTI-MSI4.08-..)


Options


- Wilo-MS Control switchgear for expanding the scope of functions and wireless monitoring of the operating status

Your advantages

- Fully autonomous and cost-efficient water supply utilising solar power
- Easy electrical installation via integrated frequency converter and without the need for parametrisation
- Optimised water output thanks to high hydraulics and motor efficiencies and dynamic MPPT (Maximum Power Point Tracking – ensures the operation of the solar panel at maximum performance level)
- System-specific flexibility thanks to wide range of services
- Increased durability and reliability through high-quality materials and an encapsulated motor design
- Additional operational reliability by using integrated safety devices
- Straightforward remote access to the submersible pump's operating parameters and settings using the Solar Connect tool in the Wilo-Assistant app
- Notifications via push messages when the operating status changes

- Comprehensive accessories for setting up a solar-powered pumping station

Ordering information						
Type	Rated power	Mains connection	Connection	Art. no.		
	P_2 kW					EUR
Actun Opti MSH4.01-03	1.10	1~230 V, 50/60 Hz	Rp 1¼	6084592	L	2,579.-
Actun Opti MSH4.02-02	1.10	1~230 V, 50/60 Hz	Rp 1¼	6082887	L	2,604.-
Actun Opti MSI4.05-04	1.10	1~230 V, 50/60 Hz	Rp 1½	6082892	L	1,797.-
Actun Opti MSI4.05-08	2.20	1~230 V, 50/60 Hz	Rp 1½	6082889	L	3,056.-
Actun Opti MSI4.08-03	1.10	1~230 V, 50/60 Hz	Rp 1½	6082890	L	1,904.-
Actun Opti MSI4.08-05	2.20	1~230 V, 50/60 Hz	Rp 1½	6082891	L	3,056.-

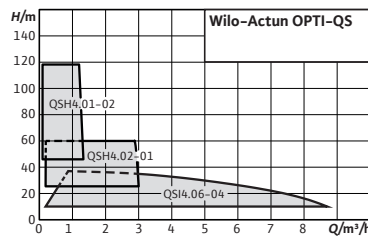

Accessories
Accessories

Page
503

Select 4 online

All information at www.wilo-select.com

Wilo-Actun OPTI-QS



Construction

Multistage submersible pump in tie strap version (QSI) or as a progressive cavity pump (QSH) for vertical or horizontal installation

Application

- Specially designed for operation with photovoltaic modules
- For water supply and drinking water supply from boreholes and rainwater storage tanks
- Process water supply
- Sprinkling and irrigation
- Pressure boosting
- For pumping water without long-fibre and abrasive constituents

Scope of delivery


- Submersible pump with connection cable (2.5 m)
- Casting resin cable connector with integrated water level sensor
- Installation and operating instructions
- Hydraulics for self-assembly (QSH only), incl. installation instructions and installation accessories



Your advantages


- Fully autonomous and cost-efficient water supply utilising solar power
- Easy electrical installation via integrated frequency converter and without the need for parametrisation
- Optimised water output thanks to high hydraulics and motor efficiencies and dynamic MPPT (Maximum Power Point Tracking – ensures the operation of the solar panel at maximum performance level)
- System-specific flexibility thanks to wide range of services
- Increased durability and reliability through high-quality materials and an encapsulated motor design
- Additional operational reliability by using integrated safety devices

Options

- Wilo-QS Stop Module for the connection of an external switch (e.g. float switch) with integrated overvoltage protection
- Comprehensive accessories for setting up a solar-powered pumping station

Ordering information					
Type	Rated power	Connection	Art. no.		
	P_2 kW				EUR
Actun Opti QSH4.01-02	0.48	Rp 1¼	6084593	L	2,005.-
Actun Opti QSH4.02-01	0.48	Rp 1¼	6082886	L	2,024.-
Actun Opti QSI4.06-04	0.48	Rp 1½	6082885	L	1,526.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

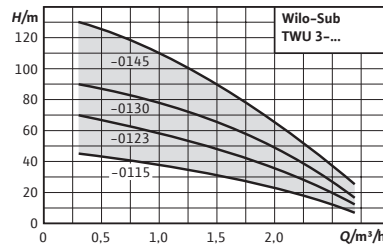

Accessories
Accessories

Page
503

Select 4 online

All information at www.wilo-select.com

Wilo-Sub TWU 3



Construction

Multistage 3" submersible pump in jacketed construction for vertical or horizontal installation

Application

- For private water supply from boreholes, wells and rainwater storage tanks
- For domestic water supply, sprinkling and irrigation
- For pumping water without long-fibre and abrasive constituents

Scope of delivery

- Hydraulics + motor fully assembled
- 1.8 m connecting cable approved for drinking water (cross-section: 4x1.5 mm²)
- Single-phase version including switchbox with capacitor, thermal motor protection and On/Off switch

Your advantages

- Parts that come in contact with fluids are corrosion-free
- Integrated non-return valve
- Maintenance-friendly, rewindable motor

- Installation and operating instructions

Options

- Motor versions for special voltages 3~230 V, 50 Hz; 1~230 V, 60 Hz; 3~380 V, 60 Hz


Notice

Costs for commissioning and function check on request.

Price group: PG5

Ordering information									
Type	Motor diameter	Rated power	Connection	Art. no. 1~230 V, 50 Hz	1~230 V, 50 Hz		Art. no. 3~400 V, 50 Hz	3~400 V, 50 Hz	
					🚚	EUR		🚚	EUR
Sub TWU 3-0115	3 in	0.37 kW	Rp 1	4090889	🚚	968.-	4090892	🚚	856.-
Sub TWU 3-0123	3	0.55	Rp 1	4090890	🚚	998.-	4090893	🚚	896.-
Sub TWU 3-0130	3	0.75	Rp 1	4090891	🚚	1,020.-	4090894	🚚	918.-
Sub TWU 3-0145	3	1.10	Rp 1	-	-	-	4090895	🚚	1,137.-

🚚 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, 📞 = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

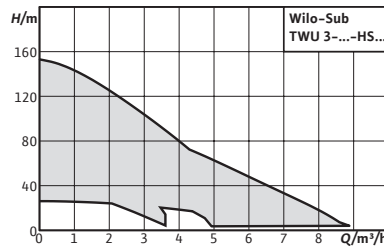

Accessories
Accessories

Page
503

Select 4 online

All information at www.wilo-select.com

Wilo-Sub TWU 3 HS



Construction

Multistage, frequency controlled 3" submersible pump in jacketed construction for vertical or horizontal installation

Application

- For private water supply from boreholes, wells and rainwater storage tanks
- For domestic water supply, sprinkling and irrigation
- For pumping water without long-fibre and abrasive constituents

Scope of delivery

- Hydraulics + motor ready assembled
- Frequency converter
- 1.75 m connecting cable approved for drinking water (cross-section: 4x1.5 mm²)
- Installation and operating instructions

Options

- Special cable lengths on request

Your advantages

- Constant, adjustable pressure thanks to external frequency converter with integrated control (TWU 3 HS-ECP)
- Easy installation with no additional sensors provided by the customer for pressure control (TWU 3 HS-ECP)
- High output thanks to integrated frequency converters with fixed motor speed of 8,400 rpm (TWU 3 HS-I)
- Reduction of well bore expansion and installation costs due to narrower diameter and installation volume
- Comprehensive monitoring and protection functions for absolute operational reliability

Notice


Costs for commissioning and function check on request.


Price group: PG5

Ordering information							
Type	Motor diameter	Rated power	Connection	Mains connection	Art. no.		
	∅ in	P ₂ kW					EUR
Sub TWU 3-0202-HS-I	3	0.60	Rp 1	1~230 V, 50/60 Hz	6064276	L	988.-
Sub TWU 3-0204-HS-I	3	0.90	Rp 1	1~230 V, 50/60 Hz	6064277	L	1,093.-
Sub TWU 3-0205-HS-I	3	0.90	Rp 1	1~230 V, 50/60 Hz	6064278	L	1,150.-
Sub TWU 3-0206-HS-I	3	1.50	Rp 1	1~230 V, 50/60 Hz	6064279	L	1,416.-
Sub TWU 3-0302-HS-I	3	0.60	Rp 1	1~230 V, 50/60 Hz	6064280	L	988.-
Sub TWU 3-0303-HS-I	3	0.90	Rp 1	1~230 V, 50/60 Hz	6064281	L	1,037.-

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☞ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.


Price group: PG5

Ordering information							
Type	Motor diameter	Rated power	Connection	Mains connection	Art. no.		
	\varnothing in	P_2 kW					EUR
Sub TWU 3-0304-HS-I	3	1.50	Rp 1	1~230 V, 50/60 Hz	6064282	L	1,120.-
Sub TWU 3-0501-HS-I	3	0.60	Rp 1	1~230 V, 50/60 Hz	6064283	L	988.-
Sub TWU 3-0503-HS-I	3	0.90	Rp 1	1~230 V, 50/60 Hz	6064284	L	1,037.-
Sub TWU 3-0504-HS-I	3	1.50	Rp 1	1~230 V, 50/60 Hz	6064285	L	1,120.-
Sub TWU 3.02-04-HS-ECP-B	3	0.60	Rp 1	1~230 V, 50/60 Hz	6079396	L	1,190.-
Sub TWU 3.02-06-HS-ECP-B	3	0.90	Rp 1	1~230 V, 50/60 Hz	6079397	L	1,229.-
Sub TWU 3.02-09-HS-ECP-B	3	1.50	Rp 1	1~230 V, 50/60 Hz	6079398	L	1,337.-
Sub TWU 3.03-03-HS-ECP-B	3	0.60	Rp 1	1~230 V, 50/60 Hz	6079399	L	1,142.-
Sub TWU 3.03-05-HS-ECP-B	3	0.90	Rp 1	1~230 V, 50/60 Hz	6079400	L	1,250.-
Sub TWU 3.03-08-HS-ECP-B	3	1.50	Rp 1	1~230 V, 50/60 Hz	6079401	L	1,344.-
Sub TWU 3.05-04-HS-ECP-B	3	0.90	Rp 1¼	1~230 V, 50/60 Hz	6079402	L	1,243.-
Sub TWU 3.05-07-HS-ECP-B	3	1.50	Rp 1¼	1~230 V, 50/60 Hz	6079403	L	1,305.-

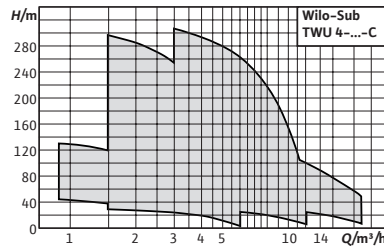

Select 4 online

All information at www.wilo-select.com



Wilo-Sub TWU 4

Construction

Multistage 4" submersible pump in jacketed construction for vertical and horizontal installation

Application

- For water supply from boreholes and rainwater storage tanks
- For domestic water supply, sprinkling and irrigation
- Pressure boosting
- Lowering the water level
- For pumping water without long-fibre and abrasive constituents

Scope of delivery

- Hydraulics + motor completely assembled
- 1.5/1.75/2.5/4.0 m connection cable approved for drinking water (cross-section: 4x1.5 mm²)
- Single-phase version including switchbox with capacitor, thermal motor protection and On/Off switch
- Installation and operating instructions

Your advantages

- Parts that come in contact with fluids are corrosion-free
- Integrated non-return valve
- Low-wearing due to floating impellers
- Maintenance-friendly motor

Options

- Motor versions for special voltages 3~230 V, 50 Hz; 3~500 V, 50 Hz; 1~230 V, 60 Hz; 3~230 V, 60 Hz; 3~380 V, 60 Hz; 3~460 V, 60 Hz

Notice

Important: All pumps with direct-starting motors.

Submersible pumps in other versions **on request**.

Costs for commissioning and function check on request.

Price group: PG5

Ordering information									
Sub TWU 4	Mains connection	Motor diameter	Rated power	Connection	Minimum efficiency index (MEI)	Art. no.		Item no. for jacket pipe cooling (vertical)	Item no. for jacket pipe cooling (horizontal)
		∅ in	P ₂ kW				EUR		
4-0207-C	1~230 V, 50 Hz	4	0.37	Rp 1¼	≥0.7	6046661	L 739.-	4064430	6037935
4-0207-C	3~400 V, 50 Hz	4	0.37	Rp 1¼	≥0.7	6046688	L 673.-	4064430	6037935
4-0210-C	3~400 V, 50 Hz	4	0.55	Rp 1¼	≥0.7	6046687	L 717.-	4064430	6037935
4-0210-C	1~230 V, 50 Hz	4	0.55	Rp 1¼	≥0.7	6046690	L 784.-	4064430	6037935

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☞ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.


Price group: PG5

Ordering information										
Sub TWU 4	Mains connection	Motor diameter	Rated power	Connec- tion	Minimum efficiency index (MEI)	Art. no.		Item no. for jacket pipe cooling (vertical)	Item no. for jacket pipe cooling (horizontal)	
		∅ in	P ₂ kW				🚚 EUR			
4-0214-C	3~400 V, 50 Hz	4	0.75	Rp 1¼	≥0.7	6046686	L	769.-	4064430	6037935
4-0214-C	1~230 V, 50 Hz	4	0.75	Rp 1¼	≥0.7	6046689	L	836.-	4064430	6037935
4-0220-C	1~230 V, 50 Hz	4	1.10	Rp 1¼	≥0.7	6049336	L	1,039.-	4064430	6037935
4-0220-C	3~400 V, 50 Hz	4	1.10	Rp 1¼	≥0.7	6049347	L	966.-	4064430	6037935
4-0405-C	3~400 V, 50 Hz	4	0.37	Rp 1¼	≥0.7	6049348	L	659.-	4064430	6037935
4-0405-C	1~230 V, 50 Hz	4	0.37	Rp 1¼	≥0.7	6049337	L	727.-	4064430	6037935
4-0407-C	1~230 V, 50 Hz	4	0.55	Rp 1¼	≥0.7	6049338	L	762.-	4064430	6037935
4-0407-C	3~400 V, 50 Hz	4	0.55	Rp 1¼	≥0.7	6049349	L	695.-	4064430	6037935
4-0409-C	3~400 V, 50 Hz	4	0.75	Rp 1¼	≥0.7	6049350	L	742.-	4064430	6037935
4-0409-C	1~230 V, 50 Hz	4	0.75	Rp 1¼	≥0.7	6049339	L	808.-	4064430	6037935
4-0414-C	1~230 V, 50 Hz	4	1.10	Rp 1¼	≥0.7	6049340	L	981.-	4064430	6037935
4-0414-C	3~400 V, 50 Hz	4	1.10	Rp 1¼	≥0.7	6049351	L	908.-	4064430	6037935
4-0418-C	3~400 V, 50 Hz	4	1.50	Rp 1¼	≥0.7	6049352	L	1,165.-	4064430	6037935
4-0418-C	1~230 V, 50 Hz	4	1.50	Rp 1¼	≥0.7	6049341	L	1,253.-	4064430	6037935
4-0427-C	1~230 V, 50 Hz	4	2.20	Rp 1¼	≥0.7	6049342	L	1,526.-	4064430	6037935
4-0427-C	3~400 V, 50 Hz	4	2.20	Rp 1¼	≥0.7	6049353	L	1,401.-	4064430	6037935
4-0435-C	3~400 V, 50 Hz	4	3.00	Rp 1¼	≥0.7	6049354	L	1,637.-	4064431	6038901
4-0444-C	3~400 V, 50 Hz	4	4.00	Rp 1¼	≥0.7	6049355	L	1,837.-	4064431	6038901
4-0448-C	3~400 V, 50 Hz	4	4.00	Rp 1¼	≥0.7	6049356	L	2,143.-	4064431	6038901
4.08-05-C	1~230 V, 50 Hz	4	0.75	Rp 2	≥0.4	6081619	L	873.-	4064430	6037935
4.08-05-C	3~400 V, 50 Hz	4	0.75	Rp 2	≥0.4	6081623	L	764.-	4064430	6037935
4.08-07-C	1~230 V, 50 Hz	4	1.10	Rp 2	≥0.4	6081620	L	1,015.-	4064430	6037935
4.08-07-C	3~400 V, 50 Hz	4	1.10	Rp 2	≥0.4	6081624	L	880.-	4064430	6037935
4.08-10-C	1~230 V, 50 Hz	4	1.50	Rp 2	≥0.4	6081621	L	1,201.-	4064430	6037935
4.08-10-C	3~400 V, 50 Hz	4	1.50	Rp 2	≥0.4	6081625	L	1,014.-	4064430	6037935
4.08-15-C	1~230 V, 50 Hz	4	2.20	Rp 2	≥0.4	6081622	L	1,563.-	4064430	6037935
4.08-15-C	3~400 V, 50 Hz	4	2.20	Rp 2	≥0.4	6081626	L	1,288.-	4064430	6037935
4.08-21-C	3~400 V, 50 Hz	4	3.00	Rp 2	≥0.4	6081627	L	1,819.-	4064431	6038901
4.08-29-C	3~400 V, 50 Hz	4	5.50	Rp 2	≥0.4	6081628	L	2,235.-	4064431	6038901
4.08-34-C	3~400 V, 50 Hz	4	5.50	Rp 2	≥0.4	6081629	L	2,815.-	4064431	6038901
4.08-39-C	3~400 V, 50 Hz	4	5.50	Rp 2	≥0.4	6081630	C	2,833.-	4064431	6038901
4.08-45-C	3~400 V, 50 Hz	4	7.50	Rp 2	≥0.4	6081631	C	3,462.-	4064431	6038901
4.08-51-C	3~400 V, 50 Hz	4	7.50	Rp 2	≥0.4	6081632	C	3,690.-	4064431	6038901
4.16-08-C	1~230 V, 50 Hz	4	1.50	Rp 2	≥0.4	6082862	C	1,170.-	4064430	6037935
4.16-08-C	3~400 V, 50 Hz	4	1.50	Rp 2	≥0.4	6082864	L	1,059.-	4064430	6037935
4.16-12-C	1~230 V, 50 Hz	4	2.20	Rp 2	≥0.4	6082863	C	1,280.-	4064430	6037935
4.16-12-C	3~400 V, 50 Hz	4	2.20	Rp 2	≥0.4	6082865	L	1,147.-	4064430	6037935
4.16-16-C	3~400 V, 50 Hz	4	3.00	Rp 2	≥0.4	6082866	L	1,297.-	4064431	6037936
4.16-21-C	3~400 V, 50 Hz	4	4.00	Rp 2	≥0.4	6082867	C	1,691.-	4064431	6037936
4.16-30-C	3~400 V, 50 Hz	4	5.50	Rp 2	≥0.4	6082868	C	2,002.-	4064431	6037936

🚚 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Cooling shroud					
Type	Name		Price group		
					EUR
4064430	Cooling shroud for 4" submersible pumps.	L	PG14		287.-
4064431	Cooling shroud for 4" submersible pumps.	L	PG14		312.-
6037935	Cooling shroud for 4" submersible pumps.	C	PG14		504.-
6038901	Cooling shroud for 4" submersible pumps.	C	PG14		568.-

🚚 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ℹ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

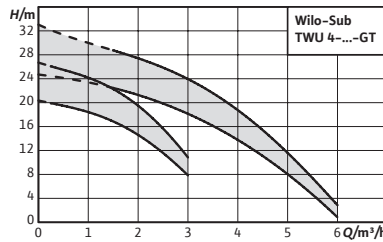

Accessories
Accessories

Page
503

Select 4 online

All information at www.wilo-select.com

Wilo-Sub TWU 4-...-GT



Construction

Multistage 4" submersible pump in jacketed construction for vertical and horizontal installation

Application

- Geothermal applications
- For water supply from boreholes and rainwater storage tanks
- For domestic water supply, sprinkling and irrigation
- Pressure boosting
- Lowering of the water level
- For pumping water without long-fibre and abrasive constituents

Scope of delivery

- Hydraulics and motor ready assembled
- Connection cable with drinking water approval (TWU 4-...-GT with 15 m cable; TWU 4-...-QC-GT with short cable and plug for rapid replacement)
- Installation and operating instructions

Options

- Motor versions for special voltages 3~380 V, 60 Hz; 3~460 V, 60 Hz

Notice

Attention: All pumps with direct starting motors.


Your advantages


- Low operating costs thanks to optimised hydraulics and efficient motors for targeted use in geothermal applications
- High annual performance factor (JAZ) through increased system effectiveness
- High operational reliability thanks to floating impellers and integrated non-return valve
- Easy installation thanks to Quick-Connect variant for extending the motor cable easily and quickly


Submersible pumps in other versions **on request.**

Costs for commissioning and function check on request.

Price group: PG5

Ordering information										
Sub TWU 4-...-GT	Mains connection	Motor diameter	Rated power	Connection	Minimum efficiency index (MEI)	Art. no.			Item no. for jacket pipe cooling (vertical)	Item no. for jacket pipe cooling (horizontal)
		\varnothing in	P_2 kW					EUR		
4-0203-DM-CI-GT	3~400 V, 50 Hz	4	0.25	Rp 1¼	≥0.7	6079004	L	814.-	4064430	6037935
4-0203-DM-CI-QC-GT	3~400 V, 50 Hz	4	0.25	Rp 1¼	≥0.7	6079005	L	903.-	4064430	6037935
4-0204-DM-CI-GT	3~400 V, 50 Hz	4	0.25	Rp 1¼	≥0.7	6079006	L	838.-	4064430	6037935
4-0204-DM-CI-QC-GT	3~400 V, 50 Hz	4	0.25	Rp 1¼	≥0.7	6079007	L	925.-	4064430	6037935
4-0404-DM-CI-GT	3~400 V, 50 Hz	4	0.25	Rp 1¼	≥0.7	6079008	L	838.-	4064430	6037935
4-0404-DM-CI-QC-GT	3~400 V, 50 Hz	4	0.25	Rp 1¼	≥0.7	6079009	L	925.-	4064430	6037935
4-0405-DM-CI-GT	3~400 V, 50 Hz	4	0.37	Rp 1¼	≥0.7	6079010	L	860.-	4064430	6037935
4-0405-DM-CI-QC-GT	3~400 V, 50 Hz	4	0.37	Rp 1¼	≥0.7	6079011	L	946.-	4064430	6037935

Cooling shroud				
Type	Name		Price group	
				EUR
4064430	Cooling shroud for 4" submersible pumps.	L	PG14	287.-
6037935	Cooling shroud for 4" submersible pumps.	C	PG14	504.-

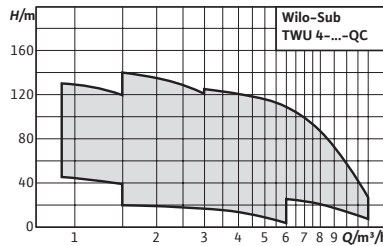

Accessories
Accessories

Page
503

Select 4 online

All information at www.wilo-select.com

Wilo-Sub TWU 4-QC



Construction

Multistage 4" submersible pump in jacketed construction for vertical and horizontal installation

Application

- For water supply from boreholes and rainwater storage tanks
- For domestic water supply, sprinkling and irrigation
- Pressure boosting
- Lowering the water level
- For pumping water without long-fibre and abrasive constituents

Scope of delivery

- Hydraulics + motor fully mounted
- 1.5 or 1.75 m connecting cable approved for drinking water (cross-section: 4x1.5 mm²)
- Single-phase version including switchbox with capacitor, thermal motor protection and On/Off switch
- Installation and operating instructions

Your advantages

- Parts that come in contact with fluids are corrosion-free
- Integrated non-return valve
- Low-wearing due to floating impellers
- Maintenance-friendly motor
- Quick and easy extension of motor cable, without dismantling the hydraulics

Options

- Motor versions for special voltages 1~230 V, 60 Hz; 3~380 V, 60 Hz

Notice

Important: All pumps with direct-starting motors.


Borehole pumps available in other versions **on request**.

Costs for commissioning and function check on request.

Price group: PG5

Ordering information									
Sub TWU 4-QC	Mains connection	Motor diameter	Rated power	Connection	Minimum efficiency index (MEI)	Art. no.		Item no. for jacket pipe cooling (vertical)	Item no. for jacket pipe cooling (horizontal)
		∅ in	P ₂ kW				EUR		
4-0207-C-QC	3~400 V, 50 Hz	4	0.37	Rp 1¼	≥0.7	6046682	760.-	4064430	6037935
4-0207-C-QC	1~230 V, 50 Hz	4	0.37	Rp 1¼	≥0.7	6046685	840.-	4064430	6037935
4-0210-C-QC	3~400 V, 50 Hz	4	0.55	Rp 1¼	≥0.7	6046681	806.-	4064430	6037935

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Ordering information										
Sub TWU 4-QC	Mains connection	Motor diameter	Rated power	Connection	Minimum efficiency index (MEI)	Art. no.		EUR	Item no. for jacket pipe cooling (vertical)	Item no. for jacket pipe cooling (horizontal)
		∅ in	P ₂ kW							
4-0210-C-QC	1~230 V, 50 Hz	4	0.55	Rp 1¼	≥0.7	6046684	C	882.-	4064430	6037935
4-0214-C-QC	3~400 V, 50 Hz	4	0.75	Rp 1¼	≥0.7	6046680	C	857.-	4064430	6037935
4-0214-C-QC	1~230 V, 50 Hz	4	0.75	Rp 1¼	≥0.7	6046683	C	943.-	4064430	6037935
4-0220-C-QC	1~230 V, 50 Hz	4	1.10	Rp 1¼	≥0.7	6049365	C	1,124.-	4064430	6037935
4-0220-C-QC	1~230 V, 50 Hz	4	0.37	Rp 1¼	≥0.7	6049366	C	807.-	4064430	6037935
4-0220-C-QC	3~400 V, 50 Hz	4	1.10	Rp 1¼	≥0.7	6049372	C	1,054.-	4064430	6037935
4-0405-C-QC	1~230 V, 50 Hz	4	0.55	Rp 1¼	≥0.7	6049367	C	829.-	4064430	6037935
4-0405-C-QC	3~400 V, 50 Hz	4	0.37	Rp 1¼	≥0.7	6049373	L	748.-	4064430	6037935
4-0407-C-QC	1~230 V, 50 Hz	4	0.75	Rp 1¼	≥0.7	6049368	C	908.-	4064430	6037935
4-0407-C-QC	3~400 V, 50 Hz	4	0.55	Rp 1¼	≥0.7	6049374	L	783.-	4064430	6037935
4-0409-C-QC	1~230 V, 50 Hz	4	1.10	Rp 1¼	≥0.7	6049369	C	1,077.-	4064430	6037935
4-0409-C-QC	3~400 V, 50 Hz	4	0.75	Rp 1¼	≥0.7	6049375	L	829.-	4064430	6037935
4-0414-C-QC	3~400 V, 50 Hz	4	1.10	Rp 1¼	≥0.7	6049376	L	996.-	4064430	6037935
4-0418-C-QC	3~400 V, 50 Hz	4	1.50	Rp 1¼	≥0.7	6049377	C	1,254.-	4064430	6037935
4-0427-C-QC	3~400 V, 50 Hz	4	2.20	Rp 1¼	≥0.7	6049378	C	1,490.-	4064430	6037935
4-0435-C-QC	3~400 V, 50 Hz	4	3.00	Rp 1¼	≥0.7	6049379	C	1,724.-	4064431	6038901
4.08-05-C-QC	1~230 V, 50 Hz	4	0.75	Rp 2	≥0.4	6081633	C	974.-	4064430	6037935
4.08-05-C-QC	3~400 V, 50 Hz	4	0.75	Rp 2	≥0.4	6081635	C	865.-	4064430	6037935
4.08-07-C-QC	1~230 V, 50 Hz	4	1.10	Rp 2	≥0.4	6081634	C	1,118.-	4064430	6037935
4.08-07-C-QC	3~400 V, 50 Hz	4	1.10	Rp 2	≥0.4	6081636	C	982.-	4064430	6037935
4.08-10-C-QC	3~400 V, 50 Hz	4	1.50	Rp 2	≥0.4	6081637	C	1,117.-	4064430	6037935
4.08-15-C-QC	3~400 V, 50 Hz	4	2.20	Rp 2	≥0.4	6081638	C	1,389.-	4064430	6037935
4.08-21-C-QC	3~400 V, 50 Hz	4	3.00	Rp 2	≥0.4	6081639	C	1,921.-	4064431	6038901

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.


Cooling shroud					
Type	Name			Price group	
					EUR
4064430	Cooling shroud for 4" submersible pumps.		L	PG14	287.-
4064431	Cooling shroud for 4" submersible pumps.		L	PG14	312.-
6037935	Cooling shroud for 4" submersible pumps.		C	PG14	504.-
6038901	Cooling shroud for 4" submersible pumps.		C	PG14	568.-



Price group: PG14


Electrical supply cable for TWU 4...-QC						
	Description		Cable length	Art. no.		EUR
			D m			
Motor cable QC 4 x 1,5 mm ² , 10 m	Quick-connecting cable for fast and easy extension of the motor cable on TWU 4-QC pumps	-	10.0	4087121	L	327.-
Motor cable QC 4 x 1,5 mm ² , 20 m	Quick-connecting cable for fast and easy extension of the motor cable on TWU 4-QC pumps	-	20.0	4440091	L	368.-
Motor cable QC 4 x 1,5 mm ² , 30 m	Quick-connecting cable for fast and easy extension of the motor cable on TWU 4-QC pumps	-	30.0	4087122	L	414.-
Motor cable QC 4 x 1,5 mm ² , 50 m	Quick-connecting cable for fast and easy extension of the motor cable on TWU 4-QC pumps	-	50.0	4087129	L	497.-
Motor cable QC 4 x 1,5 mm ² , 80 m	Quick-connecting cable for fast and easy extension of the motor cable on TWU 4-QC pumps	-	80.0	4087130	L	613.-
Motor cable QC 4 x 1,5 mm ² , 100 m	Quick-connecting cable for fast and easy extension of the motor cable on TWU 4-QC pumps	-	100.0	4087131	K	704.-
Motor cable QC 4 x 2,5 mm ² , 50 m	Quick-connecting cable for fast and easy extension of the motor cable on TWU 4-QC pumps	-	50.0	4087132	L	666.-
Motor cable QC 4 x 2,5 mm ² , 80 m	Quick-connecting cable for fast and easy extension of the motor cable on TWU 4-QC pumps	-	80.0	4087136	A	881.-
Motor cable QC 4 x 2,5 mm ² , 100 m	Quick-connecting cable for fast and easy extension of the motor cable on TWU 4-QC pumps	-	100.0	4087137	K	1,031.-
motor cable kit QC 4 x 1.5 mm ² , 1.5 m	Quick connection motor cable (comprising flat cable with plug connections) for replacing the standard cable with bare cable ends of Wilo-submersible pumps TWU 4-...-C, TWI 4-...-C and TWI 6-...-C (with 4" motor). The kit enables a simple and rapid retroactive extension with quick-connect cables (available separately).	4 x 1.5 mm ² (length: 1.5 m)	1.5	4096206	C	50.-
motor cable kit QC 4 x 1.5 mm ² , 2.5 m	Quick connection motor cable (comprising flat cable with plug connections) for replacing the standard cable with bare cable ends of Wilo-submersible pumps TWU 4-...-C, TWI 4-...-C and TWI 6-...-C (with 4" motor). The kit enables a simple and rapid retroactive extension with quick-connect cables (available separately).	4 x 1.5 mm ² (length: 2.5 m)	2.5	4096207	K	52.-

🚚 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, 📞 = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Electrical supply cable for TWU 4...-QC

	Description		Cable length	Art. no.		
			<i>D</i> m			EUR
<p>motor cable kit QC AISI 316, 4 x 1.5 mm², 1.5 m</p>	<p>Quick connection motor cable (comprising flat cable with plug connections) for replacing the standard cable with bare cable ends of Wilo-submersible pumps TWU 4-...-CI; TWI 4-...-CI and TWI 6-...-CI (with 4" motor). The kit enables a simple and rapid retroactive extension with quick-connect cables (available separately).</p>	<p>AISI 316, 4 x 1.5 mm², 1.5 m</p>	1.5	6080134	L	56.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

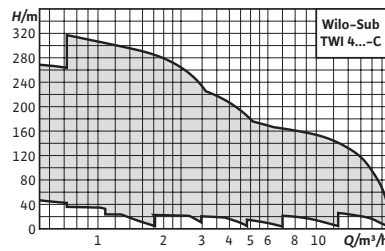

Accessories
Accessories

Page
503

Select 4 online

All information at www.wilo-select.com



Wilo-Sub TWI 4

Construction

Multistage 4" submersible pump in tie strap version for vertical or horizontal installation

Application

- For water and drinking water supply from boreholes and rainwater storage
- Process water supply
- For municipal water supply, sprinkling and irrigation
- Pressure boosting
- Lowering of the water level
- For pumping water in industrial applications
- For pumping water without long-fibre and abrasive constituents

Scope of delivery

- Hydraulics + motor completely assembled
- 1.5/2.5 m connection cable drinking water approval (cross-section: 4 x 1.5 mm²)
- Single-phase version including switchbox with capacitor, thermal motor protection and On/Off switch

Your advantages

- Long service life thanks to corrosion-resistant stainless steel, optionally available in V4A quality
- ACS certified for drinking water applications
- A high degree of flexibility thanks to versions in the 4, 6, 8 and 10-inch area
- High range of performance from 1 to 250 m³/h

- Installation and operating instructions

Options

- Hydraulics in stainless steel 1.4401
- Motor in stainless steel 1.4401
- 60 Hz version

Notice


Submersible pumps in other versions **on request**.

Costs for commissioning and function check on request.

Price group: PG5

Ordering information									
Sub TWI 4	Mains connection	Motor diameter	Rated power	Connection	Minimum efficiency index (MEI)	Art. no.		Item no. for jacket pipe cooling (vertical)	Item no. for jacket pipe cooling (horizontal)
		∅ in	P ₂ kW						
4.01-09-CI	1~230 V, 50 Hz	4	0.37	Rp 1¼	≥0.4	6079200	L	4064430	6037935
4.01-09-CI	3~400 V, 50 Hz	4	0.37	Rp 1¼	≥0.4	6079238	C	4064430	6037935

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Ordering information										
Sub TWI 4	Mains connection	Motor diameter	Rated power	Connection	Minimum efficiency index (MEI)	Art. no.			Item no. for jacket pipe cooling (vertical)	Item no. for jacket pipe cooling (horizontal)
		\varnothing in	P_2 kW					EUR		
4.01-14-CI	1~230 V, 50 Hz	4	0.55	Rp 1½	≥0.4	6079201	L	901.-	4064430	6038901
4.01-14-CI	3~400 V, 50 Hz	4	0.55	Rp 1½	≥0.4	6079239	L	776.-	4064430	6038901
4.01-18-CI	1~230 V, 50 Hz	4	0.55	Rp 1½	≥0.4	6079202	C	959.-	4064430	6038901
4.01-18-CI	3~400 V, 50 Hz	4	0.55	Rp 1½	≥0.4	6079240	C	835.-	4064430	6038901
4.01-21-CI	1~230 V, 50 Hz	4	0.75	Rp 1½	≥0.4	6079203	C	1,026.-	4064430	6038901
4.01-21-CI	3~400 V, 50 Hz	4	0.75	Rp 1½	≥0.4	6079241	L	894.-	4064430	6038901
4.01-28-CI	1~230 V, 50 Hz	4	1.10	Rp 1½	≥0.4	6079204	C	1,205.-	4064431	6037936
4.01-28-CI	3~400 V, 50 Hz	4	1.10	Rp 1½	≥0.4	6079242	C	1,065.-	4064430	6038901
4.01-36-CI	1~230 V, 50 Hz	4	1.10	Rp 1½	≥0.4	6079205	C	1,366.-	4064431	6037936
4.01-36-CI	3~400 V, 50 Hz	4	1.10	Rp 1½	≥0.4	6079243	K	1,227.-	4064430	6038901
4.01-42-CI	1~230 V, 50 Hz	4	1.50	Rp 1½	≥0.4	6079206	C	1,582.-	4064431	6037936
4.01-42-CI	3~400 V, 50 Hz	4	1.50	Rp 1½	≥0.4	6079244	K	1,433.-	4064430	6038901
4.02-09-CI	1~230 V, 50 Hz	4	0.55	Rp 1½	≥0.4	6079207	L	868.-	4064430	6037935
4.02-09-CI	3~400 V, 50 Hz	4	0.55	Rp 1½	≥0.7	6079245	L	706.-	4064430	6037935
4.02-13-CI	1~230 V, 50 Hz	4	0.75	Rp 1½	≥0.7	6079208	L	961.-	4064430	6037935
4.02-13-CI	3~400 V, 50 Hz	4	0.75	Rp 1½	≥0.7	6079246	L	788.-	4064430	6038901
4.02-18-CI	1~230 V, 50 Hz	4	1.10	Rp 1½	≥0.7	6079209	L	1,104.-	4064431	6037936
4.02-18-CI	3~400 V, 50 Hz	4	1.10	Rp 1½	≥0.7	6079247	C	922.-	4064430	6038901
4.02-23-CI	1~230 V, 50 Hz	4	1.10	Rp 1½	≥0.7	6079210	L	1,172.-	4064431	6037936
4.02-23-CI	3~400 V, 50 Hz	4	1.10	Rp 1½	≥0.7	6079248	K	990.-	4064430	6038901
4.02-28-CI	1~230 V, 50 Hz	4	1.50	Rp 1½	≥0.7	6079211	C	1,369.-	4064431	6037936
4.02-28-CI	3~400 V, 50 Hz	4	1.50	Rp 1½	≥0.7	6079249	K	1,134.-	4064430	6038901
4.02-33-CI	1~230 V, 50 Hz	4	1.50	Rp 1½	≥0.7	6079212	C	1,478.-	4064431	6037936
4.02-33-CI	3~400 V, 50 Hz	4	1.50	Rp 1½	≥0.7	6079250	K	1,246.-	4064430	6038901
4.02-40-CI	1~230 V, 50 Hz	4	2.20	Rp 1½	≥0.7	6079213	C	1,788.-	4064431	6037936
4.02-40-CI	3~400 V, 50 Hz	4	2.20	Rp 1½	≥0.7	6079251	K	1,516.-	4064431	6037936
4.02-48-CI	1~230 V, 50 Hz	4	2.20	Rp 1½	≥0.7	6079214	C	1,973.-	4064431	6037936
4.02-48-CI	3~400 V, 50 Hz	4	2.20	Rp 1½	≥0.7	6079252	C	1,700.-	4064431	6037936
4.03-06-CI	1~230 V, 50 Hz	4	0.55	Rp 1½	≥0.7	6079215	L	826.-	4064430	6037935
4.03-06-CI	3~400 V, 50 Hz	4	0.55	Rp 1½	≥0.7	6079253	L	667.-	4064430	6037935
4.03-09-CI	1~230 V, 50 Hz	4	0.75	Rp 1½	≥0.7	6079216	L	907.-	4064430	6037935
4.03-09-CI	3~400 V, 50 Hz	4	0.75	Rp 1½	≥0.7	6079254	L	736.-	4064430	6037935
4.03-12-CI	3~400 V, 50 Hz	4	1.10	Rp 1½	≥0.7	6079255	L	841.-	4064430	6037935
4.03-12-CI	1~230 V, 50 Hz	4	1.10	Rp 1½	≥0.7	6079217	L	1,025.-	4064430	6037935
4.03-15-CI	1~230 V, 50 Hz	4	1.10	Rp 1½	≥0.7	6079218	L	1,065.-	4064430	6037935
4.03-15-CI	3~400 V, 50 Hz	4	1.10	Rp 1½	≥0.7	6079256	L	881.-	4064430	6038901
4.03-18-CI	1~230 V, 50 Hz	4	1.50	Rp 1½	≥0.7	6079219	L	1,227.-	4064431	6037935
4.03-18-CI	3~400 V, 50 Hz	4	1.50	Rp 1½	≥0.7	6079257	L	996.-	4064430	6038901
4.03-22-CI	1~230 V, 50 Hz	4	1.50	Rp 1½	≥0.7	6079220	L	1,281.-	4064431	6037936
4.03-22-CI	3~400 V, 50 Hz	4	1.50	Rp 1½	≥0.7	6079258	L	1,044.-	4064430	6038901
4.03-25-CI	1~230 V, 50 Hz	4	2.20	Rp 1½	≥0.7	6079221	C	1,517.-	4064431	6037936
4.03-25-CI	3~400 V, 50 Hz	4	2.20	Rp 1½	≥0.7	6079259	C	1,219.-	4064431	6037936


 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo


Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.



Price group: PG5

Ordering information										
Sub TWI 4	Mains connection	Motor diameter	Rated power	Connection	Minimum efficiency index (MEI)	Art. no.		Item no. for jacket pipe cooling (vertical)	Item no. for jacket pipe cooling (horizontal)	
		∅ in	P ₂ kW				🚚 EUR			
4.03-29-CI	1~230 V, 50 Hz	4	2.20	Rp 1¼	≥0.7	6079222	K	1,579.-	4064431	6037936
4.03-29-CI	3~400 V, 50 Hz	4	2.20	Rp 1¼	≥0.7	6079260	C	1,388.-	4064431	6037936
4.03-33-CI	1~230 V, 50 Hz	4	2.20	Rp 1¼	≥0.7	6079223	K	1,830.-	4064431	6037936
4.03-33-CI	3~400 V, 50 Hz	4	2.20	Rp 1¼	≥0.7	6079261	C	1,646.-	4064431	6037936
4.03-39-CI	3~400 V, 50 Hz	4	3.00	Rp 1¼	≥0.7	6079262	C	2,050.-	4064431	6037936
4.03-45-CI	3~400 V, 50 Hz	4	3.00	Rp 1¼	≥0.7	6079263	C	2,365.-	4064431	6037936
4.03-52-C	3~400 V, 50 Hz	4	3.70	Rp 1¼	≥0.7	6072926	C	2,617.-	4064431	6037936
4.05-04-CI	1~230 V, 50 Hz	4	0.55	Rp 1½	≥0.4	6079224	L	807.-	4064430	6037935
4.05-04-CI	3~400 V, 50 Hz	4	0.55	Rp 1½	≥0.4	6079264	L	776.-	4064430	6037935
4.05-06-CI	1~230 V, 50 Hz	4	0.55	Rp 1½	≥0.4	6079225	L	862.-	4064430	6037935
4.05-06-CI	3~400 V, 50 Hz	4	0.55	Rp 1½	≥0.4	6079265	L	802.-	4064430	6037935
4.05-08-CI	1~230 V, 50 Hz	4	0.75	Rp 1½	≥0.4	6079226	L	903.-	4064430	6037935
4.05-08-CI	3~400 V, 50 Hz	4	0.75	Rp 1½	≥0.4	6079266	L	877.-	4064430	6037935
4.05-12-CI	1~230 V, 50 Hz	4	1.50	Rp 1½	≥0.4	6079227	L	1,101.-	4064431	6037937
4.05-12-CI	3~400 V, 50 Hz	4	1.50	Rp 1½	≥0.4	6079267	L	920.-	4064430	6037935
4.05-17-CI	1~230 V, 50 Hz	4	2.20	Rp 1½	≥0.4	6079228	L	1,417.-	4064431	6037937
4.05-17-CI	3~400 V, 50 Hz	4	2.20	Rp 1½	≥0.4	6079268	L	1,117.-	4064431	6037936
4.05-21-CI	1~230 V, 50 Hz	4	2.20	Rp 1½	≥0.4	6079229	C	1,470.-	4064431	6037936
4.05-21-CI	3~400 V, 50 Hz	4	2.20	Rp 1½	≥0.4	6079269	L	1,170.-	4064431	6037936
4.05-25-CI	1~230 V, 50 Hz	4	2.20	Rp 1½	≥0.4	6079230	C	1,527.-	4064431	6037936
4.05-25-CI	3~400 V, 50 Hz	4	2.20	Rp 1½	≥0.4	6079270	L	1,227.-	4064431	6037936
4.05-33-CI	3~400 V, 50 Hz	4	3.00	Rp 1½	≥0.4	6079271	C	1,718.-	4064431	6037936
4.05-38-C	3~400 V, 50 Hz	4	3.70	Rp 1½	≥0.4	6072935	K	1,963.-	4064431	6037936
4.05-44-C	3~400 V, 50 Hz	4	4.00	Rp 1½	≥0.4	6072936	K	2,190.-	4064431	6037936
4.09-05-CI	1~230 V, 50 Hz	4	1.10	Rp 2	≥0.4	6079231	C	1,094.-	4064431	6037937
4.09-05-CI	3~400 V, 50 Hz	4	1.10	Rp 2	≥0.4	6079272	L	908.-	4064431	6037937
4.09-07-CI	1~230 V, 50 Hz	4	1.10	Rp 2	≥0.4	6079232	L	1,165.-	4064431	6037937
4.09-07-CI	3~400 V, 50 Hz	4	1.10	Rp 2	≥0.4	6079273	L	980.-	4064431	6037937
4.09-10-CI	1~230 V, 50 Hz	4	1.50	Rp 2	≥0.4	6079233	L	1,404.-	4064431	6037936
4.09-10-CI	3~400 V, 50 Hz	4	1.50	Rp 2	≥0.4	6079274	L	1,168.-	4064431	6037936
4.09-12-CI	1~230 V, 50 Hz	4	2.20	Rp 2	≥0.4	6079234	L	1,617.-	4064431	6037936
4.09-12-CI	3~400 V, 50 Hz	4	2.20	Rp 2	≥0.4	6079275	L	1,352.-	4064431	6037936
4.09-15-CI	1~230 V, 50 Hz	4	2.20	Rp 2	≥0.4	6079235	L	1,787.-	4064431	6037936
4.09-15-CI	3~400 V, 50 Hz	4	2.20	Rp 2	≥0.4	6079276	L	1,481.-	4064431	6037936
4.09-18-CI	3~400 V, 50 Hz	4	3.00	Rp 2	≥0.4	6079277	L	1,943.-	4064431	6037936
4.09-21-C	3~400 V, 50 Hz	4	3.70	Rp 2	≥0.4	6072943	L	2,156.-	4064432	6038903
4.09-25-C	3~400 V, 50 Hz	4	3.70	Rp 2	≥0.4	6072944	L	2,308.-	4064432	6038903
4.09-30-C	3~400 V, 50 Hz	4	5.50	Rp 2	≥0.4	6072945	K	2,831.-	4064432	6038904
4.09-37-C	3~400 V, 50 Hz	4	5.50	Rp 2	≥0.4	6072946	L	3,101.-	4064432	6038904
4.14-04-CI	1~230 V, 50 Hz	4	1.10	Rp 2	≥0.4	6081540	C	1,210.-	4064430	6038901
4.14-04-CI	3~400 V, 50 Hz	4	1.10	Rp 2	≥0.4	6081543	L	1,070.-	4064430	6038901
4.14-06-CI	1~230 V, 50 Hz	4	1.50	Rp 2	≥0.4	6081541	C	1,503.-	4064431	6037936

🚚 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, 📞 = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Ordering information										
Sub TWI 4	Mains connection	Motor diameter	Rated power	Connection	Minimum efficiency index (MEI)	Art. no.		Item no. for jacket pipe cooling (vertical)	Item no. for jacket pipe cooling (horizontal)	
		\varnothing in	P_2 kW				 EUR			
4.14-06-CI	3~400 V, 50 Hz	4	1.50	Rp 2	≥ 0.4	6081544	L	1,300.-	4064430	6038901
4.14-08-CI	1~230 V, 50 Hz	4	2.20	Rp 2	≥ 0.4	6081542	K	1,877.-	4064431	6037936
4.14-08-CI	3~400 V, 50 Hz	4	2.20	Rp 2	≥ 0.4	6081545	L	1,617.-	4064431	6037936
4.14-11-CI	3~400 V, 50 Hz	4	3.00	Rp 2	≥ 0.4	6081546	L	2,061.-	4064431	6037936
4.14-13-CI	3~400 V, 50 Hz	4	3.00	Rp 2	≥ 0.4	6081547	L	2,255.-	4064431	6037936
4.14-15-C	3~400 V, 50 Hz	4	4.00	Rp 2	≥ 0.4	6081548	L	2,807.-	4064432	6038903
4.14-17-C	3~400 V, 50 Hz	4	4.00	Rp 2	≥ 0.4	6081549	L	3,014.-	4064432	6038903
4.14-20-C	3~400 V, 50 Hz	4	5.50	Rp 2	≥ 0.4	6081550	L	3,423.-	4064432	6038904
4.14-23-C	3~400 V, 50 Hz	4	5.50	Rp 2	≥ 0.4	6081551	L	3,712.-	4064432	6038904
4.14-27-C	3~400 V, 50 Hz	4	7.50	Rp 2	≥ 0.4	6081552	L	4,771.-	4064432	6038904
4.14-31-C	3~400 V, 50 Hz	4	7.50	Rp 2	≥ 0.4	6081553	L	5,174.-	4064432	6038904

Cooling shroud				
Type	Name		Price group	
				EUR
4064430	Cooling shroud for 4" submersible pumps.	L	PG14	287.-
4064431	Cooling shroud for 4" submersible pumps.	L	PG14	312.-
4064432	Cooling shroud for 4" submersible pumps.	L	PG14	347.-
6037936	Cooling shroud for 4" submersible pumps.	C	PG14	576.-
6037937	Cooling shroud for 4" submersible pumps.	K	PG14	535.-
6038901	Cooling shroud for 4" submersible pumps.	C	PG14	568.-
6038903	Cooling shroud for 4" submersible pumps.	C	PG14	626.-
6038904	Cooling shroud for 4" submersible pumps.	C	PG14	694.-

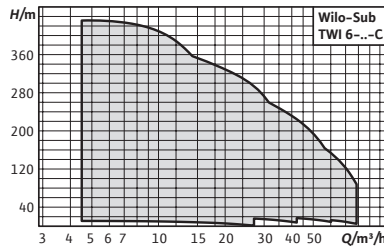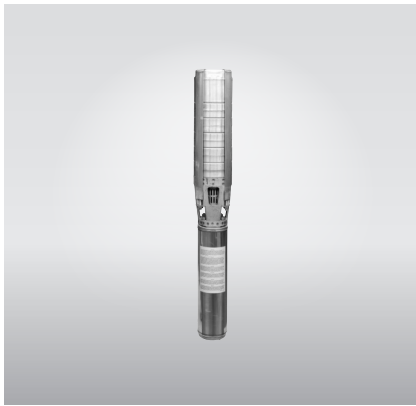

Accessories
Accessories

Page
503

Select 4 online

All information at www.wilo-select.com



Wilo-Sub TWI 6

Construction

Multistage 6" submersible pump in tie strap version for vertical or horizontal installation

Application

- For water and drinking water supply from boreholes and rainwater storage
- Process water supply
- For municipal water supply, sprinkling and irrigation
- Pressure boosting
- Lowering of the water level
- For pumping water in industrial applications
- For pumping water without long-fibre and abrasive constituents

Scope of delivery

- Hydraulics and motor ready assembled
- 4/5/10 m connection cable approved for drinking water (cross-section: 4x2.5 mm² or 4x4 mm²)
- Installation and operating instructions

Options

- Hydraulics in stainless steel 1.4401
- Stainless steel motor in 1.4401, 1.4408 or 1.4571
- 60 Hz version
- Star-delta starting
- Rewindable motor
- Rewindable motor with drinking water filling

Your advantages

- Long service life thanks to corrosion-resistant stainless steel, optionally available in V4A quality
- Individually configurable motors and materials to ensure reliable operation in all applications
- Drinking water versions with ACS approval
- 4", 6", 8" and 10" versions for high flexibility
- Volume flow performance from 1 to 250 m³/h

- Configured units for special versions

Notice

Submersible pumps in other versions **on request**.

Costs for commissioning and function check on request.

Ordering information										
Sub TWI 6	Mains connection	Motor diameter	Rated power	Connection	Minimum efficiency index (MEI)	Art. no.		Item no. for jacket pipe cooling (vertical)	Item no. for jacket pipe cooling (horizontal)	
		∅	P ₂ kW				🚚	EUR		
6.18-01-CI	3~400 V, 50 Hz	-	0.55	Rp 2½	≥0.4	6079282	K	926.-	6041871	6042336
6.18-02-CI	3~400 V, 50 Hz	-	1.50	Rp 2½	≥0.4	6079283	L	1,120.-	6041873	6042338
6.18-04-CI	3~400 V, 50 Hz	-	2.20	Rp 2½	≥0.4	6079284	L	1,385.-	6041873	6042338
6.18-05-CI	3~400 V, 50 Hz	-	3.00	Rp 2½	≥0.4	6079285	L	1,660.-	6041873	6042338
6.18-06-CI	3~400 V, 50 Hz	-	3.00	Rp 2½	≥0.4	6079286	L	1,860.-	6041873	6042338
6.18-07-C	3~400 V, 50 Hz	-	3.70	Rp 2½	≥0.4	6075205	L	2,206.-	6041894	6042357
6.18-10-C	3~400 V, 50 Hz	-	5.50	Rp 2½	≥0.4	6075206	L	2,742.-	6041890	6042353
6.18-13-C	3~400 V, 50 Hz	-	7.50	Rp 2½	≥0.4	6075207	L	3,900.-	6041891	6042354
6.18-17-C	3~400 V, 50 Hz	-	9.30	Rp 2½	≥0.4	6075208	L	4,155.-	6041891	6042354
6.18-20-C	3~400 V, 50 Hz	-	11.00	Rp 2½	≥0.4	6075209	C	4,496.-	6041891	6042354
6.18-20-C-SD	3~400 V, 50 Hz	-	11.00	Rp 2½	≥0.4	6075210	C	4,762.-	6041891	6042354
6.18-22-C	3~400 V, 50 Hz	-	15.00	Rp 2½	≥0.4	6075211	C	4,295.-	6041891	6042354
6.18-22-C-SD	3~400 V, 50 Hz	-	15.00	Rp 2½	≥0.4	6075212	C	5,011.-	6041891	6042354
6.18-24-C	3~400 V, 50 Hz	-	15.00	Rp 2½	≥0.4	6075213	C	5,177.-	6041891	6042354
6.18-24-C-SD	3~400 V, 50 Hz	-	15.00	Rp 2½	≥0.4	6075214	C	5,541.-	6041891	6042354
6.18-27-C	3~400 V, 50 Hz	-	15.00	Rp 2½	≥0.4	6075215	C	4,646.-	6041891	6042354
6.18-27-C-SD	3~400 V, 50 Hz	-	15.00	Rp 2½	≥0.4	6075216	C	5,900.-	6041891	6042354
6.18-29-C	3~400 V, 50 Hz	-	18.50	Rp 2½	≥0.4	6075217	C	6,039.-	6041883	6042347
6.18-29-C-SD	3~400 V, 50 Hz	-	18.50	Rp 2½	≥0.4	6075218	C	6,410.-	6041883	6042347
6.18-31-C	3~400 V, 50 Hz	-	18.50	Rp 2½	≥0.4	6075219	K	5,143.-	6041883	6042347
6.18-31-C-SD	3~400 V, 50 Hz	-	18.50	Rp 2½	≥0.4	6075220	K	6,490.-	6041883	6042347
6.18-33-C	3~400 V, 50 Hz	-	18.50	Rp 2½	≥0.4	6075221	K	6,298.-	6041883	6042347
6.18-33-C-SD	3~400 V, 50 Hz	-	18.50	Rp 2½	≥0.4	6075222	K	6,671.-	6041883	6042347
6.18-36-C	3~400 V, 50 Hz	-	22.00	Rp 2½	≥0.4	6075223	K	6,697.-	6041886	6042349
6.18-36-C-SD	3~400 V, 50 Hz	-	22.00	Rp 2½	≥0.4	6075224	K	7,015.-	6041886	6042349
6.18-38-C	3~400 V, 50 Hz	-	22.00	Rp 2½	≥0.4	6075225	A	7,103.-	6041886	6042349
6.18-38-C-SD	3~400 V, 50 Hz	-	22.00	Rp 2½	≥0.4	6075226	A	7,355.-	6041886	6042349
6.18-40-C	3~400 V, 50 Hz	-	22.00	Rp 2½	≥0.4	6075227	A	7,507.-	6041886	6042349
6.18-40-C-SD	3~400 V, 50 Hz	-	22.00	Rp 2½	≥0.4	6075228	A	7,780.-	6041886	6042349
6.30-02-CI	3~400 V, 50 Hz	-	2.20	Rp 3	≥0.4	6079287	L	1,320.-	6041873	6042338
6.30-03-CI	3~400 V, 50 Hz	-	3.00	Rp 3	≥0.4	6079288	L	1,562.-	6041873	6042338
6.30-04-C	3~400 V, 50 Hz	-	3.70	Rp 3	≥0.4	6075231	L	2,011.-	6041894	6042357
6.30-06-C	3~400 V, 50 Hz	-	5.50	Rp 3	≥0.4	6075232	L	2,599.-	6041890	6042353
6.30-08-C	3~400 V, 50 Hz	-	7.50	Rp 3	≥0.4	6075233	L	2,887.-	6041891	6042354
6.30-11-C	3~400 V, 50 Hz	-	11.00	Rp 3	≥0.4	6075234	L	3,937.-	6041891	6042354
6.30-11-C-SD	3~400 V, 50 Hz	-	11.00	Rp 3	≥0.4	6075235	K	4,212.-	6041891	6042354
6.30-13-C	3~400 V, 50 Hz	-	15.00	Rp 3	≥0.4	6075236	L	4,067.-	6041883	6042347
6.30-13-C-SD	3~400 V, 50 Hz	-	15.00	Rp 3	≥0.4	6075237	K	4,362.-	6041883	6042347
6.30-15-C	3~400 V, 50 Hz	-	15.00	Rp 3	≥0.4	6075238	L	4,962.-	6041883	6042347
6.30-15-C-SD	3~400 V, 50 Hz	-	15.00	Rp 3	≥0.4	6075239	K	5,133.-	6041883	6042347
6.30-17-C	3~400 V, 50 Hz	-	15.00	Rp 3	≥0.4	6075240	L	5,097.-	6041883	6042347
6.30-17-C-SD	3~400 V, 50 Hz	-	15.00	Rp 3	≥0.4	6075241	K	5,422.-	6041883	6042347

🚚 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, 📞 = please contact Wilo


Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.


Price group: PG6



Ordering information									
Sub TWI 6	Mains connection	Motor diameter	Rated power	Connection	Minimum efficiency index (MEI)	Art. no.		Item no. for jacket pipe cooling (vertical)	Item no. for jacket pipe cooling (horizontal)
		∅	P ₂ kW				🚚	EUR	
6.30-19-C	3~400 V, 50 Hz	-	18.50	Rp 3	≥0.4	6075242	K	5,665.-	6041886 6042349
6.30-19-C-SD	3~400 V, 50 Hz	-	18.50	Rp 3	≥0.4	6075243	K	6,086.-	6041886 6042349
6.30-21-C	3~400 V, 50 Hz	-	18.50	Rp 3	≥0.4	6075244	K	5,930.-	6041886 6042349
6.30-21-C-SD	3~400 V, 50 Hz	-	18.50	Rp 3	≥0.4	6075245	K	6,356.-	6041886 6042349
6.30-24-C	3~400 V, 50 Hz	-	22.00	Rp 3	≥0.4	6075246	K	6,651.-	6041886 6042349
6.30-24-C-SD	3~400 V, 50 Hz	-	22.00	Rp 3	≥0.4	6075247	K	7,279.-	6041886 6042349
6.30-26-C	3~400 V, 50 Hz	-	30.00	Rp 3	≥0.4	6075248	K	6,906.-	6041875 6042339
6.30-26-C-SD	3~400 V, 50 Hz	-	30.00	Rp 3	≥0.4	6075249	K	7,539.-	6041875 6042339
6.30-29-C	3~400 V, 50 Hz	-	30.00	Rp 3	≥0.4	6075250	K	8,040.-	6041875 6042339
6.30-29-C-SD	3~400 V, 50 Hz	-	30.00	Rp 3	≥0.4	6075251	K	8,747.-	6041875 6042339
6.30-32-C	3~400 V, 50 Hz	-	30.00	Rp 3	≥0.4	6075252	A	8,408.-	6041875 6042339
6.30-32-C-SD	3~400 V, 50 Hz	-	30.00	Rp 3	≥0.4	6075253	A	9,158.-	6041875 6042339
6.30-35-C	3~400 V, 50 Hz	-	30.00	Rp 3	≥0.4	6075254	A	8,774.-	6041875 6042339
6.30-35-C-SD	3~400 V, 50 Hz	-	30.00	Rp 3	≥0.4	6075255	A	9,461.-	6041875 6042339
6.50-02-CI	3~400 V, 50 Hz	-	3.00	Rp 3	≥0.4	6079289	L	1,923.-	6041873 6042338
6.50-03-C	3~400 V, 50 Hz	-	5.50	Rp 3	≥0.4	6075257	L	2,180.-	6041892 6042355
6.50-05-C	3~400 V, 50 Hz	-	7.50	Rp 3	≥0.4	6075258	L	2,906.-	6041879 6042343
6.50-07-C	3~400 V, 50 Hz	-	11.00	Rp 3	≥0.4	6075259	L	3,727.-	6041879 6042343
6.50-07-C-SD	3~400 V, 50 Hz	-	11.00	Rp 3	≥0.4	6075260	K	4,349.-	6041879 6042343
6.50-10-C	3~400 V, 50 Hz	-	15.00	Rp 3	≥0.4	6075261	L	5,159.-	6041884 6042348
6.50-10-C-SD	3~400 V, 50 Hz	-	15.00	Rp 3	≥0.4	6075262	K	5,523.-	6041884 6042348
6.50-12-C	3~400 V, 50 Hz	-	18.50	Rp 3	≥0.4	6075263	L	5,939.-	6041887 6042350
6.50-12-C-SD	3~400 V, 50 Hz	-	18.50	Rp 3	≥0.4	6075264	K	6,359.-	6041887 6042350
6.50-15-C	3~400 V, 50 Hz	-	22.00	Rp 3	≥0.4	6075265	L	6,943.-	6041887 6042350
6.50-15-C-SD	3~400 V, 50 Hz	-	22.00	Rp 3	≥0.4	6075266	K	7,435.-	6041887 6042350
6.50-17-C	3~400 V, 50 Hz	-	30.00	Rp 3	≥0.4	6075267	K	7,750.-	6041876 6042340
6.50-17-C-SD	3~400 V, 50 Hz	-	30.00	Rp 3	≥0.4	6075268	K	8,301.-	6041876 6042340
6.50-19-C	3~400 V, 50 Hz	-	30.00	Rp 3	≥0.4	6075269	K	8,475.-	6041876 6042340
6.50-19-C-SD	3~400 V, 50 Hz	-	30.00	Rp 3	≥0.4	6075270	K	9,081.-	6041876 6042340
6.50-22-C	3~400 V, 50 Hz	-	37.00	Rp 3	≥0.4	6075271	A	9,333.-	6041878 6042342
6.50-22-C-SD	3~400 V, 50 Hz	-	37.00	Rp 3	≥0.4	6075272	A	9,733.-	6041878 6042342
6.50-24-C	3~400 V, 50 Hz	-	37.00	Rp 3	≥0.4	6075273	A	9,956.-	6041878 6042342
6.50-24-C-SD	3~400 V, 50 Hz	-	37.00	Rp 3	≥0.4	6075274	A	10,469.-	6041878 6042342
6.60-02-C	3~400 V, 50 Hz	-	3.70	Rp 3	≥0.4	6075275	L	2,202.-	6041896 6042359
6.60-03-C	3~400 V, 50 Hz	-	5.50	Rp 3	≥0.4	6075276	L	2,723.-	6041892 6042355
6.60-04-C	3~400 V, 50 Hz	-	7.50	Rp 3	≥0.4	6075277	L	3,353.-	6041879 6042343
6.60-06-C	3~400 V, 50 Hz	-	11.00	Rp 3	≥0.4	6075278	L	3,892.-	6041879 6042343
6.60-06-C-SD	3~400 V, 50 Hz	-	11.00	Rp 3	≥0.4	6075279	K	4,533.-	6041879 6042343
6.60-08-C	3~400 V, 50 Hz	-	15.00	Rp 3	≥0.4	6075280	K	4,210.-	6041884 6042348
6.60-08-C-SD	3~400 V, 50 Hz	-	15.00	Rp 3	≥0.4	6075281	K	4,898.-	6041884 6042348
6.60-10-C	3~400 V, 50 Hz	-	18.50	Rp 3	≥0.4	6075282	L	4,998.-	6041887 6042350
6.60-10-C-SD	3~400 V, 50 Hz	-	18.50	Rp 3	≥0.4	6075283	K	4,887.-	6041887 6042350


🚚 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, 📞 = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.







Ordering information									
Sub TWI 6	Mains connection	Motor diameter	Rated power	Connection	Minimum efficiency index (MEI)	Art. no.		Item no. for jacket pipe cooling (vertical)	Item no. for jacket pipe cooling (horizontal)
		∅	P ₂ kW					EUR	
6.60-12-C	3~400 V, 50 Hz	-	22.00	Rp 3	≥0.4	6075284	L	5,823.-	6041887 6042350
6.60-12-C-SD	3~400 V, 50 Hz	-	22.00	Rp 3	≥0.4	6075285	K	6,233.-	6041887 6042350
6.60-14-C	3~400 V, 50 Hz	-	30.00	Rp 3	≥0.4	6075286	K	6,526.-	6041876 6042340
6.60-14-C-SD	3~400 V, 50 Hz	-	30.00	Rp 3	≥0.4	6075287	K	6,990.-	6041876 6042340
6.60-16-C	3~400 V, 50 Hz	-	30.00	Rp 3	≥0.4	6075288	K	7,348.-	6041876 6042340
6.60-16-C-SD	3~400 V, 50 Hz	-	30.00	Rp 3	≥0.4	6075289	K	7,868.-	6041876 6042340
6.60-18-C	3~400 V, 50 Hz	-	30.00	Rp 3	≥0.4	6075290	K	7,976.-	6041876 6042340
6.60-18-C-SD	3~400 V, 50 Hz	-	30.00	Rp 3	≥0.4	6075291	K	8,703.-	6041876 6042340
6.60-20-C	3~400 V, 50 Hz	-	37.00	Rp 3	≥0.4	6075292	K	8,623.-	6041878 6042342
6.60-20-C-SD	3~400 V, 50 Hz	-	37.00	Rp 3	≥0.4	6075293	K	9,526.-	6041878 6042342

Cooling shroud				
Type	Name		Price group	
				EUR
6041871	Cooling shroud for 6" submersible pumps.	A	PG14	419.-
6041873	Cooling shroud for 6" submersible pumps.	A	PG14	437.-
6041875	Cooling shroud for 6" submersible pumps.	C	PG14	757.-
6041876	Cooling shroud for 6" submersible pumps.	C	PG14	757.-
6041878	Cooling shroud for 6" submersible pumps.	C	PG14	780.-
6041879	Cooling shroud for 6" submersible pumps.	C	PG14	453.-
6041883	Cooling shroud for 6" submersible pumps.	C	PG14	470.-
6041884	Cooling shroud for 6" submersible pumps.	A	PG14	470.-
6041886	Cooling shroud for 6" submersible pumps.	C	PG14	470.-
6041887	Cooling shroud for 6" submersible pumps.	C	PG14	369.-
6041890	Cooling shroud for 6" submersible pumps.	C	PG14	453.-
6041891	Cooling shroud for 6" submersible pumps.	C	PG14	453.-
6041892	Cooling shroud for 6" submersible pumps.	C	PG14	453.-
6041894	Cooling shroud for 6" submersible pumps.	C	PG14	446.-
6041896	Cooling shroud for 6" submersible pumps.	C	PG14	446.-
6042336	Cooling shroud for 6" submersible pumps.	A	PG14	996.-
6042338	Cooling shroud for 6" submersible pumps.	A	PG14	1,005.-
6042339	Cooling shroud for 6" submersible pumps.	C	PG14	1,360.-
6042340	Cooling shroud for 6" submersible pumps.	C	PG14	1,360.-
6042342	Cooling shroud for 6" submersible pumps.	C	PG14	1,360.-
6042343	Cooling shroud for 6" submersible pumps.	K	PG14	1,033.-
6042347	Cooling shroud for 6" submersible pumps.	C	PG14	1,033.-
6042348	Cooling shroud for 6" submersible pumps.	C	PG14	1,033.-
6042349	Cooling shroud for 6" submersible pumps.	C	PG14	1,033.-
6042350	Cooling shroud for 6" submersible pumps.	K	PG14	1,033.-
6042353	Cooling shroud for 6" submersible pumps.	C	PG14	1,033.-
6042354	Cooling shroud for 6" submersible pumps.	C	PG14	1,033.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Cooling shroud				
Type	Name		Price group	
				EUR
6042355	Cooling shroud for 6" submersible pumps.	C	PG14	1,033.-
6042357	Cooling shroud for 6" submersible pumps.	K	PG14	1,005.-
6042359	Cooling shroud for 6" submersible pumps.	C	PG14	1,005.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

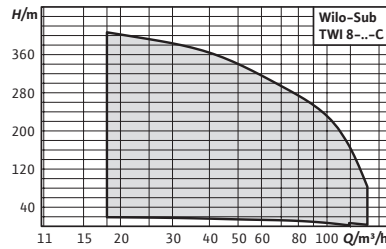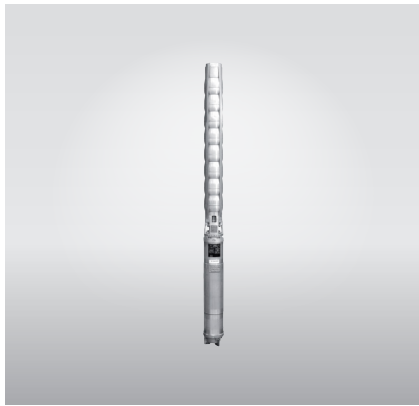


Accessories
Accessories

Page
503

Select 4 online

All information at www.wilo-select.com



Wilo-Sub TWI 8

Construction

Multistage 8" submersible pump in tie strap version for vertical or horizontal installation

Application

- For water and drinking water supply from boreholes and rainwater storage
- Process water supply
- For municipal water supply, sprinkling and irrigation
- Pressure boosting
- Lowering of the water level
- For pumping water in industrial applications
- For pumping water without long-fibre and abrasive constituents

Scope of delivery

- Hydraulics and motor ready assembled
- 4/8/10 m connection cable approved for drinking water (cross-section: 4x2.5 mm² or 4x4 mm² or single conductor)
- Installation and operating instructions

Options

- Hydraulics in stainless steel 1.4401
- Motor in stainless steel 1.4401, 1.4571 or G-CuSn10
- 60 Hz version
- Star-delta starting
- Rewindable motor

Your advantages

- Long service life thanks to corrosion-resistant stainless steel, optionally available in V4A quality
- Individually configurable motors and materials to ensure reliable operation in all applications
- Drinking water versions with ACS approval
- 4", 6", 8" and 10" versions for high flexibility
- Volume flow performance from 1 to 250 m³/h

- Rewindable motor with drinking water filling
- Configured units for special versions

Notice


Submersible pumps in other versions **on request**.



Costs for commissioning and function check on request.



Price group: PG6

Ordering information										
Sub TWI 8	Mains connection	Motor diameter	Rated power	Connec- tion	Minimum efficiency index (MEI)	Art. no.		Item no. for jacket pipe cool- ing (verti- cal)	Item no. for jacket pipe cooling (horizontal)	
		∅ in	P ₂ kW				🚚 EUR			
8.80-01-C	3~400 V, 50 Hz	8	4.00	Rp 5	≥	6075400	A	3,206.-	6043167	6043231
8.80-02-C-SD	3~400 V, 50 Hz	8	7.50	Rp 5	≥	6075401	A	3,961.-	6043124	6043199
8.80-03-C-SD	3~400 V, 50 Hz	8	11.00	Rp 5	≥	6075402	A	4,494.-	6043124	6043199
8.80-04-C-SD	3~400 V, 50 Hz	8	15.00	Rp 5	≥	6075403	A	4,776.-	6043191	6043242
8.80-05-C-SD	3~400 V, 50 Hz	8	18.50	Rp 5	≥	6075404	A	5,336.-	6043191	6043242
8.80-06-C-SD	3~400 V, 50 Hz	8	22.00	Rp 5	≥	6075405	A	6,348.-	6043191	6043242
8.80-07-C-SD	3~400 V, 50 Hz	8	30.00	Rp 5	≥	6075406	A	7,441.-	6043141	6043212
8.80-08-C-SD	3~400 V, 50 Hz	8	30.00	Rp 5	≥	6075407	A	7,706.-	6043141	6043212
8.80-09-C-SD	3~400 V, 50 Hz	8	30.00	Rp 5	≥	6075408	A	8,064.-	6043141	6043212
8.80-10-C-SD	3~400 V, 50 Hz	8	37.00	Rp 5	≥	6075409	A	9,542.-	6043171	6043235
8.80-11-C-SD	3~400 V, 50 Hz	8	45.00	Rp 5	≥	6075410	A	10,953.-	6043184	6043239
8.80-12-C-SD	3~400 V, 50 Hz	8	55.00	Rp 5	≥	6075411	A	13,954.-	6043156	-
8.80-15-C-SD	3~400 V, 50 Hz	8	75.00	Rp 5	≥	6075412	A	17,403.-	6043180	-
8.80-16-C-SD	3~400 V, 50 Hz	8	75.00	Rp 5	≥	6075413	A	17,632.-	6043180	-
8.80-18-C-SD	3~400 V, 50 Hz	8	75.00	Rp 5	≥	6075414	A	18,423.-	6043180	-
8.80-20-C-SD	3~400 V, 50 Hz	8	75.00	Rp 5	≥	6075415	A	18,759.-	6043180	-
8.90-01-C-SD	3~400 V, 50 Hz	8	5.50	Rp 5	≥	6075416	A	3,437.-	6043124	6043199
8.90-02-C-SD	3~400 V, 50 Hz	8	9.30	Rp 5	≥	6075417	A	3,889.-	6043124	6043199
8.90-03-C-SD	3~400 V, 50 Hz	8	15.00	Rp 5	≥	6075418	A	4,623.-	6043191	6043242
8.90-04-C-SD	3~400 V, 50 Hz	8	18.50	Rp 5	≥	6075419	A	5,214.-	6043191	6043242
8.90-05-C-SD	3~400 V, 50 Hz	8	22.00	Rp 5	≥	6075420	A	6,134.-	6043191	6043242
8.90-06-C-SD	3~400 V, 50 Hz	8	30.00	Rp 5	≥	6075421	A	7,373.-	6043141	6043212
8.90-07-C-SD	3~400 V, 50 Hz	8	37.00	Rp 5	≥	6075422	A	8,888.-	6043171	6043235
8.90-08-C-SD	3~400 V, 50 Hz	8	37.00	Rp 5	≥	6075423	A	9,268.-	6043171	6043235
8.90-09-C-SD	3~400 V, 50 Hz	8	45.00	Rp 5	≥	6075424	A	10,601.-	6043184	6043239
8.90-10-C-SD	3~400 V, 50 Hz	8	55.00	Rp 5	≥	6075425	A	13,442.-	6043156	-
8.90-11-C-SD	3~400 V, 50 Hz	8	55.00	Rp 5	≥	6075426	A	13,891.-	6043156	-
8.90-12-C-SD	3~400 V, 50 Hz	8	55.00	Rp 5	≥	6075427	A	14,082.-	6043156	-
8.90-13-C-SD	3~400 V, 50 Hz	8	75.00	Rp 5	≥	6075428	A	16,927.-	6043180	-
8.90-14-C-SD	3~400 V, 50 Hz	8	75.00	Rp 5	≥	6075429	A	17,547.-	6043180	-
8.90-15-C-SD	3~400 V, 50 Hz	8	75.00	Rp 5	≥	6075430	A	17,717.-	6043180	-
8.90-17-C-SD	3~400 V, 50 Hz	8	93.00	Rp 5	≥	6075431	A	21,157.-	6043188	6043253
8.90-18-C-SD	3~400 V, 50 Hz	8	93.00	Rp 5	≥	6075432	A	21,521.-	6043188	6043253
8.90-20-C-SD	3~400 V, 50 Hz	8	93.00	Rp 5	≥	6075433	A	22,035.-	6043188	6043253

🚚 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, 📞 = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Cooling shroud					
Type	Name		Price group		
					EUR
4064430	Cooling shroud for 4" submersible pumps.		L	PG14	287.-
4064431	Cooling shroud for 4" submersible pumps.		L	PG14	312.-
4064432	Cooling shroud for 4" submersible pumps.		L	PG14	347.-
6037936	Cooling shroud for 4" submersible pumps.		C	PG14	576.-
6037937	Cooling shroud for 4" submersible pumps.		K	PG14	535.-
6038901	Cooling shroud for 4" submersible pumps.		C	PG14	568.-
6038903	Cooling shroud for 4" submersible pumps.		C	PG14	626.-
6038904	Cooling shroud for 4" submersible pumps.		C	PG14	694.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

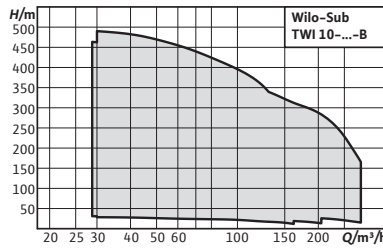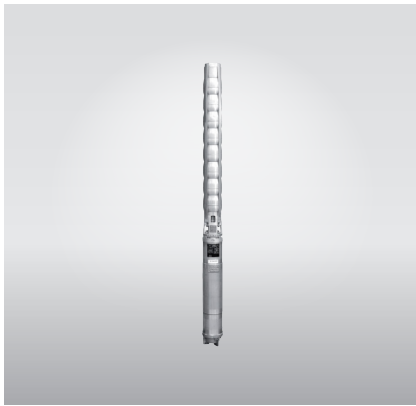

Accessories
Accessories

Page
503

Select 4online
All information at www.wilo-select.com

Wilo-Sub TWI 10

Construction

Multistage 10" submersible pump in tie strap version for vertical or horizontal installation

Application

- For water and drinking water supply from boreholes and rainwater storage
- Process water supply
- For municipal water supply, sprinkling and irrigation
- Pressure boosting
- Lowering of the water level
- For pumping water in industrial applications
- For pumping water without long-fibre and abrasive constituents

Scope of delivery

- Hydraulics + motor completely assembled
- Connection cable approved for drinking water, cable cross-section and length per standard design or per customer request
- Installation and operating instructions

Options

Your advantages

- Energy-efficient, optimised hydraulics with efficiency of up to 80 %
- Long service life thanks to corrosion-resistant stainless steel, optionally in V4A quality
- ACS certified for drinking water applications
- High range of performance from 1 to 250 m³/h
- A high degree of flexibility thanks to versions in the 4, 6, 8 and 10-inch area

- Hydraulics in stainless steel 1.4401
- Motor in stainless steel 1.4401, 1.4571 or G-CuSn10
- 60 Hz version
- Star-delta starting
- Rewindable motor
- Rewindable motor with drinking water filling as special version


Notice

Submersible pumps in other versions **on request**.

Costs for commissioning and function check on request.

Price group:

Ordering information	
Art. no.	
All types on request	On Request A

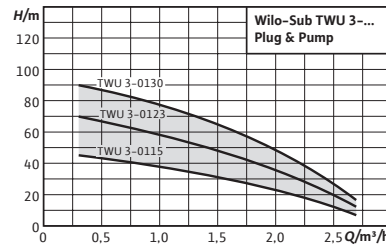

Accessories
Accessories

Page
503

Select 4 online

All information at www.wilo-select.com

Wilo-Sub TWU 3 Plug & Pump



Construction

Water-supply unit with submersible pump, control and complete accessories.

Application

Water-supply unit for

- Water supply from boreholes, wells and rainwater storage tanks
- Domestic water supply, sprinkling and irrigation
- Pumping of water without long-fibre and abrasive constituents

Scope of delivery

Wilo Plug & Pump Sub-I package for garden irrigation of private greenery in the domestic sector:

- Fully mounted
- 30 m connection cable with drinking water approval (cross-section: 4 x 1.5 mm²)
- Switchbox with capacitor, thermal motor protection and On/Off switch
- Wilo-HiControl 1 (FC); automatic flow monitor and pressure controller with integrated dry-running protection
- 30 m guy cable
- Installation and operating instructions

Wilo Plug & Pump Sub-II package for domestic water supply in single-family and multi-family houses:

- Fully mounted
- 30 m connection cable with drinking water approval (cross-section: 4 x 1.5 mm²)
- Switchbox with capacitor, thermal motor protection and On/Off switch

Your advantages

- Easy installation due to preinstalled and pre-wired components
- Parts that come in contact with the fluid are corrosion-free
- Integrated non-return valve

- Wilo pressure switching 0 – 10 bar, including 18 l diaphragm expansion tank, manometer, shut-off device and pressure switch
- 30 m guy cable
- Installation and operating instructions

Options

- Motor versions for 3~230 V, 50 Hz; 1~230 V, 60 Hz; 3~380 V, 60 Hz

Notice


Wilo-Sub-I sprinkler package for garden irrigation (FC) incl. HiControl. Ready-to-plug with 30 m connection cable wired. 30 m safety rope, small parts for hydraulic connection, cable ties and cable terminals.

Wilo-Sub-II sprinkler package for domestic water supply (DS)


including pressure switching. Ready-to-plug with 30 m connection cable wired. 18 l diaphragm pressure vessel, PN 16, 30 m safety rope, small parts for hydraulic connection, cable ties and cable terminals.


Costs for commissioning and function check on request.

Price group: PG5

Ordering information							
Sub TWU 3 Plug & Pump	Motor diameter	Rated power	Connection	Mains connection	Art. no.		
	\varnothing in	P_2 kW					EUR
3-0115-Plug&Pump/FC	3	0.37	Rp 1	1~230 V, 50 Hz	4091647	L	1,287.-
3-0123-Plug&Pump/FC	3	0.55	Rp 1	1~230 V, 50 Hz	4091649	L	1,349.-
3-0130-Plug&Pump/FC	3	0.75	Rp 1	1~230 V, 50 Hz	4091650	L	1,477.-

Price group: PG5

Ordering information							
Sub TWU 3 Plug & Pump	Motor diameter	Rated power	Connection	Mains connection	Art. no.		
	\varnothing in	P_2 kW					EUR
3-0115-Plug&Pump/DS	3	0.37	Rp 1	1~230 V, 50 Hz	4091654	C	1,297.-
3-0123-Plug&Pump/DS	3	0.55	Rp 1	1~230 V, 50 Hz	4091655	L	1,387.-
3-0130-Plug&Pump/DS	3	0.75	Rp 1	1~230 V, 50 Hz	4091656	C	1,511.-

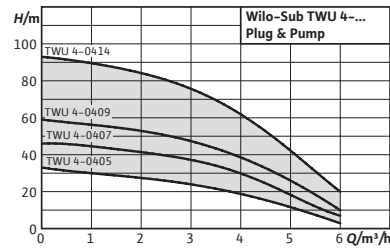

Accessories
Accessories

Page
503

Select 4 online

All information at www.wilo-select.com

Wilo-Sub TWU 4 Plug & Pump



Construction

Water-supply unit with submersible pump, control and complete accessories.

Application

Water-supply unit for domestic water supply in domestic applications

- Washing machines
- Garden sprinkling
- Transferring by pumping and filling
- Taps for process water

Scope of delivery

Wilo Plug & Pump Sub-I package for garden irrigation of private greenery in the domestic sector:

- Fully mounted
- 30 m connection cable with drinking water approval (cross-section: 4 x 1.5 mm²)
- Switchbox with capacitor, thermal motor protection and On/Off switch
- Wilo-HiControl 1 (FC); automatic flow monitor and pressure controller with integrated dry-running protection
- 30 m guy cable
- Assembly parts: 2x screwed clamp ring connections, R 1¼ to R 1 reducer, 8x cable binders
- Installation and operating instructions

Wilo Plug & Pump Sub-II package for domestic water supply in single-family and multi-family houses:

- Fully mounted

Your advantages


- Easy installation due to preinstalled and pre-wired components
- Parts that come in contact with the fluid are corrosion-free
- Integrated non-return valve
- Low-wearing due to floating impellers

- 30 m connection cable with drinking water approval (cross-section: 4 x 1.5 mm²)
- Switchbox with capacitor, thermal motor protection and On/Off switch
- Wilo pressure switching 0 – 10 bar, including 18 l diaphragm expansion tank, manometer, shut-off device and pressure switch
- 30 m guy cable
- Assembly parts: T-connector, R 1¼ to R 1 reducer, 8x cable binders
- Installation and operating instructions


Notice

Costs for commissioning and function check on request.

Price group: PG5

Ordering information								
Sub TWU 4 Plug & Pump	Motor diameter	Rated power	Connection	Minimum efficiency index (MEI)	Mains connection	Art. no.		
	\varnothing in	P_2 kW						EUR
4-0405-C-Plug&Pump/FC	4	0.37	Rp 1¼	≥0.7	1~230 V, 50 Hz	6049385	L	1,251.-
4-0407-C-Plug&Pump/FC	4	0.55	Rp 1¼	≥0.7	1~230 V, 50 Hz	6049386	L	1,271.-
4-0409-C-Plug&Pump/FC	4	0.75	Rp 1¼	≥0.7	1~230 V, 50 Hz	6049387	L	1,295.-

Price group: PG5

Ordering information								
Sub TWU 4 Plug & Pump	Motor diameter	Rated power	Connection	Minimum efficiency index (MEI)	Mains connection	Art. no.		
	\varnothing in	P_2 kW						EUR
4-0407-C-Plug&Pump/DS	4	0.55	Rp 1¼	≥0.7	1~230 V, 50 Hz	6049388	L	1,251.-
4-0409-C-Plug&Pump/DS	4	0.75	Rp 1¼	≥0.7	1~230 V, 50 Hz	6049389	L	1,365.-
4-0414-C-Plug&Pump/DS	4	1.10	Rp 1¼	≥0.7	1~230 V, 50 Hz	6049390	L	1,424.-



W-CTRL-CC-H

Construction

Comfort control system for all conventional pumps in glandless and glanded design with fixed speeds and three-phase motors.

Application

For stageless power adjustment to the variable operating states of single, double or multi-pump systems (up to 6 pumps). Controlling depends on the differential pressure Δp , feed/return temperature ($\pm T$) or differential temperature (ΔT), including the free adjustment of the duty point by means of advance correction of the full-load pump output.

Price group: PG14

Ordering information			
Type	Art. no.		EUR
1 x 2,4 DOL FC WM WP	2540254	K	6,374.-
1 x 2,4 DOL WM WP	2540230	K	3,934.-
1 x 4,0 DOL FC WM WP	2540256	K	6,455.-
1 x 4,0 DOL WM WP	2540232	K	3,934.-
1 x 6,3 DOL FC WM WP	2540258	K	6,691.-
1 x 6,3 DOL WM WP	2540234	K	3,938.-
1 x 10,0 DOL FC WM WP	2540260	K	7,040.-
1 x 10,0 DOL WM WP	2540236	K	3,942.-
1 x 12,0 DOL FC BM WP	2540262	K	8,298.-
1 x 12,0 DOL WM WP	2540238	K	4,199.-
1 x 13,0 SD FC BM WP	2540296	K	8,442.-
1 x 13,0 SD WM WP	2540278	K	5,035.-
1 x 16,0 DOL FC BM WP	2540264	K	8,419.-
1 x 16,0 DOL WM WP	2540240	K	4,251.-
1 x 16,0 SD FC BM WP	2536740	K	8,689.-
1 x 16,0 SD WM WP	2536738	K	5,093.-
1 x 19,0 SD FC BM WP	2540298	K	9,274.-
1 x 19,0 SD WM WP	2540280	K	5,128.-
1 x 20,0 DOL FC BM WP	2540266	K	10,474.-
1 x 20,0 DOL WM WP	2540242	K	4,444.-
1 x 24,0 DOL FC BM WP	2540268	K	10,541.-
1 x 24,0 DOL WM WP	2540244	K	4,694.-
1 x 24,0 SD FC BM WP	2540300	K	10,709.-
1 x 24,0 SD WM WP	2540282	K	6,010.-
1 x 32,0 DOL FC BM WP	2540270	K	11,424.-

Notice: Scope of delivery includes 1 adapter and 2 gaskets

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo


Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG14


Ordering information			
Type	Art. no.		EUR
1 x 32,0 DOL WM WP	2540246	K	4,694.-
1 x 32,0 SD FC BM WP	2540302	K	11,577.-
1 x 32,0 SD WM WP	2540284	K	6,308.-
1 x 37,5 SD FC BM WP	2540304	K	13,145.-
1 x 37,5 SD WM WP	2540286	K	6,535.-
1 x 37,0 DOL FC BM WP	2540272	K	12,657.-
1 x 37,0 DOL WM WP	2540248	K	5,088.-
1 x 43,0 SD FC BM WP	2540306	K	13,135.-
1 x 43,0 SD WM WP	2540288	K	6,653.-
1 x 44,0 DOL FC BM WP	2540274	K	13,823.-
1 x 44,0 DOL WM WP	2540250	K	5,147.-
1 x 49,0 SD FC BM WP	2540308	K	15,096.-
1 x 49,0 SD WM WP	2540290	K	6,893.-
1 x 61,0 DOL FC BM WP	2540276	K	14,973.-
1 x 61,0 DOL WM WP	2540252	K	5,817.-
1 x 61,0 SD FC BM WP	2536744	K	16,771.-
1 x 61,0 SD WM WP	2536742	K	7,187.-
1 x 72,0 SD FC BM WP	2540310	K	16,946.-
1 x 72,0 SD WM WP	2540292	K	7,352.-
1 x 89,0 SD FC BM WP	2540312	K	19,786.-
1 x 89,0 SD WM WP	2540294	K	7,484.-
1 x 104,0 SD FC BM WP	2536748	K	20,919.-
1 x 104,0 SD WM WP	2536746	K	8,249.-
2 x 2,4 DOL FC WM WP	2540255	K	6,922.-
2 x 2,4 DOL WM WP	2540231	K	4,330.-
2 x 4,0 DOL FC WM WP	2540257	K	7,008.-
2 x 4,0 DOL WM WP	2540233	K	4,330.-
2 x 6,3 DOL FC WM WP	2540259	K	7,244.-
2 x 6,3 DOL WM WP	2540235	K	4,291.-
2 x 10,0 DOL FC WM WP	2540261	K	7,764.-
2 x 10,0 DOL WM WP	2540237	K	4,324.-
2 x 12,0 DOL FC BM WP	2540263	K	8,616.-
2 x 12,0 DOL WM WP	2540239	K	4,626.-
2 x 13,0 SD FC BM WP	2540297	K	9,183.-
2 x 13,0 SD WM WP	2540279	K	5,762.-
2 x 16,0 DOL FC BM WP	2540265	K	9,023.-
2 x 16,0 DOL WM WP	2540241	K	4,675.-
2 x 16,0 SD FC BM WP	2536741	K	9,432.-
2 x 16,0 SD WM WP	2536739	K	5,824.-
2 x 19,0 SD FC BM WP	2540299	K	10,200.-
2 x 19,0 SD WM WP	2540281	K	5,859.-
2 x 20,0 DOL FC BM WP	2540267	K	11,223.-
2 x 20,0 DOL WM WP	2540243	K	4,913.-
2 x 24,0 DOL FC BM WP	2540269	K	11,303.-
2 x 24,0 DOL WM WP	2540245	K	5,170.-

Notice: Scope of delivery includes 1 adapter and 2 gaskets

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.


Ordering information			
Type	Art. no.		
			EUR
2 x 24,0 SD FC BM WP	2540301	K	11,731.-
2 x 24,0 SD WM WP	2540283	K	6,812.-
2 x 32,0 DOL FC BM WP	2540271	K	12,329.-
2 x 32,0 DOL WM WP	2540247	K	5,481.-
2 x 32,0 SD FC BM WP	2540303	K	12,517.-
2 x 32,0 SD WM WP	2540285	K	7,213.-
2 x 37,5 SD FC BM WP	2540305	K	14,266.-
2 x 37,5 SD WM WP	2540287	K	7,560.-
2 x 37,0 DOL FC BM WP	2540273	K	14,653.-
2 x 37,0 DOL WM WP	2540249	K	6,190.-
2 x 43,0 SD FC BM WP	2540307	K	14,915.-
2 x 43,0 SD WM WP	2540289	K	7,619.-
2 x 44,0 DOL FC BM WP	2540275	K	15,059.-
2 x 44,0 DOL WM WP	2540251	K	6,052.-
2 x 49,0 SD BM WP	2540291	K	9,963.-
2 x 49,0 SD FC BM WP	2540309	K	16,570.-
2 x 61,0 DOL FC BM WP	2540277	K	16,264.-
2 x 61,0 DOL WM WP	2540253	K	6,681.-
2 x 61,0 SD BM WP	2536743	K	9,965.-
2 x 61,0 SD FC BM WP	2536745	K	18,842.-
2 x 72,0 SD BM WP	2540293	K	10,652.-
2 x 72,0 SD FC BM WP	2540311	K	19,191.-
2 x 89,0 SD BM WP	2540295	K	11,299.-
2 x 89,0 SD FC BM WP	2540313	K	22,015.-
2 x 104,0 SD BM WP	2536747	K	12,184.-
2 x 104,0 SD FC BM WP	2536749	K	23,608.-



Notice: Scope of delivery includes 1 adapter and 2 gaskets


Electrical accessories – switchgears						
Type	Description		Art. no.		Price group	
						EUR
Switchgear ER-2 2 x 10.0 WM	Switchgear for wall fixation for pressure-dependent operation of two pumps, 230 and 400 V connection voltage.	Switching capacity max. 10 A	2511288	C	PG14	1,679.-
Switchgear ER1-4,0-SS	Control device with electronic motor protection, test run, main switch / control switch, with low-water display and power interruption display, potential-free collective fault signal / collective run signal, IP54, can be used for 230 V and 400 V including fine resolution level control relay and soft starter. Control device for pumps with motors, suitable for direct starting, version for star-delta motors on request.	Nominal value max. 10 A	2516236	K	PG14	3,119.-
Switchgear ER1-4,0 DA-NR	Control device with electronic motor protection, test run, main switch / control switch, with low-water display and power interruption display, potential-free collective fault signal / collective run signal, IP54, can be used for 230 V and 400 V including fine resolution level control relay. Control device for pumps with motors, suitable for direct starting, version for star-delta motors on request.	Nominal value max. 10 A	2516235	K	PG14	1,577.-
Switchgear ER1-5,5-SS	Control device with electronic motor protection, test run, main switch / control switch, with low-water display and power interruption display, potential-free collective fault signal / collective run signal, IP54, can be used for 230 V and 400 V including fine resolution level control relay and soft starter. Control device for pumps with motors, suitable for direct starting, version for star-delta motors on request.	Nominal value max. 14 A	2516228	K	PG14	3,199.-
Switchgear ER1-5,5 DA	Control device with electronic motor protection, test run, main switch / control switch, with low-water display and power interruption display, potential-free collective fault signal / collective run signal, protection class IP54 (ER1-4.0/IP41), can be used for 230 V and 400 V control device for pumps with motors suitable for direct starting.	Nominal value max. 14 A	2515336	C	PG14	2,393.-
Switchgear ER1-5,5 DA-NR	Control device with electronic motor protection, test run, main switch / control switch, with low-water display and power interruption display, potential-free collective fault signal / collective run signal, IP54, can be used for 230 V and 400 V including fine resolution level control relay. Control device for pumps with motors, suitable for direct starting, version for star-delta motors on request.	Nominal value max. 14 A	2516222	K	PG14	2,578.-
Switchgear ER1-5,5 SD	Control device with electronic motor protection, test run, main switch / control switch, with low-water display and power interruption display, potential-free collective fault signal / collective run signal, IP54, can be used for 230 V and 400 V control device for pumps with motors suitable for star-delta starting.	Nominal value max. 14 A	2506610	K	PG14	2,371.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.


Electrical accessories – switchgears						
Type	Description		Art. no.		Price group	
						EUR
Switchgear ER1-7,5-SS	Control device with electronic motor protection, test run, main switch / control switch, with low-water display and power interruption display, potential-free collective fault signal / collective run signal, IP54, can be used for 230 V and 400 V including fine resolution level control relay and soft starter. Control device for pumps with motors, suitable for direct starting, version for star-delta motors on request.	Nominal value max. 18.5 A	2515347	K	PG14	3,546.-
Switchgear ER1-7,5 DA	Control device with electronic motor protection, test run, main switch / control switch, with low-water display and power interruption display, potential-free collective fault signal / collective run signal, protection class IP54 (ER1-4.0/IP41), can be used for 230 V and 400 V control device for pumps with motors suitable for direct starting.	Nominal value max. 18.5 A	2515337	K	PG14	2,398.-
Switchgear ER1-7,5 DA-NR	Control device with electronic motor protection, test run, main switch / control switch, with low-water display and power interruption display, potential-free collective fault signal / collective run signal, IP54, can be used for 230 V and 400 V including fine resolution level control relay. Control device for pumps with motors, suitable for direct starting, version for star-delta motors on request.	Nominal value max. 18.5 A	2516223	K	PG14	2,923.-
Switchgear ER1-7,5 SD	Control device with electronic motor protection, test run, main switch / control switch, with low-water display and power interruption display, potential-free collective fault signal / collective run signal, IP54, can be used for 230 V and 400 V control device for pumps with motors suitable for star-delta starting.	Nominal value max. 18.5 A	2506614	K	PG14	2,601.-
Switchgear ER1-11,0-SS	Control device with electronic motor protection, test run, main switch / control switch, with low-water display and power interruption display, potential-free collective fault signal / collective run signal, IP54, can be used for 230 V and 400 V including fine resolution level control relay and soft starter. Control device for pumps with motors, suitable for direct starting, version for star-delta motors on request.	Nominal value max. 24 A	2516229	K	PG14	3,652.-
Switchgear ER1-11,0 DA	Control device with electronic motor protection, test run, main switch / control switch, with low-water display and power interruption display, potential-free collective fault signal / collective run signal, protection class IP54 (ER1-4.0/IP41), can be used for 230 V and 400 V control device for pumps with motors suitable for direct starting.	Nominal value max. 24 A	2515338	K	PG14	2,715.-


 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Electrical accessories – switchgears						
Type	Description		Art. no.		Price group	
						EUR
Switchgear ER1-11,0 DA-NR	Control device with electronic motor protection, test run, main switch / control switch, with low-water display and power interruption display, potential-free collective fault signal / collective run signal, IP54, can be used for 230 V and 400 V including fine resolution level control relay. Control device for pumps with motors, suitable for direct starting, version for star-delta motors on request.	Nominal value max. 24 A	2516224	K	PG14	3,085.-
Switchgear ER1-11,0 SD	Control device with electronic motor protection, test run, main switch / control switch, with low-water display and power interruption display, potential-free collective fault signal / collective run signal, IP54, can be used for 230 V and 400 V control device for pumps with motors suitable for star-delta starting.	Nominal value max. 24 A	2506618	K	PG14	2,642.-
Switchgear ER1-15,0-SS	Control device with electronic motor protection, test run, main switch / control switch, with low-water display and power interruption display, potential-free collective fault signal / collective run signal, IP54, can be used for 230 V and 400 V including fine resolution level control relay and soft starter. Control device for pumps with motors, suitable for direct starting, version for star-delta motors on request.	Nominal value max. 32 A	2516230	K	PG14	5,287.-
Switchgear ER1-15,0 DA	Control device with electronic motor protection, test run, main switch / control switch, with low-water display and power interruption display, potential-free collective fault signal / collective run signal, protection class IP54 (ER1-4.0/IP41), can be used for 230 V and 400 V control device for pumps with motors suitable for direct starting.	Nominal value max. 32 A	2515339	K	PG14	2,684.-
Switchgear ER1-15,0 DA-NR	Control device with electronic motor protection, test run, main switch / control switch, with low-water display and power interruption display, potential-free collective fault signal / collective run signal, IP54, can be used for 230 V and 400 V including fine resolution level control relay. Control device for pumps with motors, suitable for direct starting, version for star-delta motors on request.	Nominal value max. 32 A	2516225	K	PG14	3,137.-
Switchgear ER1-15,0 SD	Control device with electronic motor protection, test run, main switch / control switch, with low-water display and power interruption display, potential-free collective fault signal / collective run signal, IP54, can be used for 230 V and 400 V control device for pumps with motors suitable for star-delta starting.	Nominal value max. 32 A	2506622	K	PG14	2,815.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo


Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.



Electrical accessories – switchgears						
Type	Description		Art. no.		Price group	
						EUR
Switchgear ER1-18,5-SS	Control device with electronic motor protection, test run, main switch / control switch, with low-water display and power interruption display, potential-free collective fault signal / collective run signal, IP54, can be used for 230 V and 400 V including fine resolution level control relay and soft starter. Control device for pumps with motors, suitable for direct starting, version for star-delta motors on request.	Nominal value max. 39 A	2516231	K	PG14	5,728.-
Switchgear ER1-18,5 DA	Control device with electronic motor protection, test run, main switch / control switch, with low-water display and power interruption display, potential-free collective fault signal / collective run signal, protection class IP54 (ER1-4.0/IP41), can be used for 230 V and 400 V control device for pumps with motors suitable for direct starting.	Nominal value max. 39 A	2515340	K	PG14	2,731.-
Switchgear ER1-18,5 DA-NR	Control device with electronic motor protection, test run, main switch / control switch, with low-water display and power interruption display, potential-free collective fault signal / collective run signal, IP54, can be used for 230 V and 400 V including fine resolution level control relay. Control device for pumps with motors, suitable for direct starting, version for star-delta motors on request.	Nominal value max. 39 A	2516226	K	PG14	2,850.-
Switchgear ER1-18,5 SD	Control device with electronic motor protection, test run, main switch / control switch, with low-water display and power interruption display, potential-free collective fault signal / collective run signal, IP54, can be used for 230 V and 400 V control device for pumps with motors suitable for star-delta starting.	Nominal value max. 39 A	2516220	K	PG14	2,624.-
Switchgear ER1-22,0-SS	Control device with electronic motor protection, test run, main switch / control switch, with low-water display and power interruption display, potential-free collective fault signal / collective run signal, IP54, can be used for 230 V and 400 V including fine resolution level control relay and soft starter. Control device for pumps with motors, suitable for direct starting, version for star-delta motors on request.	Nominal value max. 46 A	2516232	K	PG14	6,340.-
Switchgear ER1-22,0 DA	Control device with electronic motor protection, test run, main switch / control switch, with low-water display and power interruption display, potential-free collective fault signal / collective run signal, protection class IP54 (ER1-4.0/IP41), can be used for 230 V and 400 V control device for pumps with motors suitable for direct starting.	Nominal value max. 46 A	2515341	K	PG14	3,194.-


Electrical accessories – switchgears						
Type	Description		Art. no.		Price group	
						EUR
Switchgear ER1-22,0 DA-NR	Control device with electronic motor protection, test run, main switch / control switch, with low-water display and power interruption display, potential-free collective fault signal / collective run signal, IP54, can be used for 230 V and 400 V including fine resolution level control relay. Control device for pumps with motors, suitable for direct starting, version for star-delta motors on request.	Nominal value max. 46 A	2516227	K	PG14	3,453.-
Switchgear ER1-22,0 SD	Control device with electronic motor protection, test run, main switch / control switch, with low-water display and power interruption display, potential-free collective fault signal / collective run signal, IP54, can be used for 230 V and 400 V control device for pumps with motors suitable for star-delta starting.	Nominal value max. 46 A	2516221	K	PG14	3,324.-
Switchgear ER 1 x 10,0 WM	Control device with electronic motor protection, test run, main switch / control switch, with low-water display and power interruption display, potential-free collective fault signal / collective run signal, protection class IP54 (ER1-4.0/IP41), can be used for 230 V and 400 V control device for pumps with motors suitable for direct starting.	Switching capacity max. 10 A	2514754	C	PG14	1,096.-
Switchgear ESK 1	Control device for connecting a pump for supplying water from boreholes and tanks (for single-family and multi-family houses), including 2 submersible electrodes and 2 holders for wall fixation. With low-water display, Manual-0-Automatic selection switch, run/fault signal lights and electronic motor protection against excess current. Connection option for 2 immersion probes, float switch, pressure switch. Protection class IP54, can be used for 230 V and 400 V, suitable for direct starting.	Nominal value 1 – 12 A	4082990	L	PG14	455.-
Switchgear PSK 1	Control device for connecting a pump for supplying water from boreholes and tanks (for single-family and multi-family houses), including 2 submersible electrodes and 2 holders for wall fixation. With low-water display, Manual-0-Automatic selection switch, run/fault signal lights and electronic motor protection against excess current. Connection option for 2 immersion probes, float switch, pressure switch. Protection class IP54, can be used for 230 V and 400 V, suitable for direct starting.	Rating 10 – 23 A	4084073	L	PG14	648.-
Switchgear SK 277	Including three electrodes, each with 3 m cable for the low-water cut-out switchgear with indirect connection in the break tank. Connected load for motors up to max. 3 kW.	-	180495295	L	PG14	825.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.


Mechanical accessories						
Type	Description		Art. no.		Price group	
						EUR
Ball valve R 2½	Ball valve with lever ball valve in PN 42 up to Rp ¾, in PN 35 starting from Rp 1.	R 2½	2663976	L	PG14	108.-
Ball valve Rp 1	Ball valve with lever ball valve in PN 42 up to Rp ¾, in PN 35 starting from Rp 1.	Rp 1	2663980	L	PG14	22.-
Ball valve Rp 1¼	Ball valve with lever ball valve in PN 42 up to Rp ¾, in PN 35 starting from Rp 1.	Rp 1¼	2663979	C	PG14	25.-
Ball valve Rp 1½	Ball valve with lever ball valve in PN 42 up to Rp ¾, in PN 35 starting from Rp 1.	Rp 1½	2663978	C	PG14	41.-
Ball valve Rp 2	Ball valve with lever ball valve in PN 42 up to Rp ¾, in PN 35 starting from Rp 1.	Rp 2	2663977	L	PG14	71.-
Ball valve Rp ¾	Ball valve with lever ball valve in PN 42 up to Rp ¾, in PN 35 starting from Rp 1.	Rp ¾	2511302	K	PG14	4.-
Ball valve Rp ½	Ball valve with lever ball valve in PN 42 up to Rp ¾, in PN 35 starting from Rp 1.	Rp ½	2663982	C	PG14	7.-
Ball valve Rp ¾	Ball valve with lever ball valve in PN 42 up to Rp ¾, in PN 35 starting from Rp 1.	Rp ¾	2663981	C	PG14	11.-
Cable terminal (stainless steel) for stainless steel cable (Ø 3 mm)	Stainless steel terminal with bolt	-	21040	L	PG14	4.-
Diaphragm pressure vessel Typ D (12D-PN16)	Expansion tank with exchangeable diaphragm, R ¾ Caution: These expansion tanks are not in conformity with DIN 4807/T5 and, for that reason, not authorised for utilisation in drinking water systems in Germany. For diaphragm vessels approved for use in drinking , see pressure boosting accessories.	12D-PN16	2515517	K	PG14	94.-
Diaphragm pressure vessel Typ D (18D-PN11)	Expansion tank with exchangeable diaphragm, R ¾ Caution: These expansion tanks are not in conformity with DIN 4807/T5 and, for that reason, not authorised for utilisation in drinking water systems in Germany. For diaphragm vessels approved for use in drinking , see pressure boosting accessories.	18D-PN11	2502038	C	PG14	114.-
Diaphragm pressure vessel Typ D (25D-PN10)	Expansion tank with exchangeable diaphragm, R ¾ Caution: These expansion tanks are not in conformity with DIN 4807/T5 and, for that reason, not authorised for utilisation in drinking water systems in Germany. For diaphragm vessels approved for use in drinking , see pressure boosting accessories.	25D-PN10	2515518	K	PG14	131.-
Diaphragm pressure vessel Typ D (33D-PN10)	Expansion tank with exchangeable diaphragm, R ¾ Caution: These expansion tanks are not in conformity with DIN 4807/T5 and, for that reason, not authorised for utilisation in drinking water systems in Germany. For diaphragm vessels approved for use in drinking , see pressure boosting accessories.	33D-PN10	2515519	C	PG14	230.-
Diaphragm pressure vessel Typ DE (60DE)	Expansion tank with exchangeable diaphragm, PN 10, 1" connection up to 100DE, 1¼" connection starting from 200DE Caution: These expansion tanks are not in conformity with DIN 4807/T5 and, for that reason, not authorised for utilisation in drinking water systems in Germany in accordance with DIN 1988. For diaphragm vessels approved for use in drinking water in accordance with DIN 1988, see pressure boosting system accessories.	60DE	2515523	L	PG14	474.-



 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Mechanical accessories						
Type	Description	Art. no.		Price group		
						EUR
Diaphragm pressure vessel Typ DE (80DE)	Expansion tank with exchangeable diaphragm, PN 10, 1" connection up to 100DE, 1¼" connection starting from 200DE Caution: These expansion tanks are not in conformity with DIN 4807/T5 and, for that reason, not authorised for utilisation in drinking water systems in Germany in accordance with DIN 1988. For diaphragm vessels approved for use in drinking water in accordance with DIN 1988, see pressure boosting system accessories.	80DE	2515524	L	PG14	549.-
Diaphragm pressure vessel Typ DE (100DE)	Expansion tank with exchangeable diaphragm, PN 10, 1" connection up to 100DE, 1¼" connection starting from 200DE Caution: These expansion tanks are not in conformity with DIN 4807/T5 and, for that reason, not authorised for utilisation in drinking water systems in Germany in accordance with DIN 1988. For diaphragm vessels approved for use in drinking water in accordance with DIN 1988, see pressure boosting system accessories.	100DE	2515525	L	PG14	931.-
Diaphragm pressure vessel Typ DE (200DE)	Expansion tank with exchangeable diaphragm, PN 10, 1" connection up to 100DE, 1¼" connection starting from 200DE Caution: These expansion tanks are not in conformity with DIN 4807/T5 and, for that reason, not authorised for utilisation in drinking water systems in Germany in accordance with DIN 1988. For diaphragm vessels approved for use in drinking water in accordance with DIN 1988, see pressure boosting system accessories.	200DE	2511823	L	PG14	1,000.-
Diaphragm pressure vessel Typ DE (300DE)	Expansion tank with exchangeable diaphragm, PN 10, 1" connection up to 100DE, 1¼" connection starting from 200DE Caution: These expansion tanks are not in conformity with DIN 4807/T5 and, for that reason, not authorised for utilisation in drinking water systems in Germany in accordance with DIN 1988. For diaphragm vessels approved for use in drinking water in accordance with DIN 1988, see pressure boosting system accessories.	300DE	2515526	L	PG14	1,043.-
Diaphragm pressure vessel Typ DE (500DE)	Expansion tank with exchangeable diaphragm, PN 10, 1" connection up to 100DE, 1¼" connection starting from 200DE Caution: These expansion tanks are not in conformity with DIN 4807/T5 and, for that reason, not authorised for utilisation in drinking water systems in Germany in accordance with DIN 1988. For diaphragm vessels approved for use in drinking water in accordance with DIN 1988, see pressure boosting system accessories.	500DE	2511831	C	PG14	2,282.-
Diaphragm valve DN 80, PN 16	Prefill valve for open tanks with up to 1500 l usable volume for replenishment.	DN 80/ PN 16	2526771	C	PG14	2,572.-
Diaphragm valve DN 100, PN 16	Prefill valve for open tanks with up to 1500 l usable volume for replenishment.	DN 100/ PN 16	2526772	C	PG14	2,841.-
Diaphragm valve DN 125, PN 16	Prefill valve for open tanks with up to 1500 l usable volume for replenishment.	DN 125/ PN 16	2526773	K	PG14	5,218.-
Drain valve UEV 1¼"	For draining the ascending pipe to allow air to pass through the ventilation valve.	1¼"	18173	A	PG14	75.-
Drain valve UEV 1½"	For draining the ascending pipe to allow air to pass through the ventilation valve.	1½"	18202	A	PG14	102.-
Drain valve UEV 2"	For draining the ascending pipe to allow air to pass through the ventilation valve.	2"	18174	A	PG14	150.-
Float valve G 1¼"	-	G 1¼"	2521896	L	PG14	248.-
Float valve G 1½"	-	G 1½"	2521897	L	PG14	301.-
Float valve G 2"	-	G 2"	2515550	L	PG14	660.-


 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.


Mechanical accessories						
Type	Description		Art. no.		Price group	
						EUR
Full-stroke safety valve R 1, PN 6	Blow-off pressure 6 bar, red brass	R 1	2007136	L	PG14	133.-
Full-stroke safety valve R 1, PN 10	Blow-off pressure 10 bar, red brass	R 1	500814799	L	PG14	125.-
Full-stroke safety valve R 1, PN 16	Blow-off pressure 16 bar, red brass	R 1	2007146	C	PG14	606.-
Full-stroke safety valve R 1¼, PN 6	Blow-off pressure 6 bar, red brass	R 1¼	2007137	L	PG14	170.-
Full-stroke safety valve R 1¼, PN 10	Blow-off pressure 10 bar, red brass	R 1¼	2007138	L	PG14	169.-
Full-stroke safety valve R 1¼, PN 16	Blow-off pressure 16 bar, red brass	R 1¼	500814891	L	PG14	682.-
Full-stroke safety valve R ¾, PN 6	Blow-off pressure 6 bar, red brass	R ¾	2007135	L	PG14	282.-
Full-stroke safety valve R ¾, PN 10	Blow-off pressure 10 bar, red brass	R ¾	500814696	L	PG14	290.-
Full-stroke safety valve R ¾, PN 16	Blow-off pressure 16 bar, red brass	R ¾	2007147	C	PG14	454.-
Non-return valve RV/S R 1	Non-return valve without screwed connection, PN 10	-	2660842	L	PG14	83.-
Non-return valve RV/S R 1¼	Non-return valve without screwed connection, PN 10	-	2660840	L	PG14	92.-
Non-return valve RV/S R 1½	Non-return valve without screwed connection, PN 10	-	502472493	L	PG14	118.-
Non-return valve RV/S R 2	Non-return valve without screwed connection, PN 10	-	2660841	L	PG14	227.-
Non-return valve RV/S R 2½	Non-return valve without screwed connection, PN 10	-	502465398	C	PG14	118.-
Non-return valve RV/S R ¾	Non-return valve without screwed connection, PN 10	-	2661842	C	PG14	53.-
Pilot valve as control valve for diaphragm valve, R ½	Pilot valve as control valve for diaphragm valve, R ½	R ½	501334690	L	PG14	225.-
Pressure gauge 0 - 6 bar	Pressure gauge with R ¼ connection, connection on back of pressure gauge.	0 to 6 bar	2028687	L	PG15	11.-
Pressure gauge 0 - 10 bar	Pressure gauge with R ¼ connection, connection on back of pressure gauge.	0 - 10 bar	2033535	L	PG15	10.-
Pressure gauge 0 - 16 bar	Pressure gauge with R ¼ connection, connection on back of pressure gauge.	0 - 16 bar	2028692	L	PG15	37.-
Pressure gauge 0 - 25 bar	Pressure gauge with R ¼ connection, connection on back of pressure gauge.	0 to 25 bar	2660743	L	PG14	21.-
Pressure gauge 0 - 40 bar	Pressure gauge with R ¼ connection, connection on back of pressure gauge.	0 to 40 bar	2502048	K	PG14	12.-
Pressure reducer R 1	For the prevention of pressure damage and minimisation of flow noise. DVGW-tested.	R 1	2531894	C	PG14	95.-
Pressure reducer R 1¼	For the prevention of pressure damage and minimisation of flow noise. DVGW-tested.	R 1¼	2531895	L	PG14	159.-
Pressure reducer R 1½	For the prevention of pressure damage and minimisation of flow noise. DVGW-tested.	R 1½	2531896	C	PG14	304.-
Pressure reducer R 2	For the prevention of pressure damage and minimisation of flow noise. DVGW-tested.	R 2	2531897	C	PG14	327.-
Pressure reducer R ½	For the prevention of pressure damage and minimisation of flow noise. DVGW-tested.	R ½	2531892	C	PG14	73.-
Pressure reducer R ¾	For the prevention of pressure damage and minimisation of flow noise. DVGW-tested.	R ¾	2531893	C	PG14	82.-
Screwed connection for non-return valve DN 20	Screwed connection for non-return valve	DN 20	2660507	K	PG14	6.-
Screwed connection for non-return valve DN 25	Screwed connection for non-return valve	DN 25	2660509	K	PG14	21.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Mechanical accessories


Type	Description		Art. no.		Price group	
						EUR
Screwed connection for non-return valve DN 40	Screwed connection for non-return valve	DN 40	2660534	C	PG14	37.-
Stainless steel cable; Ø 3 mm	Stainless steel cable for lowering with 3 mm ² cross-section, recommended max. load 100 kg for TWU 3 and TWU/TWI 4	1 m	21039	L	PG14	4.-


Electrical accessories – system accessories


Type	Description		Art. no.		Price group	
						EUR
Pressure switch WVA up to 6 bar	For the control of one pump, 8 l diaphragm pressure vessel, pressure gauge, control valve with integrated non-return valve, pressure switch.	Up to 6 bar	180492096	L	PG14	618.-
Pressure switch WVA up to 10 bar	For the control of one pump, 8 l diaphragm pressure vessel, pressure gauge, control valve with integrated non-return valve, pressure switch.	Up to 10 bar	2502050	L	PG14	613.-
Pressure switching 0 – 16 bar	Kit with pressure switch, 0 – 16 bar pressure gauge, ball valve and 8 l diaphragm pressure vessel, completely mounted. Caution: Non-return valve provided by the customer.	-	2501639	L	PG14	554.-
Sensor kit ER-2	For control of two pumps, 8 l diaphragm pressure vessel, pressure gauge, 4 – 20 mA pressure sensor, fittings and ball valve.	-	2501886	L	PG14	543.-
Signal transmitter kit, 0 up to 6 bar	For mounting a system with automatic pressure-dependent operation.	0 – 6 bar	2516555	L	PG14	231.-
Signal transmitter kit, 0 up to 10 bar	For mounting a system with automatic pressure-dependent operation.	0 – 10 bar	2516556	L	PG14	247.-
Signal transmitter kit, 0 up to 16 bar	For mounting a system with automatic pressure-dependent operation.	0 – 16 bar	2516557	L	PG14	226.-
Signal transmitter kit, 0 up to 25 bar	For mounting a system with automatic pressure-dependent operation.	0 to 25 bar	2516558	L	PG14	260.-
Signal transmitter kit, 0 up to 40 bar	For mounting a system with automatic pressure-dependent operation.	0 – 40 bar	2516559	C	PG14	269.-
low-water cut-out switchgear kit WMS R ¾	WMS R ¾ kit , pressure switch as low-water signal transmitter for direct connection to the supply pressure-side pipe.	R ¾	2000424	L	PG14	174.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.


Electrical accessories – level control						
Type	Description		Art. no.		Price group	
						EUR
Cable kit for 4 inch motors 4 x 1.5 mm², 2.5 m	Kit for replacing existing connection cable on the motor. Consisting of a flat cable with connector on the motor side and bare cable end on the switchbox end, cable set, factory-wired. Can be used for 1~230 V and 3~400 V. Suitable for use in drinking water. Only intended for use in pumps TWU 4-...-C, TWI 4-...-C, TWI 6-...-C (with 4" motor)!	2.5 m cable	6007631	A	PG14	55.-
Connection cable for subm. electrode	For connecting a submersible electrode. Cable length: 1 m	-	64904	L	PG14	2.-
Float switch WA65 with 5 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 60 °C. Switching: up „ON“/down „OFF“.	-	503211390	L	PG14	82.-
Float switch WA65 with 10 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 60 °C. Switching: up „ON“/down „OFF“.	-	503211893	L	PG14	155.-
Float switch WA65 with 20 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 60 °C. Switching: up „ON“/down „OFF“.	-	2004431	L	PG14	231.-
Float switch WA65 with 30 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 60 °C. Switching: up „ON“/down „OFF“.	-	2004432	L	PG14	314.-
Float switch WA95 B with 5 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 90 °C. Switching: up „ON“/down „OFF“.	-	6070646	A	PG14	€
Submersible electrode	As low water cut-out switchgear for indirect connection. Individual electrode must be equipped with a suitable cable on-site.	-	64873	L	PG14	32.-
Submersible electrode, 3 m	Low-water signal transmitter for connection to a switchgear with triggering relay, e.g. ER-.. or SK277 for low-water protection of borehole pumps. H07 cable material approved for use in drinking water applications.	3 m	500183799	L	PG14	42.-
Submersible electrode, 4 m	Low-water signal transmitter for connection to a switchgear with triggering relay, e.g. ER-.. or SK277 for low-water protection of borehole pumps. H07 cable material approved for use in drinking water applications.	4 m	2516278	C	PG14	50.-
Submersible electrode, 5 m	Low-water signal transmitter for connection to a switchgear with triggering relay, e.g. ER-.. or SK277 for low-water protection of borehole pumps. H07 cable material approved for use in drinking water applications.	5 m	500937990	L	PG14	62.-
Submersible electrode, 10 m	Low-water signal transmitter for connection to a switchgear with triggering relay, e.g. ER-.. or SK277 for low-water protection of borehole pumps. H07 cable material approved for use in drinking water applications.	10 m	2501937	L	PG14	84.-
Submersible electrode, 15 m	Low-water signal transmitter for connection to a switchgear with triggering relay, e.g. ER-.. or SK277 for low-water protection of borehole pumps. H07 cable material approved for use in drinking water applications.	15 m	500938193	A	PG14	131.-
Submersible electrode, 20 m	Low-water signal transmitter for connection to a switchgear with triggering relay, e.g. ER-.. or SK277 for low-water protection of borehole pumps. H07 cable material approved for use in drinking water applications.	20 m	2516283	L	PG14	114.-
Submersible electrode, 25 m	Low-water signal transmitter for connection to a switchgear with triggering relay, e.g. ER-.. or SK277 for low-water protection of borehole pumps. H07 cable material approved for use in drinking water applications.	25 m	2000601	L	PG14	157.-



 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, € = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.


Electrical accessories – level control						
Type	Description		Art. no.		Price group	
						EUR
Submersible electrode, 30 m	Low-water signal transmitter for connection to a switchgear with triggering relay, e.g. ER-... or SK277 for low-water protection of borehole pumps. H07 cable material approved for use in drinking water applications.	30 m	2514045	L	PG14	137.-
Submersible electrode, 35 m	Low-water signal transmitter for connection to a switchgear with triggering relay, e.g. ER-... or SK277 for low-water protection of borehole pumps. H07 cable material approved for use in drinking water applications.	35 m	2516284	L	PG14	152.-
Submersible electrode, 40 m	Low-water signal transmitter for connection to a switchgear with triggering relay, e.g. ER-... or SK277 for low-water protection of borehole pumps. H07 cable material approved for use in drinking water applications.	40 m	2516285	L	PG14	162.-
Submersible electrode, 50 m	Low-water signal transmitter for connection to a switchgear with triggering relay, e.g. ER-... or SK277 for low-water protection of borehole pumps. H07 cable material approved for use in drinking water applications.	50 m	2500315	L	PG14	183.-
WAEK 65 float switch, 5 m cable	Signal transmitters for fluids up to a temperature of 60 °C. incl. small switchgear EK for pumps with AC motor up to 1 kW rated power. Switching: up „ON”/down „OFF”.	5 m cable	503211698	L	PG14	157.-
WAEK 65 float switch, 10 m cable	Signal transmitters for fluids up to a temperature of 60 °C. incl. small switchgear EK for pumps with AC motor up to 1 kW rated power. Switching: up „ON”/down „OFF”.	10 m cable	2005516	L	PG14	197.-
WAEK 65 float switch, 20 m cable	Signal transmitters for fluids up to a temperature of 60 °C. incl. small switchgear EK for pumps with AC motor up to 1 kW rated power. Switching: up „ON”/down „OFF”.	20 m cable	2005517	L	PG14	277.-
WAO 65 float switch, 5 m cable	Signal transmitters for fluids up to a temperature of 60 °C. Switching: up „Off”/down „On”.	5 m cable	503211595	L	PG14	114.-
WAO 65 float switch, 10 m cable	Signal transmitters for fluids up to a temperature of 60 °C. Switching: up „Off”/down „On”.	10 m cable	2006027	L	PG14	155.-
WAO 65 float switch, 20 m cable	Signal transmitters for fluids up to a temperature of 60 °C. Switching: up „Off”/down „On”.	20 m cable	2004429	L	PG14	231.-
WAO 65 float switch, 30 m cable	Signal transmitters for fluids up to a temperature of 60 °C. Switching: up „Off”/down „On”.	30 m cable	2004430	L	PG14	318.-
WAOEK 65 float switch, 20 m cable	Signal transmitters for fluids up to a temperature of 60 °C. incl. small switchgear EK for pumps with AC motor up to 1 kW rated power. Switching: up „Off”/down „On”.	20 m cable	2005626	L	PG14	277.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.


Electrical accessories – cables						
Type	Description	Art. no.		Price group		
						EUR
Cable kit for 4 inch motors 4 x 1.5 mm², 2.5 m	Kit for replacing existing connection cable on the motor. Consisting of a flat cable with connector on the motor side and bare cable end on the switchbox end, cable set, factory-wired. Can be used for 1~230 V and 3~400 V. Suitable for use in drinking water. Only intended for use in pumps TWU 4-...-C, TWI 4-...-C, TWI 6-...-C (with 4" motor)!	2.5 m cable 6007631	A	PG14		55.-
Cable kit for 4 inch motors 4 x 1.5 mm², 5 m	Kit for replacing existing connection cable on the motor. Consisting of a flat cable with connector on the motor side and bare cable end on the switchbox end, cable set, factory-wired. Suitable for 1~230 V and 3~400 V. Suitable for use in drinking water. Only intended for use in pumps TWU 4-...-C, TWI 4-...-C, TWI 6-...-C (with 4" motor)!	5 m 6024965	K	PG14		95.-
Cable kit for 4 inch motors 4 x 1.5 mm², 10 m	Kit for replacing existing connection cable on the motor. Consisting of a flat cable with connector on the motor side and bare cable end on the switchbox end, cable set, factory-wired. Suitable for 1~230 V and 3~400 V. Suitable for use in drinking water. Only intended for use in pumps TWU 4-...-C, TWI 4-...-C, TWI 6-...-C (with 4" motor)!	10 m 6024966	L	PG14		140.-
Cable kit for 4 inch motors 4 x 1.5 mm², 20 m	Kit for replacing existing connection cable on the motor. Consisting of a flat cable with connector on the motor side and bare cable end on the switchbox end, cable set, factory-wired. Suitable for 1~230 V and 3~400 V. Suitable for use in drinking water. Only intended for use in pumps TWU 4-...-C, TWI 4-...-C, TWI 6-...-C (with 4" motor)!	20 m 6035351	K	PG14		220.-
Cable kit for 4 inch motors 4 x 1.5 mm², 30 m	Kit for replacing existing connection cable on the motor. Consisting of a flat cable with connector on the motor side and bare cable end on the switchbox end, cable set, factory-wired. Suitable for 1~230 V and 3~400 V. Suitable for use in drinking water. Only intended for use in pumps TWU 4-...-C, TWI 4-...-C, TWI 6-...-C (with 4" motor)!	30 m 6036946	L	PG14		278.-
Cable kit for 4 inch motors 4 x 1.5 mm², 40 m	Kit for replacing existing connection cable on the motor. Consisting of a flat cable with connector on the motor side and bare cable end on the switchbox end, cable set, factory-wired. Suitable for 1~230 V and 3~400 V. Suitable for use in drinking water. Only intended for use in pumps TWU 4-...-C, TWI 4-...-C, TWI 6-...-C (with 4" motor)!	40 m 6036947	L	PG14		351.-
Cable kit for 4 inch motors 4 x 1.5 mm², 50 m	Kit for replacing existing connection cable on the motor. Consisting of a flat cable with connector on the motor side and bare cable end on the switchbox end, cable set, factory-wired. Suitable for 1~230 V and 3~400 V. Suitable for use in drinking water. Only intended for use in pumps TWU 4-...-C, TWI 4-...-C, TWI 6-...-C (with 4" motor)!	50 m 6036948	C	PG14		429.-
Cable kit for 4 inch motors AISI 316, 4 x 1.5 mm², 5 m	Kit for replacing existing connection cable on the motor. Consisting of a flat cable with connector on the motor side and bare cable end on the switchbox end, cable set, factory-wired. Suitable for 1~230 V and 3~400 V. Suitable for use in drinking water. Only intended for use in pumps TWU 4-...-C, TWI 4-...-C, TWI 6-...-C (with 4" motor)!	AISI 316, 4 x 1.5 mm ² , 5 m 6079030	K	PG14		166.-
Cable kit for 4 inch motors AISI 316, 4 x 1.5 mm², 10 m	Kit for replacing existing connection cable on the motor. Consisting of a flat cable with connector on the motor side and bare cable end on the switchbox end, cable set, factory-wired. Suitable for 1~230 V and 3~400 V. Suitable for use in drinking water. Only intended for use in pumps TWU 4-...-C, TWI 4-...-C, TWI 6-...-C (with 4" motor)!	AISI 316, 4 x 1.5 mm ² , 10 m 6079029	K	PG14		202.-
Cable kit for 4 inch motors AISI 316, 4 x 1.5 mm², 15 m	Kit for replacing existing connection cable on the motor. Consisting of a flat cable with connector on the motor side and bare cable end on the switchbox end, cable set, factory-wired. Suitable for 1~230 V and 3~400 V. Suitable for use in drinking water. Only intended for use in pumps TWU 4-...-C, TWI 4-...-C, TWI 6-...-C (with 4" motor)!	AISI 316, 4 x 1.5 mm ² , 15 m 6079028	K	PG14		238.-



 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Electrical accessories – cables						
Type	Description		Art. no.		Price group	
						EUR
Cable kit for 4 inch motors AISI 316, 4 x 1.5 mm², 20 m	Kit for replacing existing connection cable on the motor. Consisting of a flat cable with connector on the motor side and bare cable end on the switchbox end, cable set, factory-wired. Suitable for 1~230 V and 3~400 V. Suitable for use in drinking water. Only intended for use in pumps TWU 4-...-C, TWI 4-...-C, TWI 6-...-C (with 4" motor)!	AISI 316, 4 x 1,5 mm ² , 20 m	6079036	A	PG14	276.-
Cable kit for 4 inch motors AISI 316, 4 x 1.5 mm², 30 m	Kit for replacing existing connection cable on the motor. Consisting of a flat cable with connector on the motor side and bare cable end on the switchbox end, cable set, factory-wired. Suitable for 1~230 V and 3~400 V. Suitable for use in drinking water. Only intended for use in pumps TWU 4-...-C, TWI 4-...-C, TWI 6-...-C (with 4" motor)!	AISI 316, 4 x 1,5 mm ² , 30 m	6079035	K	PG14	347.-
Cable kit for 4 inch motors AISI 316, 4 x 1.5 mm², 40 m	Kit for replacing existing connection cable on the motor. Consisting of a flat cable with connector on the motor side and bare cable end on the switchbox end, cable set, factory-wired. Suitable for 1~230 V and 3~400 V. Suitable for use in drinking water. Only intended for use in pumps TWU 4-...-C, TWI 4-...-C, TWI 6-...-C (with 4" motor)!	AISI 316, 4 x 1,5 mm ² , 40 m	6079034	K	PG14	419.-
Cable kit for 4 inch motors AISI 316, 4 x 1.5 mm², 50 m	Kit for replacing existing connection cable on the motor. Consisting of a flat cable with connector on the motor side and bare cable end on the switchbox end, cable set, factory-wired. Suitable for 1~230 V and 3~400 V. Suitable for use in drinking water. Only intended for use in pumps TWU 4-...-C, TWI 4-...-C, TWI 6-...-C (with 4" motor)!	AISI 316, 4 x 1,5 mm ² , 50 m	6079033	K	PG14	491.-
Cable kit for 6 inch motors 4 x 4 mm², 10 m	Kit for replacing existing connection cable on the motor. Consisting of a flat cable with connector on the motor side and bare cable end on the switchbox end, cable set, factory-wired. Available in the lengths: 10 m, 20 m, 30 m, 40 m and 50 m. Suitable for use in drinking water.	10 m, 4 x 4 mm ²	6036603	L	PG14	350.-
Cable kit for 6 inch motors 4 x 4 mm², 20 m	Kit for replacing existing connection cable on the motor. Consisting of a flat cable with connector on the motor side and bare cable end on the switchbox end, cable set, factory-wired. Available in the lengths: 10 m, 20 m, 30 m, 40 m and 50 m. Suitable for use in drinking water.	20 m; 4 x 4 mm ² (including earth cable)	6036604	K	PG14	586.-
Cable kit for 6 inch motors 4 x 4 mm², 30 m	Kit for replacing existing connection cable on the motor. Consisting of a flat cable with connector on the motor side and bare cable end on the switchbox end, cable set, factory-wired. Available in the lengths: 10 m, 20 m, 30 m, 40 m and 50 m. Suitable for use in drinking water.	30 m; 4 x 4 mm ² (including earth cable)	6036605	C	PG14	783.-
Cable kit for 6 inch motors 4 x 4 mm², 40 m	Kit for replacing existing connection cable on the motor. Consisting of a flat cable with connector on the motor side and bare cable end on the switchbox end, cable set, factory-wired. Available in the lengths: 10 m, 20 m, 30 m, 40 m and 50 m. Suitable for use in drinking water.	40 m; 4 x 4 mm ² (including earth cable)	6036606	C	PG14	997.-
Cable kit for 6 inch motors 4 x 4 mm², 50 m	Kit for replacing existing connection cable on the motor. Consisting of a flat cable with connector on the motor side and bare cable end on the switchbox end, cable set, factory-wired. Available in the lengths: 10 m, 20 m, 30 m, 40 m and 50 m. Suitable for use in drinking water.	50 m; 4 x 4 mm ² (including earth cable)	6036607	C	PG14	1,219.-
Cable kit for 6 inch motors 4 x 8,4 mm², 8 m	Kit for replacing existing connection cable on the motor. Consisting of a flat cable with connector on the motor side and bare cable end on the switchbox end, cable set, factory-wired. Available in the lengths: 10 m, 20 m, 30 m, 40 m and 50 m. Suitable for use in drinking water.	8 m; 4 x 8,4 mm ² (including earth cable)	6030798	A	PG14	492.-
Cable kit for 6 inch motors 4 x 8,4 mm², 10 m	Kit for replacing existing connection cable on the motor. Consisting of a flat cable with connector on the motor side and bare cable end on the switchbox end, cable set, factory-wired. Available in the lengths: 10 m, 20 m, 30 m, 40 m and 50 m. Suitable for use in drinking water.	10 m; 4 x 8,4 mm ² (including earth cable)	6037500	K	PG14	544.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.


Electrical accessories – cables						
Type	Description		Art. no.		Price group	
						EUR
Cable kit for 6 inch motors 4 x 8,4 mm², 20 m	Kit for replacing existing connection cable on the motor. Consisting of a flat cable with connector on the motor side and bare cable end on the switchbox end, cable set, factory-wired. Available in the lengths: 10 m, 20 m, 30 m, 40 m and 50 m. Suitable for use in drinking water.	20 m; 4 x 8.4 mm ² (including earth cable)	6037501	K	PG14	985.-
Cable kit for 6 inch motors 4 x 8,4 mm², 30 m	Kit for replacing existing connection cable on the motor. Consisting of a flat cable with connector on the motor side and bare cable end on the switchbox end, cable set, factory-wired. Available in the lengths: 10 m, 20 m, 30 m, 40 m and 50 m. Suitable for use in drinking water.	30 m; 4 x 8.4 mm ² (including earth cable)	6037502	A	PG14	1,308.-
Cable kit for 6 inch motors 4 x 8,4 mm², 40 m	Kit for replacing existing connection cable on the motor. Consisting of a flat cable with connector on the motor side and bare cable end on the switchbox end, cable set, factory-wired. Available in the lengths: 10 m, 20 m, 30 m, 40 m and 50 m. Suitable for use in drinking water.	40 m; 4 x 8.4 mm ² (including earth cable)	6037503	A	PG14	1,689.-
Cable kit for 6 inch motors 4 x 8,4 mm², 50 m	Kit for replacing existing connection cable on the motor. Consisting of a flat cable with connector on the motor side and bare cable end on the switchbox end, cable set, factory-wired. Available in the lengths: 10 m, 20 m, 30 m, 40 m and 50 m. Suitable for use in drinking water.	50 m; 4 x 8.4 mm ² (including earth cable)	6037504	A	PG14	2,074.-
Earth cable, 1 x 25 mm²	Earth cable, suitable for drinking water applications. Flexible 1-wire copper cable in accordance with ACS 04 ACC LI 021, NFC 15-100 AD8, BS 6920, IEC 60332-1. Price per 1 m	1 x 25.0 mm ²	4075939	A	PG14	3.-
Motor cable connector kit	For secure quick-plug connection of motor cable and cable extension. Caution: Motor cable needs to be already equipped with a plug. Scope of delivery: Kit comprising coupling element, 2-component sealing kit and small parts.	For cable cross-sections 4 x 0.5 to 4 x 2.5 mm ²	4087148	L	PG14	56.-
Motor cable for drinking water 3" motor, 4 x 1.5 mm², 10 m	Kit with improved corrosion protection (stainless steel cable connector, extended insulation) for replacing the existing connection cable on the motor. Comprising 4 x 1.5 mm ² flat cable with connector on the motor side and bare cable end on the switchbox end. Cable set is factory-wired. Suitable for 1~230 V and 3~400 V. Suitable for use in drinking water. Only intended for use in pumps TWU 3-...HS-B!	10 m	6080529	L	PG14	51.-
Motor cable for drinking water 3" motor, 4 x 1.5 mm², 20 m	Kit with improved corrosion protection (stainless steel cable connector, extended insulation) for replacing the existing connection cable on the motor. Comprising 4 x 1.5 mm ² flat cable with connector on the motor side and bare cable end on the switchbox end. Cable set is factory-wired. Suitable for 1~230 V and 3~400 V. Suitable for use in drinking water. Only intended for use in pumps TWU 3-...HS-B!	20 m	6080530	L	PG14	87.-
Motor cable for drinking water 3" motor, 4 x 1.5 mm², 30 m	Kit with improved corrosion protection (stainless steel cable connector, extended insulation) for replacing the existing connection cable on the motor. Comprising 4 x 1.5 mm ² flat cable with connector on the motor side and bare cable end on the switchbox end. Cable set is factory-wired. Suitable for 1~230 V and 3~400 V. Suitable for use in drinking water. Only intended for use in pumps TWU 3-...HS-B!	30 m	6080525	L	PG14	122.-
Motor cable for drinking water 3" motor, 4 x 1.5 mm², 40 m	Kit with improved corrosion protection (stainless steel cable connector, extended insulation) for replacing the existing connection cable on the motor. Comprising 4 x 1.5 mm ² flat cable with connector on the motor side and bare cable end on the switchbox end. Cable set is factory-wired. Suitable for 1~230 V and 3~400 V. Suitable for use in drinking water. Only intended for use in pumps TWU 3-...HS-B!	40 m	6080526	L	PG14	157.-
Motor cable for drinking water 3" motor, 4 x 1.5 mm², 50 m	Kit with improved corrosion protection (stainless steel cable connector, extended insulation) for replacing the existing connection cable on the motor. Comprising 4 x 1.5 mm ² flat cable with connector on the motor side and bare cable end on the switchbox end. Cable set is factory-wired. Suitable for 1~230 V and 3~400 V. Suitable for use in drinking water. Only intended for use in pumps TWU 3-...HS-B!	50 m	6080527	L	PG14	193.-



 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.


Electrical accessories – cables						
Type	Description	Art. no.		Price group		
						EUR
Motor cable for drinking water 3" motor, 4 x 1.5 mm², 60 m	Kit with improved corrosion protection (stainless steel cable connector, extended insulation) for replacing the existing connection cable on the motor. Comprising 4 x 1.5 mm ² flat cable with connector on the motor side and bare cable end on the switchbox end. Cable set is factory-wired. Suitable for 1~230 V and 3~400 V. Suitable for use in drinking water. Only intended for use in pumps TWU 3-...HS-B!	60 m	6080528	L	PG14	229.-
Motor cable for process water 3 x 25 mm²	For extension of the motor cable located on the pump. Suitable for process water applications. Flexible 3- or 4-wire copper cable in accordance with Class E of DIN VDE 0298 Part 3000 and DIN VDE 0282 Part 810. Immersion depth: 500 m. version: Round cable with bare cable ends. Available in length gradations of 1 m each. Price per 1 m	3 x 25.0 mm ²	4093850	A	PG14	50.-
Motor cable for process water 3 x 35 mm²	For extension of the motor cable located on the pump. Suitable for process water applications. Flexible 3- or 4-wire copper cable in accordance with Class E of DIN VDE 0298 Part 3000 and DIN VDE 0282 Part 810. Immersion depth: 500 m. version: Round cable with bare cable ends. Available in length gradations of 1 m each. Price per 1 m	3 x 35.0 mm ²	4093851	A	PG14	62.-
Motor cable for process water 3 x 50 mm²	For extension of the motor cable located on the pump. Suitable for process water applications. Flexible 3- or 4-wire copper cable in accordance with Class E of DIN VDE 0298 Part 3000 and DIN VDE 0282 Part 810. Immersion depth: 500 m. version: Round cable with bare cable ends. Available in length gradations of 1 m each. Price per 1 m	3 x 50.0 mm ²	4093852	A	PG14	73.-
Motor cable for process water 3 x 70 mm²	For extension of the motor cable located on the pump. Suitable for process water applications. Flexible 3- or 4-wire copper cable in accordance with Class E of DIN VDE 0298 Part 3000 and DIN VDE 0282 Part 810. Immersion depth: 500 m. version: Round cable with bare cable ends. Available in length gradations of 1 m each. Price per 1 m	3x 70.0 mm ²	4093853	A	PG14	110.-
Motor cable for process water 4 x 10 mm²	For extension of the motor cable located on the pump. Suitable for process water applications. Flexible 3- or 4-wire copper cable in accordance with Class E of DIN VDE 0298 Part 3000 and DIN VDE 0282 Part 810. Immersion depth: 500 m. version: Round cable with bare cable ends. Available in length gradations of 1 m each. Price per 1 m	4 x 10.0 mm ² (including earth cable)	4094676	A	PG14	21.-
Motor cable for process water 4 x 16 mm²	For extension of the motor cable located on the pump. Suitable for process water applications. Flexible 3- or 4-wire copper cable in accordance with Class E of DIN VDE 0298 Part 3000 and DIN VDE 0282 Part 810. Immersion depth: 500 m. version: Round cable with bare cable ends. Available in length gradations of 1 m each. Price per 1 m	4 x 16.0 mm ² (including earth cable)	4094668	A	PG14	35.-
Motor cable for process water 4 x 25 mm²	For extension of the motor cable located on the pump. Suitable for process water applications. Flexible 3- or 4-wire copper cable in accordance with Class E of DIN VDE 0298 Part 3000 and DIN VDE 0282 Part 810. Immersion depth: 500 m. version: Round cable with bare cable ends. Available in length gradations of 1 m each. Price per 1 m	4 x 25.0 mm ² (including earth cable)	4046682	A	PG14	53.-
Motor cable for process water 4 x 35 mm²	For extension of the motor cable located on the pump. Suitable for process water applications. Flexible 3- or 4-wire copper cable in accordance with Class E of DIN VDE 0298 Part 3000 and DIN VDE 0282 Part 810. Immersion depth: 500 m. version: Round cable with bare cable ends. Available in length gradations of 1 m each. Price per 1 m	4 x 35.0 mm ² (including earth cable)	4046684	A	PG14	68.-

🚚 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, 📞 = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.


Electrical accessories – cables						
Type	Description		Art. no.		Price group	
						EUR
Motor cable for process water 4 x 50 mm²	For extension of the motor cable located on the pump. Suitable for process water applications. Flexible 3- or 4-wire copper cable in accordance with Class E of DIN VDE 0298 Part 3000 and DIN VDE 0282 Part 810. Immersion depth: 500 m. version: Round cable with bare cable ends. Available in length gradations of 1 m each. Price per 1 m	4 x 50.0 mm ² (including earth cable)	4051974	A	PG14	96.-
Motor cable for process water 4 x 70 mm²	For extension of the motor cable located on the pump. Suitable for process water applications. Flexible 3- or 4-wire copper cable in accordance with Class E of DIN VDE 0298 Part 3000 and DIN VDE 0282 Part 810. Immersion depth: 500 m. version: Round cable with bare cable ends. Available in length gradations of 1 m each. Price per 1 m	4 x 70.0 mm ² (including earth cable)	4093847	A	PG14	137.-
Motor cable for process water 4 x 95 mm²	For extension of the motor cable located on the pump. Suitable for process water applications. Flexible 3- or 4-wire copper cable in accordance with Class E of DIN VDE 0298 Part 3000 and DIN VDE 0282 Part 810. Immersion depth: 500 m. version: Round cable with bare cable ends. Available in length gradations of 1 m each. Price per 1 m	4 x 95.0 mm ² (including earth cable)	4093848	A	PG14	202.-
Motor cable for process water 4 x 120 mm²	For extension of the motor cable located on the pump. Suitable for process water applications. Flexible 3- or 4-wire copper cable in accordance with Class E of DIN VDE 0298 Part 3000 and DIN VDE 0282 Part 810. Immersion depth: 500 m. version: Round cable with bare cable ends. Available in length gradations of 1 m each. Price per 1 m	4 x 120.0 mm ² (including earth cable)	4093849	A	PG14	240.-
Sealing kit 3 x 1.5 to 4 x 1.5 mm²	2-component sealing kit for easy, durable connection of open cable ends over and under water.	3 x 1.5 to 4 x 1.5 mm ²	6001126	C	PG14	45.-
Sealing kit 3 x 2.5 to 7 x 2.5 mm²	2-component sealing kit for easy, durable connection of open cable ends over and under water.	3 x 2.5 to 4 x 2.5 mm ²	6001128	C	PG14	55.-
Sealing kit 3 x 4 to 4 x 4 mm²	2-component sealing kit for easy, durable connection of open cable ends over and under water.	3 x 4.0 to 4 x 4.0 mm ²	6001129	C	PG14	53.-
Sealing kit 4 x 1.5 to 4 x 10 mm²	2-component sealing kit for easy, durable connection of open cable ends over and under water.	4 x 1.5 to 4 x 10 mm ²	4065698	L	PG14	77.-
Sealing kit 4 x 10 to 4 x 25 mm²	2-component sealing kit for easy, durable connection of open cable ends over and under water.	4 x 10 to 4 x 25 mm ²	4065699	C	PG14	132.-
Sealing kit 4 x 25 to 4 x 35 mm²	2-component sealing kit for easy, durable connection of open cable ends over and under water.	4 x 25 to 4 x 35 mm ²	4065700	C	PG14	201.-
Sealing kit 4 x 50 to 4 x 70 mm²	2-component sealing kit for easy, durable connection of open cable ends over and under water.	4 x 50 to 4 x 70 mm ²	4065701	C	PG14	258.-
heat-shrink connections 4 x 1.5 mm² and 2.5 mm²	For sealing a connection of open cable ends.	4 x 1.5 mm ² and 2.5 mm ²	4029677	L	PG14	24.-
heat-shrink connections 4 x 4.0 mm² and 6.0 mm²	For sealing a connection of open cable ends.	4 x 4.0 mm ² and 6.0 mm ²	4059213	L	PG14	50.-
heat-shrink connections 4 x 10 mm² and 16 mm²	For sealing a connection of open cable ends.	4 x 10 mm ² and 16 mm ²	4029678	L	PG14	82.-
motor cable for drinking water 3 x 2.5 mm²	For extension of the motor cable located on the pump. Suitable for drinking water applications. Flexible 3- or 4-wire copper cable in accordance with Class E of ACS 04 ACC LI 021, NFC 15-100 AD8, BS 6920, IEC 60332-1. Max. immersion depth: 200 m version: Round cable with bare cable ends. Available in length gradations of 1 m each. Price per 1 m	3 x 2.5 mm ²	4093842	A	PG14	4.-


 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Electrical accessories – cables						
Type	Description	Art. no.		Price group		
						EUR
motor cable for drinking water 3 x 4 mm ²	For extension of the motor cable located on the pump. Suitable for drinking water applications. Flexible 3- or 4-wire copper cable in accordance with Class E of ACS 04 ACC LI 021, NFC 15-100 AD8, BS 6920, IEC 60332-1. Max. immersion depth: 200 m version: Round cable with bare cable ends. Available in length gradations of 1 m each. Price per 1 m	3 x 4.0 mm ²	4093843	 A	PG14	7.-
motor cable for drinking water 3 x 6 mm ²	For extension of the motor cable located on the pump. Suitable for drinking water applications. Flexible 3- or 4-wire copper cable in accordance with Class E of ACS 04 ACC LI 021, NFC 15-100 AD8, BS 6920, IEC 60332-1. Max. immersion depth: 200 m version: Round cable with bare cable ends. Available in length gradations of 1 m each. Price per 1 m	3 x 6.0 mm ²	4093844	A	PG14	8.-
motor cable for drinking water 3 x 10 mm ²	For extension of the motor cable located on the pump. Suitable for drinking water applications. Flexible 3- or 4-wire copper cable in accordance with Class E of ACS 04 ACC LI 021, NFC 15-100 AD8, BS 6920, IEC 60332-1. Max. immersion depth: 200 m version: Round cable with bare cable ends. Available in length gradations of 1 m each. Price per 1 m	3 x 10.0 mm ²	4093845	A	PG14	21.-
motor cable for drinking water 3 x 16 mm ²	For extension of the motor cable located on the pump. Suitable for drinking water applications. Flexible 3- or 4-wire copper cable in accordance with Class E of ACS 04 ACC LI 021, NFC 15-100 AD8, BS 6920, IEC 60332-1. Max. immersion depth: 200 m version: Round cable with bare cable ends. Available in length gradations of 1 m each. Price per 1 m	3 x 16.0 mm ²	4093846	A	PG14	37.-
motor cable for drinking water 4 x 1.5 mm ²	For extension of the motor cable located on the pump. Suitable for drinking water applications. Flexible 3- or 4-wire copper cable in accordance with Class E of ACS 04 ACC LI 021, NFC 15-100 AD8, BS 6920, IEC 60332-1. Max. immersion depth: 200 m version: Round cable with bare cable ends. Available in length gradations of 1 m each. Price per 1 m	4 x 1.5 mm ² (including earth cable)	6045510	L	PG14	3.-
motor cable for drinking water 4 x 2.5 mm ²	For extension of the motor cable located on the pump. Suitable for drinking water applications. Flexible 3- or 4-wire copper cable in accordance with Class E of ACS 04 ACC LI 021, NFC 15-100 AD8, BS 6920, IEC 60332-1. Max. immersion depth: 200 m version: Round cable with bare cable ends. Available in length gradations of 1 m each. Price per 1 m	4 x 2.5 mm ² (including earth cable)	6019630	A	-	12.-
motor cable for drinking water 4 x 4 mm ²	For extension of the motor cable located on the pump. Suitable for drinking water applications. Flexible 3- or 4-wire copper cable in accordance with Class E of ACS 04 ACC LI 021, NFC 15-100 AD8, BS 6920, IEC 60332-1. Max. immersion depth: 200 m version: Round cable with bare cable ends. Available in length gradations of 1 m each. Price per 1 m	4 x 4.0 mm ² (including earth cable)	6019995	L	PG14	22.-
motor cable for drinking water 4 x 6 mm ²	For extension of the motor cable located on the pump. Suitable for drinking water applications. Flexible 3- or 4-wire copper cable in accordance with Class E of ACS 04 ACC LI 021, NFC 15-100 AD8, BS 6920, IEC 60332-1. Max. immersion depth: 200 m version: Round cable with bare cable ends. Available in length gradations of 1 m each. Price per 1 m	4 x 6.0 mm ² (including earth cable)	6022012	A	PG14	☞
motor cable for drinking water 4 x 10 mm ²	For extension of the motor cable located on the pump. Suitable for drinking water applications. Flexible 3- or 4-wire copper cable in accordance with Class E of ACS 04 ACC LI 021, NFC 15-100 AD8, BS 6920, IEC 60332-1. Max. immersion depth: 200 m version: Round cable with bare cable ends. Available in length gradations of 1 m each. Price per 1 m	4 x 10.0 mm ² (including earth cable)	6019018	C	PG14	28.-
motor cable for drinking water 4 x 16 mm ²	For extension of the motor cable located on the pump. Suitable for drinking water applications. Flexible 3- or 4-wire copper cable in accordance with Class E of ACS 04 ACC LI 021, NFC 15-100 AD8, BS 6920, IEC 60332-1. Max. immersion depth: 200 m version: Round cable with bare cable ends. Available in length gradations of 1 m each. Price per 1 m	4 x 16.0 mm ² (including earth cable)	6022013	C	PG14	50.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☞ = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Electrical accessories – cables						
Type	Description	Art. no.	Price group		EUR	
motor cable for drinking water 4 x 25 mm²	For extension of the motor cable located on the pump. Suitable for drinking water applications. Flexible 3- or 4-wire copper cable in accordance with Class E of ACS 04 ACC LI 021, NFC 15-100 AD8, BS 6920, IEC 60332-1. Max. immersion depth: 200 m version: Round cable with bare cable ends. Available in length gradations of 1 m each. Price per 1 m	6038861		C	PG14	89.-
motor cable kit QC 4 x 1.5 mm², 1.5 m	Quick connection motor cable (comprising flat cable with plug connections) for replacing the standard cable with bare cable ends of Wilo-submersible pumps TWU 4-...-C, TWI 4-...-C and TWI 6-...-C (with 4" motor). The kit enables a simple and rapid retroactive extension with quick-connect cables (available separately).	4096206		C	PG14	50.-
motor cable kit QC 4 x 1.5 mm², 2.5 m	Quick connection motor cable (comprising flat cable with plug connections) for replacing the standard cable with bare cable ends of Wilo-submersible pumps TWU 4-...-C, TWI 4-...-C and TWI 6-...-C (with 4" motor). The kit enables a simple and rapid retroactive extension with quick-connect cables (available separately).	4096207		K	PG14	52.-
motor cable kit QC AISI 316, 4 x 1.5 mm², 1.5 m	Quick connection motor cable (comprising flat cable with plug connections) for replacing the standard cable with bare cable ends of Wilo-submersible pumps TWU 4-...-CI; TWI 4-...-CI and TWI 6-...-CI (with 4" motor). The kit enables a simple and rapid retroactive extension with quick-connect cables (available separately).	6080134		L	PG14	56.-

Electrical accessories – temperature monitoring						
Type	Description	Art. no.	Price group		EUR	
Pt 100 sensor for 6" motors	Threaded PT100 for thermal motor monitoring, suitable for later connection to 6" motors.	6028701		C	PG14	520.-
Pt 100 sensor for 8" motors, 30 – 75 kW	Threaded PT100 for thermal motor monitoring, suitable for later connection to 8" motors.	6035453		C	PG14	568.-
Pt 100 sensor for 8" motors, 93 – 150 kW	Threaded PT100 for thermal motor monitoring, suitable for later connection to 8" motors.	6035454		A	PG14	568.-
Evaluation relay DGW 2.01	Evaluation relay for the connection of one PT100 sensor for temperature monitoring and control.	6002962		L	PG14	509.-



Accessories	Page
Commissioning/maintenance	683

Select 4 online

All information at www.wilo-select.com

Wilo-Drain LP



Construction

Self-priming drainage pump with standard motor for dry well installation

Application

Pumping of

- Wastewater
- Process water
- Sea water

Your advantages

- Simple operation due to the extensive scope of delivery

Scope of delivery

- Pump
- 2 x counter flanges with G 1½ female thread
- Installation and operating instructions

Price group: PG7

Ordering information						
Type	Pressure port	Rated power	Mains connection	Art. no.		
		P_2 kW				EUR
Drain LP 40/10	Rp 1½	0.40	1~230 V, 50 Hz	2047645	L	483.-

Price group: PG14


Mechanical accessories						
Type	Description	Art. no.				
						EUR
Suction hose set Rp 1½ (DN 40), 3 m	incl. PVC hose, hose nozzle, 2 hose clamps, foot valve and connecting pieces	6042689		L		389.-
Suction hose set Rp 1½ (DN 40), 6 m	incl. PVC hose, hose nozzle, 2 hose clamps, foot valve and connecting pieces	6042690		A		433.-
Hose nozzle Ø 40 mm/R 1½	with male thread made of plastic, incl. hose clip	4027335		L		36.-
Synthetic pressure hose 3 m, Ø 42 mm	Inside Ø 42 mm, PN 6, including hose clip	2027641		K		41.-
Synthetic pressure hose 5 m, Ø 42 mm	Inside Ø 42 mm, PN 6, including hose clip	2027642		L		70.-
Synthetic pressure hose 15 m, Ø 42 mm	Inside Ø 42 mm, PN 6, including hose clip	2027643		K		129.-

🚚 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, 📞 = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG14

Electrical accessories – simple mains connection

Accessories for simple connection to the mains system.

Type	Description	Art. no.		EUR
				
5 m connection cable including plug with on/off switch	5 m connection cable of H07RN-F type (cross-section: 3G1) including shock-proof plug with on/off switch, without motor protection	2050436	L	80.-


You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

Price group: PG14

Electrical accessories – mains-independent alarm signal

Alarm signal for detection of flooding in rooms and buildings. The alarm signal is acoustic, optical or wireless. In addition, other consumers can be controlled directly.

Type	Description	Art. no.		EUR
				
Small alarm switch-gear KAS	Network-independent small alarm switchgear in ISO plug housing with shock-proof plug, acoustic alarm signal and attached electrode with 3 m cable for level measurement.	501534094	L	354.-
AlarmControl 1	Network-independent alarm system with shockproof plug, acoustic alarm signal and attached mini float switch with 3 m cable for level measurement.	2522846	L	138.-
AlarmControl 2	Network-independent alarm system with shock-proof adapter plug for the direct connection of a consumer, acoustic alarm signal and attached mini float switch with 3 m cable for level measurement.	2522847	L	171.-


You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

Price group: PG14

Electrical accessories – level control with float switch

Level measurement using several float switches for the different water levels, including high water alarm signal. The breakdown barrier and the Ex cutoff relays are not required except for the connection of signal transmitters in potentially explosive areas! These can also be dispensed with when the SC-L...-Ex switchgear is used!



Type	Description	Art. no.		EUR
				
MS-L-1x4kW-DOL	Microprocessor-controlled switchgear for level-dependent control of a submersible pump with float switch.	2539741	L	504.-
MS-L-2x4kW-DOL	Microprocessor-controlled switchgear for level-dependent control of 2 submersible pumps with float switch.	2539745	L	681.-
Float switch WA65 with 5 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 60 °C. Switching: up „ON"/down „OFF".	503211390	L	82.-
Float switch WA65 with 10 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 60 °C. Switching: up „ON"/down „OFF".	503211893	L	155.-
Float switch WA65 with 20 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 60 °C. Switching: up „ON"/down „OFF".	2004431	L	231.-
Float switch WA65 with 30 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 60 °C. Switching: up „ON"/down „OFF".	2004432	L	314.-
Flash light 1~230 VAC	Xenon flashing light for wall mounting for indoor and outdoor installation. Luminous color: red, flash frequency: 0,75 Hz	2551613	L	140.-
Signal horn 1~230 V	Horn with a bell mouth for wall mounting for indoor and outdoor use. Alarm signal by electromechanical sound generation with steel diaphragm (88 dBA).	501459398	L	84.-
NiMh rechargeable battery, 9 V/200 mAh	Rechargeable battery to be installed in the switchgears Wilo-control MS-L and EC-L for a mains-independent alarm	2522850	L	25.-

You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

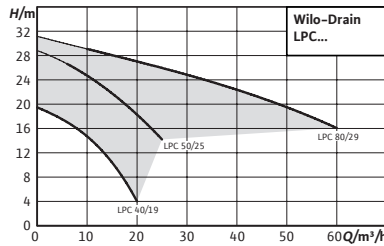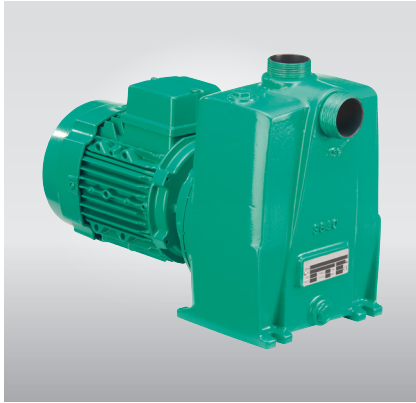

Accessories **Page**
Commissioning/maintenance 683

Select 4 online

All information at www.wilo-select.com

Wilo-Drain LPC



Construction

Self-priming drainage pump with standard motor for dry well installation

Application

- Pumping of
- Wastewater
- Process water

Your advantages

- Long service life thanks to its robust construction in grey cast iron
- Easy maintenance due to integrated inspection opening
- Flexible application

Scope of delivery

- Pump
- Installation and operating instructions

Price group: PG7

Ordering information						
Type	Pressure port	Rated power	Mains connection	Art. no.		
		P_2 kW				EUR
Drain LPC 40/19	G 1½	1.10	3~400 V, 50 Hz	2081686	L	1,979.-
Drain LPC 50/25	G 2	2.20	3~400 V, 50 Hz	2081660	L	2,906.-
Drain LPC 80/29	G 3	4.00	3~400 V, 50 Hz	2081693	L	3,583.-


Price group: PG14

Accessories for portable dry well installation DN40						
Type	Description	Art. no.				
						EUR
Suction hose set Rp 1½ (DN 40), 3 m	incl. PVC hose, hose nozzle, 2 hose clamps, foot valve and connecting pieces	6042689		L		389.-
Suction hose set Rp 1½ (DN 40), 6 m	incl. PVC hose, hose nozzle, 2 hose clamps, foot valve and connecting pieces	6042690		A		433.-
Hose nozzle Ø 40 mm/R 1½	with male thread made of plastic, incl. hose clip	4027335		L		36.-
Synthetic pressure hose 3 m, Ø 42 mm	Inside Ø 42 mm, PN 6, including hose clip	2027641		K		41.-


☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☞ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG14

Accessories for portable dry well installation DN40


Type	Description	Art. no.		EUR
				
Synthetic pressure hose 5 m, Ø 42 mm	Inside Ø 42 mm, PN 6, including hose clip	2027642	L	70.-
Synthetic pressure hose 15 m, Ø 42 mm	Inside Ø 42 mm, PN 6, including hose clip	2027643	K	129.-

Accessories for portable dry well installation DN50

Type	Description	Art. no.		EUR
				
Suction hose set R 2 (DN 50), 3 m	incl. PVC hose, hose nozzle, 2 hose clamps, foot valve and connecting pieces	6043355	A	395.-
Suction hose set R 2 (DN 50), 8 m	incl. PVC hose, hose nozzle, 2 hose clamps, foot valve and connecting pieces	6043356	A	475.-
Hose nozzle G 2/Ø 50 mm	made of brass with male thread for clamp binding. Incl. hose clip.	2083111	K	59.-
Synthetic pressure hose 3 m, Ø 60 mm	Inside Ø 60 mm, PN 6, including hose clip	2027644	A	109.-
Synthetic pressure hose 5 m, Ø 60 mm	Inside Ø 60 mm, PN 6, including hose clip	2027645	A	164.-
Synthetic pressure hose 15 m, Ø 60 mm	Inside Ø 60 mm, PN 6, including hose clip	2027646	A	215.-
Synthetic pressure hose 10 m, Ø 60 mm	Inside Ø 60 mm, PN 6, including hose clip	2018106	A	305.-

Price group: PG14


Accessories for portable dry well installation DN80

Type	Description	Art. no.		EUR
				
Suction hose set R 3 (DN 80), 3 m	incl. PVC hose, hose nozzle, 2 hose clamps, foot valve and connecting pieces	6043357	A	865.-
Suction hose set R 3 (DN 80), 8 m	incl. PVC hose, hose nozzle, 2 hose clamps, foot valve and connecting pieces	6043358	A	1,067.-
Hose nozzle R 3/Ø 90 mm	made of steel with conical male thread without collar. Incl. hose clip.	2083112	K	162.-
Synthetic pressure hose 10 m, Ø 90 mm	Inside Ø 90 mm, PN 8, including 2 hose clips	2017152	A	218.-
Synthetic pressure hose 20 m, Ø 90 mm	Inside Ø 90 mm, PN 8, including 2 hose clips	2017193	C	412.-
Synthetic pressure hose 30 m, Ø 90 mm	Inside Ø 90 mm, PN 8, including 2 hose clips	2017194	A	572.-

Price group: PG14

Electrical accessories – simple mains connection

Accessories for simple connection to the mains system.

Type	Description	Art. no.		EUR
				
Connection cable 4 x 1.5 mm ²	Connection cable Type NSSHÖU; cross-section: 4x1.5 mm ² (material sold by the metre)	6007632	C	7.-

You can find more accessories at the end in the chapter Electric accessories!


Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact WiloSubject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG14

Electrical accessories – simple mains connection

Accessories for simple connection to the mains system.

Type	Description	Art. no.		EUR
Connection cable 4 x 2.5 mm²	Connection cable Type NSSHÖU; cross-section: 4x2.5 mm ² (material sold by the metre)	6007639	 C	13.-
CEE motor protection plug 1.8...2.6 A	CEE phase inverter plug with indication of the direction of rotation and thermal motor protection Connection for a float switch. With On/Off switch for „manual/automatic mode”	2525865	L	359.-
CEE motor protection plug 3.7...5.5 A	CEE phase inverter plug with indication of the direction of rotation and thermal motor protection Connection for a float switch. With On/Off switch for „manual/automatic mode”	2017212	C	375.-
CEE motor protection plug 5.5...8.0 A	CEE phase inverter plug with indication of the direction of rotation and thermal motor protection Connection for a float switch. With On/Off switch for „manual/automatic mode”	2017213	C	390.-


You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

Price group: PG14

Electrical accessories – mains-independent alarm signal

Alarm signal for detection of flooding in rooms and buildings. The alarm signal is acoustic, optical or wireless. In addition, other consumers can be controlled directly.

Type	Description	Art. no.		EUR
Small alarm switch-gear KAS	Network-independent small alarm switchgear in ISO plug housing with shock-proof plug, acoustic alarm signal and attached electrode with 3 m cable for level measurement.	501534094	 L	354.-
AlarmControl 1	Network-independent alarm system with shockproof plug, acoustic alarm signal and attached mini float switch with 3 m cable for level measurement.	2522846	L	138.-
AlarmControl 2	Network-independent alarm system with shock-proof adapter plug for the direct connection of a consumer, acoustic alarm signal and attached mini float switch with 3 m cable for level measurement.	2522847	L	171.-


You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

Price group: PG14

Electrical accessories – level control with float switch

Level measurement using several float switches for the different water levels, including high water alarm signal. The breakdown barrier and the Ex cutoff relays are not required except for the connection of signal transmitters in potentially explosive areas! These can also be dispensed with when the SC-L...-Ex switchgear is used!

Type	Description	Art. no.		EUR
MS-L-1x4kW-DOL	Microprocessor-controlled switchgear for level-dependent control of a submersible pump with float switch.	2539741	 L	504.-
MS-L-2x4kW-DOL	Microprocessor-controlled switchgear for level-dependent control of 2 submersible pumps with float switch.	2539745	L	681.-
Float switch WA65 with 5 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 60 °C. Switching: up „ON”/down „OFF”.	503211390	L	82.-
Float switch WA65 with 10 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 60 °C. Switching: up „ON”/down „OFF”.	503211893	L	155.-
Float switch WA65 with 20 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 60 °C. Switching: up „ON”/down „OFF”.	2004431	L	231.-
Float switch WA65 with 30 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 60 °C. Switching: up „ON”/down „OFF”.	2004432	L	314.-

You can find more accessories at the end in the chapter Electric accessories!


Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.



Electrical accessories – level control with float switch

Level measurement using several float switches for the different water levels, including high water alarm signal. The breakdown barrier and the Ex cutoff relays are not required except for the connection of signal transmitters in potentially explosive areas! These can also be dispensed with when the SC-L...-Ex switchgear is used!

Type	Description	Art. no.		EUR
				
Flash light 1~230 VAC	Xenon flashing light for wall mounting for indoor and outdoor installation. Luminous color: red, flash frequency: 0,75 Hz	2551613	L	140.-
Signal horn 1~230 V	Horn with a bell mouth for wall mounting for indoor and outdoor use. Alarm signal by electromechanical sound generation with steel diaphragm (88 dBA).	501459398	L	84.-
ZSD CEE16 with 5 m cable, 5 m	Intermediate float switch with CEE plug/coupling for level-dependent control of three-phase consumers	6023412	A	513.-
ZSD CEE16 with 10 m cable, 10 m	Intermediate float switch with CEE plug/coupling for level-dependent control of three-phase consumers	6021206	C	549.-
ZSD CEE16 with 20 m cable, 20 m	Intermediate float switch with CEE plug/coupling for level-dependent control of three-phase consumers	6021205	C	558.-
NiMh rechargeable battery, 9 V/200 mAh	Rechargeable battery to be installed in the switchgears Wilo-control MS-L and EC-L for a mains-independent alarm	2522850	L	25.-

You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

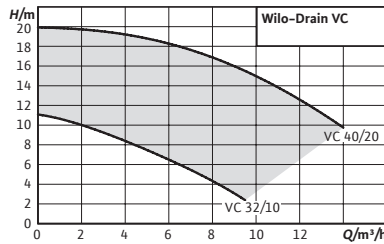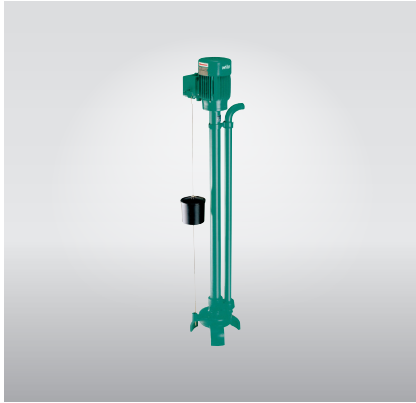

Accessories Page
Commissioning/maintenance 683

Select 4 online

All information at www.wilo-select.com

Wilo-Drain VC



Construction

Vertical pedestal-type non-submersible drainage pump with standard motor

Application

Pumping of

- Wastewater with a maximum fluid temperature of 95 °C

Your advantages

- For fluid temperatures up to 95 °C
- Long service life, even in the event of long periods of standstill
- Easy operation due to the attached float switch

Scope of delivery

- Pump with fitted float switch
- Installation and operating instructions

Price group: PG7

Ordering information							
Type	Pressure port	Rated power	Mains connection	Art. no.			
		P_2 kW					EUR
Drain VC 32/10	R 1	0.37	1~230 V, 50 Hz	2044582	L		1,843.-
Drain VC 32/10	R 1	0.37	3~400 V, 50 Hz	2044583	L		1,654.-
Drain VC 40/20	R 1½	2.20	3~400 V, 50 Hz	2044584	L		2,733.-

Price group: PG14

Electrical accessories – simple mains connection							
Accessories for simple connection to the mains system.							
Type	Description	Art. no.					
							EUR
5 m connection cable including plug with on/off switch	5 m connection cable of H07RN-F type (cross-section: 3G1) including shock-proof plug with on/off switch, without motor protection	2050436			L		80.-


You can find more accessories at the end in the chapter **Electric accessories!**

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

Price group: PG14

Electrical accessories – simple mains connection

Accessories for simple connection to the mains system.

Type	Description	Art. no.		EUR
				
Connection cable 4 x 1.5 mm²	Connection cable Type NSSHÖU; cross-section: 4x1.5 mm ² (material sold by the metre)	6007632	C	7.-
Connection cable 4 x 2.5 mm²	Connection cable Type NSSHÖU; cross-section: 4x2.5 mm ² (material sold by the metre)	6007639	C	13.-
CEE motor protection plug 1.2...1.8 A	CEE phase inverter plug with indication of the direction of rotation and thermal motor protection Connection for a float switch. With On/Off switch for „manual/automatic mode”	2525864	C	369.-
CEE motor protection plug 2.6...3.7 A	CEE phase inverter plug with indication of the direction of rotation and thermal motor protection Connection for a float switch. With On/Off switch for „manual/automatic mode”	2017211	C	375.-


You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

Price group: PG14

Electrical accessories – mains-independent alarm signal

Alarm signal for detection of flooding in rooms and buildings. The alarm signal is acoustic, optical or wireless. In addition, other consumers can be controlled directly.

Type	Description	Art. no.		EUR
				
Small alarm switch-gear KAS	Network-independent small alarm switchgear in ISO plug housing with shock-proof plug, acoustic alarm signal and attached electrode with 3 m cable for level measurement.	501534094	L	354.-
AlarmControl 1	Network-independent alarm system with shockproof plug, acoustic alarm signal and attached mini float switch with 3 m cable for level measurement.	2522846	L	138.-
AlarmControl 2	Network-independent alarm system with shock-proof adapter plug for the direct connection of a consumer, acoustic alarm signal and attached mini float switch with 3 m cable for level measurement.	2522847	L	171.-

You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.



Accessories **Page**
Commissioning/maintenance 683

Select 4 online
All information at www.wilo-select.com

Wilo-Initial Drain



Construction

Submersible drainage pump

Application

Pumping of

- Sewage without faeces or long-fibre constituents
- Wastewater

Scope of delivery

- Pump with a 10 m cable, mains plug and fitted float switch
- Hose connection nozzle \varnothing 24/32 mm and thread Rp 1"
- Installation and operating instructions


Your advantages

- Automatic motor protection provided by the temperature sensor
- Automatic mode due to the float switch
- Excellent reliability due to its robust material and double gasket

Price group: PG7

Ordering information						
	Pressure port	Connection cable length	Rated power	Mains connection	Art. no.	
		D m	P ₂ kW			
Initial DRAIN 10-7	Rp 1½	10	0.37	1~230 V, 50 Hz	4168021	L 103.-
Initial DRAIN 13-9	Rp 1½	10	0.50	1~230 V, 50 Hz	4186548	A 112.-

= ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

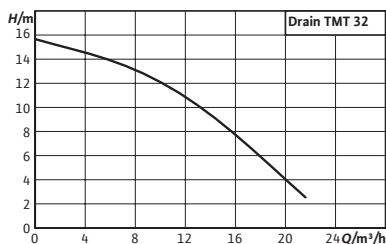

Accessories Page
Commissioning/maintenance 683

Select 4 online

All information at www.wilo-select.com

Wilo-Drain TMT



Construction

Submersible drainage pump

Application

Pumping of

- Wastewater with a maximum fluid temperature of 95 °C

Your advantages

- Temperature resistance for fluid temperatures up to 95 °C
- High operational reliability due to motor temperature monitoring and sealed cable inlet

Scope of delivery

- Submersible drainage pump
- Installation and operating instructions

Price group: PG7

Ordering information							
Type	Pressure port	Connection cable length	Rated power	Mains connection	Art. no.		
		D m	P ₂ kW				EUR
Drain TMT 32M113/7,5Ci	G 1¼	10	0.75	3~400 V, 50 Hz	6070087	L	2,689.-

Price group: PG14

Electrical accessories – simple mains connection							
Accessories for simple connection to the mains system.							
Type	Description			Art. no.			
							EUR
CEE motor protection plug 1.8...2.6 A	CEE phase inverter plug with indication of the direction of rotation and thermal motor protection Connection for a float switch. With On/Off switch for „manual/automatic mode“			2525865	L		359.-


You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

Price group: PG14

Electrical accessories – mains-independent alarm signal

Alarm signal for detection of flooding in rooms and buildings. The alarm signal is acoustic, optical or wireless. In addition, other consumers can be controlled directly.

Type	Description	Art. no.		EUR
				
DrainAlarm 2	Network-independent alarm switchgear with optical and acoustic alarm signal and with a connection for one float switch.	2545133	L	412.-
DrainAlarm GSM	Network-independent alarm switchgear with optical, acoustic and wireless (per GSM) alarm signal and with a connection for one float switch.	2542911	L	1,111.-
Flash light 1~230V	Optical alarm signal for connection to a switchgear. Suitable for outside installation.	2551613	L	140.-
Signal horn 1~230V	Acoustic alarm signal (88 dBA) for connection to a switchgear. Suitable for outside installation.	501459398	L	84.-


You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

Price group: PG14


Electrical accessories – level control with float switch

Level measurement using several float switches for the different water levels, including high water alarm signal. The breakdown barrier and the Ex cutoff relays are not required except for the connection of signal transmitters in potentially explosive areas! These can also be dispensed with when the SC-L...-Ex switchgear is used!

Type	Description	Art. no.		EUR
				
MS-L-1x4kW-DOL	Microprocessor-controlled switchgear for level-dependent control of a submersible pump with float switch.	2539741	L	504.-
MS-L-2x4kW-DOL	Microprocessor-controlled switchgear for level-dependent control of 2 submersible pumps with float switch.	2539745	L	681.-
Float switch WA KR1 S with 5 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 100 °C. Switching: up „ON"/down „OFF".	6082806	L	116.-
Float switch WA KR1 S with 10 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 100 °C. Switching: up „ON"/down „OFF".	6082807	L	195.-
Flash light 1~230 VAC	Xenon flashing light for wall mounting for indoor and outdoor installation. Luminous color: red, flash frequency: 0,75 Hz	2551613	L	140.-
Signal horn 1~230 V	Horn with a bell mouth for wall mounting for indoor and outdoor use. Alarm signal by electromechanical sound generation with steel diaphragm (88 dBA).	501459398	L	84.-
NiMH rechargeable battery, 9 V/200 mAh	Rechargeable battery to be installed in the switchgears Wilo-control MS-L and EC-L for a mains-independent alarm	2522850	L	25.-

You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

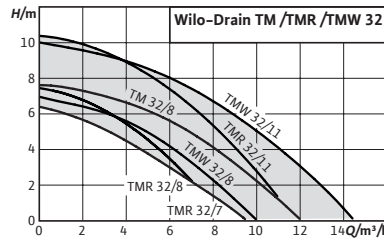

Accessories **Page**
Commissioning/maintenance 683

Series extension

Select 4 online
All information at www.wilo-select.com

Wilo-Drain TM/TMW/TMR 32



Construction

Submersible drainage pump

Application

Pumping of

- Sewage without faeces or long-fibre constituents
- Wastewater

Scope of delivery

- Pump with connection cable and plug
- Fitted float switch (apart from TM 32/8-10)
- Threaded connection with non-return valve (Drain TMW/TMR)

Your advantages

- User-friendly – ergonomic handle, low weight, ready-to-plug version (Plug&Pump)
- Operationally reliable – stainless steel-encapsulated motor with sheath flow cooling, mechanical seal and sealing chamber
- Drain TMR with flat suction – minimal residual water level of 2 mm

- Hose connection, supplied (Drain TM)
- Installation and operating instructions

Price group: PG7

Ordering information							
Type	Pressure port	Connection cable length	Rated power	Mains connection	Art. no.		
		D m	P ₂ kW				
Drain TM 32/7	G 1¼	4	0.25	1~230 V, 50 Hz	4048412	L	240.-
Drain TM 32/8-10M	G 1¼	10	0.37	1~230 V, 50 Hz	4048411	L	286.-
Drain TMR 32/8	G 1¼	4	0.37	1~230 V, 50 Hz	4145325	L	256.-
Drain TMR 32/8-10M	G 1¼	10	0.37	1~230 V, 50 Hz	4145326	L	286.-
Drain TMR 32/11	G 1¼	4	0.55	1~230 V, 50 Hz	4145327	L	484.-
Drain TMW 32/8	G 1¼	4	0.37	1~230 V, 50 Hz	4048413	L	256.-
Drain TMW 32/8-10M	G 1¼	10	0.37	1~230 V, 50 Hz	4058059	L	347.-
Drain TMW 32/11	G 1¼	4	0.55	1~230 V, 50 Hz	4048414	L	484.-
Drain TMW 32/11-10M	G 1¼	10	0.55	1~230 V, 50 Hz	4058060	L	583.-
Drain TMW 32/11HD	G 1¼	10	0.55	1~230 V, 50 Hz	4048715	L	647.-

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☞ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG14

Accessories for stationary wet well installation

Type	Description	Art. no.		EUR
Gate valve set Rp 1¼	made of brass with female thread and double nipple with male thread R 1¼	2528652	L	57.-
Non-return valve Rp 1¼	made of plastic, with female thread	501533696	L	88.-

Price group: PG14


Electrical accessories – mains-independent alarm signal

Alarm signal for detection of flooding in rooms and buildings. The alarm signal is acoustic, optical or wireless. In addition, other consumers can be controlled directly.

Type	Description	Art. no.		EUR
Small alarm switch-gear KAS	Network-independent small alarm switchgear in ISO plug housing with shock-proof plug, acoustic alarm signal and attached electrode with 3 m cable for level measurement.	501534094	L	354.-
AlarmControl 1	Network-independent alarm system with shockproof plug, acoustic alarm signal and attached mini float switch with 3 m cable for level measurement.	2522846	L	138.-
AlarmControl 2	Network-independent alarm system with shock-proof adapter plug for the direct connection of a consumer, acoustic alarm signal and attached mini float switch with 3 m cable for level measurement.	2522847	L	171.-

You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

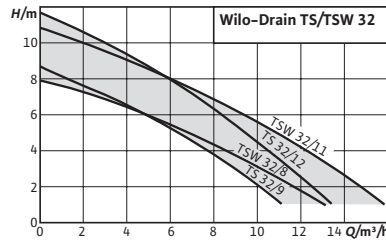

Accessories Page
Commissioning/maintenance 683

Select 4 online
All information at www.wilo-select.com

Wilo-Drain TS/TSW 32



Construction

Submersible drainage pump

Application

Pumping of

- Sewage without faeces or long-fibre constituents
- Wastewater

Scope of delivery

- Pump with connection cable and plug
- Attached float switch
- Non-return valve, supplied
- Hose connection, enclosed
- Installation and operating instructions

Your advantages

- User-friendly – lightweight, ready-to-plug version (Plug&Pump)
- Perfect for mobile applications – features a robust, impact-resistant stainless steel housing
- Reliable operation – stainless steel-encapsulated motor with sheath flow cooling, mechanical seal and sealing chamber

Price group: PG7

	Pressure port	Rated power	Connection cable length	Mains connection	Art. no.		
		P_2 kW	D m				EUR
Drain TS 32/9-A	Rp 1¼	0.30	10	1~230 V, 50 Hz	6043943	L	330.-
Drain TS 32/12-A	Rp 1¼	0.60	10	1~230 V, 50 Hz	6043945	L	406.-
Drain TSW 32/8-A	Rp 1¼	0.30	10	1~230 V, 50 Hz	6045167	L	347.-
Drain TSW 32/11-A	Rp 1¼	0.60	10	1~230 V, 50 Hz	6045166	L	430.-

Price group: PG14


Accessories for stationary wet well installation							
Type	Description	Art. no.					EUR
Gate valve set Rp 1¼	made of brass with female thread and double nipple with male thread R 1¼	2528652	L				57.-
Non-return valve Rp 1¼	made of plastic, with female thread	501533696	L				88.-

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG14


Electrical accessories – mains-independent alarm signal

Alarm signal for detection of flooding in rooms and buildings. The alarm signal is acoustic, optical or wireless. In addition, other consumers can be controlled directly.

Type	Description	Art. no.		EUR
				
Small alarm switch-gear KAS	Network-independent small alarm switchgear in ISO plug housing with shock-proof plug, acoustic alarm signal and attached electrode with 3 m cable for level measurement.	501534094	L	354.-
AlarmControl 1	Network-independent alarm system with shockproof plug, acoustic alarm signal and attached mini float switch with 3 m cable for level measurement.	2522846	L	138.-
AlarmControl 2	Network-independent alarm system with shock-proof adapter plug for the direct connection of a consumer, acoustic alarm signal and attached mini float switch with 3 m cable for level measurement.	2522847	L	171.-

You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

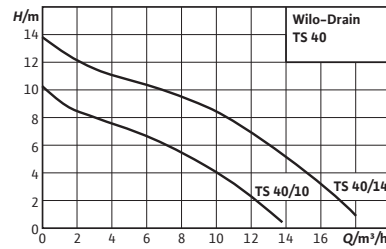

Accessories **Page**
Commissioning/maintenance 683

Select 4 online

All information at www.wilo-select.com

Wilo-Drain TS 40



Construction

Submersible drainage pump

Application

Pumping of

- Sewage without faeces or long-fibre constituents
- Wastewater

Scope of delivery

- Pump with 10 m connection cable and bare cable end

Your advantages

- Simple handling thanks to low weight
- Attached float switch and plug (A version) enable ease of use

- A-model with float switch and plug
- Hose connection
- Installation and operating instructions

Price group: PG7

Ordering information							
	Pressure port	Rated power	Connection cable length	Mains connection	Art. no.		
		P_2 kW	D m				EUR
Drain TS 40/10-A	Rp 1½	0.40	10	1~230 V, 50 Hz	2063926	L	536.-
Drain TS 40/10	Rp 1½	0.40	10	1~230 V, 50 Hz	2063928	L	510.-
Drain TS 40/10	Rp 1½	0.40	10	3~400 V, 50 Hz	2063927	L	533.-
Drain TS 40/14-A	Rp 1½	0.75	10	1~230 V, 50 Hz	2063929	L	602.-
Drain TS 40/14	Rp 1½	0.75	10	1~230 V, 50 Hz	2063931	L	573.-
Drain TS 40/14	Rp 1½	0.75	10	3~400 V, 50 Hz	2063930	L	591.-

Price group: PG14

Accessories for stationary wet well installation DN40							
Type	Description	Art. no.					
							EUR
Shut-off ball cock Rp 1½, G-CuSn10	made of brass, nickel-plated, with female thread	4027337	L				62.-
Non-return valve Rp 1½	made of EN-GJL-250, with female thread	4027330	L				148.-
90° pipe elbow G 1½	Made of steel, galvanised with G 1½ / R 1½ female/male thread	2083117	L				53.-

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG14

Accessories for stationary wet well installation DN40				
Type	Description	Art. no.		EUR
Mounting accessories DN 40/50/65, PN 10	For one flange connection, with screws, nuts and flat gasket	6076963	L	25.-
Lifting chain kit PCS-LU, stainless steel, 200 kg, 1 m	Lifting chain for raising and lowering pumps; incl. 1 shackle.	6084895	L	79.-
Lifting chain kit PCS-LU, stainless steel, 200 kg, 3 m	Lifting chain for raising and lowering pumps; incl. 1 shackle; with connecting links each metre for suspension.	6084894	L	178.-
Lifting chain kit PCS-LU, stainless steel, 200 kg, 6 m	Lifting chain for raising and lowering pumps; incl. 1 shackle; with connecting links each metre for suspension.	6084893	L	240.-

Price group: PG14

Accessories for portable wet well installation DN40				
Type	Description	Art. no.		EUR
Hose nozzle Ø 40 mm/R 1½	with male thread made of plastic, incl. hose clip	4027335	L	36.-
Synthetic pressure hose 3 m, Ø 42 mm	Inside Ø 42 mm, PN 6, including hose clip	2027641	K	41.-
Synthetic pressure hose 5 m, Ø 42 mm	Inside Ø 42 mm, PN 6, including hose clip	2027642	L	70.-
Synthetic pressure hose 15 m, Ø 42 mm	Inside Ø 42 mm, PN 6, including hose clip	2027643	K	129.-
Fixed coupling Storz C/G 1½	made of aluminium, Storz C connection, with male thread	6072745	A	21.-
Plastic spiral hose 5 m, with Storz C	Inside Ø 52 mm, including coupling, 4.5/13.5 bar	6022269	L	308.-
Plastic spiral hose 10 m, with Storz C	Inside Ø 52 mm, including coupling, 4.5/13.5 bar	6022270	K	496.-
Plastic spiral hose 20 m, with Storz C	Inside Ø 52 mm, including coupling, 4.5/13.5 bar	6022271	K	696.-
Lifting chain kit PCS-LU, stainless steel, 200 kg, 1 m	Lifting chain for raising and lowering pumps; incl. 1 shackle.	6084895	L	79.-
Lifting chain kit PCS-LU, stainless steel, 200 kg, 3 m	Lifting chain for raising and lowering pumps; incl. 1 shackle; with connecting links each metre for suspension.	6084894	L	178.-
Lifting chain kit PCS-LU, stainless steel, 200 kg, 6 m	Lifting chain for raising and lowering pumps; incl. 1 shackle; with connecting links each metre for suspension.	6084893	L	240.-

Price group: PG14

Electrical accessories – simple mains connection

Accessories for simple connection to the mains system.

Type	Description	Art. no.		EUR
CEE motor protection plug 1.2...1.8 A	CEE phase inverter plug with indication of the direction of rotation and thermal motor protection Connection for a float switch. With On/Off switch for „manual/automatic mode”	2525864	C	369.-
CEE motor protection plug 1.8...2.6 A	CEE phase inverter plug with indication of the direction of rotation and thermal motor protection Connection for a float switch. With On/Off switch for „manual/automatic mode”	2525865	L	359.-

You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

Price group: PG14

Electrical accessories – level control with float switch

Level measurement using several float switches for the different water levels, including high water alarm signal. The breakdown barrier and the Ex cutoff relays are not required except for the connection of signal transmitters in potentially explosive areas! These can also be dispensed with when the SC-L...-Ex switchgear is used!

Type	Description	Art. no.		EUR
MS-L-1x4kW-DOL	Microprocessor-controlled switchgear for level-dependent control of a submersible pump with float switch.	2539741	L	504.-
MS-L-2x4kW-DOL	Microprocessor-controlled switchgear for level-dependent control of 2 submersible pumps with float switch.	2539745	L	681.-
Float switch WA65 with 5 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 60 °C. Switching: up „ON”/down „OFF”.	503211390	L	82.-
Float switch WA65 with 10 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 60 °C. Switching: up „ON”/down „OFF”.	503211893	L	155.-
Float switch WA65 with 20 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 60 °C. Switching: up „ON”/down „OFF”.	2004431	L	231.-
Float switch WA65 with 30 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 60 °C. Switching: up „ON”/down „OFF”.	2004432	L	314.-
Flash light 1~230 VAC	Xenon flashing light for wall mounting for indoor and outdoor installation. Luminous color: red, flash frequency: 0,75 Hz	2551613	L	140.-
Signal horn 1~230 V	Horn with a bell mouth for wall mounting for indoor and outdoor use. Alarm signal by electromechanical sound generation with steel diaphragm (88 dBA).	501459398	L	84.-
NiMh rechargeable battery, 9 V/200 mAh	Rechargeable battery to be installed in the switchgears Wilo-control MS-L and EC-L for a mains-independent alarm	2522850	L	25.-

You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

Price group: PG14

Electrical accessories – mains-independent alarm signal

Alarm signal for detection of flooding in rooms and buildings. The alarm signal is acoustic, optical or wireless. In addition, other consumers can be controlled directly.


Type	Description	Art. no.		EUR
Small alarm switch-gear KAS	Network-independent small alarm switchgear in ISO plug housing with shock-proof plug, acoustic alarm signal and attached electrode with 3 m cable for level measurement.	501534094	L	354.-
AlarmControl 1	Network-independent alarm system with shockproof plug, acoustic alarm signal and attached mini float switch with 3 m cable for level measurement.	2522846	L	138.-
AlarmControl 2	Network-independent alarm system with shock-proof adapter plug for the direct connection of a consumer, acoustic alarm signal and attached mini float switch with 3 m cable for level measurement.	2522847	L	171.-

You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

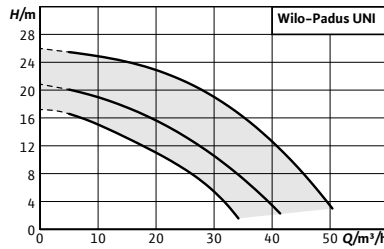

Accessories **Page**
Commissioning/maintenance 683

Series extension

Select 4 online
All information at www.wilo-select.com

Wilo-Padus UNI



Construction

Submersible drainage pump for intermittent operation for portable wet well installation

Application

Pumping of

- Sewage not containing faeces (EN 12050-2)
- Wastewater
- Fluids with a pH value of > 4.5
- Material version „B“: Aggressive fluids, e.g. lake/sea water, condensate, distilled water

Scope of delivery

- Submersible drainage pump with 10 m cable
- Operating and maintenance manual

Your advantages


- Exceptional reliability owing to corrosion-free hydraulics for universal applications and various fluids
- Easy installation thanks to its low weight, integrated capacitor at the AC motor and threaded flange
- Optimum efficiency and high operational reliability owing to improved hydraulics
- Quick maintenance facilitated by direct access to the sealing chamber and pump housing
- Long maintenance intervals thanks to double mechanical seal and large volume sealing chamber
- Clog-proof thanks to the integrated strainer

Price group: PG7


Ordering information							
Type	Pressure port	Rated power	Connection cable length	Mains connection	Art. no.		
		P_2 kW	D m				
Padus UNI M05/M11-523/A	G 2	1.10	10	1~230 V, 50 Hz	6084802	L	1,030.-
Padus UNI M05/M11-523/P	G 2	1.10	10	1~230 V, 50 Hz	6084801	L	975.-
Padus UNI M05/M11-523/VA	G 2	1.10	10	1~230 V, 50 Hz	6084803	L	1,078.-
Padus UNI M05/M15-523/A	G 2	1.50	10	1~230 V, 50 Hz	6084807	L	1,279.-
Padus UNI M05/M15-523/P	G 2	1.50	10	1~230 V, 50 Hz	6084806	L	1,224.-
Padus UNI M05/M15-523/VA	G 2	1.50	10	1~230 V, 50 Hz	6084808	L	1,328.-
Padus UNI M05/T11-540	G 2	1.10	10	3~400 V, 50 Hz	6084804	L	970.-
Padus UNI M05/T11-540/A	G 2	1.10	10	3~400 V, 50 Hz	6084805	L	1,368.-
Padus UNI M05/T15-540	G 2	1.50	10	3~400 V, 50 Hz	6084809	L	1,219.-
Padus UNI M05/T15-540/A	G 2	1.50	10	3~400 V, 50 Hz	6084810	L	1,617.-

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG7

Ordering information							
Type	Pressure port	Rated power	Connection cable length	Mains connection	Art. no.		
		P_2 kW	D m				EUR
Padus UNI M05/T25-540	G 2	2.50	10	3~400 V, 50 Hz	6084811	L	1,420.-
Padus UNI M05/T25-540/A	G 2	2.50	10	3~400 V, 50 Hz	6084812	L	1,813.-
Padus UNI M05/T25-540/A 2"1/2 KIT	G 2	2.50	10	3~400 V, 50 Hz	6084816	C	1,947.-
Padus UNI M05/T25-540 2"1/2 KIT	G 2	2.50	10	3~400 V, 50 Hz	6084815	C	1,554.-
Padus UNI M05B/M11-523/A	G 2	1.10	10	1~230 V, 50 Hz	6087664	L	1,545.-
Padus UNI M05B/M15-523/A	G 2	1.50	10	1~230 V, 50 Hz	6087666	L	2,020.-
Padus UNI M05B/T11-540	G 2	1.10	10	3~400 V, 50 Hz	6087665	L	1,455.-
Padus UNI M05B/T15-540	G 2	1.50	10	3~400 V, 50 Hz	6087667	L	1,932.-
Padus UNI M05B/T25-540	G 2	2.50	10	3~400 V, 50 Hz	6087669	L	2,336.-

Price group: PG14

Accessories for stationary wet well installation DN40							
Type	Description	Art. no.					
							EUR
Non-return valve G 2	made of EN-GJL-250, with female thread	4027331	L				182.-
Shut-off ball cock Rp 2, G-CuSn10	made of brass, nickel-plated, with female thread	4027338	L				84.-
Lifting chain kit PCS-LU, stainless steel, 200 kg, 1 m	Lifting chain for raising and lowering pumps; incl. 1 shackle.	6084895	L				79.-
Lifting chain kit PCS-LU, stainless steel, 200 kg, 3 m	Lifting chain for raising and lowering pumps; incl. 1 shackle; with connecting links each metre for suspension.	6084894	L				178.-
Lifting chain kit PCS-LU, stainless steel, 200 kg, 6 m	Lifting chain for raising and lowering pumps; incl. 1 shackle; with connecting links each metre for suspension.	6084893	L				240.-

Price group: PG14

Accessories for portable wet well installation							
Type	Description	Art. no.					
							EUR
Synthetic pressure hose 3 m, Ø 60 mm	Inside Ø 60 mm, PN 6, including hose clip	2027644	A				109.-
Synthetic pressure hose 5 m, Ø 60 mm	Inside Ø 60 mm, PN 6, including hose clip	2027645	A				164.-
Synthetic pressure hose 15 m, Ø 60 mm	Inside Ø 60 mm, PN 6, including hose clip	2027646	A				215.-
Synthetic pressure hose 10 m, Ø 60 mm	Inside Ø 60 mm, PN 6, including hose clip	2018106	A				305.-
Hose nozzle Ø 60 mm/G 2	with male thread made of plastic, incl. hose clip	4027334	C				36.-
Fixed coupling Storz C/G 2	made of aluminium, Storz C connection, with male thread	2018102	L				22.-
Plastic spiral hose 5 m, with Storz C	Inside Ø 52 mm, including coupling, 4.5/13.5 bar	6022269	L				308.-
Plastic spiral hose 10 m, with Storz C	Inside Ø 52 mm, including coupling, 4.5/13.5 bar	6022270	K				496.-
Plastic spiral hose 20 m, with Storz C	Inside Ø 52 mm, including coupling, 4.5/13.5 bar	6022271	K				696.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG14

Accessories for portable wet well installation

Type	Description	Art. no.		EUR
Lifting chain kit PCS-LU, stainless steel, 200 kg, 1 m	Lifting chain for raising and lowering pumps; incl. 1 shackle.	6084895	L	79.-
Lifting chain kit PCS-LU, stainless steel, 200 kg, 3 m	Lifting chain for raising and lowering pumps; incl. 1 shackle; with connecting links each metre for suspension.	6084894	L	178.-
Lifting chain kit PCS-LU, stainless steel, 200 kg, 6 m	Lifting chain for raising and lowering pumps; incl. 1 shackle; with connecting links each metre for suspension.	6084893	L	240.-

Price group: PG14

Electrical accessories – simple mains connection

Accessories for simple connection to the mains system.

Type	Description	Art. no.		EUR
CEE motor protection plug 2.6...3.7 A	CEE phase inverter plug with indication of the direction of rotation and thermal motor protection Connection for a float switch. With On/Off switch for „manual/automatic mode“	2017211	C	375.-
CEE motor protection plug 3.7...5.5 A	CEE phase inverter plug with indication of the direction of rotation and thermal motor protection Connection for a float switch. With On/Off switch for „manual/automatic mode“	2017212	C	375.-

You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

Price group: PG14

Electrical accessories – level control with float switch

Level measurement using several float switches for the different water levels, including high water alarm signal. The breakdown barrier and the Ex cutoff relays are not required except for the connection of signal transmitters in potentially explosive areas! These can also be dispensed with when the SC-L...-Ex switchgear is used!


Type	Description	Art. no.		EUR
MS-L-1x4kW-DOL	Microprocessor-controlled switchgear for level-dependent control of a submersible pump with float switch.	2539741	L	504.-
MS-L-2x4kW-DOL	Microprocessor-controlled switchgear for level-dependent control of 2 submersible pumps with float switch.	2539745	L	681.-
Float switch WA65 with 5 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 60 °C. Switching: up „ON“/down „OFF“.	503211390	L	82.-
Float switch WA65 with 10 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 60 °C. Switching: up „ON“/down „OFF“.	503211893	L	155.-
Float switch WA65 with 20 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 60 °C. Switching: up „ON“/down „OFF“.	2004431	L	231.-
Float switch WA65 with 30 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 60 °C. Switching: up „ON“/down „OFF“.	2004432	L	314.-
Flash light 1~230 VAC	Xenon flashing light for wall mounting for indoor and outdoor installation. Luminous color: red, flash frequency: 0.75 Hz	2551613	L	140.-
Signal horn 1~230 V	Horn with a bell mouth for wall mounting for indoor and outdoor use. Alarm signal by electromechanical sound generation with steel diaphragm (88 dBA).	501459398	L	84.-
NiMh rechargeable battery, 9 V/200 mAh	Rechargeable battery to be installed in the switchgears Wilo-control MS-L and EC-L for a mains-independent alarm	2522850	L	25.-

You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

🚚 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

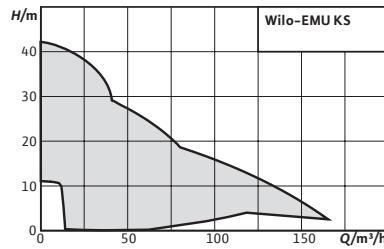

Accessories **Page**
Commissioning/maintenance 683

Select 4 online

All information at www.wilo-select.com

Wilo-EMU KS



Construction

Submersible drainage pump

Application

Pumping of

- Wastewater
- Process water

Scope of delivery

- Pump with connection cable and plug
- S version also with float switch
- Pressure port with Storz pipe coupling
- Installation and operating instructions

Your advantages

- Long service life thanks to robust construction
- High operational reliability thanks to continuous duty, also in slurping operation
- Easy handling due to connection cable with plug
- Easy operation due to the fitted float switch (S version)

Notice


Additional variants are available upon request, in grey cast iron, with Ceram coating or Ex-rated.


Price group: PG8

Ordering information							
Type	Pressure port	Rated power	Mains connection	Explosion protection	Art. no.		
		P_2 kW		ATEX			EUR
EMU KS 5Ex D0	Storz C	0.75	3~400 V, 50 Hz	yes	6030969	C	1,614.-
EMU KS 5Ex DMS-Ex	Storz C	0.75	3~400 V, 50 Hz	yes	-	A	☞
EMU KS 6Ex D0	Storz C	0.75	3~400 V, 50 Hz	yes	-	A	☞
EMU KS 6Ex DMS-Ex	Storz C	0.75	3~400 V, 50 Hz	yes	-	A	☞
EMU KS 8D	Storz C	0.75	3~400 V, 50 Hz	no	6019736	L	1,174.-
EMU KS 8D GG	Storz C	0.75	3~400 V, 50 Hz	no	-	A	☞
EMU KS 8DS	Storz C	0.75	3~400 V, 50 Hz	no	6019739	C	1,268.-
EMU KS 8DS GG	Storz C	0.75	3~400 V, 50 Hz	no	-	A	☞
EMU KS 8E	Storz C	0.75	1~230 V, 50 Hz	no	6019740	L	1,174.-
EMU KS 8E GG	Storz C	0.75	1~230 V, 50 Hz	no	-	A	☞
EMU KS 8ES	Storz C	0.75	1~230 V, 50 Hz	no	6019741	L	1,268.-
EMU KS 8ES GG	Storz C	0.75	1~230 V, 50 Hz	no	-	A	☞
EMU KS 9D	Storz C	0.75	3~400 V, 50 Hz	no	6019743	C	1,232.-


☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☞ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG8


Ordering information							
Type	Pressure port	Rated power	Mains connection	Explosion protection	Art. no.		
		P_2 kW		ATEX			EUR
EMU KS 9D GG	Storz C	0.75	3~400 V, 50 Hz	no	-	A	☒
EMU KS 9DS	Storz C	0.75	3~400 V, 50 Hz	no	-	A	☒
EMU KS 9DS GG	Storz C	0.75	3~400 V, 50 Hz	no	-	A	☒
EMU KS 9E	Storz C	0.75	1~230 V, 50 Hz	no	6019745	C	1,232.-
EMU KS 9E GG	Storz C	0.75	1~230 V, 50 Hz	no	-	A	☒
EMU KS 9ES	Storz C	0.75	1~230 V, 50 Hz	no	6020835	C	1,327.-
EMU KS 9ES GG	Storz C	0.75	1~230 V, 50 Hz	no	-	A	☒
EMU KS 12D GG	Storz C	1.30	3~400 V, 50 Hz	no	6042087	C	1,463.-
EMU KS 12DS GG	Storz C	1.30	3~400 V, 50 Hz	no	6042089	C	1,682.-
EMU KS 12E GG	Storz C	1.30	1~230 V, 50 Hz	no	6042086	C	1,463.-
EMU KS 12ES GG	Storz C	1.30	1~230 V, 50 Hz	no	6042088	C	1,682.-
EMU KS 14D	Storz C	0.75	3~400 V, 50 Hz	no	6019447	C	1,408.-
EMU KS 14D GG	Storz C	0.75	3~400 V, 50 Hz	no	-	A	☒
EMU KS 14DS	Storz C	0.75	3~400 V, 50 Hz	no	-	A	☒
EMU KS 14DS GG	Storz C	0.75	3~400 V, 50 Hz	no	-	A	☒
EMU KS 14E	Storz C	0.75	1~230 V, 50 Hz	no	6019448	C	1,408.-
EMU KS 14E GG	Storz C	0.75	1~230 V, 50 Hz	no	-	A	☒
EMU KS 14ES	Storz C	0.75	1~230 V, 50 Hz	no	6019449	C	1,501.-
EMU KS 14ES GG	Storz C	0.75	1~230 V, 50 Hz	no	-	A	☒
EMU KS 15D	Storz C	1.30	3~400 V, 50 Hz	no	6019450	L	1,619.-
EMU KS 15D GG	Storz C	1.30	3~400 V, 50 Hz	no	-	A	☒
EMU KS 15DS	Storz C	1.30	3~400 V, 50 Hz	no	6019784	C	1,713.-
EMU KS 15DS GG	Storz C	1.30	3~400 V, 50 Hz	no	-	A	☒
EMU KS 15E	Storz C	1.30	1~230 V, 50 Hz	no	6019785	L	1,619.-
EMU KS 15E GG	Storz C	1.30	1~230 V, 50 Hz	no	-	A	☒
EMU KS 15ES	Storz C	1.30	1~230 V, 50 Hz	no	6001201	L	1,713.-
EMU KS 15ES GG	Storz C	1.30	1~230 V, 50 Hz	no	-	A	☒
EMU KS 16Ex D0	Storz C	2.00	3~400 V, 50 Hz	yes	-	A	☒
EMU KS 16Ex DMS-Ex	Storz C	2.00	3~400 V, 50 Hz	yes	-	A	☒
EMU KS 20D GG	Storz B	2.20	3~400 V, 50 Hz	no	6042090	L	2,714.-
EMU KS 20DS GG	Storz B	2.20	3~400 V, 50 Hz	no	6042091	C	2,930.-
EMU KS 24D	Storz B	2.40	-	no	6001204	L	2,451.-
EMU KS 24DS	Storz B	2.40	-	no	6023360	C	2,716.-
EMU KS 37ZH D	Storz A	3.85	3~400 V, 50 Hz	no	6019730	L	4,303.-
EMU KS 37ZH DS	Storz A	3.85	3~400 V, 50 Hz	no	-	A	☒
EMU KS 37ZM D	Storz A	3.85	3~400 V, 50 Hz	no	6019731	L	4,303.-
EMU KS 37ZM DS	Storz A	3.85	3~400 V, 50 Hz	no	-	A	☒
EMU KS 37ZN D	Storz A	3.85	3~400 V, 50 Hz	no	6019732	L	4,303.-
EMU KS 37ZN DS	Storz A	3.85	3~400 V, 50 Hz	no	-	A	☒
EMU KS 70ZH D	Storz A	7.50	3~400 V, 50 Hz	no	6021370	L	5,118.-
EMU KS 70ZH DS	Storz A	7.50	3~400 V, 50 Hz	no	-	A	☒
EMU KS 70ZM D	Storz A	7.50	3~400 V, 50 Hz	no	6021343	L	5,118.-
EMU KS 70ZM DS	Storz A	7.50	3~400 V, 50 Hz	no	-	A	☒
EMU KS 70ZN D	Storz A	7.50	3~400 V, 50 Hz	no	6021369	L	5,118.-
EMU KS 70ZN DS	Storz A	7.50	3~400 V, 50 Hz	no	-	A	☒

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☒ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG14

Accessories for portable wet well installation				
Type	Description	Art. no.		
				EUR
Coupling key for Storz A, B, C	For Storz A, B and C	6022280	L	33.-
Flat suction KS 8/KS 9	Suction down to 10 mm, additional level control device not possible	6032495	L	54.-
Suction strainer extension KS 8/KS 9	for filtering coarse contaminants	6032496	K	180.-
Suction strainer extension KS 14/KS 15	for filtering coarse contaminants	6032616	C	184.-
Synthetic fibre pressure hose 5 m, with Storz C	Inside Ø 52 mm, including coupling, 12/40 bar	6003651	C	54.-
Synthetic fibre pressure hose 10 m, with Storz C	Inside Ø 52 mm, including coupling, 12/40 bar	6003650	C	78.-
Synthetic fibre pressure hose 20 m, with Storz C	Inside Ø 52 mm, including coupling, 12/40 bar	6003649	C	117.-
Synthetic fibre pressure hose 5 m, with Storz B	Inside Ø 75 mm, including coupling, 12/40 bar	6003052	A	89.-
Synthetic fibre pressure hose 10 m, with Storz B	Inside Ø 75 mm, including coupling, 12/40 bar	6003051	A	116.-
Synthetic fibre pressure hose 20 m, with Storz B	Inside Ø 75 mm, including coupling, 12/40 bar	6003050	A	204.-
Synthetic fibre pressure hose 20 m, with Storz A	Inside Ø 102 mm, including coupling, 8/20 bar	6022393	L	338.-
Synthetic fibre pressure hose 10 m, with Storz A	Inside Ø 102 mm, including coupling, 8/20 bar	6022392	K	327.-
Synthetic fibre pressure hose 5 m, with Storz A	Inside Ø 102 mm, including coupling, 8/20 bar	6022391	K	167.-
Plastic spiral hose 5 m, with Storz C	Inside Ø 52 mm, including coupling, 4.5/13.5 bar	6022269	L	308.-
Plastic spiral hose 10 m, with Storz C	Inside Ø 52 mm, including coupling, 4.5/13.5 bar	6022270	K	496.-
Plastic spiral hose 20 m, with Storz C	Inside Ø 52 mm, including coupling, 4.5/13.5 bar	6022271	K	696.-
Plastic spiral hose 5 m, with Storz B	Inside Ø 75 mm, including coupling, 3.5/10.5 bar	6022272	C	178.-
Plastic spiral hose 10 m, with Storz B	Inside Ø 75 mm, including coupling, 3.5/10.5 bar	6035187	A	264.-
Plastic spiral hose 20 m, with Storz B	Inside Ø 75 mm, including coupling, 3.5/10.5 bar	6022274	A	519.-
Plastic spiral hose 5 m, with Storz A	Inside Ø 102 mm, including coupling, 3/9 bar	6022275	K	286.-
Plastic spiral hose 10 m, with Storz A	Inside Ø 102 mm, including coupling, 3/9 bar	6022276	A	470.-
Plastic spiral hose 20 m, with Storz A	Inside Ø 102 mm, including coupling, 3/9 bar	6022277	K	835.-

Price group: PG14

Electrical accessories – level control with float switch				
Type	Description	Art. no.		
				EUR
MS-L-1x4kW-DOL	Microprocessor-controlled switchgear for level-dependent control of a submersible pump with float switch.	2539741	L	504.-
MS-L-2x4kW-DOL	Microprocessor-controlled switchgear for level-dependent control of 2 submersible pumps with float switch.	2539745	L	681.-
SC-L-1x16A-T34-DOL-WM	Microprocessor-controlled switchgear for level-dependent control of one submersible motor pump via level sensor or float switches.	2538932	C	2,365.-
SC-L-2x16A-T34-DOL-WM	Microprocessor-controlled switchgear for level-dependent control of two submersible motor pumps via level sensor or float switches.	2538933	C	2,972.-
Float switch WA65 with 5 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 60 °C. Switching: up „ON"/down „OFF".	503211390	L	82.-

You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG14

Electrical accessories – level control with float switch

Level measurement using several float switches for the different water levels, including high water alarm signal. The breakdown barrier and the Ex cutoff relays are not required except for the connection of signal transmitters in potentially explosive areas! These can also be dispensed with when the SC-L...-Ex switchgear is used!

Type	Description	Art. no.		EUR
Float switch WA65 with 10 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 60 °C. Switching: up „ON“/down „OFF“.	503211893	L	155.-
Float switch WA65 with 20 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 60 °C. Switching: up „ON“/down „OFF“.	2004431	L	231.-
Float switch WA65 with 30 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 60 °C. Switching: up „ON“/down „OFF“.	2004432	L	314.-
Flash light 1~230 VAC	Xenon flashing light for wall mounting for indoor and outdoor installation. Luminous color: red, flash frequency: 0,75 Hz	2551613	L	140.-
Signal horn 1~230 V	Horn with a bell mouth for wall mounting for indoor and outdoor use. Alarm signal by electromechanical sound generation with steel diaphragm (88 dBA).	501459398	L	84.-
ZSE shock-proof with 5 m cable	Intermediate float switch with shockproof plug/coupling for level-dependent control of single-phase consumers.	6017150	C	77.-
ZSE shock-proof with 10 m cable	Intermediate float switch with shockproof plug/coupling for level-dependent control of single-phase consumers.	6017313	C	83.-
ZSE shock-proof with 20 m cable	Intermediate float switch with shockproof plug/coupling for level-dependent control of single-phase consumers.	6021204	C	124.-
ZSD CEE16 with 5 m cable, 5 m	Intermediate float switch with CEE plug/coupling for level-dependent control of three-phase consumers	6023412	A	513.-
ZSD CEE16 with 10 m cable, 10 m	Intermediate float switch with CEE plug/coupling for level-dependent control of three-phase consumers	6021206	C	549.-
ZSD CEE16 with 20 m cable, 20 m	Intermediate float switch with CEE plug/coupling for level-dependent control of three-phase consumers	6021205	C	558.-
NiMH rechargeable battery, 9 V/200 mAh	Rechargeable battery to be installed in the switchgears Wilo-control MS-L and EC-L for a mains-independent alarm	2522850	L	25.-

You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

Price group: PG14


Electrical accessories – mains-independent alarm signal

Alarm signal for detection of flooding in rooms and buildings. The alarm signal is acoustic, optical or wireless. In addition, other consumers can be controlled directly.

Type	Description	Art. no.		EUR
AlarmControl 1	Network-independent alarm system with shockproof plug, acoustic alarm signal and attached mini float switch with 3 m cable for level measurement.	2522846	L	138.-
AlarmControl 2	Network-independent alarm system with shock-proof adapter plug for the direct connection of a consumer, acoustic alarm signal and attached mini float switch with 3 m cable for level measurement.	2522847	L	171.-
DrainAlarm 2	Network-independent alarm switchgear with optical and acoustic alarm signal and with a connection for one float switch.	2545133	L	412.-
Float switch WA65 with 5 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 60 °C. Switching: up „ON“/down „OFF“.	503211390	L	82.-
Float switch WA65 with 10 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 60 °C. Switching: up „ON“/down „OFF“.	503211893	L	155.-
Flash light 1~230V	Optical alarm signal for connection to a switchgear. Suitable for outside installation.	2551613	L	140.-
Signal horn 1~230V	Acoustic alarm signal (88 dBA) for connection to a switchgear. Suitable for outside installation.	501459398	L	84.-

You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

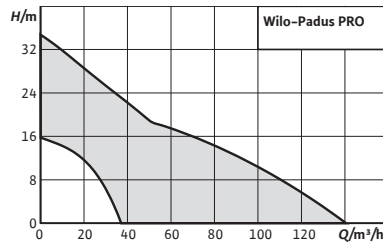

Accessories **Page**
Commissioning/maintenance 683

Select 4 online

All information at www.wilo-select.com

Wilo-Padus PRO



Construction

Submersible drainage pump

Application

Pumping of

- Wastewater
- Process water

Scope of delivery

- Pump with bare cable end
- Pump with float switch and motor protection plug (A version)
- Pressure port with Storz pipe coupling
- Installation and operating instructions

Your advantages

- High reliability in abrasive fluids thanks to rubber-coated hydraulics and an impeller made of Duplex chrome steel
- Easy installation thanks to low weight and flexible pressure connection (vertical/horizontal)
- Active cooling for reliable continuous operation
- Continuous duty in slurping operation thanks to passive cooling
- Easy maintenance thanks to quick access to wearing parts
- Equipped with energy-efficient IE3 motor technology as standard
- Highest operational reliability thanks to integrated protection function

Price group: PG8


Ordering information							
Type	Pressure port	Rated power	Connection cable length	Mains connection	Art. no.		
		P_2 kW	D m				
							EUR
Padus PRO M05/ T015-540	Storz C	1.50	23	3~400 V, 50 Hz	6087512	L	2,167.-
Padus PRO M05/ T015-540/A	Storz C	1.50	23	3~400 V, 50 Hz	6087513	L	2,792.-
Padus PRO M05/ T025-540	Storz C	2.50	23	3~400 V, 50 Hz	6087515	L	2,466.-
Padus PRO M05/ T025-540/A	Storz C	2.50	23	3~400 V, 50 Hz	6087516	L	3,086.-
Padus PRO M05/ T039-540	Storz C	3.90	23	3~400 V, 50 Hz	6087933	L	3,106.-
Padus PRO M05/ T039-540/A	Storz C	3.90	23	3~400 V, 50 Hz	6087934	L	3,743.-



= ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG8

Ordering information							
Type	Pressure port	Rated power	Connection cable length	Mains connection	Art. no.		
		P_2 kW	D m				EUR
Padus PRO M08/ T039-540	Storz B	3.90	23	3~400 V, 50 Hz	6083436	L	3,640.-
Padus PRO M08/ T039-540/A	Storz B	3.90	23	3~400 V, 50 Hz	6083437	L	4,208.-
Padus PRO M08/ T060-540	Storz B	6.00	23	3~400 V, 50 Hz	6083438	L	4,670.-
Padus PRO M08/ T060-540/A	Storz B	6.00	23	3~400 V, 50 Hz	6083439	L	5,238.-
Padus PRO M08L/ T039-540	Storz B	3.90	23	3~400 V, 50 Hz	6083440	L	3,640.-
Padus PRO M08L/ T039-540/A	Storz B	3.90	23	3~400 V, 50 Hz	6083441	L	4,208.-
Padus PRO M08L/ T060-540	Storz B	6.00	23	3~400 V, 50 Hz	6084030	L	4,578.-
Padus PRO M08L/ T060-540/A	Storz B	6.00	23	3~400 V, 50 Hz	6084031	L	5,135.-


Price group: PG14

Accessories for portable wet well installation							
Type	Description	Art. no.					
				EUR			
Coupling key for Storz A, B, C	For Storz A, B and C	6022280	L	33.-			
Synthetic fibre pres- sure hose 5 m, with Storz B	Inside Ø 75 mm, including coupling, 12/40 bar	6003052	A	89.-			
Synthetic fibre pres- sure hose 10 m, with Storz B	Inside Ø 75 mm, including coupling, 12/40 bar	6003051	A	116.-			
Synthetic fibre pres- sure hose 20 m, with Storz B	Inside Ø 75 mm, including coupling, 12/40 bar	6003050	A	204.-			
Plastic spiral hose 5 m, with Storz B	Inside Ø 75 mm, including coupling, 3.5/10.5 bar	6022272	C	178.-			
Plastic spiral hose 10 m, with Storz B	Inside Ø 75 mm, including coupling, 3.5/10.5 bar	6035187	A	264.-			
Plastic spiral hose 20 m, with Storz B	Inside Ø 75 mm, including coupling, 3.5/10.5 bar	6022274	A	519.-			
Lifting chain kit PCS- LU, stainless steel, 200 kg, 1 m	Lifting chain for raising and lowering pumps; incl. 1 shackle.	6084895	L	79.-			
Lifting chain kit PCS- LU, stainless steel, 200 kg, 3 m	Lifting chain for raising and lowering pumps; incl. 1 shackle; with connecting links each metre for suspension.	6084894	L	178.-			
Lifting chain kit PCS- LU, stainless steel, 200 kg, 6 m	Lifting chain for raising and lowering pumps; incl. 1 shackle; with connecting links each metre for suspension.	6084893	L	240.-			

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.


Electrical accessories – simple mains connection

Accessories for simple connection to the mains system.

Type	Description	Art. no.		
				
CEE motor protection plug incl. WSK 6...10 A	CEE motor protection plug with mains switch for „Manual/Automatic operation“, phase inverter, indication of the direction of rotation and thermal motor protection. Connections for thermal motor protection (WSK) with bimetalic sensor and a float switch.	6070410	C	☎
CEE motor protection plug incl. WSK 9...12 A	CEE motor protection plug with mains switch for „Manual/Automatic operation“, phase inverter, indication of the direction of rotation and thermal motor protection. Connections for thermal motor protection (WSK) with bimetalic sensor and a float switch.	6070411	C	☎
CEE motor protection plug 6.3...10 A	CEE motor protection plug with mains switch, phase inverter, indication of the direction of rotation and thermal motor protection.	6086197	L	☎
CEE motor protection plug 10...16 A	CEE motor protection plug with mains switch, phase inverter, indication of the direction of rotation and thermal motor protection. Notice: CEE plug in 4-pin design!	6086198	C	☎
CEE motor protection plug 6.3...10 A	CEE motor protection plug with mains switch, phase inverter, indication of the direction of rotation and thermal motor protection. Notice: CEE plug in 4-pin design!	6086199	C	☎
CEE motor protection plug 10...16 A	CEE motor protection plug with mains switch, phase inverter, indication of the direction of rotation and thermal motor protection.	6087200	C	☎

You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

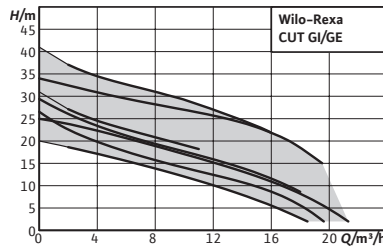

Accessories **Page**
Commissioning/maintenance 683

Select 4 online

All information at www.wilo-select.com

Wilo-Rexa CUT



Construction

Submersible sewage pump with macerator for intermittent duty and continuous duty, for stationary and portable wet well installation.

Application

Pumping of

- Sewage containing faeces in accordance with (DIN) EN 12050-1
- Wastewater

Scope of delivery

- Pump
- 10 m connection cable with plug (single-phase version) or bare cable end (three-phase version)
- Installation and operating instructions

Your advantages

- Especially reliable due to ATEX approval and longitudinally watertight cable inlet (CUT GE...)
- Excellent operational reliability due to spherically formed macerator with pulling cut
- Long service life through a high-quality motor seal with two independent mechanical seals and optional pencil electrode for sealing chamber control

Price group: PG8


Ordering information									
Type	Pressure port	Rated power	Connection cable length	Mains connection	Explosion protection	Art. no.			
		P_2 kW	D m		ATEX				EUR
Rexa CUT GE03.20/P-T15-2-540X	DN 32/40, Rp 1¼	1.50	10	3~400 V, 50 Hz	yes	6075981	L		1,351.-
Rexa CUT GE03.20/P-T15-2-540X 20m	DN 32/40, Rp 1¼	1.50	20	3~400 V, 50 Hz	yes	6080435	L		1,486.-
Rexa CUT GE03.25/P-T25-2-540X	DN 32/40, Rp 1¼	2.50	10	3~400 V, 50 Hz	yes	6069866	L		1,615.-
Rexa CUT GE03.25/P-T25-2-540X 20m	DN 32/40, Rp 1¼	2.50	20	3~400 V, 50 Hz	yes	6079714	L		1,722.-
Rexa CUT GE03.34/P-T39-2-540X	DN 32/40, Rp 1¼	3.90	10	3~400 V, 50 Hz	yes	6069867	L		1,870.-
Rexa CUT GE03.34/P-T39-2-540X 20m	DN 32/40, Rp 1¼	3.90	20	3~400 V, 50 Hz	yes	6079713	L		1,977.-
Rexa CUT GI03.26/S-M15-2-523/P	DN 32/40, Rp 1¼	1.50	10	1~230 V, 50 Hz	no	6081534	L		1,357.-

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG8

Ordering information								
Type	Pressure port	Rated power	Connection cable length	Mains connection	Explosion protection	Art. no.		
		P_2 kW	D m		ATEX			EUR
Rexa CUT GI03.26/S-T15-2-540	DN 32/40, Rp 1¼	1.50	10	3~400 V, 50 Hz	no	6069868	L	1,218.-
Rexa CUT GI03.29/S-M15-2-523/P	DN 32/40, Rp 1¼	1.50	10	1~230 V, 50 Hz	no	6081535	L	1,426.-
Rexa CUT GI03.29/S-T15-2-540	DN 32/40, Rp 1¼	1.50	10	3~400 V, 50 Hz	no	6075983	L	1,298.-
Rexa CUT GI03.31/S-M15-2-523/P	DN 32/40, Rp 1¼	1.50	10	1~230 V, 50 Hz	no	6081536	L	1,507.-
Rexa CUT GI03.31/S-T15-2-540	DN 32/40, Rp 1¼	1.50	10	3~400 V, 50 Hz	no	6080483	L	1,345.-
Rexa CUT GI03.41/S-T25-2-540	DN 32/40, Rp 1¼	2.50	10	3~400 V, 50 Hz	no	6080486	L	1,715.-

Installation drawing stationary wet well installation

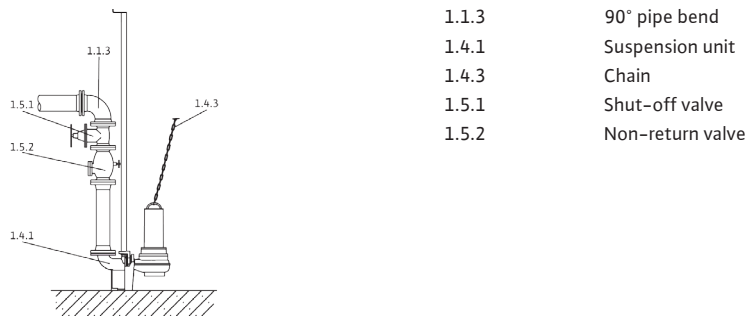

- 1.1.3 90° pipe bend
- 1.4.1 Suspension unit
- 1.4.3 Chain
- 1.5.1 Shut-off valve
- 1.5.2 Non-return valve

Price group: PG14

Accessories for stationary wet well installation DN40

Series	Reference number	Description	Art. no.		EUR
Suspension unit DN 40/50	1.4.1	Made of EN-GJL-250, painted, with free passage in DN 40, foot elbow including pump holder, profile joint, installation and floor fixation accessories and double-pipe guide pipe bracket (26.9x2 mm) without guide pipes.	2057179	L	365.-
Guide pipe Ø26.9x2mm 6m 1.4301	1.4.15	Guide pipe suitable for use with the suspension unit. Safe guide of the pump to the coupling connection. The number depends on the suspension unit.	6049244	L	93.-
Non-return valve Rp 1½	1.5.2	made of EN-GJL-250, with female thread	4027330	L	148.-
Gate valve Rp 1½, G-CuSn10	1.5.1	made of red brass, with female thread	2525187	L	64.-
Sling chain kit PCS-CE, galvanised steel, 400 kg, 5 m	1.4.3	As chain sling with 2 shackles in galvanised steel. Bearing capacity: 400 kg	6063140	L	149.-
Sling chain kit PCS-CE, galvanised steel, 400 kg, 10 m	1.4.3	As chain sling with 2 shackles in galvanised steel. Bearing capacity: 400 kg	6063142	L	277.-
Sling chain kit PCS-CE, stainless steel, 400 kg, 5 m	1.4.3	As chain sling with 2 shackles in 1.4401 stainless steel. Bearing capacity: 400 kg	6063136	L	410.-
Sling chain kit PCS-CE, stainless steel, 400 kg, 10 m	1.4.3	As chain sling with 2 shackles in 1.4401 stainless steel. Bearing capacity: 400 kg	6063138	L	646.-
Mounting accessories DN 40/50/65, PN 10	1.4.12	For one flange connection, with screws, nuts and flat gasket	6076963	L	25.-


☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG14

Accessories for stationary wet well installation DN50					
Type	Reference number	Description	Art. no.		
					EUR
Suspension unit DN 40/50	1.4.1	Made of EN-GJL-250, painted, with free passage in DN 40, foot elbow including pump holder, profile joint, installation and floor fixation accessories and double-pipe guide pipe bracket (26.9x2 mm) without guide pipes.	2057179	L	365.-
Guide pipe Ø26.9x2mm 6m 1.4301	1.4.15	Guide pipe suitable for use with the suspension unit. Safe guide of the pump to the coupling connection. The number depends on the suspension unit.	6049244	L	93.-
Non-return valve DN 50	1.5.2	made of EN-GJL-250, according to DIN EN 12050-4, including 1 set mounting accessories	2017166	L	259.-
Gate valve DN 50, EN-GJL-250	1.5.1	made of EN-GJL-250, including 1 set mounting accessories	2017160	L	184.-
90° pipe elbow DN 50	1.1.3	Made of EN-GJS-400-15, with 2 flanges, including 1 set installation accessories	2018053	L	185.-
Sling chain kit PCS-CE, galvanised steel, 400 kg, 5 m	1.4.3	As chain sling with 2 shackles in galvanised steel. Bearing capacity: 400 kg	6063140	L	149.-
Sling chain kit PCS-CE, galvanised steel, 400 kg, 10 m	1.4.3	As chain sling with 2 shackles in galvanised steel. Bearing capacity: 400 kg	6063142	L	277.-
Sling chain kit PCS-CE, stainless steel, 400 kg, 5 m	1.4.3	As chain sling with 2 shackles in 1.4401 stainless steel. Bearing capacity: 400 kg	6063136	L	410.-
Sling chain kit PCS-CE, stainless steel, 400 kg, 10 m	1.4.3	As chain sling with 2 shackles in 1.4401 stainless steel. Bearing capacity: 400 kg	6063138	L	646.-
Y-piece DN 50	1.1.5	Made of steel, galvanised, PN 10/16 flanges in accordance with DIN 2501 with 2 sets of installation accessories	2019042	L	412.-
Mounting accessories DN 40/50/65, PN 10	1.4.12	For one flange connection, with screws, nuts and flat gasket	6076963	L	25.-

Installation drawing portable wet well installation

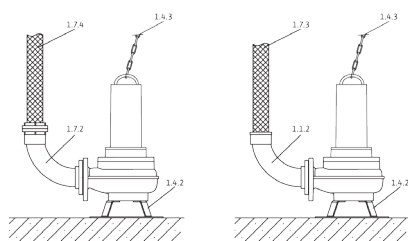


- 1.1.2 90° pipe bend with hose connection
- 1.4.2 Pump foot
- 1.4.3 Chain
- 1.7.3 Pressure hose
- 1.7.4 Pressure hose with Storz coupling
- 1.7.5 90° pipe bend with Storz coupling

Price group: PG14


Accessories for portable wet well installation					
Type	Reference number	Description	Art. no.		
					EUR
Floor supporting foot DN 40	1.4.2	Made of steel (S235JR), powder-coated, including fixation material	6069669	L	88.-
90° pipe elbow DN 40/Rp 1½	1.1.2	consisting of threaded flange DN 40/Rp 1½ (galvanized steel), 90° elbow R 1½/Rp 1½ (cast iron) and mounting accessories.	2057401	L	99.-
Sling chain kit PCS-CE, galvanised steel, 400 kg, 5 m	1.4.3	As chain sling with 2 shackles in galvanised steel. Bearing capacity: 400 kg	6063140	L	149.-
Sling chain kit PCS-CE, galvanised steel, 400 kg, 10 m	1.4.3	As chain sling with 2 shackles in galvanised steel. Bearing capacity: 400 kg	6063142	L	277.-

🚚 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, 📞 = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG14

Accessories for portable wet well installation					
Type	Reference number	Description	Art. no.		
					EUR
Sling chain kit PCS-CE, stainless steel, 400 kg, 5 m	1.4.3	As chain sling with 2 shackles in 1.4401 stainless steel. Bearing capacity: 400 kg	6063136	L	410.-
Sling chain kit PCS-CE, stainless steel, 400 kg, 10 m	1.4.3	As chain sling with 2 shackles in 1.4401 stainless steel. Bearing capacity: 400 kg	6063138	L	646.-
Synthetic pressure hose 3 m, Ø 42 mm	1.7.3	Inside Ø 42 mm, PN 6, including hose clip	2027641	K	41.-
Synthetic pressure hose 5 m, Ø 42 mm	1.7.3	Inside Ø 42 mm, PN 6, including hose clip	2027642	L	70.-
Synthetic pressure hose 15 m, Ø 42 mm	1.7.3	Inside Ø 42 mm, PN 6, including hose clip	2027643	K	129.-

Price group: PG14

Electrical accessories – level control with dynamic pressure system					
Level measurement via an open dynamic pressure system with the option of a separate dynamic pressure bell for the high water level.					
Type	Description	Art. no.			
					EUR
EC-L-1x12A-DOL-MT34-WM-EMS-IPS	Microcontroller-controlled switchgear with LC display, symbol-based menu navigation and integrated pressure transducer for level-dependent control of a submersible pump by means of float switches, level sensor or immersion bell. WITHOUT main switch, mains isolator must be provided on-site! Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543212	L		892.-
EC-L-2x12A-DOL-MT34-WM-EMS-IPS	Microcontroller-controlled switchgear with LC display, symbol-based menu navigation and integrated pressure transducer for level-dependent control of two submersible pumps by means of float switches, level sensor or immersion bell. WITHOUT main switch, mains isolator must be provided on-site! Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543222	L		1,372.-
Dynamic pressure bell with 10 m hose	Pneumatic signal transmitter for media containing faeces with a max. temperature of 60 °C. The signal transmitter is open in direction of the fluid and must be ventilated after each pumping out (OFF depending on time).	2516976	L		88.-
Bubbling-through system	Small compressor for constant aeration of the dynamic pressure bell, including non-return valve, 3 m hose and T-connector.	2516977	L		216.-
Flash light 24 VDC	Xenon flashing light for wall mounting for indoor and outdoor installation. Luminous color: red, flash frequency: 0,75 Hz	2551612	A		☞
Flash light 1~230 VAC	Xenon flashing light for wall mounting for indoor and outdoor installation. Luminous color: red, flash frequency: 0,75 Hz	2551613	L		140.-
Signal horn 12-24 VDC	Horn with a bell mouth for wall mounting for indoor and outdoor use. Alarm signal by electromechanical sound generation with steel diaphragm (92 dBA).	2017208	A		☞
Signal horn 1~230 V	Horn with a bell mouth for wall mounting for indoor and outdoor use. Alarm signal by electromechanical sound generation with steel diaphragm (88 dBA).	501459398	L		84.-
NiMH rechargeable battery, 9 V/200 mAh	Rechargeable battery to be installed in the switchgears Wilo-control MS-L and EC-L for a mains-independent alarm	2522850	L		25.-

You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☞ = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG14

Electrical accessories – level control with float switch

Level measurement using a level sensor with various measurement ranges, including high water alarm and dry-running protection.

Type	Description	Art. no.		EUR
MS-L-1x4kW-DOL	Microprocessor-controlled switchgear for level-dependent control of a submersible pump with float switch.	2539741	L	504.-
MS-L-2x4kW-DOL	Microprocessor-controlled switchgear for level-dependent control of 2 submersible pumps with float switch.	2539745	L	681.-
Float switch MS1 with 10 m cable	Signal transmitters for aggressive fluids and fluids containing faeces up to a max. temperature of 80 °C. Switching: up „ON“/down „OFF“.	2004593	L	114.-
Float switch WA65 with 5 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 60 °C. Switching: up „ON“/down „OFF“.	503211390	L	82.-
Float switch WA65 with 10 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 60 °C. Switching: up „ON“/down „OFF“.	503211893	L	155.-
Float switch WA65 with 20 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 60 °C. Switching: up „ON“/down „OFF“.	2004431	L	231.-
Float switch WA65 with 30 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 60 °C. Switching: up „ON“/down „OFF“.	2004432	L	314.-
Ex cut-off relay (2-circuit)	Ex cut-off relay for the connection of 2 float switches for level control in explosive atmospheres.	2513059	L	721.-
Ex cut-off relay (3-circuit)	Ex cut-off relay for the connection of 3 float switches for level control in explosive atmospheres.	2510698	K	909.-
Flash light 1~230 VAC	Xenon flashing light for wall mounting for indoor and outdoor installation. Luminous color: red, flash frequency: 0,75 Hz	2551613	L	140.-
Signal horn 1~230 V	Horn with a bell mouth for wall mounting for indoor and outdoor use. Alarm signal by electromechanical sound generation with steel diaphragm (88 dBA).	501459398	L	84.-

You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

Price group: PG14

Electrical accessories – level control with level sensor

Level measurement using a level sensor with various measurement ranges, including high water alarm and dry-running protection. The breakdown barrier and the Ex cut-off relays are not required except for the connection of signal transmitters in potentially explosive areas! These can also be dispensed with when the SC-L...-Ex switchgear is used!

Type	Description	Art. no.		EUR
EC-L-1x12A-DOL-MT34-WM	Microcontroller-controlled switchgear with LC display and symbol-based menu navigation for level-dependent control of a submersible pump by means of float switches or level sensor. Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543210	L	914.-
EC-L-1x12A-DOL-MT34-WM-EMS	Microcontroller-controlled switchgear with LC display and symbol-based menu navigation for level-dependent control of a submersible pump by means of float switches or level sensor. WITHOUT main switch, mains isolator must be provided on-site! Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543211	L	832.-
EC-L-2x12A-DOL-MT34-WM	Microcontroller-controlled switchgear with LC display and symbol-based menu navigation for level-dependent control of submersible pumps by means of float switches or level sensor. Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543220	L	1,444.-

You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.


🚚 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, 📞 = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG14

Electrical accessories – level control with level sensor

Level measurement using a level sensor with various measurement ranges, including high water alarm and dry-running protection. The breakdown barrier and the Ex cut-off relays are not required except for the connection of signal transmitters in potentially explosive areas! These can also be dispensed with when the SC-L..-Ex switchgear is used!

Type	Description	Art. no.		EUR
				
EC-L-2x12A-DOL-MT34-WM-EMS	Microcontroller-controlled switchgear with LC display and symbol-based menu navigation for level-dependent control of submersible pumps by means of float switches or level sensor. WITHOUT main switch, mains isolator must be provided on-site! Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543221	L	1,269.-
Level sensor 0-1 mWS, with 10 m cable	Signal transmitter with ATEX approval for fluids containing faeces with a maximum temperature of 60 °C. Output signal: 4...20 mA	2519924	L	442.-
Level sensor 0-1 mWS, with 30 m cable	Signal transmitter with ATEX approval for fluids containing faeces with a maximum temperature of 60 °C. Output signal: 4...20 mA	2519925	L	522.-
Level sensor 0-1 mWS, with 50 m cable	Signal transmitter with ATEX approval for fluids containing faeces with a maximum temperature of 60 °C. Output signal: 4...20 mA	2519926	L	632.-
Level sensor 0-2.5 mWS with 10 m cable	Signal transmitter with ATEX approval for fluids containing faeces with a maximum temperature of 60 °C. Output signal: 4...20 mA	2519921	L	442.-
Level sensor 0-2.5 mWS, with 30 m cable	Signal transmitter with ATEX approval for fluids containing faeces with a maximum temperature of 60 °C. Output signal: 4...20 mA	2519922	L	522.-
Level sensor 0-2.5 mWS, with 50 m cable	Signal transmitter with ATEX approval for fluids containing faeces with a maximum temperature of 60 °C. Output signal: 4...20 mA	2519923	L	632.-
Flash light 1~230V	Optical alarm signal for connection to a switchgear. Suitable for outside installation.	2551613	L	140.-
Signal horn 1~230V	Acoustic alarm signal (88 dBA) for connection to a switchgear. Suitable for outside installation.	501459398	L	84.-
Cable clamp	For fixation of a signal transmitter in the pump chamber. The clamp is fixed in the pump chamber with a hook; the cable of the signal transmitter is clamped and fixed via the intrinsic weight of the signal transmitter.	2519927	L	22.-
Zener barrier	Breakdown barrier (Zener barrier) for the connection of one level sensor in an explosive atmosphere.	2541372	L	277.-
NiMh rechargeable battery, 9 V/200 mAh	Rechargeable battery to be installed in the switchgears Wilo-control MS-L and EC-L for a mains-independent alarm	2522850	L	25.-


You can find more accessories at the end in the chapter **Electric accessories!**

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

Price group: PG14

Electrical accessories – mains-independent alarm signal

Alarm signal for detection of flooding in rooms and buildings. The alarm signal is acoustic, optical or wireless. In addition, other consumers can be controlled directly.


Type	Description	Art. no.		EUR
				
DrainAlarm 2	Network-independent alarm switchgear with optical and acoustic alarm signal and with a connection for one float switch.	2545133	L	412.-
DrainAlarm GSM	Network-independent alarm switchgear with optical, acoustic and wireless (per GSM) alarm signal and with a connection for one float switch.	2542911	L	1,111.-
Float switch MS1 with 10 m cable	Signal transmitters for aggressive fluids and fluids containing faeces up to a max. temperature of 80 °C. Switching: up „ON“/down „OFF“.	2004593	L	114.-
Flash light 1~230V	Optical alarm signal for connection to a switchgear. Suitable for outside installation.	2551613	L	140.-
Signal horn 1~230V	Acoustic alarm signal (88 dBA) for connection to a switchgear. Suitable for outside installation.	501459398	L	84.-

You can find more accessories at the end in the chapter **Electric accessories!**

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

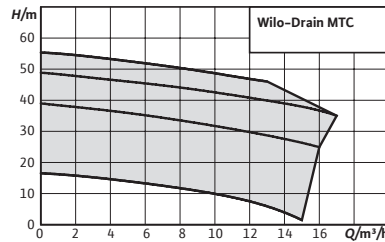

Accessories **Page**
Commissioning/maintenance 683

Select 4 online

All information at www.wilo-select.com

Wilo-Drain MTC



Construction

Submersible sewage pump with external macerator for continuous duty for stationary and portable wet well installation.

Application

Pumping of

- Sewage containing faeces
- Pre-cleaned sewage without faeces and long-fibre components
- Wastewater

Your advantages

- Heavy-duty version made of cast iron
- External macerator
- Sealing with mechanical seal on fluid side
- Sealing chamber

Scope of delivery


- Pump
- 10-metre connection cable with bare cable end
- A version with attached float switch and shockproof plug
- Installation and operating instructions

Price group: PG8

Ordering information								
Type	Pressure port	Rated power	Connection cable length	Mains connection	Explosion protection	Art. no.		
		P_2 kW	D m		ATEX			EUR
Drain MTC 32F39.16/30	DN 32	3.40	10	3~400 V, 50 Hz	no	2081263	L	1,967.-
Drain MTC 32F39.16/30Ex	DN 32	3.40	10	3~400 V, 50 Hz	yes	2081262	L	2,127.-
Drain MTC 32F49.17/66	DN 32	6.60	10	3~400 V, 50 Hz	no	2081265	L	5,606.-
Drain MTC 32F49.17/66Ex	DN 32	6.60	10	3~400 V, 50 Hz	yes	2081264	L	5,837.-
Drain MTC 32F55.13/66	DN 32	6.60	10	3~400 V, 50 Hz	no	2081267	L	5,689.-
Drain MTC 32F55.13/66Ex	DN 32	6.60	10	3~400 V, 50 Hz	yes	2081266	L	5,934.-
Drain MTC 40F16.15/7	DN 40 / Rp 1½	0.70	10	3~400 V, 50 Hz	no	2081261	L	1,292.-
Drain MTC 40F16.15/7-A	DN 40 / Rp 1½	0.70	10	1~230 V, 50 Hz	no	2081260	L	1,351.-

= ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Installation drawing stationary wet well installation



- 1.1.3 90° pipe bend
- 1.4.1 Suspension unit
- 1.4.3 Chain
- 1.5.1 Shut-off valve
- 1.5.2 Non-return valve

Price group: PG14

Accessories for stationary wet well installation MTC32F39...55

Type	Reference number	Description	Art. no.		EUR
Suspension unit Rp 1½	1.4.1	Made of EN-GJL-250, painted, with free passage in DN 32, foot elbow including pump holder, profile joint, installation and floor fixation accessories and single-pipe guide pipe bracket (26.9x2 mm) without guide pipe.	2082630	L	477.-
Guide pipe Ø26.9x2mm 6m 1.4301	1.4.15	Guide pipe suitable for use with the suspension unit. Safe guide of the pump to the coupling connection. The number depends on the suspension unit.	6049244	L	93.-
Non-return valve Rp 1½	1.5.2	made of EN-GJL-250, with female thread	4027330	L	148.-
Gate valve Rp 1½, G-CuSn10	1.5.1	made of red brass, with female thread	2525187	L	64.-
Sling chain kit PCS-CE, galvanised steel, 400 kg, 5 m	1.4.3	As chain sling with 2 shackles in galvanised steel. Bearing capacity: 400 kg	6063140	L	149.-
Sling chain kit PCS-CE, galvanised steel, 400 kg, 10 m	1.4.3	As chain sling with 2 shackles in galvanised steel. Bearing capacity: 400 kg	6063142	L	277.-
Sling chain kit PCS-CE, stainless steel, 400 kg, 5 m	1.4.3	As chain sling with 2 shackles in 1.4401 stainless steel. Bearing capacity: 400 kg	6063136	L	410.-
Sling chain kit PCS-CE, stainless steel, 400 kg, 10 m	1.4.3	As chain sling with 2 shackles in 1.4401 stainless steel. Bearing capacity: 400 kg	6063138	L	646.-


Price group: PG14

Accessories for stationary wet well installation MTC40


Type	Reference number	Description	Art. no.		EUR
Suspension unit DN 40/50	1.4.1	Made of EN-GJL-250, painted, with free passage in DN 40, foot elbow including pump holder, profile joint, installation and floor fixation accessories and double-pipe guide pipe bracket (26.9x2 mm) without guide pipes.	2057179	L	365.-
Guide pipe Ø26.9x2mm 6m 1.4301	1.4.15	Guide pipe suitable for use with the suspension unit. Safe guide of the pump to the coupling connection. The number depends on the suspension unit.	6049244	L	93.-
Non-return valve Rp 1½	1.5.2	made of EN-GJL-250, with female thread	4027330	L	148.-
Gate valve Rp 1½, G-CuSn10	1.5.1	made of red brass, with female thread	2525187	L	64.-
Sling chain kit PCS-CE, galvanised steel, 400 kg, 5 m	1.4.3	As chain sling with 2 shackles in galvanised steel. Bearing capacity: 400 kg	6063140	L	149.-

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG14


Accessories for stationary wet well installation MTC40					
Type	Reference number	Description	Art. no.		
					EUR
Sling chain kit PCS-CE, galvanised steel, 400 kg, 10 m	1.4.3	As chain sling with 2 shackles in galvanised steel. Bearing capacity: 400 kg	6063142	L	277.-
Sling chain kit PCS-CE, stainless steel, 400 kg, 5 m	1.4.3	As chain sling with 2 shackles in 1.4401 stainless steel. Bearing capacity: 400 kg	6063136	L	410.-
Sling chain kit PCS-CE, stainless steel, 400 kg, 10 m	1.4.3	As chain sling with 2 shackles in 1.4401 stainless steel. Bearing capacity: 400 kg	6063138	L	646.-

Installation drawing portable wet well installation

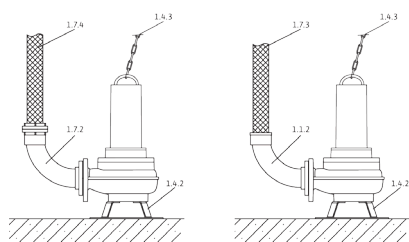




- 1.1.2 90° pipe bend with hose connection
- 1.4.2 Pump foot
- 1.4.3 Chain
- 1.7.3 Pressure hose
- 1.7.4 Pressure hose with Storz coupling
- 1.7.5 90° pipe bend with Storz coupling

Price group: PG14

Accessories for portable wet well installation MTC32F39...55					
Type	Reference number	Description	Art. no.		
					EUR
Floor supporting foot MTC 32F49, MTC 32F55	-	Made of steel (S235JR), lacquered, including fixation material	2098296	L	638.-
Floor supporting foot MTC 32F39	-	Made of steel (S235JR), lacquered, including fixation material	2098295	L	176.-
Sling chain kit PCS-CE, galvanised steel, 400 kg, 5 m	1.4.3	As chain sling with 2 shackles in galvanised steel. Bearing capacity: 400 kg	6063140	L	149.-
Sling chain kit PCS-CE, galvanised steel, 400 kg, 10 m	1.4.3	As chain sling with 2 shackles in galvanised steel. Bearing capacity: 400 kg	6063142	L	277.-
Sling chain kit PCS-CE, stainless steel, 400 kg, 5 m	1.4.3	As chain sling with 2 shackles in 1.4401 stainless steel. Bearing capacity: 400 kg	6063136	L	410.-
Sling chain kit PCS-CE, stainless steel, 400 kg, 10 m	1.4.3	As chain sling with 2 shackles in 1.4401 stainless steel. Bearing capacity: 400 kg	6063138	L	646.-

Price group: PG14

Accessories for portable wet well installation MTC40					
Type	Reference number	Description	Art. no.		
					EUR
90° pipe elbow DN 40/Rp 1½	1.1.2	consisting of threaded flange DN 40/Rp 1½ (galvanized steel), 90° elbow R 1½/Rp 1½ (cast iron) and mounting accessories.	2057401	L	99.-
Sling chain kit PCS-CE, galvanised steel, 400 kg, 5 m	1.4.3	As chain sling with 2 shackles in galvanised steel. Bearing capacity: 400 kg	6063140	L	149.-
Sling chain kit PCS-CE, galvanised steel, 400 kg, 10 m	1.4.3	As chain sling with 2 shackles in galvanised steel. Bearing capacity: 400 kg	6063142	L	277.-
Sling chain kit PCS-CE, stainless steel, 400 kg, 5 m	1.4.3	As chain sling with 2 shackles in 1.4401 stainless steel. Bearing capacity: 400 kg	6063136	L	410.-
Sling chain kit PCS-CE, stainless steel, 400 kg, 10 m	1.4.3	As chain sling with 2 shackles in 1.4401 stainless steel. Bearing capacity: 400 kg	6063138	L	646.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG14

Electrical accessories – level control with dynamic pressure system

Level measurement via an open dynamic pressure system with the option of a separate dynamic pressure bell for the high water level.

Type	Description	Art. no.		EUR
EC-L-1x12A-DOL-MT34-WM-EMS-IPS	Microcontroller-controlled switchgear with LC display, symbol-based menu navigation and integrated pressure transducer for level-dependent control of a submersible pump by means of float switches, level sensor or immersion bell. WITHOUT main switch, mains isolator must be provided on-site! Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543212	L	892.-
EC-L-2x12A-DOL-MT34-WM-EMS-IPS	Microcontroller-controlled switchgear with LC display, symbol-based menu navigation and integrated pressure transducer for level-dependent control of two submersible pumps by means of float switches, level sensor or immersion bell. WITHOUT main switch, mains isolator must be provided on-site! Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543222	L	1,372.-
Dynamic pressure bell with 10 m hose	Pneumatic signal transmitter for media containing faeces with a max. temperature of 60 °C. The signal transmitter is open in direction of the fluid and must be ventilated after each pumping out (OFF depending on time).	2516976	L	88.-
Bubbling-through system	Small compressor for constant aeration of the dynamic pressure bell, including non-return valve, 3 m hose and T-connector.	2516977	L	216.-
Flash light 24 VDC	Xenon flashing light for wall mounting for indoor and outdoor installation. Luminous color: red, flash frequency: 0,75 Hz	2551612	A	☞
Flash light 1~230 VAC	Xenon flashing light for wall mounting for indoor and outdoor installation. Luminous color: red, flash frequency: 0,75 Hz	2551613	L	140.-
Signal horn 12-24 VDC	Horn with a bell mouth for wall mounting for indoor and outdoor use. Alarm signal by electromechanical sound generation with steel diaphragm (92 dBA).	2017208	A	☞
Signal horn 1~230 V	Horn with a bell mouth for wall mounting for indoor and outdoor use. Alarm signal by electromechanical sound generation with steel diaphragm (88 dBA).	501459398	L	84.-
NiMH rechargeable battery, 9 V/200 mAh	Rechargeable battery to be installed in the switchgears Wilo-control MS-L and EC-L for a mains-independent alarm	2522850	L	25.-

You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

Price group: PG14

Electrical accessories – level control with float switch

Level measurement using several float switches for the different water levels, including high water alarm signal. The breakdown barrier and the Ex cutoff relays are not required except for the connection of signal transmitters in potentially explosive areas! These can also be dispensed with when the SC-L..-Ex switchgear is used!

Type	Description	Art. no.		EUR
MS-L-1x4kW-DOL	Microprocessor-controlled switchgear for level-dependent control of a submersible pump with float switch.	2539741	L	504.-
MS-L-2x4kW-DOL	Microprocessor-controlled switchgear for level-dependent control of 2 submersible pumps with float switch.	2539745	L	681.-
SC-L-1x16A-T34-DOL-WM	Microprocessor-controlled switchgear for level-dependent control of one submersible motor pump via level sensor or float switches.	2538932	C	2,365.-
SC-L-2x16A-T34-DOL-WM	Microprocessor-controlled switchgear for level-dependent control of two submersible motor pumps via level sensor or float switches.	2538933	C	2,972.-
Float switch MS1 with 10 m cable	Signal transmitters for aggressive fluids and fluids containing faeces up to a max. temperature of 80 °C. Switching: up „ON”/down „OFF”.	2004593	L	114.-
Ex cut-off relay (2-circuit)	Ex cut-off relay for the connection of 2 float switches for level control in explosive atmospheres.	2513059	L	721.-

You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.


☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☞ = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG14

Electrical accessories – level control with float switch

Level measurement using several float switches for the different water levels, including high water alarm signal. The breakdown barrier and the Ex cutoff relays are not required except for the connection of signal transmitters in potentially explosive areas! These can also be dispensed with when the SC-L...-Ex switchgear is used!

Type	Description	Art. no.		EUR
				
Ex cut-off relay (3-circuit)	Ex cut-off relay for the connection of 3 float switches for level control in explosive atmospheres.	2510698	K	909.-
Ex cut-off relay (4-circuit)	Ex cut-off relay for the connection of 4 float switches for level control in explosive atmospheres.	2510699	K	853.-
Ex cut-off relay (5-circuit)	Ex cut-off relay for the connection of 5 float switches for level control in explosive atmospheres.	2510674	K	1,153.-
Flash light 1~230 VAC	Xenon flashing light for wall mounting for indoor and outdoor installation. Luminous color: red, flash frequency: 0,75 Hz	2551613	L	140.-
Signal horn 1~230 V	Horn with a bell mouth for wall mounting for indoor and outdoor use. Alarm signal by electromechanical sound generation with steel diaphragm (88 dBA).	501459398	L	84.-
NiMh rechargeable battery, 9 V/200 mAh	Rechargeable battery to be installed in the switchgears Wilo-control MS-L and EC-L for a mains-independent alarm	2522850	L	25.-


You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

Price group: PG14

Electrical accessories – mains-independent alarm signal

Alarm signal for detection of flooding in rooms and buildings. The alarm signal is acoustic, optical or wireless. In addition, other consumers can be controlled directly.

Type	Description	Art. no.		EUR
				
DrainAlarm 2	Network-independent alarm switchgear with optical and acoustic alarm signal and with a connection for one float switch.	2545133	L	412.-
DrainAlarm GSM	Network-independent alarm switchgear with optical, acoustic and wireless (per GSM) alarm signal and with a connection for one float switch.	2542911	L	1,111.-
Float switch MS1 with 10 m cable	Signal transmitters for aggressive fluids and fluids containing faeces up to a max. temperature of 80 °C. Switching: up „ON“/down „OFF“.	2004593	L	114.-
Flash light 1~230 VAC	Xenon flashing light for wall mounting for indoor and outdoor installation. Luminous color: red, flash frequency: 0,75 Hz	2551613	L	140.-
Signal horn 1~230 V	Horn with a bell mouth for wall mounting for indoor and outdoor use. Alarm signal by electromechanical sound generation with steel diaphragm (88 dBA).	501459398	L	84.-


You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

Price group: PG14

Electrical accessories – level control with level sensor

Level measurement using a level sensor with various measurement ranges, including high water alarm and dry-running protection. The breakdown barrier and the Ex cut-off relays are not required except for the connection of signal transmitters in potentially explosive areas! These can also be dispensed with when the SC-L...-Ex switchgear is used!

Type	Description	Art. no.		EUR
				
EC-L-1x12A-DOL-MT34-WM	Microcontroller-controlled switchgear with LC display and symbol-based menu navigation for level-dependent control of a submersible pump by means of float switches or level sensor. Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543210	L	914.-

You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Electrical accessories – level control with level sensor

Level measurement using a level sensor with various measurement ranges, including high water alarm and dry-running protection. The breakdown barrier and the Ex cut-off relays are not required except for the connection of signal transmitters in potentially explosive areas! These can also be dispensed with when the SC-L...-Ex switchgear is used!

Type	Description	Art. no.		EUR
EC-L-1x12A-DOL-MT34-WM-EMS	Microcontroller-controlled switchgear with LC display and symbol-based menu navigation for level-dependent control of a submersible pump by means of float switches or level sensor. WITHOUT main switch, mains isolator must be provided on-site! Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543211	L	832.-
EC-L-2x12A-DOL-MT34-WM	Microcontroller-controlled switchgear with LC display and symbol-based menu navigation for level-dependent control of submersible pumps by means of float switches or level sensor. Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543220	L	1,444.-
EC-L-2x12A-DOL-MT34-WM-EMS	Microcontroller-controlled switchgear with LC display and symbol-based menu navigation for level-dependent control of submersible pumps by means of float switches or level sensor. WITHOUT main switch, mains isolator must be provided on-site! Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543221	L	1,269.-
EC-L-3x12A-DOL-MT34-WM	Microcontroller-controlled switchgear with LCD display and symbol-based menu navigation for level-dependent control of three submersible pumps by means of a level sensor. Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543230	L	2,107.-
SC-L-1x16A-T34-SD-WM	Microprocessor-controlled switchgear for level-dependent control of one submersible motor pump via level sensor or float switches.	2543273	C	2,621.-
SC-L-2x16A-T34-SD-WM		2543274	C	3,382.-
Level sensor 0-1 mWS, with 10 m cable	Signal transmitter with ATEX approval for fluids containing faeces with a maximum temperature of 60 °C. Output signal: 4...20 mA	2519924	L	442.-
Level sensor 0-1 mWS, with 30 m cable		2519925	L	522.-
Level sensor 0-1 mWS, with 50 m cable		2519926	L	632.-
Level sensor 0-2.5 mWS with 10 m cable		2519921	L	442.-
Level sensor 0-2.5 mWS, with 30 m cable		2519922	L	522.-
Level sensor 0-2.5 mWS, with 50 m cable		2519923	L	632.-
Cable clamp		For fixation of a signal transmitter in the pump chamber. The clamp is fixed in the pump chamber with a hook; the cable of the signal transmitter is clamped and fixed via the intrinsic weight of the signal transmitter.	2519927	L
Zener barrier	Breakdown barrier (Zener barrier) for the connection of one level sensor in an explosive atmosphere.	2541372	L	277.-
Flash light 24 VDC	Xenon flashing light for wall mounting for indoor and outdoor installation. Luminous color: red, flash frequency: 0,75 Hz	2551612	A	☞
Flash light 1~230 VAC		2551613	L	140.-
Signal horn 12-24 VDC	Horn with a bell mouth for wall mounting for indoor and outdoor use. Alarm signal by electromechanical sound generation with steel diaphragm (92 dBA).	2017208	A	☞
Signal horn 1~230 V	Horn with a bell mouth for wall mounting for indoor and outdoor use. Alarm signal by electromechanical sound generation with steel diaphragm (88 dBA).	501459398	L	84.-
NiMH rechargeable battery, 9 V/200 mAh	Rechargeable battery to be installed in the switchgears Wilo-control MS-L and EC-L for a mains-independent alarm	2522850	L	25.-

You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☞ = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.



Accessories **Page**
Commissioning/maintenance 683

Select 4 online

All information at www.wilo-select.com

Wilo-Initial Waste



Construction

Submersible sewage pump for intermittent operation for stationary and portable wet well installation.

Application

Pumping of

- Sewage not containing faeces
- Wastewater

Scope of delivery

- Pump with a 10 m cable, mains plug and fitted float switch
- Threaded elbow Rp 1½"
- Installation and operating instructions


Your advantages

- Easy installation in narrow shafts due to its compact design and low weight
- Automatic motor protection provided by the temperature sensor
- Automatic mode due to the float switch
- Excellent reliability due to its robust material and double gasket

Price group: PG7

Ordering information							
	Pressure port	Rated power	Connection cable length	Mains connection	Explosion protection	Art. no.	
		P_2 kW	D m		ATEX		
Initial WASTE 14-9	Rp 1½	0.65	10	1~230 V, 50 Hz	no	4168022	L
Initial WASTE 16-11	Rp 1½	0.75	10	1~230 V, 50 Hz	no	4186549	A

☑ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

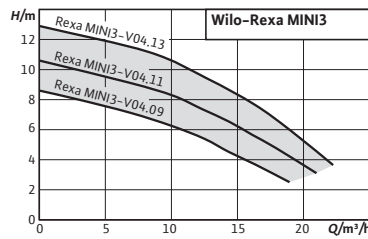

Accessories Page
Commissioning/maintenance 683

Select 4 online

All information at www.wilo-select.com

Wilo-Rexa MINI3



Construction

Submersible sewage pump for intermittent operation for stationary and portable wet well installation.

Application

- Pumping of
- Sewage not containing faeces
 - Wastewater

Scope of delivery

- Pump with connection cable and
- Plug (version P)
 - Plug and float switch (version A)
 - Bare cable end (3~)
- Installation and operating instructions

Your advantages

- High efficiency and operational reliability thanks to the optimised hydraulics
- Easy installation – even in narrow drainage pits – thanks to its lightweight, compact design with integrated condenser and threaded flange
- Reliable use in a variety of drainage applications thanks to the corrosion-free impeller and sealed cable inlet
- Longer maintenance intervals thanks to the high-volume sealing chamber and double seal
- Quick maintenance facilitated by direct access to the sealing chamber and pump housing

Price group: PG7

Ordering information							
Type	Pressure port	Connection cable length	Rated power	Mains connection	Art. no.		
		D m	P ₂ kW				
Rexa MINI3-V04.09/ M05-523/A-5M	G 1½	5	0.50	1~230 V, 50 Hz	3094002	L	526.-
Rexa MINI3-V04.09/ M05-523/A-10M	G 1½	10	0.50	1~230 V, 50 Hz	3094009	L	542.-
Rexa MINI3-V04.09/ M05-523/P-5M	G 1½	5	0.50	1~230 V, 50 Hz	3094001	L	502.-
Rexa MINI3-V04.09/ M05-523/P-10M	G 1½	10	0.50	1~230 V, 50 Hz	3094008	L	529.-
Rexa MINI3-V04.09/ T05-540/O-5M	G 1½	5	0.50	3~400 V, 50 Hz	3094003	L	479.-
Rexa MINI3-V04.09/ T05-540/O-10M	G 1½	10	0.50	3~400 V, 50 Hz	3094010	L	506.-

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☞ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG7

Ordering information							
Type	Pressure port	Connection cable length	Rated power	Mains connection	Art. no.		
		D m	P_2 kW				
Rexa MINI3-V04.11/ M06-523/A-5M	G 1½	5	0.60	1~230 V, 50 Hz	3094005	L	542.-
Rexa MINI3-V04.11/ M06-523/A-10M	G 1½	10	0.60	1~230 V, 50 Hz	3094012	L	577.-
Rexa MINI3-V04.11/ M06-523/P-5M	G 1½	5	0.60	1~230 V, 50 Hz	3094004	L	534.-
Rexa MINI3-V04.11/ M06-523/P-10M	G 1½	10	0.60	1~230 V, 50 Hz	3094011	L	563.-
Rexa MINI3-V04.11/ T06-540/O-5M	G 1½	5	0.60	3~400 V, 50 Hz	3094006	L	502.-
Rexa MINI3-V04.11/ T06-540/O-10M	G 1½	10	0.60	3~400 V, 50 Hz	3094013	L	529.-
Rexa MINI3-V04.13/ M08-523/A-5M	G 1½	5	0.75	1~230 V, 50 Hz	3094007	L	558.-

Price group: PG14

Accessories for stationary wet well installation DN50				
Type	Description	Art. no.		EUR
Shut-off ball cock Rp 1½, G-CuSn10	made of brass, nickel-plated, with female thread	4027337	L	62.-
Non-return valve Rp 1½	made of EN-GJL-250, with female thread	4027330	L	148.-
90° pipe elbow G 1½	Made of steel, galvanised with G 1½ / R 1½ female/male thread	2083117	L	53.-
Mounting accessories DN 40/50/65, PN 10	For one flange connection, with screws, nuts and flat gasket	6076963	L	25.-
Lifting chain kit PCS-LU, stainless steel, 200 kg, 1 m	Lifting chain for raising and lowering pumps; incl. 1 shackle.	6084895	L	79.-
Lifting chain kit PCS-LU, stainless steel, 200 kg, 3 m	Lifting chain for raising and lowering pumps; incl. 1 shackle; with connecting links each metre for suspension.	6084894	L	178.-
Lifting chain kit PCS-LU, stainless steel, 200 kg, 6 m	Lifting chain for raising and lowering pumps; incl. 1 shackle; with connecting links each metre for suspension.	6084893	L	240.-

Price group: PG14

Accessories for portable wet well installation DN50				
Type	Description	Art. no.		EUR
Hose nozzle Ø 40 mm/R 1½	with male thread made of plastic, incl. hose clip	4027335	L	36.-
Synthetic pressure hose 3 m, Ø 42 mm	Inside Ø 42 mm, PN 6, including hose clip	2027641	K	41.-
Synthetic pressure hose 5 m, Ø 42 mm	Inside Ø 42 mm, PN 6, including hose clip	2027642	L	70.-
Synthetic pressure hose 15 m, Ø 42 mm	Inside Ø 42 mm, PN 6, including hose clip	2027643	K	129.-
Fixed coupling Storz C/G 1½	made of aluminium, Storz C connection, with male thread	6072745	A	21.-
Plastic spiral hose 5 m, with Storz C	Inside Ø 52 mm, including coupling, 4.5/13.5 bar	6022269	L	308.-

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☞ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG14

Accessories for portable wet well installation DN50

Type	Description	Art. no.		EUR
Plastic spiral hose 10 m, with Storz C	Inside Ø 52 mm, including coupling, 4.5/13.5 bar	6022270	K	496.-
Plastic spiral hose 20 m, with Storz C	Inside Ø 52 mm, including coupling, 4.5/13.5 bar	6022271	K	696.-
Lifting chain kit PCS-LU, stainless steel, 200 kg, 1 m	Lifting chain for raising and lowering pumps; incl. 1 shackle.	6084895	L	79.-
Lifting chain kit PCS-LU, stainless steel, 200 kg, 3 m	Lifting chain for raising and lowering pumps; incl. 1 shackle; with connecting links each metre for suspension.	6084894	L	178.-
Lifting chain kit PCS-LU, stainless steel, 200 kg, 6 m	Lifting chain for raising and lowering pumps; incl. 1 shackle; with connecting links each metre for suspension.	6084893	L	240.-

Price group: PG14

Electrical accessories – simple mains connection

Accessories for simple connection to the mains system.

Type	Description	Art. no.		EUR
CEE motor protection plug 1.2...1.8 A	CEE phase inverter plug with indication of the direction of rotation and thermal motor protection Connection for a float switch. With On/Off switch for „manual/automatic mode”	2525864	C	369.-
CEE motor protection plug 1.8...2.6 A	CEE phase inverter plug with indication of the direction of rotation and thermal motor protection Connection for a float switch. With On/Off switch for „manual/automatic mode”	2525865	L	359.-

You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

Price group: PG14

Electrical accessories – level control with float switch

Level measurement using several float switches for the different water levels, including high water alarm signal.


Type	Description	Art. no.		EUR
MS-L-1x4kW-DOL	Microprocessor-controlled switchgear for level-dependent control of a submersible pump with float switch.	2539741	L	504.-
MS-L-2x4kW-DOL	Microprocessor-controlled switchgear for level-dependent control of 2 submersible pumps with float switch.	2539745	L	681.-
Float switch WA65 with 5 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 60 °C. Switching: up „ON”/down „OFF”.	503211390	L	82.-
Float switch WA65 with 10 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 60 °C. Switching: up „ON”/down „OFF”.	503211893	L	155.-
Float switch WA65 with 20 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 60 °C. Switching: up „ON”/down „OFF”.	2004431	L	231.-
Float switch WA65 with 30 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 60 °C. Switching: up „ON”/down „OFF”.	2004432	L	314.-
Flash light 1~230 VAC	Xenon flashing light for wall mounting for indoor and outdoor installation. Luminous color: red, flash frequency: 0,75 Hz	2551613	L	140.-
Signal horn 1~230 V	Horn with a bell mouth for wall mounting for indoor and outdoor use. Alarm signal by electromechanical sound generation with steel diaphragm (88 dBA).	501459398	L	84.-
NiMh rechargeable battery, 9 V/200 mAh	Rechargeable battery to be installed in the switchgears Wilo-control MS-L and EC-L for a mains-independent alarm	2522850	L	25.-

You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☞ = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

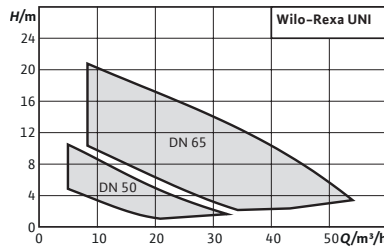

Accessories **Page**
Commissioning/maintenance 683

Series extension

Select 4 online
All information at www.wilo-select.com

Wilo-Rexa UNI



Construction

Submersible sewage pump for intermittent operation for stationary and portable wet well installation

Application

Pumping of

- Sewage containing faeces in accordance with EN 12050-1
- Wastewater
- Fluids with a pH value of > 4.5
- Material version „B”: Aggressive fluids, e.g. lake/sea water, condensate, distilled water

Scope of delivery

- Submersible sewage pump with 10 m cable
- Operating and maintenance manual


Your advantages

- Excellent reliability due to corrosion-free hydraulics for universal application and various fluids
- Easy installation thanks to its light weight, integrated capacitor at the single-phase motor and flange with integrated fixation
- Optimum efficiency and operational safety thanks to its vortex hydraulics and smooth surfaces
- Quick maintenance facilitated by direct access to the sealing chamber and pump housing
- Long maintenance interval thanks to its double seal and a high volume sealing chamber

Price group: PG7

Ordering information							Price group: PG7	
Type	Pressure port	Connection cable length	Rated power	Mains connection	Art. no.		EUR	
		D m	P ₂ kW					
Rexa UNI V05/M04-523/A	DN 50	10	0.37	1~230 V, 50 Hz	6082114	L	679.-	
Rexa UNI V05/M04-523/P	DN 50	10	0.37	1~230 V, 50 Hz	6082113	L	623.-	
Rexa UNI V05/M06-523/A	DN 50	10	0.55	1~230 V, 50 Hz	6082118	L	867.-	
Rexa UNI V05/M06-523/P	DN 50	10	0.55	1~230 V, 50 Hz	6082117	L	811.-	
Rexa UNI V05/M08-523/A	DN 50	10	0.75	1~230 V, 50 Hz	6082122	L	1,126.-	
Rexa UNI V05/M08-523/P	DN 50	10	0.75	1~230 V, 50 Hz	6082121	L	1,070.-	
Rexa UNI V05/T04-540	DN 50	10	0.37	3~400 V, 50 Hz	6082115	L	618.-	
Rexa UNI V05/T04-540/A	DN 50	10	0.37	3~400 V, 50 Hz	6082116	L	1,015.-	
Rexa UNI V05/T06-540	DN 50	10	0.55	3~400 V, 50 Hz	6082119	L	805.-	
Rexa UNI V05/T06-540/A	DN 50	10	0.55	3~400 V, 50 Hz	6082120	L	1,203.-	
Rexa UNI V05/T08-540	DN 50	10	0.75	3~400 V, 50 Hz	6082123	L	1,065.-	


= ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Ordering information							
Type	Pressure port	Connection cable length	Rated power	Mains connection	Art. no.		
		D m	P_2 kW				EUR
Rexa UNI V05/T08-540/A	DN 50	10	0.75	3~400 V, 50 Hz	6082124	L	1,462.-
Rexa UNI V05B/M04-523/A	DN 50	10	0.37	1~230 V, 50 Hz	6087653	L	1,019.-
Rexa UNI V05B/M06-523/A	DN 50	10	0.55	1~230 V, 50 Hz	6087655	L	1,300.-
Rexa UNI V05B/M08-523/A	DN 50	10	0.75	1~230 V, 50 Hz	6087657	L	1,689.-
Rexa UNI V05B/T04-540	DN 50	10	0.37	3~400 V, 50 Hz	6087654	L	928.-
Rexa UNI V05B/T06-540	DN 50	10	0.55	3~400 V, 50 Hz	6087656	L	1,207.-
Rexa UNI V05B/T08-540	DN 50	10	0.75	3~400 V, 50 Hz	6087658	L	1,598.-
Rexa UNI V06/M11-523/A	DN 65	10	1.10	1~230 V, 50 Hz	6082138	L	1,396.-
Rexa UNI V06/M11-523/P	DN 65	10	1.10	1~230 V, 50 Hz	6082137	L	1,340.-
Rexa UNI V06/M15-523/A	DN 65	10	1.50	1~230 V, 50 Hz	6082142	L	1,545.-
Rexa UNI V06/M15-523/P	DN 65	10	1.50	1~230 V, 50 Hz	6082141	L	1,485.-
Rexa UNI V06/T11-540	DN 65	10	1.10	3~400 V, 50 Hz	6082139	L	1,334.-
Rexa UNI V06/T11-540/A	DN 65	10	1.10	3~400 V, 50 Hz	6082140	L	1,733.-
Rexa UNI V06/T15-540	DN 65	10	1.50	3~400 V, 50 Hz	6082143	L	1,480.-
Rexa UNI V06/T15-540/A	DN 65	10	1.50	3~400 V, 50 Hz	6082144	L	1,877.-
Rexa UNI V06/T25-540	DN 65	10	2.50	3~400 V, 50 Hz	6082145	L	1,882.-
Rexa UNI V06/T25-540/A	DN 65	10	2.50	3~400 V, 50 Hz	6082146	L	2,281.-
Rexa UNI V06B/M11-523/A	DN 65	10	1.10	1~230 V, 50 Hz	6087659	L	2,095.-
Rexa UNI V06B/M15-523/A	DN 65	10	1.50	1~230 V, 50 Hz	6087661	L	2,318.-
Rexa UNI V06B/T11-540	DN 65	10	1.10	3~400 V, 50 Hz	6087660	L	2,002.-
Rexa UNI V06B/T15-540	DN 65	10	1.50	3~400 V, 50 Hz	6087662	L	2,220.-
Rexa UNI V06B/T25-540	DN 65	10	2.50	3~400 V, 50 Hz	6087663	L	2,824.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Installation drawing stationary wet well installation



- 1.1.3 90° pipe bend
- 1.4.1 Suspension unit
- 1.4.3 Chain
- 1.5.1 Shut-off valve
- 1.5.2 Non-return valve

Price group: PG14

Accessories for stationary wet well installation DN50


Type	Reference number	Description	Art. no.		EUR
Suspension unit DN 50/2RK	1.4.1	For 2-pipe guide of EN-GJL-250, cataphoretic-coated, with free passage in DN 50, coupling base with 90° pipe elbow, including coupling connection, guide pipe bracket of stainless steel for pump chamber fixation, profile joint and mounting accessories; two guide pipes (26.9 x 2 mm) are to be provided by the customer!	6070146	L	291.-
Non-return valve DN 50	1.5.2	made of EN-GJL-250, according to DIN EN 12050-4, including 1 set mounting accessories	2017166	L	259.-
Gate valve DN 50, EN-GJL-250	1.5.1	made of EN-GJL-250, including 1 set mounting accessories	2017160	L	184.-
90° pipe elbow DN 50	1.1.3	Made of EN-GJS-400-15, with 2 flanges, including 1 set installation accessories	2018053	L	185.-
Y-piece DN 50	1.1.5	Made of steel, galvanised, PN 10/16 flanges in accordance with DIN 2501 with 2 sets of installation accessories	2019042	L	412.-
Mounting accessories DN 40/50/65, PN 10	1.4.12	For one flange connection, with screws, nuts and flat gasket	6076963	L	25.-
Guide pipe Ø26.9x2mm 6m 1.4301	1.4.15	Guide pipe suitable for use with the suspension unit. Safe guide of the pump to the coupling connection. The number depends on the suspension unit.	6049244	L	93.-
Guide pipe Ø26.9x2mm 6m 1.4571	1.4.15	Guide pipe suitable for use with the suspension unit. Safe guide of the pump to the coupling connection. The number depends on the suspension unit.	6049245	L	191.-
Guide pipe bracket DN 50 for ST pipe	1.4.1	for 2-pipe guide, of stainless steel, for pipe attachment on a steel pipe, including mounting accessories	6061084	A	70.-
Guide pipe bracket DN 50 for GG pipe	1.4.1	for 2-pipe guide, of stainless steel, for pipe attachment on a cast-iron pipe, including mounting accessories	6066851	K	70.-
Bracket for guide pipe extension DN 50 for ST pipe	1.4.1	for 2-pipe guide, of stainless steel, for pipe attachment on a steel pipe, including mounting accessories	6066846	A	91.-
Bracket for guide pipe extension DN 50 for GG pipe	1.4.1	for 2-pipe guide, of stainless steel, for pipe attachment on a cast-iron pipe, including mounting accessories	6066852	A	93.-
Lifting chain kit PCS-LU, stainless steel, 200 kg, 1 m	1.4.3	Lifting chain for raising and lowering pumps; incl. 1 shackle.	6084895	L	79.-
Lifting chain kit PCS-LU, stainless steel, 200 kg, 3 m	1.4.3	Lifting chain for raising and lowering pumps; incl. 1 shackle; with connecting links each metre for suspension.	6084894	L	178.-
Lifting chain kit PCS-LU, stainless steel, 200 kg, 6 m	1.4.3	Lifting chain for raising and lowering pumps; incl. 1 shackle; with connecting links each metre for suspension.	6084893	L	240.-

🚚 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, 📞 = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Accessories for stationary wet well installation DN65

Type	Reference number	Description	Art. no.		EUR
Suspension unit DN 65/2RK	1.4.1	For 2-pipe guide of EN-GJL-250, cataphoretic coating, with free passage in DN 65, coupling base with 90° pipe elbow, including coupling connection, guide pipe bracket of stainless steel for pump chamber fixation, profile joint and installation accessories; 2 guide pipes (26.9 x 2 mm) are to be provided by the customer!	6070150	L	318.-
Non-return valve DN 65	1.5.2	made of EN-GJL-250, according to DIN EN 12050-4, including 1 set mounting accessories	2017167	L	297.-
Gate valve DN 65, EN-GJL-250	1.5.1	made of EN-GJL-250, including 1 set mounting accessories	2017161	L	218.-
90° pipe elbow DN 65	1.1.3	Made of EN-GJS-400-15, with 2 flanges, including 1 set installation accessories	2017183	L	188.-
Y-piece DN 65	1.1.5	Made of steel, galvanised, PN 10/16 flanges in accordance with DIN 2501 with 2 sets of installation accessories	2017178	L	479.-
Mounting accessories DN 40/50/65, PN 10	1.4.12	For one flange connection, with screws, nuts and flat gasket	6076963	L	25.-
Guide pipe Ø26.9x2mm 6m 1.4301	1.4.15	Guide pipe suitable for use with the suspension unit. Safe guide of the pump to the coupling connection. The number depends on the suspension unit.	6049244	L	93.-
Guide pipe Ø26.9x2mm 6m 1.4571	1.4.15	Guide pipe suitable for use with the suspension unit. Safe guide of the pump to the coupling connection. The number depends on the suspension unit.	6049245	L	191.-
Guide pipe bracket DN 65 for ST pipe	1.4.1	for 2-pipe guide, of stainless steel, for pipe attachment on a steel pipe, including mounting accessories	6066848	L	95.-
Guide pipe bracket DN 65 for GG pipe	1.4.1	for 2-pipe guide, of stainless steel, for pipe attachment on a cast-iron pipe, including mounting accessories	6066847	A	95.-
Bracket for guide pipe extension DN 65 for ST pipe	1.4.1	for 2-pipe guide, of stainless steel, for pipe attachment on a steel pipe, including mounting accessories	6066850	K	115.-
Bracket for guide pipe extension DN 65 for GG pipe	1.4.1	for 2-pipe guide, of stainless steel, for pipe attachment on a cast-iron pipe, including mounting accessories	6066849	A	115.-
Lifting chain kit PCS-LU, stainless steel, 200 kg, 1 m	1.4.3	Lifting chain for raising and lowering pumps; incl. 1 shackle.	6084895	L	79.-
Lifting chain kit PCS-LU, stainless steel, 200 kg, 3 m	1.4.3	Lifting chain for raising and lowering pumps; incl. 1 shackle; with connecting links each metre for suspension.	6084894	L	178.-
Lifting chain kit PCS-LU, stainless steel, 200 kg, 6 m	1.4.3	Lifting chain for raising and lowering pumps; incl. 1 shackle; with connecting links each metre for suspension.	6084893	L	240.-

Installation drawing portable wet well installation

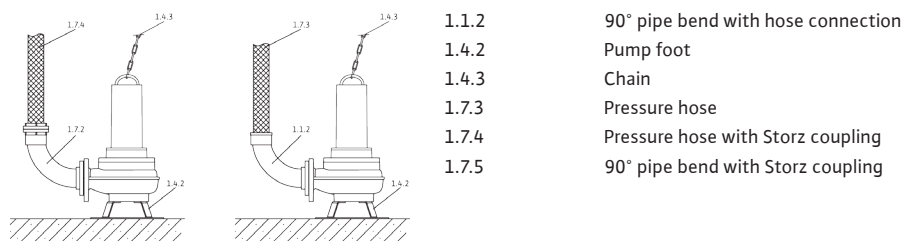

Price group: PG14

Accessories for portable wet well installation DN50					
Type	Reference number	Description	Art. no.		
					EUR
90° pipe elbow DN 50/60 mm	1.1.2	Made of PVC, with hose connector Ø 60 mm, flange on pump side, including 1 set of installation accessories	4027344	L	96.-
Synthetic pressure hose 3 m, Ø 60 mm	1.7.3	Inside Ø 60 mm, PN 6, including hose clip	2027644	A	109.-
Synthetic pressure hose 5 m, Ø 60 mm	1.7.3	Inside Ø 60 mm, PN 6, including hose clip	2027645	A	164.-
Synthetic pressure hose 10 m, Ø 60 mm	1.7.3	Inside Ø 60 mm, PN 6, including hose clip	2018106	A	305.-
Synthetic pressure hose 15 m, Ø 60 mm	1.7.3	Inside Ø 60 mm, PN 6, including hose clip	2027646	A	215.-
Fixed coupling set Storz C/ DN 50	1.7.2	with 90° pipe elbow and flange connection; pipe elbow made of EN-GJL-250, Storz coupling made of aluminium, incl. 1 set of mounting accessories	6031671	L	186.-
Synthetic fibre pressure hose 5 m, with Storz C	1.7.4	Inside Ø 52 mm, including coupling, 12/40 bar	6003651	C	54.-
Synthetic fibre pressure hose 10 m, with Storz C	1.7.4	Inside Ø 52 mm, including coupling, 12/40 bar	6003650	C	78.-
Synthetic fibre pressure hose 20 m, with Storz C	1.7.4	Inside Ø 52 mm, including coupling, 12/40 bar	6003649	C	117.-
Lifting chain kit PCS-LU, stainless steel, 200 kg, 6 m	1.4.3	Lifting chain for raising and lowering pumps; incl. 1 shackle; with connecting links each metre for suspension.	6084893	L	240.-
Lifting chain kit PCS-LU, stainless steel, 200 kg, 3 m	1.4.3	Lifting chain for raising and lowering pumps; incl. 1 shackle; with connecting links each metre for suspension.	6084894	L	178.-
Lifting chain kit PCS-LU, stainless steel, 200 kg, 1 m	1.4.3	Lifting chain for raising and lowering pumps; incl. 1 shackle.	6084895	L	79.-

Price group: PG14

Accessories for portable wet well installation DN65					
Type	Reference number	Description	Art. no.		
					EUR
90° pipe elbow DN 65/70 mm	1.1.2	Made of EN-GJL-250, with hose connector Ø 70 mm, flange on pump side, including 1 set of installation accessories	4027346	L	88.-
Synthetic pressure hose 10 m, Ø 70 mm	1.7.3	Inside Ø 70 mm, PN 8, including hose clip	2014151	C	182.-
Threaded flange DN 65 on Rp 2½	1.1.7	made of galvanized steel, DN 65 with Rp 2½ female thread, incl. 1 set of mounting accessories	4015204	L	92.-
90° pipe elbow G 2½	1.1.1	Made of steel, galvanised with G 2½ / R 2½ female/male thread	4015212	L	98.-
Fixed coupling Storz C/G 2½	1.7.5	made of aluminium, Storz C connection, with male thread	2015234	L	32.-
Synthetic fibre pressure hose 5 m, with Storz C	1.7.4	Inside Ø 52 mm, including coupling, 12/40 bar	6003651	C	54.-
Synthetic fibre pressure hose 10 m, with Storz C	1.7.4	Inside Ø 52 mm, including coupling, 12/40 bar	6003650	C	78.-
Synthetic fibre pressure hose 20 m, with Storz C	1.7.4	Inside Ø 52 mm, including coupling, 12/40 bar	6003649	C	117.-
Lifting chain kit PCS-LU, stainless steel, 200 kg, 6 m	1.4.3	Lifting chain for raising and lowering pumps; incl. 1 shackle; with connecting links each metre for suspension.	6084893	L	240.-
Lifting chain kit PCS-LU, stainless steel, 200 kg, 3 m	1.4.3	Lifting chain for raising and lowering pumps; incl. 1 shackle; with connecting links each metre for suspension.	6084894	L	178.-
Lifting chain kit PCS-LU, stainless steel, 200 kg, 1 m	1.4.3	Lifting chain for raising and lowering pumps; incl. 1 shackle.	6084895	L	79.-

= ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Electrical accessories – level control with dynamic pressure system

Level measurement via an open dynamic pressure system with the option of a separate dynamic pressure bell for the high water level.

Type	Description	Art. no.		EUR
EC-L-1x12A-DOL-MT34-WM-EMS-IPS	Microcontroller-controlled switchgear with LC display, symbol-based menu navigation and integrated pressure transducer for level-dependent control of a submersible pump by means of float switches, level sensor or immersion bell. WITHOUT main switch, mains isolator must be provided on-site! Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543212	L	892.-
EC-L-2x12A-DOL-MT34-WM-EMS-IPS	Microcontroller-controlled switchgear with LC display, symbol-based menu navigation and integrated pressure transducer for level-dependent control of two submersible pumps by means of float switches, level sensor or immersion bell. WITHOUT main switch, mains isolator must be provided on-site! Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543222	L	1,372.-
Dynamic pressure bell with 10 m hose	Pneumatic signal transmitter for media containing faeces with a max. temperature of 60 °C. The signal transmitter is open in direction of the fluid and must be ventilated after each pumping out (OFF depending on time).	2516976	L	88.-
Bubbling-through system	Small compressor for constant aeration of the dynamic pressure bell, including non-return valve, 3 m hose and T-connector.	2516977	L	216.-
Flash light 24 VDC	Xenon flashing light for wall mounting for indoor and outdoor installation. Luminous color: red, flash frequency: 0,75 Hz	2551612	A	☞
Flash light 1~230 VAC	Xenon flashing light for wall mounting for indoor and outdoor installation. Luminous color: red, flash frequency: 0,75 Hz	2551613	L	140.-
Signal horn 12-24 VDC	Horn with a bell mouth for wall mounting for indoor and outdoor use. Alarm signal by electromechanical sound generation with steel diaphragm (92 dBA).	2017208	A	☞
Signal horn 1~230 V	Horn with a bell mouth for wall mounting for indoor and outdoor use. Alarm signal by electromechanical sound generation with steel diaphragm (88 dBA).	501459398	L	84.-
NiMH rechargeable battery, 9 V/200 mAh	Rechargeable battery to be installed in the switchgears Wilo-control MS-L and EC-L for a mains-independent alarm	2522850	L	25.-

You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

Electrical accessories – level control with float switch

Level measurement using several float switches for the different water levels, including high water alarm signal. The breakdown barrier and the Ex cutoff relays are not required except for the connection of signal transmitters in potentially explosive areas! These can also be dispensed with when the SC-L...-Ex switchgear is used!

Type	Description	Art. no.		EUR
MS-L-1x4kW-DOL	Microprocessor-controlled switchgear for level-dependent control of a submersible pump with float switch.	2539741	L	504.-
MS-L-2x4kW-DOL	Microprocessor-controlled switchgear for level-dependent control of 2 submersible pumps with float switch.	2539745	L	681.-
Float switch WA65 with 5 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 60 °C. Switching: up „ON"/down „OFF".	503211390	L	82.-
Float switch WA65 with 10 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 60 °C. Switching: up „ON"/down „OFF".	503211893	L	155.-
Float switch WA65 with 20 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 60 °C. Switching: up „ON"/down „OFF".	2004431	L	231.-
Float switch WA65 with 30 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 60 °C. Switching: up „ON"/down „OFF".	2004432	L	314.-
Flash light 1~230V	Optical alarm signal for connection to a switchgear. Suitable for outside installation.	2551613	L	140.-

You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.


☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☞ = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG14

Electrical accessories – level control with float switch

Level measurement using several float switches for the different water levels, including high water alarm signal. The breakdown barrier and the Ex cutoff relays are not required except for the connection of signal transmitters in potentially explosive areas! These can also be dispensed with when the SC-L..-Ex switchgear is used!

Type	Description	Art. no.		EUR
				
Signal horn 1~230V	Acoustic alarm signal (88 dBA) for connection to a switchgear. Suitable for outside installation.	501459398	L	84.-
NiMh rechargeable battery, 9 V/200 mAh	Rechargeable battery to be installed in the switchgears Wilo-control MS-L and EC-L for a mains-independent alarm	2522850	L	25.-


You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

Price group: PG14

Electrical accessories – level control with level sensor

Level measurement using a level sensor with various measurement ranges, including high water alarm and dry-running protection. The breakdown barrier and the Ex cut-off relays are not required except for the connection of signal transmitters in potentially explosive areas! These can also be dispensed with when the SC-L..-Ex switchgear is used!

Type	Description	Art. no.		EUR
				
EC-L-1x12A-DOL-MT34-WM	Microcontroller-controlled switchgear with LC display and symbol-based menu navigation for level-dependent control of a submersible pump by means of float switches or level sensor. Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543210	L	914.-
EC-L-1x12A-DOL-MT34-WM-EMS	Microcontroller-controlled switchgear with LC display and symbol-based menu navigation for level-dependent control of a submersible pump by means of float switches or level sensor. WITHOUT main switch, mains isolator must be provided on-site! Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543211	L	832.-
EC-L-2x12A-DOL-MT34-WM	Microcontroller-controlled switchgear with LC display and symbol-based menu navigation for level-dependent control of submersible pumps by means of float switches or level sensor. Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543220	L	1,444.-
EC-L-2x12A-DOL-MT34-WM-EMS	Microcontroller-controlled switchgear with LC display and symbol-based menu navigation for level-dependent control of submersible pumps by means of float switches or level sensor. WITHOUT main switch, mains isolator must be provided on-site! Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543221	L	1,269.-
EC-L-3x12A-DOL-MT34-WM	Microcontroller-controlled switchgear with LCD display and symbol-based menu navigation for level-dependent control of three submersible pumps by means of a level sensor. Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543230	L	2,107.-

You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG14

Electrical accessories – level control with level sensor

Level measurement using a level sensor with various measurement ranges, including high water alarm and dry-running protection. The breakdown barrier and the Ex cut-off relays are not required except for the connection of signal transmitters in potentially explosive areas! These can also be dispensed with when the SC-L...-Ex switchgear is used!

Type	Description	Art. no.		EUR
Level sensor 0–1 mWS, with 10 m cable	Signal transmitter with ATEX approval for fluids containing faeces with a maximum temperature of 60 °C. Output signal: 4...20 mA	2519924	L	442.-
Level sensor 0–1 mWS, with 30 m cable		2519925	L	522.-
Level sensor 0–1 mWS, with 50 m cable		2519926	L	632.-
Level sensor 0–2.5 mWS with 10 m cable		2519921	L	442.-
Level sensor 0–2.5 mWS, with 30 m cable		2519922	L	522.-
Level sensor 0–2.5 mWS, with 50 m cable		2519923	L	632.-
Cable clamp	For fixation of a signal transmitter in the pump chamber. The clamp is fixed in the pump chamber with a hook; the cable of the signal transmitter is clamped and fixed via the intrinsic weight of the signal transmitter.	2519927	L	22.-
Flash light 24 VDC	Xenon flashing light for wall mounting for indoor and outdoor installation. Luminous color: red, flash frequency: 0,75 Hz	2551612	A	☞
Flash light 1~230 VAC	Xenon flashing light for wall mounting for indoor and outdoor installation. Luminous color: red, flash frequency: 0,75 Hz	2551613	L	140.-
Signal horn 12–24 VDC	Horn with a bell mouth for wall mounting for indoor and outdoor use. Alarm signal by electromechanical sound generation with steel diaphragm (92 dBA).	2017208	A	☞
Signal horn 1~230 V	Horn with a bell mouth for wall mounting for indoor and outdoor use. Alarm signal by electromechanical sound generation with steel diaphragm (88 dBA).	501459398	L	84.-
NiMh rechargeable battery, 9 V/200 mAh	Rechargeable battery to be installed in the switchgears Wilo-control MS-L and EC-L for a mains-independent alarm	2522850	L	25.-

You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

Price group: PG14

Electrical accessories – mains-independent alarm signal

Alarm signal for detection of flooding in rooms and buildings. The alarm signal is acoustic, optical or wireless. In addition, other consumers can be controlled directly.


Type	Description	Art. no.		EUR
DrainAlarm 2	Network-independent alarm switchgear with optical and acoustic alarm signal and with a connection for one float switch.	2545133	L	412.-
DrainAlarm GSM	Network-independent alarm switchgear with optical, acoustic and wireless (per GSM) alarm signal and with a connection for one float switch.	2542911	L	1,111.-
Float switch WA65 with 5 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 60 °C. Switching: up „ON"/down „OFF".	503211390	L	82.-
Float switch WA65 with 10 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 60 °C. Switching: up „ON"/down „OFF".	503211893	L	155.-
Float switch WA65 with 20 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 60 °C. Switching: up „ON"/down „OFF".	2004431	L	231.-
Float switch WA65 with 30 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 60 °C. Switching: up „ON"/down „OFF".	2004432	L	314.-
Flash light 1~230V	Optical alarm signal for connection to a switchgear. Suitable for outside installation.	2551613	L	140.-
Signal horn 1~230V	Acoustic alarm signal (88 dBA) for connection to a switchgear. Suitable for outside installation.	501459398	L	84.-

You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☞ = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

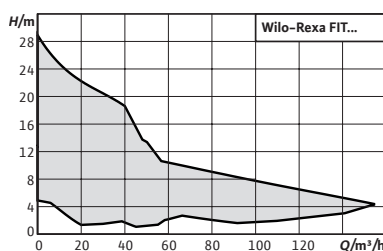

Accessories

Commissioning/maintenance

Page

683

Select 4 online

All information at www.wilo-select.com

Wilo-Rexa FIT



Construction

Submersible sewage pump for intermittent operation for stationary and portable wet well installation.

Application

Pumping of

- Sewage containing faeces in accordance with EN 12050-1
- Wastewater

Scope of delivery

- Submersible sewage pump with 10 m cable
- Cable version depending on the variant:
 - With bare cable ends (O)
 - With plug (P)
 - With float switch and plug (A)
- Operating and maintenance manual

Your advantages

- Ready-to-plug and immediately ready to go (A and P version)
- Attached float switch (A-model) enables easy operation
- Safe vortex hydraulics with large, free ball passage to prevent clogging during operation
- Sealing chamber with optional external monitoring
- Lightweight

Ordering information DN50

Type	Pressure port	Rated power P_2 kW	Float switch	Mains plug	Mains connection	Art. no.	Price group		EUR
Rexa FIT V05DA-122/ EAD0-2-M0011-523-A	DN 50	1.10	yes	Shock-proof	1~230 V, 50 Hz	6064576	PG7	C	1,141.-
Rexa FIT V05DA-122/ EAD0-2-M0011-523-P	DN 50	1.10	no	Shock-proof	1~230 V, 50 Hz	6064578	PG7	C	1,106.-
Rexa FIT V05DA-122/ EAD1-2-T0011-540-A	DN 50	1.10	yes	CEE	3~400 V, 50 Hz	6064577	PG7	C	1,361.-
Rexa FIT V05DA-122/ EAD1-2-T0011-540-O	DN 50	1.10	no	no	3~400 V, 50 Hz	6064579	PG7	L	1,008.-
Rexa FIT V05DA-124/ EAD0-2-M0011-523-A	DN 50	1.10	yes	Shock-proof	1~230 V, 50 Hz	6064580	PG7	L	1,189.-
Rexa FIT V05DA-124/ EAD0-2-M0011-523-P	DN 50	1.10	no	Shock-proof	1~230 V, 50 Hz	6064582	PG7	C	1,153.-

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Ordering information DN50									
Type	Pressure port	Rated power P_2 kW	Float switch	Mains plug	Mains connection	Art. no.	Price group		EUR
Rexa FIT V05DA-124/ EAD1-2-T0011-540-A	DN 50	1.10	yes	CEE	3~400 V, 50 Hz	6064581	PG7	C	1,418.-
Rexa FIT V05DA-124/ EAD1-2-T0011-540-O	DN 50	1.10	no	no	3~400 V, 50 Hz	6064583	PG7	L	1,066.-
Rexa FIT V05DA-126/ EAD0-2-M0015-523-A	DN 50	1.50	yes	Shock- proof	1~230 V, 50 Hz	6064584	PG7	L	1,404.-
Rexa FIT V05DA-126/ EAD0-2-M0015-523-P	DN 50	1.50	no	Shock- proof	1~230 V, 50 Hz	6064586	PG7	L	1,367.-
Rexa FIT V05DA-126/ EAD1-2-T0015-540-A	DN 50	1.50	yes	CEE	3~400 V, 50 Hz	6064585	PG7	L	1,582.-
Rexa FIT V05DA-126/ EAD1-2-T0015-540-O	DN 50	1.50	no	no	3~400 V, 50 Hz	6064587	PG7	L	1,229.-
Rexa FIT V05DA-222/ EAD1-2-T0025-540-A	DN 50	2.50	yes	CEE	3~400 V, 50 Hz	6064588	PG7	C	1,776.-
Rexa FIT V05DA-222/ EAD1-2-T0025-540-O	DN 50	2.50	no	no	3~400 V, 50 Hz	6064589	PG7	L	1,423.-
Rexa FIT V05DA-224/ EAD1-2-T0025-540-A	DN 50	2.50	yes	CEE	3~400 V, 50 Hz	6064590	PG7	C	1,851.-
Rexa FIT V05DA-224/ EAD1-2-T0025-540-O	DN 50	2.50	no	no	3~400 V, 50 Hz	6064591	PG7	L	1,498.-
Rexa FIT V05DA-226/ EAD1-2-T0039-540-A	DN 50	3.90	yes	CEE	3~400 V, 50 Hz	6064592	PG7	L	1,971.-
Rexa FIT V05DA-226/ EAD1-2-T0039-540-O	DN 50	3.90	no	no	3~400 V, 50 Hz	6064593	PG7	L	1,618.-
Rexa FIT V05DA-228/ EAD1-2-T0039-540-A	DN 50	3.90	yes	CEE	3~400 V, 50 Hz	6064594	PG7	C	1,966.-
Rexa FIT V05DA-228/ EAD1-2-T0039-540-O	DN 50	3.90	no	no	3~400 V, 50 Hz	6064595	PG7	L	1,614.-

Ordering information DN65									
Type	Pressure port	Rated power P_2 kW	Float switch	Mains plug	Mains connection	Art. no.	Price group		EUR
Rexa FIT V06DA-212/ EAD0-2-M0011-523-A	DN 65/80	1.10	yes	Shock- proof	1~230 V, 50 Hz	6064596	PG7	C	1,419.-
Rexa FIT V06DA-212/ EAD0-2-M0011-523-P	DN 65/80	1.10	no	Shock- proof	1~230 V, 50 Hz	6064598	PG7	C	1,383.-
Rexa FIT V06DA-212/ EAD1-2-T0011-540-A	DN 65/80	1.10	yes	CEE	3~400 V, 50 Hz	6064597	PG7	C	1,659.-
Rexa FIT V06DA-212/ EAD1-2-T0011-540-O	DN 65/80	1.10	no	no	3~400 V, 50 Hz	6064599	PG7	L	1,305.-
Rexa FIT V06DA-214/ EAD0-2-M0015-523-A	DN 65/80	1.50	yes	Shock- proof	1~230 V, 50 Hz	6064700	PG7	L	1,493.-
Rexa FIT V06DA-214/ EAD0-2-M0015-523-P	DN 65/80	1.50	no	Shock- proof	1~230 V, 50 Hz	6064702	PG7	C	1,457.-
Rexa FIT V06DA-214/ EAD1-2-T0015-540-A	DN 65/80	1.50	yes	CEE	3~400 V, 50 Hz	6064701	PG7	C	1,729.-
Rexa FIT V06DA-214/ EAD1-2-T0015-540-O	DN 65/80	1.50	no	no	3~400 V, 50 Hz	6064703	PG7	L	1,375.-
Rexa FIT V06DA-216/ EAD1-2-T0025-540-A	DN 65/80	2.50	yes	CEE	3~400 V, 50 Hz	6064704	PG7	L	1,864.-
Rexa FIT V06DA-216/ EAD1-2-T0025-540-O	DN 65/80	2.50	no	no	3~400 V, 50 Hz	6064705	PG7	L	1,510.-



☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☞ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Ordering information DN65

Type	Pressure port	Rated power P_2 kW	Float switch	Mains plug	Mains connection	Art. no.	Price group		EUR
Rexa FIT V06DA-222/ EAD1-2-T0039-540-A	DN 65/80	3.90	yes	CEE	3~400 V, 50 Hz	6064706	PG7	L	1,958.-
Rexa FIT V06DA-222/ EAD1-2-T0039-540-O	DN 65/80	3.90	no	no	3~400 V, 50 Hz	6064707	PG7	L	1,605.-
Rexa FIT V06DA-224/ EAD1-2-T0039-540-A	DN 65/80	3.90	yes	CEE	3~400 V, 50 Hz	6064708	PG7	C	1,997.-
Rexa FIT V06DA-224/ EAD1-2-T0039-540-O	DN 65/80	3.90	no	no	3~400 V, 50 Hz	6064709	PG7	L	1,644.-
Rexa FIT V06DA-622/ EAD0-4-M0011-523-P	DN 65/80	1.10	no	Shock- proof	1~230 V, 50 Hz	6064710	PG7	C	1,573.-
Rexa FIT V06DA-622/ EAD1-4-T0011-540-O	DN 65/80	1.10	no	no	3~400 V, 50 Hz	6064711	PG7	L	1,425.-
Rexa FIT V06DA-623/ EAD0-4-M0015-523-P	DN 65/80	1.50	no	Shock- proof	1~230 V, 50 Hz	6064712	PG7	C	1,600.-
Rexa FIT V06DA-623/ EAD1-4-T0015-540-O	DN 65/80	1.50	no	no	3~400 V, 50 Hz	6064713	PG7	L	1,449.-
Rexa FIT V06DA-625/ EAD0-4-M0015-523-P	DN 65/80	1.50	no	Shock- proof	1~230 V, 50 Hz	6064714	PG7	C	1,651.-
Rexa FIT V06DA-625/ EAD1-4-T0015-540-O	DN 65/80	1.50	no	no	3~400 V, 50 Hz	6064715	PG7	L	1,495.-
Rexa FIT V06DA-626/ EAD1-4-T0025-540-O	DN 65/80	2.50	no	no	3~400 V, 50 Hz	6064716	PG7	L	1,585.-
Rexa FIT V06DA-628/ EAD1-4-T0025-540-O	DN 65/80	2.50	no	no	3~400 V, 50 Hz	6064717	PG7	L	1,621.-

Ordering information DN80


Type	Pressure port	Rated power P_2 kW	Float switch	Mains plug	Mains connection	Art. no.	Price group		EUR
Rexa FIT V08DA-422/ EAD0-4-M0011-523-A	DN 80/100	1.10	yes	Shock- proof	1~230 V, 50 Hz	6065917	PG7	C	1,860.-
Rexa FIT V08DA-422/ EAD0-4-M0011-523-P	DN 80/100	1.10	no	Shock- proof	1~230 V, 50 Hz	6065919	PG7	C	1,824.-
Rexa FIT V08DA-422/ EAD1-4-T0011-540-A	DN 80/100	1.10	yes	CEE	3~400 V, 50 Hz	6065918	PG7	C	2,047.-
Rexa FIT V08DA-422/ EAD1-4-T0011-540-O	DN 80/100	1.10	no	no	3~400 V, 50 Hz	6065920	PG7	C	1,695.-
Rexa FIT V08DA-424/ EAD0-4-M0011-523-A	DN 80/100	1.10	yes	Shock- proof	1~230 V, 50 Hz	6065921	PG7	C	1,903.-
Rexa FIT V08DA-424/ EAD0-4-M0011-523-P	DN 80/100	1.10	no	Shock- proof	1~230 V, 50 Hz	6065923	PG7	C	1,867.-
Rexa FIT V08DA-424/ EAD1-4-T0011-540-A	DN 80/100	1.10	yes	CEE	3~400 V, 50 Hz	6065922	PG7	C	2,085.-
Rexa FIT V08DA-424/ EAD1-4-T0011-540-O	DN 80/100	1.10	no	no	3~400 V, 50 Hz	6065924	PG7	L	1,732.-
Rexa FIT V08DA-426/ EAD0-4-M0015-523-A	DN 80/100	1.50	yes	Shock- proof	1~230 V, 50 Hz	6065925	PG7	C	1,984.-
Rexa FIT V08DA-426/ EAD0-4-M0015-523-P	DN 80/100	1.50	no	Shock- proof	1~230 V, 50 Hz	6065927	PG7	C	1,947.-
Rexa FIT V08DA-426/ EAD1-4-T0015-540-A	DN 80/100	1.50	yes	CEE	3~400 V, 50 Hz	6065926	PG7	C	2,113.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
 Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Ordering information DN80									
Type	Pressure port	Rated power P_2 kW	Float switch	Mains plug	Mains connection	Art. no.	Price group		EUR
Rexa FIT V08DA-426/ EAD1-4-T0015-540-O	DN 80/100	1.50	no	no	3~400 V, 50 Hz	6065928	PG7	L	1,759.-
Rexa FIT V08DA-428/ EAD1-4-T0025-540-O	DN 80/100	2.50	no	no	3~400 V, 50 Hz	6065929	PG7	L	1,772.-
Rexa FIT V08DA-524/ EAD0-4-T0035-540-O	DN 80/100	3.50	no	no	3~400 V, 50 Hz	6065931	PG7	L	1,952.-
Rexa FIT V08DA-526/ EAD0-4-T0035-540-O	DN 80/100	3.50	no	no	3~400 V, 50 Hz	6065932	PG7	L	2,007.-

Ordering information DN100									
Type	Pressure port	Rated power P_2 kW	Float switch	Mains plug	Mains connection	Art. no.	Price group		EUR
Rexa FIT V10DA-422/ EAD1-4-T0015-540-O	DN 100	1.50	no	no	3~400 V, 50 Hz	6081900	PG8	L	1,904.-
Rexa FIT V10DA-424/ EAD1-4-T0025-540-O	DN 100	2.50	no	no	3~400 V, 50 Hz	6081901	PG8	L	1,916.-
Rexa FIT V10DA-425/ EAD1-4-T0025-540-O	DN 100	2.50	no	no	3~400 V, 50 Hz	6081902	PG8	C	1,972.-
Rexa FIT V10DA-426/ EAD0-4-T0035-540-O	DN 100	3.50	no	no	3~400 V, 50 Hz	6081903	PG8	L	2,095.-
Rexa FIT V10DA-428/ EAD0-4-T0035-540-O	DN 100	3.50	no	no	3~400 V, 50 Hz	6081904	PG8	L	2,151.-

Installation drawing stationary wet well installation



- 1.1.3 90° pipe bend
- 1.4.1 Suspension unit
- 1.4.3 Chain
- 1.5.1 Shut-off valve
- 1.5.2 Non-return valve

Price group: PG14


Accessories for stationary wet well installation DN50									
Type	Reference number	Description	Art. no.		EUR				
Suspension unit DN 50/2RK	1.4.1	For 2-pipe guide of EN-GJL-250, cathaphoretic-coated, with free passage in DN 50, coupling base with 90° pipe elbow, including coupling connection, guide pipe bracket of stainless steel for pump chamber fixation, profile joint and mounting accessories; two guide pipes (26.9 x 2 mm) are to be provided by the customer!	6070146	L	291.-				
Non-return valve DN 50	1.5.2	made of EN-GJL-250, according to DIN EN 12050-4, including 1 set mounting accessories	2017166	L	259.-				
Gate valve DN 50, EN-GJL-250	1.5.1	made of EN-GJL-250, including 1 set mounting accessories	2017160	L	184.-				



☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG14


Accessories for stationary wet well installation DN50					
Type	Reference number	Description	Art. no.		
					EUR
Guide pipe Ø26.9x2mm 6m 1.4301	1.4.15	Guide pipe suitable for use with the suspension unit. Safe guide of the pump to the coupling connection. The number depends on the suspension unit.	6049244	L	93.-
90° pipe elbow DN 50	1.1.3	Made of EN-GJS-400-15, with 2 flanges, including 1 set installation accessories	2018053	L	185.-
Guide pipe bracket DN 50 for GG pipe	1.4.1	for 2-pipe guide, of stainless steel, for pipe attachment on a cast-iron pipe, including mounting accessories	6066851	K	70.-
Guide pipe bracket DN 50 for ST pipe	1.4.1	for 2-pipe guide, of stainless steel, for pipe attachment on a steel pipe, including mounting accessories	6061084	A	70.-
Bracket for guide pipe extension DN 50 for GG pipe	1.4.1	for 2-pipe guide, of stainless steel, for pipe attachment on a cast-iron pipe, including mounting accessories	6066852	A	93.-
Bracket for guide pipe extension DN 50 for ST pipe	1.4.1	for 2-pipe guide, of stainless steel, for pipe attachment on a steel pipe, including mounting accessories	6066846	A	91.-
Sling chain kit PCS- CE, galvanised steel, 400 kg, 5 m	1.4.3	As chain sling with 2 shackles in galvanised steel. Bearing capacity: 400 kg	6063140	L	149.-
Sling chain kit PCS- CE, galvanised steel, 400 kg, 10 m	1.4.3	As chain sling with 2 shackles in galvanised steel. Bearing capacity: 400 kg	6063142	L	277.-
Sling chain kit PCS- CE, stainless steel, 400 kg, 5 m	1.4.3	As chain sling with 2 shackles in 1.4401 stainless steel. Bearing capacity: 400 kg	6063136	L	410.-
Sling chain kit PCS- CE, stainless steel, 400 kg, 10 m	1.4.3	As chain sling with 2 shackles in 1.4401 stainless steel. Bearing capacity: 400 kg	6063138	L	646.-
Y-piece DN 50	1.1.5	Made of steel, galvanised, PN 10/16 flanges in accordance with DIN 2501 with 2 sets of installation accessories	2019042	L	412.-
Mounting accessories DN 40/50/65, PN 10	1.4.12	For one flange connection, with screws, nuts and flat gasket	6076963	L	25.-

Price group: PG14


Accessories for stationary wet well installation DN65					
Type	Reference number	Description	Art. no.		
					EUR
Suspension unit DN 65/2RK	1.4.1	For 2-pipe guide of EN-GJL-250, cathaphoretic coating, with free passage in DN 65, coupling base with 90° pipe elbow, including coupling connection, guide pipe bracket of stainless steel for pump chamber fixation, profile joint and installation accessories; 2 guide pipes (26.9 x 2 mm) are to be provided by the customer!	6070150	L	318.-
Guide pipe Ø26.9x2mm 6m 1.4301	1.4.15	Guide pipe suitable for use with the suspension unit. Safe guide of the pump to the coupling connection. The number depends on the suspension unit.	6049244	L	93.-
Guide pipe bracket DN 65 for GG pipe	1.4.1	for 2-pipe guide, of stainless steel, for pipe attachment on a cast-iron pipe, including mounting accessories	6066847	A	95.-
Guide pipe bracket DN 65 for ST pipe	1.4.1	for 2-pipe guide, of stainless steel, for pipe attachment on a steel pipe, including mounting accessories	6066848	L	95.-
Bracket for guide pipe extension DN 65 for GG pipe	1.4.1	for 2-pipe guide, of stainless steel, for pipe attachment on a cast-iron pipe, including mounting accessories	6066849	A	115.-
Bracket for guide pipe extension DN 65 for ST pipe	1.4.1	for 2-pipe guide, of stainless steel, for pipe attachment on a steel pipe, including mounting accessories	6066850	K	115.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG14

Accessories for stationary wet well installation DN65					
Type	Reference number	Description	Art. no.		
					EUR
Non-return valve DN 65	1.5.2	made of EN-GJL-250, according to DIN EN 12050-4, including 1 set mounting accessories	2017167	L	297.-
Gate valve DN 65, EN-GJL-250	1.5.1	made of EN-GJL-250, including 1 set mounting accessories	2017161	L	218.-
90° pipe elbow DN 65	1.1.3	Made of EN-GJS-400-15, with 2 flanges, including 1 set installation accessories	2017183	L	188.-
Sling chain kit PCS-CE, galvanised steel, 400 kg, 5 m	1.4.3	As chain sling with 2 shackles in galvanised steel. Bearing capacity: 400 kg	6063140	L	149.-
Sling chain kit PCS-CE, galvanised steel, 400 kg, 10 m	1.4.3	As chain sling with 2 shackles in galvanised steel. Bearing capacity: 400 kg	6063142	L	277.-
Sling chain kit PCS-CE, stainless steel, 400 kg, 5 m	1.4.3	As chain sling with 2 shackles in 1.4401 stainless steel. Bearing capacity: 400 kg	6063136	L	410.-
Sling chain kit PCS-CE, stainless steel, 400 kg, 10 m	1.4.3	As chain sling with 2 shackles in 1.4401 stainless steel. Bearing capacity: 400 kg	6063138	L	646.-
Y-piece DN 65	1.1.5	Made of steel, galvanised, PN 10/16 flanges in accordance with DIN 2501 with 2 sets of installation accessories	2017178	L	479.-
Mounting accessories DN 40/50/65, PN 10	1.4.12	For one flange connection, with screws, nuts and flat gasket	6076963	L	25.-
Guide pipe Ø26.9x2mm 6m 1.4571	1.4.15	Guide pipe suitable for use with the suspension unit. Safe guide of the pump to the coupling connection. The number depends on the suspension unit.	6049245	L	191.-

Price group: PG14

Accessories for stationary wet well installation DN80					
Type	Reference number	Description	Art. no.		
					EUR
Suspension unit DN 80/2RK	1.4.1	Made of EN-GJL-250, painted, with free passage in DN 80, foot elbow including pump holder, profile joint, installation and floor fixation accessories and double-pipe guide pipe bracket (42.4x2 mm) without guide pipes.	6082333	L	318.-
Non-return valve DN 80	1.5.2	made of EN-GJL-250, according to DIN EN 12050-4, including 1 set mounting accessories	2017168	L	333.-
Gate valve DN 80, EN-GJL-250	1.5.1	made of EN-GJL-250, including 1 set mounting accessories	2017162	L	301.-
90° pipe elbow DN 80	1.1.3	Made of EN-GJS-400-15, with 2 flanges, including 1 set installation accessories	2012064	L	203.-
Sling chain kit PCS-CE, galvanised steel, 400 kg, 5 m	1.4.3	As chain sling with 2 shackles in galvanised steel. Bearing capacity: 400 kg	6063140	L	149.-
Sling chain kit PCS-CE, galvanised steel, 400 kg, 10 m	1.4.3	As chain sling with 2 shackles in galvanised steel. Bearing capacity: 400 kg	6063142	L	277.-
Sling chain kit PCS-CE, stainless steel, 400 kg, 5 m	1.4.3	As chain sling with 2 shackles in 1.4401 stainless steel. Bearing capacity: 400 kg	6063136	L	410.-
Sling chain kit PCS-CE, stainless steel, 400 kg, 10 m	1.4.3	As chain sling with 2 shackles in 1.4401 stainless steel. Bearing capacity: 400 kg	6063138	L	646.-
Y-piece DN 80	1.1.5	Made of steel, galvanised, PN 10/16 flanges in accordance with DIN 2501 with 2 sets of installation accessories	2017179	L	737.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG14

Accessories for stationary wet well installation DN80


Type	Reference number	Description	Art. no.		EUR
Mounting accessories DN 80/100, PN 10	1.4.12	For one flange connection, with screws, nuts and flat gasket	6077521	L	27.-
Guide pipe Ø42.4x2mm 6m 1.4301	1.4.15	Guide pipe suitable for use with the suspension unit. Safe guide of the pump to the coupling connection. The number depends on the suspension unit.	6031565	L	130.-
Guide pipe Ø42.4x2mm 6m 1.4571	1.4.15	Guide pipe suitable for use with the suspension unit. Safe guide of the pump to the coupling connection. The number depends on the suspension unit.	6031566	L	228.-

Price group: PG14

Accessories for stationary wet well installation DN100

Type	Reference number	Description	Art. no.		EUR
Non-return valve DN 100	1.5.2	made of EN-GJL-250, according to DIN EN 12050-4, including 1 set mounting accessories	2017169	L	399.-
Gate valve DN 100, EN-GJL-250	1.5.1	made of EN-GJL-250, including 1 set mounting accessories	2017163	L	355.-
90° pipe elbow DN 100	1.1.3	Made of EN-GJS-400-15, with 2 flanges, including 1 set installation accessories	2004669	L	245.-
Y-piece DN 100	1.1.5	Made of steel, galvanised, PN 10/16 flanges in accordance with DIN 2501 with 2 sets of installation accessories	2017180	L	879.-
Sling chain kit PCS-CE, galvanised steel, 400 kg, 5 m	1.4.3	As chain sling with 2 shackles in galvanised steel. Bearing capacity: 400 kg	6063140	L	149.-
Sling chain kit PCS-CE, galvanised steel, 400 kg, 10 m	1.4.3	As chain sling with 2 shackles in galvanised steel. Bearing capacity: 400 kg	6063142	L	277.-
Sling chain kit PCS-CE, stainless steel, 400 kg, 5 m	1.4.3	As chain sling with 2 shackles in 1.4401 stainless steel. Bearing capacity: 400 kg	6063136	L	410.-
Sling chain kit PCS-CE, stainless steel, 400 kg, 10 m	1.4.3	As chain sling with 2 shackles in 1.4401 stainless steel. Bearing capacity: 400 kg	6063138	L	646.-
Suspension unit DN 100/2RK	1.4.1	Made of EN-GJL-250, painted, with free passage in DN 100, foot elbow including pump holder, profile joint, installation and floor fixation accessories and double-pipe guide pipe bracket (42.4x2 mm) without guide pipes.	6082336	L	456.-
Mounting accessories DN 80/100, PN 10	1.4.12	For one flange connection, with screws, nuts and flat gasket	6077521	L	27.-

Installation drawing portable wet well installation

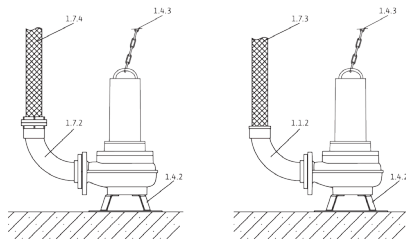


- 1.1.2 90° pipe bend with hose connection
- 1.4.2 Pump foot
- 1.4.3 Chain
- 1.7.3 Pressure hose
- 1.7.4 Pressure hose with Storz coupling
- 1.7.5 90° pipe bend with Storz coupling

Price group: PG14


Accessories for portable wet well installation DN50



Type	Reference number	Description	Art. no.		EUR
Floor supporting foot DN 50/65	1.4.2	Made of steel (S235JR), powder-coated, including fixation material	6064666	L	151.-
90° pipe elbow DN 50/60 mm	1.1.2	Made of PVC, with hose connector Ø 60 mm, flange on pump side, including 1 set of installation accessories	4027344	L	96.-
Synthetic pressure hose 3 m, Ø 60 mm	1.7.3	Inside Ø 60 mm, PN 6, including hose clip	2027644	A	109.-
Synthetic pressure hose 5 m, Ø 60 mm	1.7.3	Inside Ø 60 mm, PN 6, including hose clip	2027645	A	164.-
Synthetic pressure hose 10 m, Ø 60 mm	1.7.3	Inside Ø 60 mm, PN 6, including hose clip	2018106	A	305.-
Synthetic pressure hose 15 m, Ø 60 mm	1.7.3	Inside Ø 60 mm, PN 6, including hose clip	2027646	A	215.-
Fixed coupling set Storz C/DN 50	1.7.2	with 90° pipe elbow and flange connection; pipe elbow made of EN-GJL-250, Storz coupling made of aluminium, incl. 1 set of mounting accessories	6031671	L	186.-
Synthetic fibre pressure hose 5 m, with Storz C	1.7.4	Inside Ø 52 mm, including coupling, 12/40 bar	6003651	C	54.-
Synthetic fibre pressure hose 10 m, with Storz C	1.7.4	Inside Ø 52 mm, including coupling, 12/40 bar	6003650	C	78.-
Synthetic fibre pressure hose 20 m, with Storz C	1.7.4	Inside Ø 52 mm, including coupling, 12/40 bar	6003649	C	117.-
Sling chain kit PCS-CE, galvanised steel, 400 kg, 5 m	1.4.3	As chain sling with 2 shackles in galvanised steel. Bearing capacity: 400 kg	6063140	L	149.-
Sling chain kit PCS-CE, galvanised steel, 400 kg, 10 m	1.4.3	As chain sling with 2 shackles in galvanised steel. Bearing capacity: 400 kg	6063142	L	277.-
Sling chain kit PCS-CE, stainless steel, 400 kg, 5 m	1.4.3	As chain sling with 2 shackles in 1.4401 stainless steel. Bearing capacity: 400 kg	6063136	L	410.-
Sling chain kit PCS-CE, stainless steel, 400 kg, 10 m	1.4.3	As chain sling with 2 shackles in 1.4401 stainless steel. Bearing capacity: 400 kg	6063138	L	646.-

Price group: PG14


Accessories for portable wet well installation DN65					
Type	Reference number	Description	Art. no.		
					EUR
Floor supporting foot DN 50/65	1.4.2	Made of steel (S235JR), powder-coated, including fixation material	6064666	L	151.-
90° pipe elbow DN 65/70 mm	1.1.2	Made of EN-GJL-250, with hose connector Ø 70 mm, flange on pump side, including 1 set of installation accessories	4027346	L	88.-
Synthetic pressure hose 10 m, Ø 70 mm	1.7.3	Inside Ø 70 mm, PN 8, including hose clip	2014151	C	182.-
Threaded flange DN 65 on Rp 2½	1.1.7	made of galvanized steel, DN 65 with Rp 2½ female thread, incl. 1 set of mounting accessories	4015204	L	92.-
90° pipe elbow G 2½	1.1.1	Made of steel, galvanised with G 2½ / R 2½ female/male thread	4015212	L	98.-
Fixed coupling Storz C/G 2½	1.7.5	made of aluminium, Storz C connection, with male thread	2015234	L	32.-
Synthetic fibre pressure hose 5 m, with Storz C	1.7.4	Inside Ø 52 mm, including coupling, 12/40 bar	6003651	C	54.-
Synthetic fibre pressure hose 10 m, with Storz C	1.7.4	Inside Ø 52 mm, including coupling, 12/40 bar	6003650	C	78.-
Synthetic fibre pressure hose 20 m, with Storz C	1.7.4	Inside Ø 52 mm, including coupling, 12/40 bar	6003649	C	117.-
Sling chain kit PCS-CE, galvanised steel, 400 kg, 5 m	1.4.3	As chain sling with 2 shackles in galvanised steel. Bearing capacity: 400 kg	6063140	L	149.-
Sling chain kit PCS-CE, galvanised steel, 400 kg, 10 m	1.4.3	As chain sling with 2 shackles in galvanised steel. Bearing capacity: 400 kg	6063142	L	277.-
Sling chain kit PCS-CE, stainless steel, 400 kg, 5 m	1.4.3	As chain sling with 2 shackles in 1.4401 stainless steel. Bearing capacity: 400 kg	6063136	L	410.-
Sling chain kit PCS-CE, stainless steel, 400 kg, 10 m	1.4.3	As chain sling with 2 shackles in 1.4401 stainless steel. Bearing capacity: 400 kg	6063138	L	646.-

Price group: PG14


Accessories for portable wet well installation DN80					
Type	Reference number	Description	Art. no.		
					EUR
Floor supporting foot DN 80/100	1.4.2	Made of steel (S235JR), powder-coated, including fixation material	6065949	L	220.-
Floor supporting foot DN 80/100	1.4.2	Made of stainless steel (1.4571), including fixation material	6065953	C	725.-
Fixed coupling set Storz B/DN 80	1.7.2	with 90° pipe elbow and flange connection; pipe elbow made of EN-GJL-250, Storz coupling made of aluminium, incl. 1 set of mounting accessories	6031385	L	245.-
Synthetic fibre pressure hose 5 m, with Storz B	1.7.4	Inside Ø 75 mm, including coupling, 12/40 bar	6003052	A	89.-
Synthetic fibre pressure hose 10 m, with Storz B	1.7.4	Inside Ø 75 mm, including coupling, 12/40 bar	6003051	A	116.-
Synthetic fibre pressure hose 20 m, with Storz B	1.7.4	Inside Ø 75 mm, including coupling, 12/40 bar	6003050	A	204.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
 Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG14

Accessories for portable wet well installation DN80					
Type	Reference number	Description	Art. no.		
					EUR
Sling chain kit PCS-CE, galvanised steel, 400 kg, 5 m	1.4.3	As chain sling with 2 shackles in galvanised steel. Bearing capacity: 400 kg	6063140	L	149.-
Sling chain kit PCS-CE, galvanised steel, 400 kg, 10 m	1.4.3	As chain sling with 2 shackles in galvanised steel. Bearing capacity: 400 kg	6063142	L	277.-
Sling chain kit PCS-CE, stainless steel, 400 kg, 5 m	1.4.3	As chain sling with 2 shackles in 1.4401 stainless steel. Bearing capacity: 400 kg	6063136	L	410.-
Sling chain kit PCS-CE, stainless steel, 400 kg, 10 m	1.4.3	As chain sling with 2 shackles in 1.4401 stainless steel. Bearing capacity: 400 kg	6063138	L	646.-

Price group: PG14

Accessories for portable wet well installation DN100					
Type	Reference number	Description	Art. no.		
					EUR
Floor supporting foot DN 80/100	1.4.2	Made of steel (S235JR), powder-coated, including fixation material	6065949	L	220.-
Floor supporting foot DN 80/100	1.4.2	Made of stainless steel (1.4571), including fixation material	6065953	C	725.-
Fixed coupling set Storz A/DN 100	1.7.2	with 90° pipe elbow and flange connection; pipe elbow made of EN-GJL-250, Storz coupling made of aluminium, incl. 1 set of mounting accessories	6031672	L	327.-
Synthetic fibre pressure hose 5 m, with Storz A	1.7.4	Inside Ø 102 mm, including coupling, 8/20 bar	6022391	K	167.-
Synthetic fibre pressure hose 10 m, with Storz A	1.7.4	Inside Ø 102 mm, including coupling, 8/20 bar	6022392	K	327.-
Synthetic fibre pressure hose 20 m, with Storz A	1.7.4	Inside Ø 102 mm, including coupling, 8/20 bar	6022393	L	338.-
Sling chain kit PCS-CE, galvanised steel, 400 kg, 5 m	1.4.3	As chain sling with 2 shackles in galvanised steel. Bearing capacity: 400 kg	6063140	L	149.-
Sling chain kit PCS-CE, galvanised steel, 400 kg, 10 m	1.4.3	As chain sling with 2 shackles in galvanised steel. Bearing capacity: 400 kg	6063142	L	277.-
Sling chain kit PCS-CE, stainless steel, 400 kg, 5 m	1.4.3	As chain sling with 2 shackles in 1.4401 stainless steel. Bearing capacity: 400 kg	6063136	L	410.-
Sling chain kit PCS-CE, stainless steel, 400 kg, 10 m	1.4.3	As chain sling with 2 shackles in 1.4401 stainless steel. Bearing capacity: 400 kg	6063138	L	646.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG14

Electrical accessories – level control with dynamic pressure system

Level measurement via an open dynamic pressure system with the option of a separate dynamic pressure bell for the high water level.

Type	Description	Art. no.		EUR
EC-L-1x12A-DOL-MT34-WM-EMS-IPS	Microcontroller-controlled switchgear with LC display, symbol-based menu navigation and integrated pressure transducer for level-dependent control of a submersible pump by means of float switches, level sensor or immersion bell. WITHOUT main switch, mains isolator must be provided on-site! Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543212	L	892.-
EC-L-2x12A-DOL-MT34-WM-EMS-IPS	Microcontroller-controlled switchgear with LC display, symbol-based menu navigation and integrated pressure transducer for level-dependent control of two submersible pumps by means of float switches, level sensor or immersion bell. WITHOUT main switch, mains isolator must be provided on-site! Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543222	L	1,372.-
Dynamic pressure bell with 10 m hose	Pneumatic signal transmitter for media containing faeces with a max. temperature of 60 °C. The signal transmitter is open in direction of the fluid and must be ventilated after each pumping out (OFF depending on time).	2516976	L	88.-
Bubbling-through system	Small compressor for constant aeration of the dynamic pressure bell, including non-return valve, 3 m hose and T-connector.	2516977	L	216.-
Flash light 24 VDC	Xenon flashing light for wall mounting for indoor and outdoor installation. Luminous color: red, flash frequency: 0,75 Hz	2551612	A	☞
Flash light 1~230 VAC	Xenon flashing light for wall mounting for indoor and outdoor installation. Luminous color: red, flash frequency: 0,75 Hz	2551613	L	140.-
Signal horn 12-24 VDC	Horn with a bell mouth for wall mounting for indoor and outdoor use. Alarm signal by electromechanical sound generation with steel diaphragm (92 dBA).	2017208	A	☞
Signal horn 1~230 V	Horn with a bell mouth for wall mounting for indoor and outdoor use. Alarm signal by electromechanical sound generation with steel diaphragm (88 dBA).	501459398	L	84.-
NiMh rechargeable battery, 9 V/200 mAh	Rechargeable battery to be installed in the switchgears Wilo-control MS-L and EC-L for a mains-independent alarm	2522850	L	25.-

You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

Price group: PG14

Electrical accessories – level control with float switch

Level measurement using several float switches for the different water levels, including high water alarm signal.

Type	Description	Art. no.		EUR
MS-L-1x4kW-DOL	Microprocessor-controlled switchgear for level-dependent control of a submersible pump with float switch.	2539741	L	504.-
MS-L-2x4kW-DOL	Microprocessor-controlled switchgear for level-dependent control of 2 submersible pumps with float switch.	2539745	L	681.-
Float switch WA65 with 5 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 60 °C. Switching: up „ON“/down „OFF“.	503211390	L	82.-
Float switch WA65 with 10 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 60 °C. Switching: up „ON“/down „OFF“.	503211893	L	155.-
Float switch WA65 with 20 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 60 °C. Switching: up „ON“/down „OFF“.	2004431	L	231.-
Float switch WA65 with 30 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 60 °C. Switching: up „ON“/down „OFF“.	2004432	L	314.-
Flash light 1~230V	Optical alarm signal for connection to a switchgear. Suitable for outside installation.	2551613	L	140.-
Signal horn 1~230V	Acoustic alarm signal (88 dBA) for connection to a switchgear. Suitable for outside installation.	501459398	L	84.-
NiMh rechargeable battery, 9 V/200 mAh	Rechargeable battery to be installed in the switchgears Wilo-control MS-L and EC-L for a mains-independent alarm	2522850	L	25.-

You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☞ = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Electrical accessories – level control with level sensor

Level measurement using a level sensor with various measurement ranges, including high water alarm and dry-running protection.

Type	Description	Art. no.		EUR
EC-L-1x12A-DOL-MT34-WM	Microcontroller-controlled switchgear with LC display and symbol-based menu navigation for level-dependent control of a submersible pump by means of float switches or level sensor. Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543210	L	914.-
EC-L-1x12A-DOL-MT34-WM-EMS	Microcontroller-controlled switchgear with LC display and symbol-based menu navigation for level-dependent control of a submersible pump by means of float switches or level sensor. WITHOUT main switch, mains isolator must be provided on-site! Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543211	L	832.-
EC-L-2x12A-DOL-MT34-WM	Microcontroller-controlled switchgear with LC display and symbol-based menu navigation for level-dependent control of submersible pumps by means of float switches or level sensor. Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543220	L	1,444.-
EC-L-2x12A-DOL-MT34-WM-EMS	Microcontroller-controlled switchgear with LC display and symbol-based menu navigation for level-dependent control of submersible pumps by means of float switches or level sensor. WITHOUT main switch, mains isolator must be provided on-site! Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543221	L	1,269.-
EC-L-3x12A-DOL-MT34-WM	Microcontroller-controlled switchgear with LCD display and symbol-based menu navigation for level-dependent control of three submersible pumps by means of a level sensor. Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543230	L	2,107.-
Level sensor 0-1 mWS, with 10 m cable	Signal transmitter with ATEX approval for fluids containing faeces with a maximum temperature of 60 °C. Output signal: 4...20 mA	2519924	L	442.-
Level sensor 0-1 mWS, with 30 m cable	Signal transmitter with ATEX approval for fluids containing faeces with a maximum temperature of 60 °C. Output signal: 4...20 mA	2519925	L	522.-
Level sensor 0-1 mWS, with 50 m cable	Signal transmitter with ATEX approval for fluids containing faeces with a maximum temperature of 60 °C. Output signal: 4...20 mA	2519926	L	632.-
Level sensor 0-2.5 mWS with 10 m cable	Signal transmitter with ATEX approval for fluids containing faeces with a maximum temperature of 60 °C. Output signal: 4...20 mA	2519921	L	442.-
Level sensor 0-2.5 mWS, with 30 m cable	Signal transmitter with ATEX approval for fluids containing faeces with a maximum temperature of 60 °C. Output signal: 4...20 mA	2519922	L	522.-
Level sensor 0-2.5 mWS, with 50 m cable	Signal transmitter with ATEX approval for fluids containing faeces with a maximum temperature of 60 °C. Output signal: 4...20 mA	2519923	L	632.-
Cable clamp	For fixation of a signal transmitter in the pump chamber. The clamp is fixed in the pump chamber with a hook; the cable of the signal transmitter is clamped and fixed via the intrinsic weight of the signal transmitter.	2519927	L	22.-
Flash light 24 VDC	Xenon flashing light for wall mounting for indoor and outdoor installation. Luminous color: red, flash frequency: 0,75 Hz	2551612	A	☛

You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

☛ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☛ = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG14

Electrical accessories – level control with level sensor

Level measurement using a level sensor with various measurement ranges, including high water alarm and dry-running protection.

Type	Description	Art. no.		EUR
Flash light 1~230 VAC	Xenon flashing light for wall mounting for indoor and outdoor installation. Luminous color: red, flash frequency: 0,75 Hz	2551613	L	140.-
Signal horn 12~24 VDC	Horn with a bell mouth for wall mounting for indoor and outdoor use. Alarm signal by electromechanical sound generation with steel diaphragm (92 dBA).	2017208	A	☎
Signal horn 1~230 V	Horn with a bell mouth for wall mounting for indoor and outdoor use. Alarm signal by electromechanical sound generation with steel diaphragm (88 dBA).	501459398	L	84.-
NiMh rechargeable battery, 9 V/200 mAh	Rechargeable battery to be installed in the switchgears Wilo-control MS-L and EC-L for a mains-independent alarm	2522850	L	25.-

You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

Price group: PG14



Electrical accessories – mains-independent alarm signal

Alarm signal for detection of flooding in rooms and buildings. The alarm signal is acoustic, optical or wireless. In addition, other consumers can be controlled directly.

Type	Description	Art. no.		EUR
DrainAlarm 2	Network-independent alarm switchgear with optical and acoustic alarm signal and with a connection for one float switch.	2545133	L	412.-
DrainAlarm GSM	Network-independent alarm switchgear with optical, acoustic and wireless (per GSM) alarm signal and with a connection for one float switch.	2542911	L	1,111.-
Float switch WA65 with 5 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 60 °C. Switching: up „ON"/down „OFF".	503211390	L	82.-
Float switch WA65 with 10 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 60 °C. Switching: up „ON"/down „OFF".	503211893	L	155.-
Float switch WA65 with 20 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 60 °C. Switching: up „ON"/down „OFF".	2004431	L	231.-
Float switch WA65 with 30 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 60 °C. Switching: up „ON"/down „OFF".	2004432	L	314.-
Flash light 1~230V	Optical alarm signal for connection to a switchgear. Suitable for outside installation.	2551613	L	140.-
Signal horn 1~230V	Acoustic alarm signal (88 dBA) for connection to a switchgear. Suitable for outside installation.	501459398	L	84.-

You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

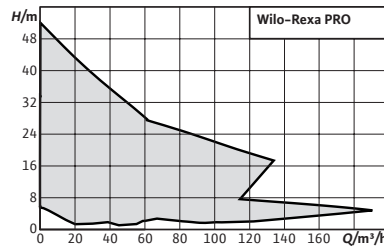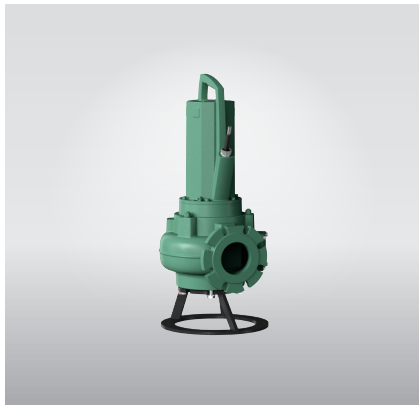

Accessories **Page**
Commissioning/maintenance 683

Select 4 online
All information at www.wilo-select.com

Wilo-Rexa PRO



Construction

Submersible sewage pump for continuous duty for stationary and portable wet well installation, as well as for stationary dry well installation.

Application

Pumping of

- Untreated sewage
- Sewage containing faeces
- Wastewater

Scope of delivery

- Submersible sewage pump with 10 m cable
- Operating and maintenance manual

Options

Your advantages


- Highly efficient thanks to efficiency-optimised, single-channel impellers
- Reliable operation due to clogging-free vortex impellers.
- Tested safety. Ex-rated in accordance with ATEX as standard
- Energy-efficient IE3 motor technology available as an option



- IE3 motors
- PTC sensor for winding monitoring
- Static gaskets made of FKM
- Coating Ceram C0 for housing and impeller
- Special voltages


Ordering information DN50

Type	Pressure port	Rated power	Explosion protection	Mains connection	Art. no.	Price group		
		P_2 kW	ATEX					EUR
Rexa PRO C05DA-322/EAD1X2-T0011-540-O	DN 50	1.10	yes	3~400 V, 50 Hz	6076425	PG8	L	1,397.-
Rexa PRO C05DA-322/EAD0X2-M0011-523-O	DN 50	1.10	yes	1~230 V, 50 Hz	6076424	PG8	C	1,646.-
Rexa PRO C05DA-324/EAD1X2-T0011-540-O	DN 50	1.10	yes	3~400 V, 50 Hz	6076427	PG8	L	1,449.-
Rexa PRO C05DA-324/EAD0X2-M0011-523-O	DN 50	1.10	yes	1~230 V, 50 Hz	6076426	PG8	C	1,731.-

= ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Ordering information DN50								
Type	Pressure port	Rated power	Explosion protection	Mains connection	Art. no.	Price group		
		P_2 kW	ATEX					EUR
Rexa PRO C05DA-326/EAD1X2- T0015-540-O	DN 50	1.50	yes	3~400 V, 50 Hz	6076429	PG8	L	1,510.-
Rexa PRO C05DA-326/EAD0X2- M0015-523-O	DN 50	1.50	yes	1~230 V, 50 Hz	6076428	PG8	C	1,871.-
Rexa PRO C05DA-328/EAD1X2- T0025-540-O	DN 50	2.50	yes	3~400 V, 50 Hz	6076430	PG8	L	1,630.-
Rexa PRO C05DA-329/EAD1X2- T0025-540-O	DN 50	2.50	yes	3~400 V, 50 Hz	6076431	PG8	L	1,675.-
Rexa PRO V05DA-122/EAD1X2- T0011-540-O	DN 50	1.10	yes	3~400 V, 50 Hz	6064719	PG8	L	1,318.-
Rexa PRO V05DA-122/EAD0X2- M0011-523-O	DN 50	1.10	yes	1~230 V, 50 Hz	6064718	PG8	C	1,586.-
Rexa PRO V05DA-124/EAD1X2- T0011-540-O	DN 50	1.10	yes	3~400 V, 50 Hz	6064721	PG8	L	1,374.-
Rexa PRO V05DA-124/EAD0X2- M0011-523-O	DN 50	1.10	yes	1~230 V, 50 Hz	6064720	PG8	L	1,660.-
Rexa PRO V05DA-126/EAD1X2- T0015-540-O	DN 50	1.50	yes	3~400 V, 50 Hz	6064723	PG8	L	1,418.-
Rexa PRO V05DA-126/EAD0X2- M0015-523-O	DN 50	1.50	yes	1~230 V, 50 Hz	6064722	PG8	C	1,811.-
Rexa PRO V05DA-222/EAD1X2- T0025-540-O	DN 50	2.50	yes	3~400 V, 50 Hz	6064724	PG8	L	1,671.-
Rexa PRO V05DA-224/EAD1X2- T0025-540-O	DN 50	2.50	yes	3~400 V, 50 Hz	6064725	PG8	L	1,702.-
Rexa PRO V05DA-226/EAD1X2- T0039-540-O	DN 50	3.90	yes	3~400 V, 50 Hz	6064726	PG8	L	1,911.-
Rexa PRO V05DA-228/EAD1X2- T0039-540-O	DN 50	3.90	yes	3~400 V, 50 Hz	6064727	PG8	L	1,945.-
Rexa PRO V05DA-323/EAD0X2- T0068-540-O	DN 50	6.75	yes	3~400 V, 50 Hz	6082575	PG8	L	3,169.-
Rexa PRO V05DA-324/EAD0X2- T0105-540-O	DN 50	10.50	yes	3~400 V, 50 Hz	6082576	PG8	L	3,449.-
Rexa PRO V05DA-325/EAD0X2- T0105-540-O	DN 50	10.50	yes	3~400 V, 50 Hz	6082577	PG8	L	3,486.-
Rexa PRO V05DA-326/EAD0X2- T0105-540-O	DN 50	10.50	yes	3~400 V, 50 Hz	6082578	PG8	L	3,524.-
Rexa PRO V05DA-328/EAD0X2- T0105-540-O	DN 50	10.50	yes	3~400 V, 50 Hz	6082579	PG8	L	3,561.-


 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
 Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Ordering information DN65								
Type	Pressure port	Rated power	Explosion protection	Mains connection	Art. no.	Price group		
		P_2 kW	ATEX					EUR
Rexa PRO C06DA-342/EAD1X2- T0025-540-O	DN 65/80	2.50	yes	3~400 V, 50 Hz	6077700	PG8	C	1,748.-
Rexa PRO C06DA-344/EAD1X2- T0025-540-O	DN 65/80	2.50	yes	3~400 V, 50 Hz	6077701	PG8	L	1,782.-
Rexa PRO C06DA-345/EAD1X2- T0025-540-O	DN 65/80	2.50	yes	3~400 V, 50 Hz	6077702	PG8	L	1,816.-
Rexa PRO C06DA-346/EAD1X2- T0039-540-O	DN 65/80	3.90	yes	3~400 V, 50 Hz	6077703	PG8	L	1,942.-
Rexa PRO C06DA-348/EAD1X2- T0039-540-O	DN 65/80	3.90	yes	3~400 V, 50 Hz	6077704	PG8	L	1,976.-
Rexa PRO C06DA-349/EAD1X2- T0039-540-O	DN 65/80	3.90	yes	3~400 V, 50 Hz	6077705	PG8	L	2,009.-
Rexa PRO V06DA-212/EAD1X2- T0011-540-O	DN 65/80	1.10	yes	3~400 V, 50 Hz	6064729	PG8	L	1,581.-
Rexa PRO V06DA-212/EAD0X2- M0011-523-O	DN 65/80	1.10	yes	1~230 V, 50 Hz	6064728	PG8	C	1,900.-
Rexa PRO V06DA-214/EAD1X2- T0015-540-O	DN 65/80	1.50	yes	3~400 V, 50 Hz	6064731	PG8	L	1,645.-
Rexa PRO V06DA-214/EAD0X2- M0015-523-O	DN 65/80	1.50	yes	1~230 V, 50 Hz	6064730	PG8	C	1,928.-
Rexa PRO V06DA-216/EAD1X2- T0025-540-O	DN 65/80	2.50	yes	3~400 V, 50 Hz	6064732	PG8	L	1,812.-
Rexa PRO V06DA-222/EAD1X2- T0039-540-O	DN 65/80	3.90	yes	3~400 V, 50 Hz	6064733	PG8	L	1,949.-
Rexa PRO V06DA-224/EAD1X2- T0039-540-O	DN 65/80	3.90	yes	3~400 V, 50 Hz	6064734	PG8	L	2,001.-
Rexa PRO V06DA-622/EAD1X4- T0011-540-O	DN 65/80	1.10	yes	3~400 V, 50 Hz	6064736	PG8	L	1,783.-
Rexa PRO V06DA-622/EAD0X4- M0011-523-O	DN 65/80	1.10	yes	1~230 V, 50 Hz	6064735	PG8	C	2,030.-
Rexa PRO V06DA-623/EAD1X4- T0015-540-O	DN 65/80	1.50	yes	3~400 V, 50 Hz	6064738	PG8	L	1,814.-
Rexa PRO V06DA-623/EAD0X4- M0015-523-O	DN 65/80	1.50	yes	1~230 V, 50 Hz	6064737	PG8	C	2,064.-
Rexa PRO V06DA-625/EAD1X4- T0015-540-O	DN 65/80	1.50	yes	3~400 V, 50 Hz	6064740	PG8	L	1,876.-
Rexa PRO V06DA-625/EAD0X4- M0015-523-O	DN 65/80	1.50	yes	1~230 V, 50 Hz	6064739	PG8	C	2,130.-


 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Ordering information DN65


Type	Pressure port	Rated power	Explosion protection	Mains connection	Art. no.	Price group		
		P_2 kW	ATEX					EUR
Rexa PRO V06DA-626/EAD1X4- T0025-540-O	DN 65/80	2.50	yes	3~400 V, 50 Hz	6064741	PG8	L	1,935.-
Rexa PRO V06DA-628/EAD1X4- T0025-540-O	DN 65/80	2.50	yes	3~400 V, 50 Hz	6064742	PG8	L	1,980.-

Ordering information DN80

Type	Pressure port	Rated power	Explosion protection	Mains connection	Art. no.	Price group		
		P_2 kW	ATEX					EUR
Rexa PRO C08DA-412/EAD1X2- T0011-540-O	DN 80	1.10	yes	3~400 V, 50 Hz	6078833	PG8	L	1,604.-
Rexa PRO C08DA-412/EAD0X2- M0011-523-O	DN 80	1.10	yes	1~230 V, 50 Hz	6078834	PG8	C	2,069.-
Rexa PRO C08DA-413/EAD1X2- T0015-540-O	DN 80	1.50	yes	3~400 V, 50 Hz	6078835	PG8	L	1,639.-
Rexa PRO C08DA-413/EAD0X2- M0015-523-O	DN 80	1.50	yes	1~230 V, 50 Hz	6078836	PG8	C	2,103.-
Rexa PRO C08DA-415/EAD1X2- T0025-540-O	DN 80	2.50	yes	3~400 V, 50 Hz	6078837	PG8	L	1,746.-
Rexa PRO C08DA-417/EAD1X4- T0011-540-O	DN 80	1.10	yes	3~400 V, 50 Hz	6078838	PG8	C	1,799.-
Rexa PRO C08DA-417/EAD0X4- M0011-523-O	DN 80	1.10	yes	1~230 V, 50 Hz	6078839	PG8	C	2,207.-
Rexa PRO C08DA-418/EAD1X4- T0015-540-O	DN 80	1.50	yes	3~400 V, 50 Hz	6078840	PG8	L	1,833.-
Rexa PRO C08DA-418/EAD0X4- M0015-523-O	DN 80	1.50	yes	1~230 V, 50 Hz	6078841	PG8	C	2,244.-
Rexa PRO C08DA-432/EAD1X2- T0025-540-O	DN 80	2.50	yes	3~400 V, 50 Hz	6078110	PG8	L	1,917.-
Rexa PRO C08DA-433/EAD1X2- T0025-540-O	DN 80	2.50	yes	3~400 V, 50 Hz	6078111	PG8	L	1,950.-
Rexa PRO C08DA-434/EAD1X2- T0039-540-O	DN 80	3.90	yes	3~400 V, 50 Hz	6078112	PG8	L	2,148.-
Rexa PRO C08DA-435/EAD1X2- T0039-540-O	DN 80	3.90	yes	3~400 V, 50 Hz	6078113	PG8	L	2,181.-
Rexa PRO C08DA-436/EAD1X2- T0050-540-O	DN 80	5.00	yes	3~400 V, 50 Hz	6078153	PG8	L	2,304.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.



Ordering information DN80								
Type	Pressure port	Rated power	Explosion protection	Mains connection	Art. no.	Price group		
		P_2 kW	ATEX					EUR
Rexa PRO C08DA-437/EAD1X2- T0050-540-O	DN 80	5.00	yes	3~400 V, 50 Hz	6078154	PG8	L	2,339.-
Rexa PRO V08DA-243/EAD0X2- T0068-540-O	DN 80/100	6.75	yes	3~400 V, 50 Hz	6082820	PG8	L	3,250.-
Rexa PRO V08DA-244/EAD0X2- T0105-540-O	DN 80/100	10.50	yes	3~400 V, 50 Hz	6082821	PG8	L	3,536.-
Rexa PRO V08DA-245/EAD0X2- T0105-540-O	DN 80/100	10.50	yes	3~400 V, 50 Hz	6082822	PG8	L	3,580.-
Rexa PRO V08DA-246/EAD0X2- T0105-540-O	DN 80/100	10.50	yes	3~400 V, 50 Hz	6082823	PG8	L	3,624.-
Rexa PRO V08DA-248/EAD0X2- T0105-540-O	DN 80/100	10.50	yes	3~400 V, 50 Hz	6082824	PG8	L	3,668.-
Rexa PRO V08DA-423/EAD1X4- T0011-540-O	DN 80/100	1.10	yes	3~400 V, 50 Hz	6065934	PG8	L	1,934.-
Rexa PRO V08DA-423/EAD0X4- M0011-523-O	DN 80/100	1.10	yes	1~230 V, 50 Hz	6065933	PG8	C	2,221.-
Rexa PRO V08DA-424/EAD1X4- T0011-540-O	DN 80/100	1.10	yes	3~400 V, 50 Hz	6065936	PG8	L	1,960.-
Rexa PRO V08DA-424/EAD0X4- M0011-523-O	DN 80/100	1.10	yes	1~230 V, 50 Hz	6065935	PG8	C	2,252.-
Rexa PRO V08DA-426/EAD1X4- T0015-540-O	DN 80/100	1.50	yes	3~400 V, 50 Hz	6065938	PG8	L	1,991.-
Rexa PRO V08DA-426/EAD0X4- M0015-523-O	DN 80/100	1.50	yes	1~230 V, 50 Hz	6065937	PG8	C	2,279.-
Rexa PRO V08DA-428/EAD1X4- T0025-540-O	DN 80/100	2.50	yes	3~400 V, 50 Hz	6065939	PG8	L	2,075.-
Rexa PRO V08DA-524/EAD0X4- T0035-540-O	DN 80/100	3.45	yes	3~400 V, 50 Hz	6065941	PG8	L	2,230.-
Rexa PRO V08DA-526/EAD0X4- T0035-540-O	DN 80/100	3.45	yes	3~400 V, 50 Hz	6065942	PG8	L	2,280.-
Rexa PRO V08DA-526/EAD0X4- T0045-540-O	DN 80/100	4.50	yes	3~400 V, 50 Hz	6073819	PG8	L	2,476.-
Rexa PRO V08DA-528/EAD0X4- T0045-540-O	DN 80/100	4.50	yes	3~400 V, 50 Hz	6073820	PG8	L	2,519.-
Rexa PRO V08DA-528/EAD0X4- T0065-540-O	DN 80/100	6.50	yes	3~400 V, 50 Hz	6073801	PG8	L	2,703.-


 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Ordering information DN100

Type	Pressure port	Rated power P_2 kW	Explosion protection ATEX	Mains connection	Art. no.	Price group		EUR
Rexa PRO C10DA-512/EAD1X4- T0011-540-O	DN 100	1.10	yes	3~400 V, 50 Hz	6076767	PG8	C	2,470.-
Rexa PRO C10DA-512/EAD0X4- M0011-523-O	DN 100	1.50	yes	1~230 V, 50 Hz	6076766	PG8	C	2,975.-
Rexa PRO C10DA-513/EAD1X4- T0015-540-O	DN 100	1.50	yes	3~400 V, 50 Hz	6076769	PG8	C	2,501.-
Rexa PRO C10DA-513/EAD0X4- M0015-523-O	DN 100	1.10	yes	1~230 V, 50 Hz	6076768	PG8	C	3,006.-
Rexa PRO C10DA-514/EAD1X4- T0025-540-O	DN 100	2.50	yes	3~400 V, 50 Hz	6076770	PG8	L	2,609.-
Rexa PRO C10DA-516/EAD0X4- T0035-540-O	DN 100	3.45	yes	3~400 V, 50 Hz	6076771	PG8	L	2,723.-
Rexa PRO C10DA-518/EAD0X4- T0035-540-O	DN 100	3.45	yes	3~400 V, 50 Hz	6076772	PG8	L	2,755.-
Rexa PRO C10DA-518/EAD0X4- T0045-540-O	DN 100	4.50	yes	3~400 V, 50 Hz	6076773	PG8	L	3,055.-
Rexa PRO V10DA-422/EAD1X4- T0015-540-O	DN 100	1.50	yes	3~400 V, 50 Hz	6081910	PG8	L	2,149.-
Rexa PRO V10DA-424/EAD1X4- T0025-540-O	DN 100	2.50	yes	3~400 V, 50 Hz	6081911	PG8	L	2,233.-
Rexa PRO V10DA-425/EAD1X4- T0025-540-O	DN 100	2.50	yes	3~400 V, 50 Hz	6081912	PG8	L	2,289.-
Rexa PRO V10DA-426/EAD0X4- T0035-540-O	DN 100	3.45	yes	3~400 V, 50 Hz	6081913	PG8	L	2,388.-
Rexa PRO V10DA-428/EAD0X4- T0035-540-O	DN 100	3.45	yes	3~400 V, 50 Hz	6081914	PG8	L	2,438.-
Rexa PRO V10DA-428/EAD0X4- T0045-540-O	DN 100	4.50	yes	3~400 V, 50 Hz	6081915	PG8	L	2,678.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
 Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Installation drawing stationary wet well installation


1.1.3	90° pipe bend
1.4.1	Suspension unit
1.4.3	Chain
1.5.1	Shut-off valve
1.5.2	Non-return valve

Price group: PG14

Accessories for stationary wet well installation DN50


Type	Reference number	Description	Art. no.		EUR
Suspension unit DN 50/2RK	1.4.1	For 2-pipe guide of EN-GJL-250, cataphoretic-coated, with free passage in DN 50, coupling base with 90° pipe elbow, including coupling connection, guide pipe bracket of stainless steel for pump chamber fixation, profile joint and mounting accessories; two guide pipes (26.9 x 2 mm) are to be provided by the customer!	6070146	L	291.-
Non-return valve DN 50	1.5.2	made of EN-GJL-250, according to DIN EN 12050-4, including 1 set mounting accessories	2017166	L	259.-
Gate valve DN 50, EN-GJL-250	1.5.1	made of EN-GJL-250, including 1 set mounting accessories	2017160	L	184.-
Guide pipe Ø26.9x2mm 6m 1.4301	1.4.15	Guide pipe suitable for use with the suspension unit. Safe guide of the pump to the coupling connection. The number depends on the suspension unit.	6049244	L	93.-
90° pipe elbow DN 50	1.1.3	Made of EN-GJS-400-15, with 2 flanges, including 1 set installation accessories	2018053	L	185.-
Guide pipe bracket DN 50 for GG pipe	1.4.1	for 2-pipe guide, of stainless steel, for pipe attachment on a cast-iron pipe, including mounting accessories	6066851	K	70.-
Guide pipe bracket DN 50 for ST pipe	1.4.1	for 2-pipe guide, of stainless steel, for pipe attachment on a steel pipe, including mounting accessories	6061084	A	70.-
Bracket for guide pipe extension DN 50 for GG pipe	1.4.1	for 2-pipe guide, of stainless steel, for pipe attachment on a cast-iron pipe, including mounting accessories	6066852	A	93.-
Bracket for guide pipe extension DN 50 for ST pipe	1.4.1	for 2-pipe guide, of stainless steel, for pipe attachment on a steel pipe, including mounting accessories	6066846	A	91.-
Sling chain kit PCS-CE, galvanised steel, 400 kg, 5 m	1.4.3	As chain sling with 2 shackles in galvanised steel. Bearing capacity: 400 kg	6063140	L	149.-
Sling chain kit PCS-CE, galvanised steel, 400 kg, 10 m	1.4.3	As chain sling with 2 shackles in galvanised steel. Bearing capacity: 400 kg	6063142	L	277.-
Sling chain kit PCS-CE, stainless steel, 400 kg, 5 m	1.4.3	As chain sling with 2 shackles in 1.4401 stainless steel. Bearing capacity: 400 kg	6063136	L	410.-
Sling chain kit PCS-CE, stainless steel, 400 kg, 10 m	1.4.3	As chain sling with 2 shackles in 1.4401 stainless steel. Bearing capacity: 400 kg	6063138	L	646.-
Y-piece DN 50	1.1.5	Made of steel, galvanised, PN 10/16 flanges in accordance with DIN 2501 with 2 sets of installation accessories	2019042	L	412.-
Mounting accessories DN 40/50/65, PN 10	1.4.12	For one flange connection, with screws, nuts and flat gasket	6076963	L	25.-

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☞ = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG14

Accessories for stationary wet well installation DN65					
Type	Reference number	Description	Art. no.		EUR
Suspension unit DN 65/2RK	1.4.1	For 2-pipe guide of EN-GJL-250, cataphoretic coating, with free passage in DN 65, coupling base with 90° pipe elbow, including coupling connection, guide pipe bracket of stainless steel for pump chamber fixation, profile joint and installation accessories; 2 guide pipes (26.9 x 2 mm) are to be provided by the customer!	6070150	L	318.-
Guide pipe Ø26.9x2mm 6m 1.4301	1.4.15	Guide pipe suitable for use with the suspension unit. Safe guide of the pump to the coupling connection. The number depends on the suspension unit.	6049244	L	93.-
Guide pipe bracket DN 65 for GG pipe	1.4.1	for 2-pipe guide, of stainless steel, for pipe attachment on a cast-iron pipe, including mounting accessories	6066847	A	95.-
Guide pipe bracket DN 65 for ST pipe	1.4.1	for 2-pipe guide, of stainless steel, for pipe attachment on a steel pipe, including mounting accessories	6066848	L	95.-
Bracket for guide pipe extension DN 65 for GG pipe	1.4.1	for 2-pipe guide, of stainless steel, for pipe attachment on a cast-iron pipe, including mounting accessories	6066849	A	115.-
Bracket for guide pipe extension DN 65 for ST pipe	1.4.1	for 2-pipe guide, of stainless steel, for pipe attachment on a steel pipe, including mounting accessories	6066850	K	115.-
Non-return valve DN 65	1.5.2	made of EN-GJL-250, according to DIN EN 12050-4, including 1 set mounting accessories	2017167	L	297.-
Gate valve DN 65, EN-GJL-250	1.5.1	made of EN-GJL-250, including 1 set mounting accessories	2017161	L	218.-
90° pipe elbow DN 65	1.1.3	Made of EN-GJS-400-15, with 2 flanges, including 1 set installation accessories	2017183	L	188.-
Sling chain kit PCS-CE, galvanised steel, 400 kg, 5 m	1.4.3	As chain sling with 2 shackles in galvanised steel. Bearing capacity: 400 kg	6063140	L	149.-
Sling chain kit PCS-CE, galvanised steel, 400 kg, 10 m	1.4.3	As chain sling with 2 shackles in galvanised steel. Bearing capacity: 400 kg	6063142	L	277.-
Sling chain kit PCS-CE, stainless steel, 400 kg, 5 m	1.4.3	As chain sling with 2 shackles in 1.4401 stainless steel. Bearing capacity: 400 kg	6063136	L	410.-
Sling chain kit PCS-CE, stainless steel, 400 kg, 10 m	1.4.3	As chain sling with 2 shackles in 1.4401 stainless steel. Bearing capacity: 400 kg	6063138	L	646.-
Y-piece DN 65	1.1.5	Made of steel, galvanised, PN 10/16 flanges in accordance with DIN 2501 with 2 sets of installation accessories	2017178	L	479.-
Mounting accessories DN 40/50/65, PN 10	1.4.12	For one flange connection, with screws, nuts and flat gasket	6076963	L	25.-
Guide pipe Ø26.9x2mm 6m 1.4571	1.4.15	Guide pipe suitable for use with the suspension unit. Safe guide of the pump to the coupling connection. The number depends on the suspension unit.	6049245	L	191.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
 Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG14

Accessories for stationary wet well installation DN80					
Type	Reference number	Description	Art. no.		
					EUR
Suspension unit DN 80/2RK	1.4.1	Made of EN-GJL-250, painted, with free passage in DN 80, foot elbow including pump holder, profile joint, installation and floor fixation accessories and double-pipe guide pipe bracket (42.4x2 mm) without guide pipes.	6082333	L	318.-
Non-return valve DN 80	1.5.2	made of EN-GJL-250, according to DIN EN 12050-4, including 1 set mounting accessories	2017168	L	333.-
Gate valve DN 80, EN-GJL-250	1.5.1	made of EN-GJL-250, including 1 set mounting accessories	2017162	L	301.-
90° pipe elbow DN 80	1.1.3	Made of EN-GJS-400-15, with 2 flanges, including 1 set installation accessories	2012064	L	203.-
Sling chain kit PCS-CE, galvanised steel, 400 kg, 5 m	1.4.3	As chain sling with 2 shackles in galvanised steel. Bearing capacity: 400 kg	6063140	L	149.-
Sling chain kit PCS-CE, galvanised steel, 400 kg, 10 m	1.4.3	As chain sling with 2 shackles in galvanised steel. Bearing capacity: 400 kg	6063142	L	277.-
Sling chain kit PCS-CE, stainless steel, 400 kg, 5 m	1.4.3	As chain sling with 2 shackles in 1.4401 stainless steel. Bearing capacity: 400 kg	6063136	L	410.-
Sling chain kit PCS-CE, stainless steel, 400 kg, 10 m	1.4.3	As chain sling with 2 shackles in 1.4401 stainless steel. Bearing capacity: 400 kg	6063138	L	646.-
Y-piece DN 80	1.1.5	Made of steel, galvanised, PN 10/16 flanges in accordance with DIN 2501 with 2 sets of installation accessories	2017179	L	737.-
Mounting accessories DN 80/100, PN 10	1.4.12	For one flange connection, with screws, nuts and flat gasket	6077521	L	27.-
Guide pipe Ø42.4x2mm 6m 1.4301	1.4.15	Guide pipe suitable for use with the suspension unit. Safe guide of the pump to the coupling connection. The number depends on the suspension unit.	6031565	L	130.-
Guide pipe Ø42.4x2mm 6m 1.4571	1.4.15	Guide pipe suitable for use with the suspension unit. Safe guide of the pump to the coupling connection. The number depends on the suspension unit.	6031566	L	228.-

Price group: PG14

Accessories for stationary wet well installation DN100					
Type	Reference number	Description	Art. no.		
					EUR
Non-return valve DN 100	1.5.2	made of EN-GJL-250, according to DIN EN 12050-4, including 1 set mounting accessories	2017169	L	399.-
Gate valve DN 100, EN-GJL-250	1.5.1	made of EN-GJL-250, including 1 set mounting accessories	2017163	L	355.-
90° pipe elbow DN 100	1.1.3	Made of EN-GJS-400-15, with 2 flanges, including 1 set installation accessories	2004669	L	245.-
Y-piece DN 100	1.1.5	Made of steel, galvanised, PN 10/16 flanges in accordance with DIN 2501 with 2 sets of installation accessories	2017180	L	879.-
Sling chain kit PCS-CE, galvanised steel, 400 kg, 5 m	1.4.3	As chain sling with 2 shackles in galvanised steel. Bearing capacity: 400 kg	6063140	L	149.-
Sling chain kit PCS-CE, galvanised steel, 400 kg, 10 m	1.4.3	As chain sling with 2 shackles in galvanised steel. Bearing capacity: 400 kg	6063142	L	277.-
Sling chain kit PCS-CE, stainless steel, 400 kg, 5 m	1.4.3	As chain sling with 2 shackles in 1.4401 stainless steel. Bearing capacity: 400 kg	6063136	L	410.-


☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG14

Accessories for stationary wet well installation DN100					
Type	Reference number	Description	Art. no.		
					EUR
Sling chain kit PCS-CE, stainless steel, 400 kg, 10 m	1.4.3	As chain sling with 2 shackles in 1.4401 stainless steel. Bearing capacity: 400 kg	6063138	L	646.-
Suspension unit DN 100/2RK	1.4.1	Made of EN-GJL-250, painted, with free passage in DN 100, foot elbow including pump holder, profile joint, installation and floor fixation accessories and double-pipe guide pipe bracket (42.4x2 mm) without guide pipes.	6082336	L	456.-
Mounting accessories DN 80/100, PN 10	1.4.12	For one flange connection, with screws, nuts and flat gasket	6077521	L	27.-

Installation drawing portable wet well installation

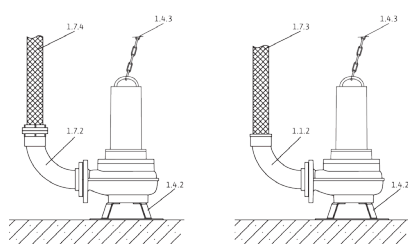

- 1.1.2 90° pipe bend with hose connection
- 1.4.2 Pump foot
- 1.4.3 Chain
- 1.7.3 Pressure hose
- 1.7.4 Pressure hose with Storz coupling
- 1.7.5 90° pipe bend with Storz coupling

Price group: PG14

Accessories for portable wet well installation DN50					
Type	Reference number	Description	Art. no.		
					EUR
Floor supporting foot DN 50/65	1.4.2	Made of steel (S235JR), powder-coated, including fixation material	6064666	L	151.-
90° pipe elbow DN 50/60 mm	1.1.2	Made of PVC, with hose connector Ø 60 mm, flange on pump side, including 1 set of installation accessories	4027344	L	96.-
Synthetic pressure hose 3 m, Ø 60 mm	1.7.3	Inside Ø 60 mm, PN 6, including hose clip	2027644	A	109.-
Synthetic pressure hose 5 m, Ø 60 mm	1.7.3	Inside Ø 60 mm, PN 6, including hose clip	2027645	A	164.-
Synthetic pressure hose 10 m, Ø 60 mm	1.7.3	Inside Ø 60 mm, PN 6, including hose clip	2018106	A	305.-
Synthetic pressure hose 15 m, Ø 60 mm	1.7.3	Inside Ø 60 mm, PN 6, including hose clip	2027646	A	215.-
Fixed coupling set Storz C/DN 50	1.7.2	with 90° pipe elbow and flange connection; pipe elbow made of EN-GJL-250, Storz coupling made of aluminium, incl. 1 set of mounting accessories	6031671	L	186.-
Synthetic fibre pressure hose 5 m, with Storz C	1.7.4	Inside Ø 52 mm, including coupling, 12/40 bar	6003651	C	54.-
Synthetic fibre pressure hose 10 m, with Storz C	1.7.4	Inside Ø 52 mm, including coupling, 12/40 bar	6003650	C	78.-
Synthetic fibre pressure hose 20 m, with Storz C	1.7.4	Inside Ø 52 mm, including coupling, 12/40 bar	6003649	C	117.-
Sling chain kit PCS-CE, galvanised steel, 400 kg, 5 m	1.4.3	As chain sling with 2 shackles in galvanised steel. Bearing capacity: 400 kg	6063140	L	149.-
Sling chain kit PCS-CE, galvanised steel, 400 kg, 10 m	1.4.3	As chain sling with 2 shackles in galvanised steel. Bearing capacity: 400 kg	6063142	L	277.-

= ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG14

Accessories for portable wet well installation DN50					
Type	Reference number	Description	Art. no.		
					EUR
Sling chain kit PCS-CE, stainless steel, 400 kg, 5 m	1.4.3	As chain sling with 2 shackles in 1.4401 stainless steel. Bearing capacity: 400 kg	6063136	L	410.-
Sling chain kit PCS-CE, stainless steel, 400 kg, 10 m	1.4.3	As chain sling with 2 shackles in 1.4401 stainless steel. Bearing capacity: 400 kg	6063138	L	646.-

Price group: PG14

Accessories for portable wet well installation DN65					
Type	Reference number	Description	Art. no.		
					EUR
Floor supporting foot DN 50/65	1.4.2	Made of steel (S235JR), powder-coated, including fixation material	6064666	L	151.-
90° pipe elbow DN 65/70 mm	1.1.2	Made of EN-GJL-250, with hose connector Ø 70 mm, flange on pump side, including 1 set of installation accessories	4027346	L	88.-
Synthetic pressure hose 10 m, Ø 70 mm	1.7.3	Inside Ø 70 mm, PN 8, including hose clip	2014151	C	182.-
Threaded flange DN 65 on Rp 2½	1.1.7	made of galvanized steel, DN 65 with Rp 2½ female thread, incl. 1 set of mounting accessories	4015204	L	92.-
90° pipe elbow G 2½	1.1.1	Made of steel, galvanised with G 2½ / R 2½ female/male thread	4015212	L	98.-
Fixed coupling Storz C/G 2½	1.7.5	made of aluminium, Storz C connection, with male thread	2015234	L	32.-
Synthetic fibre pressure hose 5 m, with Storz C	1.7.4	Inside Ø 52 mm, including coupling, 12/40 bar	6003651	C	54.-
Synthetic fibre pressure hose 10 m, with Storz C	1.7.4	Inside Ø 52 mm, including coupling, 12/40 bar	6003650	C	78.-
Synthetic fibre pressure hose 20 m, with Storz C	1.7.4	Inside Ø 52 mm, including coupling, 12/40 bar	6003649	C	117.-
Sling chain kit PCS-CE, galvanised steel, 400 kg, 5 m	1.4.3	As chain sling with 2 shackles in galvanised steel. Bearing capacity: 400 kg	6063140	L	149.-
Sling chain kit PCS-CE, galvanised steel, 400 kg, 10 m	1.4.3	As chain sling with 2 shackles in galvanised steel. Bearing capacity: 400 kg	6063142	L	277.-
Sling chain kit PCS-CE, stainless steel, 400 kg, 5 m	1.4.3	As chain sling with 2 shackles in 1.4401 stainless steel. Bearing capacity: 400 kg	6063136	L	410.-
Sling chain kit PCS-CE, stainless steel, 400 kg, 10 m	1.4.3	As chain sling with 2 shackles in 1.4401 stainless steel. Bearing capacity: 400 kg	6063138	L	646.-

Price group: PG14

Accessories for portable wet well installation DN80					
Type	Reference number	Description	Art. no.		
					EUR
Floor supporting foot DN 80/100	1.4.2	Made of steel (S235JR), powder-coated, including fixation material	6065949	L	220.-
Floor supporting foot DN 80/100	1.4.2	Made of stainless steel (1.4571), including fixation material	6065953	C	725.-

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG14

Accessories for portable wet well installation DN80

Type	Reference number	Description	Art. no.		EUR
Fixed coupling set Storz B/DN 80	1.7.2	with 90° pipe elbow and flange connection; pipe elbow made of EN-GJL-250, Storz coupling made of aluminium, incl. 1 set of mounting accessories	6031385	L	245.-
Synthetic fibre pressure hose 5 m, with Storz B	1.7.4	Inside Ø 75 mm, including coupling, 12/40 bar	6003052	A	89.-
Synthetic fibre pressure hose 10 m, with Storz B	1.7.4	Inside Ø 75 mm, including coupling, 12/40 bar	6003051	A	116.-
Synthetic fibre pressure hose 20 m, with Storz B	1.7.4	Inside Ø 75 mm, including coupling, 12/40 bar	6003050	A	204.-
Sling chain kit PCS-CE, galvanised steel, 400 kg, 5 m	1.4.3	As chain sling with 2 shackles in galvanised steel. Bearing capacity: 400 kg	6063140	L	149.-
Sling chain kit PCS-CE, galvanised steel, 400 kg, 10 m	1.4.3	As chain sling with 2 shackles in galvanised steel. Bearing capacity: 400 kg	6063142	L	277.-
Sling chain kit PCS-CE, stainless steel, 400 kg, 5 m	1.4.3	As chain sling with 2 shackles in 1.4401 stainless steel. Bearing capacity: 400 kg	6063136	L	410.-
Sling chain kit PCS-CE, stainless steel, 400 kg, 10 m	1.4.3	As chain sling with 2 shackles in 1.4401 stainless steel. Bearing capacity: 400 kg	6063138	L	646.-

Price group: PG14

Accessories for portable wet well installation DN100

Type	Reference number	Description	Art. no.		EUR
Floor supporting foot DN 80/100	1.4.2	Made of steel (S235JR), powder-coated, including fixation material	6065949	L	220.-
Floor supporting foot DN 80/100	1.4.2	Made of stainless steel (1.4571), including fixation material	6065953	C	725.-
Fixed coupling set Storz A/DN 100	1.7.2	with 90° pipe elbow and flange connection; pipe elbow made of EN-GJL-250, Storz coupling made of aluminium, incl. 1 set of mounting accessories	6031672	L	327.-
Synthetic fibre pressure hose 5 m, with Storz A	1.7.4	Inside Ø 102 mm, including coupling, 8/20 bar	6022391	K	167.-
Synthetic fibre pressure hose 10 m, with Storz A	1.7.4	Inside Ø 102 mm, including coupling, 8/20 bar	6022392	K	327.-
Synthetic fibre pressure hose 20 m, with Storz A	1.7.4	Inside Ø 102 mm, including coupling, 8/20 bar	6022393	L	338.-
Sling chain kit PCS-CE, galvanised steel, 400 kg, 5 m	1.4.3	As chain sling with 2 shackles in galvanised steel. Bearing capacity: 400 kg	6063140	L	149.-
Sling chain kit PCS-CE, galvanised steel, 400 kg, 10 m	1.4.3	As chain sling with 2 shackles in galvanised steel. Bearing capacity: 400 kg	6063142	L	277.-
Sling chain kit PCS-CE, stainless steel, 400 kg, 5 m	1.4.3	As chain sling with 2 shackles in 1.4401 stainless steel. Bearing capacity: 400 kg	6063136	L	410.-
Sling chain kit PCS-CE, stainless steel, 400 kg, 10 m	1.4.3	As chain sling with 2 shackles in 1.4401 stainless steel. Bearing capacity: 400 kg	6063138	L	646.-


🚚 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, 📞 = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG14

Electrical accessories – level control with dynamic pressure system

Level measurement via an open dynamic pressure system with the option of a separate dynamic pressure bell for the high water level.

Type	Description	Art. no.		EUR
				
EC-L-1x12A-DOL-MT34-WM-EMS-IPS	Microcontroller-controlled switchgear with LC display, symbol-based menu navigation and integrated pressure transducer for level-dependent control of a submersible pump by means of float switches, level sensor or immersion bell. WITHOUT main switch, mains isolator must be provided on-site! Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543212	L	892.-
EC-L-2x12A-DOL-MT34-WM-EMS-IPS	Microcontroller-controlled switchgear with LC display, symbol-based menu navigation and integrated pressure transducer for level-dependent control of two submersible pumps by means of float switches, level sensor or immersion bell. WITHOUT main switch, mains isolator must be provided on-site! Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543222	L	1,372.-
Dynamic pressure bell with 10 m hose	Pneumatic signal transmitter for media containing faeces with a max. temperature of 60 °C. The signal transmitter is open in direction of the fluid and must be ventilated after each pumping out (OFF depending on time).	2516976	L	88.-
Bubbling-through system	Small compressor for constant aeration of the dynamic pressure bell, including non-return valve, 3 m hose and T-connector.	2516977	L	216.-
NiMH rechargeable battery, 9 V/200 mAh	Rechargeable battery to be installed in the switchgears Wilo-control MS-L and EC-L for a mains-independent alarm	2522850	L	25.-


You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

Price group: PG14

Electrical accessories – level control with float switch

Level measurement using several float switches for the different water levels, including high water alarm signal. The breakdown barrier and the Ex cutoff relays are not required except for the connection of signal transmitters in potentially explosive areas! These can also be dispensed with when the SC-L..-Ex switchgear is used!

Type	Description	Art. no.		EUR
				
EC-L-1x12A-DOL-MT34-WM	Microcontroller-controlled switchgear with LC display and symbol-based menu navigation for level-dependent control of a submersible pump by means of float switches or level sensor. Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543210	L	914.-
EC-L-1x12A-DOL-MT34-WM-EMS	Microcontroller-controlled switchgear with LC display and symbol-based menu navigation for level-dependent control of a submersible pump by means of float switches or level sensor. WITHOUT main switch, mains isolator must be provided on-site! Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543211	L	832.-
EC-L-2x12A-DOL-MT34-WM	Microcontroller-controlled switchgear with LC display and symbol-based menu navigation for level-dependent control of submersible pumps by means of float switches or level sensor. Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543220	L	1,444.-

You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG14

Electrical accessories – level control with float switch

Level measurement using several float switches for the different water levels, including high water alarm signal. The breakdown barrier and the Ex cutoff relays are not required except for the connection of signal transmitters in potentially explosive areas! These can also be dispensed with when the SC-L...-Ex switchgear is used!

Type	Description	Art. no.		EUR
EC-L-2x12A-DOL-MT34-WM-EMS	Microcontroller-controlled switchgear with LC display and symbol-based menu navigation for level-dependent control of submersible pumps by means of float switches or level sensor. WITHOUT main switch, mains isolator must be provided on-site! Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543221	L	1,269.-
EC-L-3x12A-DOL-MT34-WM	Microcontroller-controlled switchgear with LCD display and symbol-based menu navigation for level-dependent control of three submersible pumps by means of a level sensor. Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543230	L	2,107.-
SC-L-1x12A-T34-SD-WM	Microprocessor-controlled switchgear for level-dependent control of one submersible motor pump via level sensor or float switches.	2538948	C	2,611.-
SC-L-2x12A-T34-SD-WM	Microprocessor-controlled switchgear for level-dependent control of two submersible motor pumps via level sensor or float switches.	2538949	K	3,343.-
SC-L-1x12A-T34-SD-WM	Microprocessor-controlled switchgear for level-dependent control of one submersible motor pump via level sensor or float switches.	2538948	C	2,611.-
SC-L-2x12A-T34-SD-WM	Microprocessor-controlled switchgear for level-dependent control of two submersible motor pumps via level sensor or float switches.	2538949	K	3,343.-
SC-L-1x16A-T34-SD-WM	Microprocessor-controlled switchgear for level-dependent control of one submersible motor pump via level sensor or float switches.	2543273	C	2,621.-
SC-L-2x16A-T34-SD-WM	Microprocessor-controlled switchgear for level-dependent control of two submersible motor pumps via level sensor or float switches.	2543274	C	3,382.-
SC-L-1x18A-T34-SD-WM	Microprocessor-controlled switchgear for level-dependent control of one submersible motor pump via level sensor or float switches.	2538952	C	2,633.-
SC-L-2x18A-T34-SD-WM	Microprocessor-controlled switchgear for level-dependent control of two submersible motor pumps via level sensor or float switches.	2538953	C	3,422.-
SC-L-1x24A-T34-SD-WM	Microprocessor-controlled switchgear for level-dependent control of one submersible motor pump via level sensor or float switches.	2538956	C	3,178.-
SC-L-2x24A-T34-SD-WM	Microprocessor-controlled switchgear for level-dependent control of two submersible motor pumps via level sensor or float switches.	2538957	C	3,713.-
Float switch MS1 with 10 m cable	Signal transmitters for aggressive fluids and fluids containing faeces up to a max. temperature of 80 °C. Switching: up „ON“/down „OFF“.	2004593	L	114.-
Ex cut-off relay (2-circuit)	Ex cut-off relay for the connection of 2 float switches for level control in explosive atmospheres.	2513059	L	721.-
Ex cut-off relay (3-circuit)	Ex cut-off relay for the connection of 3 float switches for level control in explosive atmospheres.	2510698	K	909.-
Ex cut-off relay (4-circuit)	Ex cut-off relay for the connection of 4 float switches for level control in explosive atmospheres.	2510699	K	853.-
Ex cut-off relay (5-circuit)	Ex cut-off relay for the connection of 5 float switches for level control in explosive atmospheres.	2510674	K	1,153.-
Flash light 24 VDC	Xenon flashing light for wall mounting for indoor and outdoor installation. Luminous color: red, flash frequency: 0,75 Hz	2551612	A	☞
Flash light 1~230 VAC	Xenon flashing light for wall mounting for indoor and outdoor installation. Luminous color: red, flash frequency: 0,75 Hz	2551613	L	140.-
Signal horn 12~24 VDC	Horn with a bell mouth for wall mounting for indoor and outdoor use. Alarm signal by electromechanical sound generation with steel diaphragm (92 dBA).	2017208	A	☞
Signal horn 1~230 V	Horn with a bell mouth for wall mounting for indoor and outdoor use. Alarm signal by electromechanical sound generation with steel diaphragm (88 dBA).	501459398	L	84.-

You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.


☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☞ = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG14

Electrical accessories – level control with float switch

Level measurement using several float switches for the different water levels, including high water alarm signal. The breakdown barrier and the Ex cutoff relays are not required except for the connection of signal transmitters in potentially explosive areas! These can also be dispensed with when the SC-L...-Ex switchgear is used!

Type	Description	Art. no.		EUR
				
Communication module GSM (SC)	Additional module for equipping the switchgear series SC/SCe for dialling into GSM mobile phone networks.	2542216	A	444.-
NiMH rechargeable battery, 9 V/200 mAh	Rechargeable battery to be installed in the switchgears Wilo-control MS-L and EC-L for a mains-independent alarm	2522850	L	25.-


You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

Price group: PG14

Electrical accessories – level control with level sensor

Level measurement using a level sensor with various measurement ranges, including high water alarm and dry-running protection. The breakdown barrier and the Ex cut-off relays are not required except for the connection of signal transmitters in potentially explosive areas! These can also be dispensed with when the SC-L...-Ex switchgear is used!

Type	Description	Art. no.		EUR
				
EC-L-1x12A-DOL-MT34-WM	Microcontroller-controlled switchgear with LC display and symbol-based menu navigation for level-dependent control of a submersible pump by means of float switches or level sensor. Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543210	L	914.-
EC-L-1x12A-DOL-MT34-WM-EMS	Microcontroller-controlled switchgear with LC display and symbol-based menu navigation for level-dependent control of a submersible pump by means of float switches or level sensor. WITHOUT main switch, mains isolator must be provided on-site! Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543211	L	832.-
EC-L-2x12A-DOL-MT34-WM	Microcontroller-controlled switchgear with LC display and symbol-based menu navigation for level-dependent control of submersible pumps by means of float switches or level sensor. Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543220	L	1,444.-
EC-L-2x12A-DOL-MT34-WM-EMS	Microcontroller-controlled switchgear with LC display and symbol-based menu navigation for level-dependent control of submersible pumps by means of float switches or level sensor. WITHOUT main switch, mains isolator must be provided on-site! Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543221	L	1,269.-
EC-L-3x12A-DOL-MT34-WM	Microcontroller-controlled switchgear with LCD display and symbol-based menu navigation for level-dependent control of three submersible pumps by means of a level sensor. Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543230	L	2,107.-
SC-L-1x12A-T34-SD-WM	Microprocessor-controlled switchgear for level-dependent control of one submersible motor pump via level sensor or float switches.	2538948	C	2,611.-
SC-L-2x12A-T34-SD-WM	Microprocessor-controlled switchgear for level-dependent control of two submersible motor pumps via level sensor or float switches.	2538949	K	3,343.-
SC-L-1x12A-T34-SD-WM	Microprocessor-controlled switchgear for level-dependent control of one submersible motor pump via level sensor or float switches.	2538948	C	2,611.-

You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG14

Electrical accessories – level control with level sensor

Level measurement using a level sensor with various measurement ranges, including high water alarm and dry-running protection. The breakdown barrier and the Ex cut-off relays are not required except for the connection of signal transmitters in potentially explosive areas! These can also be dispensed with when the SC-L...-Ex switchgear is used!

Type	Description	Art. no.		EUR
SC-L-2x12A-T34-SD-WM	Microprocessor-controlled switchgear for level-dependent control of two submersible motor pumps via level sensor or float switches.	2538949	K	3,343.-
SC-L-1x16A-T34-SD-WM	Microprocessor-controlled switchgear for level-dependent control of one submersible motor pump via level sensor or float switches.	2543273	C	2,621.-
SC-L-2x16A-T34-SD-WM	Microprocessor-controlled switchgear for level-dependent control of two submersible motor pumps via level sensor or float switches.	2543274	C	3,382.-
SC-L-1x18A-T34-SD-WM	Microprocessor-controlled switchgear for level-dependent control of one submersible motor pump via level sensor or float switches.	2538952	C	2,633.-
SC-L-2x18A-T34-SD-WM	Microprocessor-controlled switchgear for level-dependent control of two submersible motor pumps via level sensor or float switches.	2538953	C	3,422.-
SC-L-1x24A-T34-SD-WM	Microprocessor-controlled switchgear for level-dependent control of one submersible motor pump via level sensor or float switches.	2538956	C	3,178.-
SC-L-2x24A-T34-SD-WM	Microprocessor-controlled switchgear for level-dependent control of two submersible motor pumps via level sensor or float switches.	2538957	C	3,713.-
Level sensor 0-1 mWS, with 10 m cable	Signal transmitter with ATEX approval for fluids containing faeces with a maximum temperature of 60 °C. Output signal: 4...20 mA	2519924	L	442.-
Level sensor 0-1 mWS, with 30 m cable	Signal transmitter with ATEX approval for fluids containing faeces with a maximum temperature of 60 °C. Output signal: 4...20 mA	2519925	L	522.-
Level sensor 0-1 mWS, with 50 m cable	Signal transmitter with ATEX approval for fluids containing faeces with a maximum temperature of 60 °C. Output signal: 4...20 mA	2519926	L	632.-
Level sensor 0-2.5 mWS with 10 m cable	Signal transmitter with ATEX approval for fluids containing faeces with a maximum temperature of 60 °C. Output signal: 4...20 mA	2519921	L	442.-
Level sensor 0-2.5 mWS, with 30 m cable	Signal transmitter with ATEX approval for fluids containing faeces with a maximum temperature of 60 °C. Output signal: 4...20 mA	2519922	L	522.-
Level sensor 0-2.5 mWS, with 50 m cable	Signal transmitter with ATEX approval for fluids containing faeces with a maximum temperature of 60 °C. Output signal: 4...20 mA	2519923	L	632.-
Pencil electrode (30 mm) with 10 m cable	External pencil electrode in stainless steel housing with 10 m cable for monitoring leakage in the sealing chamber.	6065216	L	99.-
Zener barrier	Breakdown barrier (Zener barrier) for the connection of one level sensor in an explosive atmosphere.	2541372	L	277.-
Communication module GSM (SC)	Additional module for equipping the switchgear series SC/SCe for dialling into GSM mobile phone networks.	2542216	A	444.-
NiMh rechargeable battery, 9 V/200 mAh	Rechargeable battery to be installed in the switchgears Wilo-control MS-L and EC-L for a mains-independent alarm	2522850	L	25.-

You can find more accessories at the end in the chapter Electric accessories!


Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

🚚 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, 📞 = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.


Electrical accessories – mains-independent alarm signal

Alarm signal for detection of flooding in rooms and buildings. The alarm signal is acoustic, optical or wireless. In addition, other consumers can be controlled directly.

Type	Description	Art. no.		EUR
DrainAlarm 2	Network-independent alarm switchgear with optical and acoustic alarm signal and with a connection for one float switch.	2545133	 L	412.-
DrainAlarm GSM	Network-independent alarm switchgear with optical, acoustic and wireless (per GSM) alarm signal and with a connection for one float switch.	2542911	L	1,111.-
Float switch MS1 with 10 m cable	Signal transmitters for aggressive fluids and fluids containing faeces up to a max. temperature of 80 °C. Switching: up „ON“/down „OFF“.	2004593	L	114.-
Flash light 1~230 VAC	Xenon flashing light for wall mounting for indoor and outdoor installation. Luminous color: red, flash frequency: 0,75 Hz	2551613	L	140.-
Signal horn 1~230 V	Horn with a bell mouth for wall mounting for indoor and outdoor use. Alarm signal by electromechanical sound generation with steel diaphragm (88 dBA).	501459398	L	84.-

You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

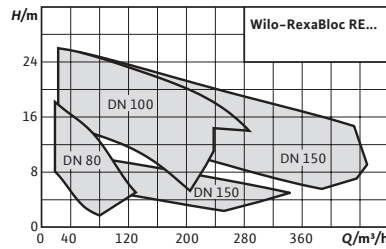

Accessories

Commissioning/maintenance

Page

683

Select 4 online

All information at www.wilo-select.com

Wilo-RexaBloc RE



Construction

Sewage pump in block design with standard motor for stationary dry well installation.

Application

Pumping of

- Untreated sewage
- Sewage containing faeces in accordance with EN 12050-1
- Wastewater

Scope of delivery

- Monobloc unit with fitted standard motor in three-phase version, without connection cable
- Angle bracket on the pressure connection for fastening lifting equipment
- Installation and operating instructions

Your advantages

- High operational reliability due to shut bearing bracket design with oil-filled sealing chamber and additional leakage chamber.
- Optionally with two mechanical seals for increased operational reliability.
- Equipped with IE3 motors as standard. Optionally available with IE4 premium motors.
- „Back pull out“ design for easy maintenance. This means the motor and the impeller can be removed without needing to remove the hydraulics from the piping.

Options

- IE4 motors
- Twin mechanical seal made of SiC/SiC
- 'Bare shaft' version

Price group: PG8

Ordering information						
Type	Pressure port	Rated power	Mains connection	Art. no.		
		P_2 kW				EUR
RexaBloc RE 08.52W-170DAH100L-4	DN 80	2.20	3~400 V, 50 Hz	6073228	L	2,722.-
RexaBloc RE 08.52W-200DAH112M-4	DN 80	4.00	3~400 V, 50 Hz	6073227	L	2,903.-
RexaBloc RE 08.52W-230DAH132S-4	DN 80	5.50	3~400 V, 50 Hz	6073226	L	2,952.-
RexaBloc RE 08.52W-250DAH132S-4	DN 80	5.50	3~400 V, 50 Hz	6073225	L	2,954.-

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG8

Ordering information						
Type	Pressure port	Rated power	Mains connection	Art. no.		
		P_2 kW				EUR
RexaBloc RE 08.52W-260DAH132M-4	DN 80	7.50	3~400 V, 50 Hz	6073224	L	3,096.-
RexaBloc RE 10.44W-220DAH160M4	DN 100	11.00	3~400 V, 50 Hz	6085280	L	5,021.-
RexaBloc RE 10.44W-245DAH160L4	DN 100	15.00	3~400 V, 50 Hz	6085281	L	5,375.-
RexaBloc RE 10.44W-260DAH180M4	DN 100	18.50	3~400 V, 50 Hz	6085282	L	5,631.-
RexaBloc RE 10.44W-275DAH180L4	DN 100	22.00	3~400 V, 50 Hz	6085283	L	5,980.-
RexaBloc RE 10.44W-290DAH180L4	DN 100	22.00	3~400 V, 50 Hz	6085284	L	5,997.-
RexaBloc RE 15.84D-210DAH132S6	DN 150	3.00	3~400 V, 50 Hz	6085277	L	4,840.-
RexaBloc RE 15.84D-210DAH160M4	DN 150	11.00	3~400 V, 50 Hz	6085274	L	5,736.-
RexaBloc RE 15.84D-230DAH160L4	DN 150	15.00	3~400 V, 50 Hz	6085273	L	6,101.-
RexaBloc RE 15.84D-245DAH132L6	DN 150	5.50	3~400 V, 50 Hz	6085276	L	5,033.-
RexaBloc RE 15.84D-245DAH180M4	DN 150	18.50	3~400 V, 50 Hz	6085272	L	6,331.-
RexaBloc RE 15.84D-260DAH180L4	DN 150	22.00	3~400 V, 50 Hz	6085271	L	6,662.-
RexaBloc RE 15.84D-275DAH160L6	DN 150	11.00	3~400 V, 50 Hz	6085275	L	6,259.-
RexaBloc RE 15.84D-275DAH180L4	DN 150	22.00	3~400 V, 50 Hz	6085270	L	6,690.-

Price group: PG14

Accessories for stationary dry well installation DN80						
Type	Description	Art. no.				
						EUR
Non-return valve DN 80	made of EN-GJL-250, according to DIN EN 12050-4, including 1 set mounting accessories	2017168	L			333.-
Gate valve DN 80, EN-GJL-250	made of EN-GJL-250, including 1 set mounting accessories	2017162	L			301.-
Y-piece DN 80	Made of steel, galvanised, PN 10/16 flanges in accordance with DIN 2501 with 2 sets of installation accessories	2017179	L			737.-
Mounting accessories DN 80/100, PN 10	For one flange connection, with screws, nuts and flat gasket	6077521	L			27.-
Sling chain kit PCS-CE, stainless steel, 400 kg, 5 m	As chain sling with 2 shackles in 1.4401 stainless steel. Bearing capacity: 400 kg	6063136	L			410.-
Sling chain kit PCS-CE, stainless steel, 400 kg, 10 m	As chain sling with 2 shackles in 1.4401 stainless steel. Bearing capacity: 400 kg	6063138	L			646.-

= ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG14

Accessories for stationary dry well installation DN100

Type	Description	Art. no.		EUR
Non-return valve DN 100	made of EN-GJL-250, according to DIN EN 12050-4, including 1 set mounting accessories	2017169	L	399.-
Gate valve DN 100, EN-GJL-250	made of EN-GJL-250, including 1 set mounting accessories	2017163	L	355.-
Sling chain kit PCS-CE, stainless steel, 400 kg, 5 m	As chain sling with 2 shackles in 1.4401 stainless steel. Bearing capacity: 400 kg	6063136	L	410.-
Sling chain kit PCS-CE, stainless steel, 400 kg, 10 m	As chain sling with 2 shackles in 1.4401 stainless steel. Bearing capacity: 400 kg	6063138	L	646.-
Y-piece DN 100	Made of steel, galvanised, PN 10/16 flanges in accordance with DIN 2501 with 2 sets of installation accessories	2017180	L	879.-
Mounting accessories DN 80/100, PN 10	For one flange connection, with screws, nuts and flat gasket	6077521	L	27.-

Price group: PG14

Accessories for stationary dry well installation DN150

Type	Description	Art. no.		EUR
Non-return valve DN 150	made of EN-GJL-250, according to DIN EN 12050-4, including 1 set mounting accessories	2017170	L	860.-
Gate valve DN 150, EN-GJL-250	made of EN-GJL-250, including 1 set mounting accessories	2017164	L	588.-
Sling chain kit PCS-CE, stainless steel, 400 kg, 5 m	As chain sling with 2 shackles in 1.4401 stainless steel. Bearing capacity: 400 kg	6063136	L	410.-
Sling chain kit PCS-CE, stainless steel, 400 kg, 10 m	As chain sling with 2 shackles in 1.4401 stainless steel. Bearing capacity: 400 kg	6063138	L	646.-
Y-piece DN 150	Made of steel, galvanised, PN 10/16 flanges in accordance with DIN 2501 with 2 sets of installation accessories	2017181	L	1,308.-
Mounting accessories DN 150, PN 10	For one flange connection, with screws, nuts and flat gasket	6077523	L	34.-

Price group: PG14

Electrical accessories – level control with float switch

Level measurement using several float switches for the different water levels, including high water alarm signal. The breakdown barrier and the Ex cutoff relays are not required except for the connection of signal transmitters in potentially explosive areas! These can also be dispensed with when the SC-L...-Ex switchgear is used!

Type	Description	Art. no.		EUR
MS-L-1x4kW-DOL	Microprocessor-controlled switchgear for level-dependent control of a submersible pump with float switch.	2539741	L	504.-
MS-L-2x4kW-DOL	Microprocessor-controlled switchgear for level-dependent control of 2 submersible pumps with float switch.	2539745	L	681.-
SC-L-1x16A-T34-DOL-WM	Microprocessor-controlled switchgear for level-dependent control of one submersible motor pump via level sensor or float switches.	2538932	C	2,365.-
SC-L-2x16A-T34-DOL-WM	Microprocessor-controlled switchgear for level-dependent control of two submersible motor pumps via level sensor or float switches.	2538933	C	2,972.-
SC-L-1x24A-T34-DOL-WM	Microprocessor-controlled switchgear for level-dependent control of one submersible motor pump via level sensor or float switches.	2538940	A	☎

You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

☎ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG14

Electrical accessories – level control with float switch

Level measurement using several float switches for the different water levels, including high water alarm signal. The breakdown barrier and the Ex cutoff relays are not required except for the connection of signal transmitters in potentially explosive areas! These can also be dispensed with when the SC-L...-Ex switchgear is used!

Type	Description	Art. no.		EUR
SC-L-2x24A-T34-DOL-WM	Microprocessor-controlled switchgear for level-dependent control of two submersible motor pumps via level sensor or float switches.	2538941	A	☎
SC-L-1x32A-T34-DOL-WM	Microprocessor-controlled switchgear for level-dependent control of one submersible motor pump via level sensor or float switches.	2538944	A	☎
SC-L-2x32A-T34-DOL-WM	Microprocessor-controlled switchgear for level-dependent control of two submersible motor pumps via level sensor or float switches.	2538945	A	☎
Float switch WA65 with 5 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 60 °C. Switching: up „ON"/down „OFF".	503211390	L	82.-
Float switch WA65 with 10 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 60 °C. Switching: up „ON"/down „OFF".	503211893	L	155.-
Float switch WA65 with 20 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 60 °C. Switching: up „ON"/down „OFF".	2004431	L	231.-
Float switch WA65 with 30 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 60 °C. Switching: up „ON"/down „OFF".	2004432	L	314.-
Flash light 1~230 VAC	Xenon flashing light for wall mounting for indoor and outdoor installation. Luminous color: red, flash frequency: 0,75 Hz	2551613	L	140.-
Signal horn 1~230 V	Horn with a bell mouth for wall mounting for indoor and outdoor use. Alarm signal by electromechanical sound generation with steel diaphragm (88 dBA).	501459398	L	84.-
NiMh rechargeable battery, 9 V/200 mAh	Rechargeable battery to be installed in the switchgears Wilo-control MS-L and EC-L for a mains-independent alarm	2522850	L	25.-

You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

Price group: PG14

Electrical accessories – level control with level sensor

Level measurement using a level sensor with various measurement ranges, including high water alarm and dry-running protection. The breakdown barrier and the Ex cut-off relays are not required except for the connection of signal transmitters in potentially explosive areas! These can also be dispensed with when the SC-L...-Ex switchgear is used!

Type	Description	Art. no.		EUR
EC-L-1x12A-DOL-MT34-WM	Microcontroller-controlled switchgear with LC display and symbol-based menu navigation for level-dependent control of a submersible pump by means of float switches or level sensor. Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543210	L	914.-
EC-L-1x12A-DOL-MT34-WM-EMS	Microcontroller-controlled switchgear with LC display and symbol-based menu navigation for level-dependent control of a submersible pump by means of float switches or level sensor. WITHOUT main switch, mains isolator must be provided on-site! Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543211	L	832.-
EC-L-2x12A-DOL-MT34-WM	Microcontroller-controlled switchgear with LC display and symbol-based menu navigation for level-dependent control of submersible pumps by means of float switches or level sensor. Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543220	L	1,444.-

You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

☎ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG14

Electrical accessories – level control with level sensor

Level measurement using a level sensor with various measurement ranges, including high water alarm and dry-running protection. The breakdown barrier and the Ex cut-off relays are not required except for the connection of signal transmitters in potentially explosive areas! These can also be dispensed with when the SC-L...-Ex switchgear is used!

Type	Description	Art. no.		EUR
				
EC-L-2x12A-DOL-MT34-WM-EMS	Microcontroller-controlled switchgear with LC display and symbol-based menu navigation for level-dependent control of submersible pumps by means of float switches or level sensor. WITHOUT main switch, mains isolator must be provided on-site! Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543221	L	1,269.-
EC-L-3x12A-DOL-MT34-WM	Microcontroller-controlled switchgear with LCD display and symbol-based menu navigation for level-dependent control of three submersible pumps by means of a level sensor. Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543230	L	2,107.-
SC-L-1x16A-T34-DOL-WM	Microprocessor-controlled switchgear for level-dependent control of one submersible motor pump via level sensor or float switches.	2538932	C	2,365.-
SC-L-2x16A-T34-DOL-WM	Microprocessor-controlled switchgear for level-dependent control of two submersible motor pumps via level sensor or float switches.	2538933	C	2,972.-
SC-L-1x24A-T34-DOL-WM	Microprocessor-controlled switchgear for level-dependent control of one submersible motor pump via level sensor or float switches.	2538940	A	☞
SC-L-2x24A-T34-DOL-WM	Microprocessor-controlled switchgear for level-dependent control of two submersible motor pumps via level sensor or float switches.	2538941	A	☞
SC-L-1x32A-T34-DOL-WM	Microprocessor-controlled switchgear for level-dependent control of one submersible motor pump via level sensor or float switches.	2538944	A	☞
SC-L-2x32A-T34-DOL-WM	Microprocessor-controlled switchgear for level-dependent control of two submersible motor pumps via level sensor or float switches.	2538945	A	☞
Level sensor 0-1 mWS, with 10 m cable	Signal transmitter with ATEX approval for fluids containing faeces with a maximum temperature of 60 °C. Output signal: 4...20 mA	2519924	L	442.-
Level sensor 0-1 mWS, with 30 m cable	Signal transmitter with ATEX approval for fluids containing faeces with a maximum temperature of 60 °C. Output signal: 4...20 mA	2519925	L	522.-
Level sensor 0-1 mWS, with 50 m cable	Signal transmitter with ATEX approval for fluids containing faeces with a maximum temperature of 60 °C. Output signal: 4...20 mA	2519926	L	632.-
Level sensor 0-2.5 mWS with 10 m cable	Signal transmitter with ATEX approval for fluids containing faeces with a maximum temperature of 60 °C. Output signal: 4...20 mA	2519921	L	442.-
Level sensor 0-2.5 mWS, with 30 m cable	Signal transmitter with ATEX approval for fluids containing faeces with a maximum temperature of 60 °C. Output signal: 4...20 mA	2519922	L	522.-
Level sensor 0-2.5 mWS, with 50 m cable	Signal transmitter with ATEX approval for fluids containing faeces with a maximum temperature of 60 °C. Output signal: 4...20 mA	2519923	L	632.-
Cable clamp	For fixation of a signal transmitter in the pump chamber. The clamp is fixed in the pump chamber with a hook; the cable of the signal transmitter is clamped and fixed via the intrinsic weight of the signal transmitter.	2519927	L	22.-
Flash light 24 VDC	Xenon flashing light for wall mounting for indoor and outdoor installation. Luminous color: red, flash frequency: 0,75 Hz	2551612	A	☞
Flash light 1~230 VAC	Xenon flashing light for wall mounting for indoor and outdoor installation. Luminous color: red, flash frequency: 0,75 Hz	2551613	L	140.-
Signal horn 12-24 VDC	Horn with a bell mouth for wall mounting for indoor and outdoor use. Alarm signal by electromechanical sound generation with steel diaphragm (92 dBA).	2017208	A	☞

You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.


 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☞ = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG14

Electrical accessories – level control with level sensor

Level measurement using a level sensor with various measurement ranges, including high water alarm and dry-running protection. The breakdown barrier and the Ex cut-off relays are not required except for the connection of signal transmitters in potentially explosive areas! These can also be dispensed with when the SC-L...-Ex switchgear is used!

Type	Description	Art. no.		EUR
				
Signal horn 1~230 V	Horn with a bell mouth for wall mounting for indoor and outdoor use. Alarm signal by electromechanical sound generation with steel diaphragm (88 dBA).	501459398	L	84.-
NiMH rechargeable battery, 9 V/200 mAh	Rechargeable battery to be installed in the switchgears Wilo-control MS-L and EC-L for a mains-independent alarm	2522850	L	25.-


You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

Price group: PG14


Electrical accessories – mains-independent alarm signal

Alarm signal for detection of flooding in rooms and buildings. The alarm signal is acoustic, optical or wireless. In addition, other consumers can be controlled directly.

Type	Description	Art. no.		EUR
				
DrainAlarm 2	Network-independent alarm switchgear with optical and acoustic alarm signal and with a connection for one float switch.	2545133	L	412.-
DrainAlarm GSM	Network-independent alarm switchgear with optical, acoustic and wireless (per GSM) alarm signal and with a connection for one float switch.	2542911	L	1,111.-
Float switch MS1 with 10 m cable	Signal transmitters for aggressive fluids and fluids containing faeces up to a max. temperature of 80 °C. Switching: up „ON“/down „OFF“.	2004593	L	114.-
Flash light 1~230V	Optical alarm signal for connection to a switchgear. Suitable for outside installation.	2551613	L	140.-
Signal horn 1~230V	Acoustic alarm signal (88 dBA) for connection to a switchgear. Suitable for outside installation.	501459398	L	84.-

You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

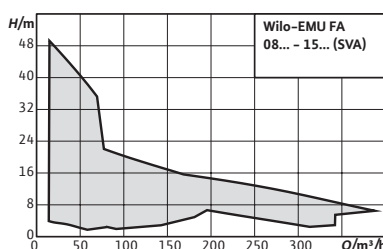

Accessories

Commissioning/maintenance

Page

683

Select 4 online

All information at www.wilo-select.com

Wilo-EMU FA



Construction

Submersible sewage pump without cooling system for continuous duty for stationary and portable wet well installation.

Application

Pumping of

- Sewage containing faeces
- Pre-cleaned sewage without faeces and long-fibre components
- Wastewater

Your advantages

- Operationally reliable and efficient thanks to single-channel hydraulics with large, free ball passage
- Process reliability thanks to optional monitoring for the sealing chamber

Scope of delivery

- Submersible sewage pump ready for connection with 10 m connection cable without plug
- Installation and operating instructions


Price group: PG8

Ordering information DN80


Type	Pressure port	Free ball passage	Rated current	Explosion protection	Art. no.			
						<i>l</i> mm	<i>I_N</i> A	ATEX
EMU FA 08.53-170E + T 13-4/9HEX	DN 80/100	70	4.2	yes	6047614		K	3,197.-
EMU FA 08.53-185E + T 13-4/12HEX	DN 80/100	70	5.1	yes	6047616		C	3,255.-
EMU FA 08.53-200E + T 13-4/18HEX	DN 80/100	70	9.2	yes	6047618		K	3,374.-
EMU FA 08.53-215E + T 13-4/18HEX	DN 80/100	70	9.2	yes	6046643		K	3,432.-
EMU FA 08.64-234E + T 17-4/16HEX	DN 80/100	80	13.5	yes	6047622		K	3,730.-
EMU FA 08.64-246E + T 17-4/16HEX	DN 80/100	80	13.5	yes	6047624		C	3,778.-
EMU FA 08.64-258E + T 17.2-4/24HEX	DN 80/100	80	21	yes	6047626		C	4,726.-
EMU FA 08.64-270E + T 17.2-4/24HEX	DN 80/100	80	21	yes	6047628		K	4,783.-

= ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.


Price group: PG8

Ordering information DN80							
Type	Pressure port	Free ball passage	Rated current	Explosion protection	Art. no.		
		<i>l</i> mm	<i>I_N</i> A	ATEX			EUR
EMU FA 08.64-278E + T 17.2-4/24HEX	DN 80/100	80	21	yes	6047630	K	4,842.-


Price group: PG8

Ordering information DN100							
Type	Pressure port	Free ball passage	Rated current	Explosion protection	Art. no.		
		<i>l</i> mm	<i>I_N</i> A	ATEX			EUR
EMU FA 10.33-208E + T 17-4/8HEX	DN 100	80	7.9	yes	6047662	K	3,302.-
EMU FA 10.33-223E + T 17-4/12HEX	DN 100	80	9.4	yes	6047664	C	3,491.-
EMU FA 10.33-238E + T 17-4/16HEX	DN 100	80	13.5	yes	6047666	C	3,796.-
EMU FA 10.34-234E + T 17-4/16HEX	DN 100	80	13.5	yes	6045118	K	3,911.-
EMU FA 10.34-258E + T 17.2-4/24HEX	DN 100	80	21	yes	6045117	C	5,069.-
EMU FA 10.34-278E + T 20.1-4/22GEx	DN 100	80	30.5	yes	6047678	K	7,089.-
EMU FA 10.82-215E + T 17-4/16HEX	DN 100	100	13.5	yes	6047722	C	4,490.-
EMU FA 10.82-230E + T 17.2-4/24HEX	DN 100	100	21	yes	6047724	C	5,345.-
EMU FA 10.82-245E + T 17.2-4/24HEX	DN 100	100	30.5	yes	6047726	C	5,369.-

Price group: PG8

Ordering information DN150							
Type	Pressure port	Free ball passage	Rated current	Explosion protection	Art. no.		
		<i>l</i> mm	<i>I_N</i> A	ATEX			EUR
EMU FA 15.52-215E + T 17-4/16HEX	DN 150	100	13.5	yes	6046644	C	4,537.-
EMU FA 15.52-230E + T 17.2-4/16HEX	DN 150	100	13.5	yes	6049225	K	4,564.-
EMU FA 15.52-230E + T 17.2-4/24HEX	DN 150	100	21	yes	6047730	K	5,754.-
EMU FA 15.52-245E + T 17.2-4/24HEX	DN 150	100	21	yes	6047732	K	5,781.-
EMU FA 15.52-260E + T 20.1-4/22GEx	DN 150	100	30.5	yes	6047734	K	7,559.-

Installation drawing stationary wet well installation



- 1.1.3 90° pipe bend
- 1.4.1 Suspension unit
- 1.4.3 Chain
- 1.5.1 Shut-off valve
- 1.5.2 Non-return valve

Price group: PG14

Accessories for stationary wet well installation DN80

Type	Reference number	Description	Art. no.		EUR
Suspension unit DN 80/2RK	1.4.1	Made of EN-GJL-250, painted, with free passage in DN 80, foot elbow including pump holder, profile joint, installation and floor fixation accessories and double-pipe guide pipe bracket (42.4x2 mm) without guide pipes.	6082333	L	318.-
Non-return valve DN 80	1.5.2	made of EN-GJL-250, according to DIN EN 12050-4, including 1 set mounting accessories	2017168	L	333.-
Gate valve DN 80, EN-GJL-250	1.5.1	made of EN-GJL-250, including 1 set mounting accessories	2017162	L	301.-
90° pipe elbow DN 80	1.1.3	Made of EN-GJS-400-15, with 2 flanges, including 1 set installation accessories	2012064	L	203.-
Sling chain kit PCS-CE, galvanised steel, 400 kg, 5 m	1.4.3	As chain sling with 2 shackles in galvanised steel. Bearing capacity: 400 kg	6063140	L	149.-
Sling chain kit PCS-CE, galvanised steel, 400 kg, 10 m	1.4.3	As chain sling with 2 shackles in galvanised steel. Bearing capacity: 400 kg	6063142	L	277.-
Sling chain kit PCS-CE, stainless steel, 400 kg, 5 m	1.4.3	As chain sling with 2 shackles in 1.4401 stainless steel. Bearing capacity: 400 kg	6063136	L	410.-
Sling chain kit PCS-CE, stainless steel, 400 kg, 10 m	1.4.3	As chain sling with 2 shackles in 1.4401 stainless steel. Bearing capacity: 400 kg	6063138	L	646.-
Y-piece DN 80	1.1.5	Made of steel, galvanised, PN 10/16 flanges in accordance with DIN 2501 with 2 sets of installation accessories	2017179	L	737.-
Mounting accessories DN 80/100, PN 10	1.4.12	For one flange connection, with screws, nuts and flat gasket	6077521	L	27.-
Guide pipe Ø42.4x2mm 6m 1.4301	1.4.15	Guide pipe suitable for use with the suspension unit. Safe guide of the pump to the coupling connection. The number depends on the suspension unit.	6031565	L	130.-
Guide pipe Ø42.4x2mm 6m 1.4571	1.4.15	Guide pipe suitable for use with the suspension unit. Safe guide of the pump to the coupling connection. The number depends on the suspension unit.	6031566	L	228.-


Price group: PG14

Accessories for stationary wet well installation DN100


Type	Reference number	Description	Art. no.		EUR
Non-return valve DN 100	1.5.2	made of EN-GJL-250, according to DIN EN 12050-4, including 1 set mounting accessories	2017169	L	399.-
Gate valve DN 100, EN-GJL-250	1.5.1	made of EN-GJL-250, including 1 set mounting accessories	2017163	L	355.-

🚚 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, 📞 = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG14

Accessories for stationary wet well installation DN100					
Type	Reference number	Description	Art. no.		
					EUR
90° pipe elbow DN 100	1.1.3	Made of EN-GJS-400-15, with 2 flanges, including 1 set installation accessories	2004669	L	245.-
Y-piece DN 100	1.1.5	Made of steel, galvanised, PN 10/16 flanges in accordance with DIN 2501 with 2 sets of installation accessories	2017180	L	879.-
Sling chain kit PCS-CE, galvanised steel, 400 kg, 5 m	1.4.3	As chain sling with 2 shackles in galvanised steel. Bearing capacity: 400 kg	6063140	L	149.-
Sling chain kit PCS-CE, galvanised steel, 400 kg, 10 m	1.4.3	As chain sling with 2 shackles in galvanised steel. Bearing capacity: 400 kg	6063142	L	277.-
Sling chain kit PCS-CE, stainless steel, 400 kg, 5 m	1.4.3	As chain sling with 2 shackles in 1.4401 stainless steel. Bearing capacity: 400 kg	6063136	L	410.-
Sling chain kit PCS-CE, stainless steel, 400 kg, 10 m	1.4.3	As chain sling with 2 shackles in 1.4401 stainless steel. Bearing capacity: 400 kg	6063138	L	646.-
Suspension unit DN 100/2RK	1.4.1	Made of EN-GJL-250, painted, with free passage in DN 100, foot elbow including pump holder, profile joint, installation and floor fixation accessories and double-pipe guide pipe bracket (42.4x2 mm) without guide pipes.	6082336	L	456.-
Mounting accessories DN 80/100, PN 10	1.4.12	For one flange connection, with screws, nuts and flat gasket	6077521	L	27.-


Price group: PG14

Accessories for stationary wet well installation DN150					
Type	Reference number	Description	Art. no.		
					EUR
Suspension unit DN 150/2RK	1.4.1	Made of EN-GJL-250, painted, with free passage in DN 150, foot elbow including pump holder, profile joint, installation and floor fixation accessories and double-pipe guide pipe bracket (42.4x2 mm) without guide pipes.	6036890	A	943.-
Guide pipe Ø42.4x2mm 6m 1.4301	1.4.15	Guide pipe suitable for use with the suspension unit. Safe guide of the pump to the coupling connection. The number depends on the suspension unit.	6031565	L	130.-
Non-return valve DN 150	1.5.2	made of EN-GJL-250, according to DIN EN 12050-4, including 1 set mounting accessories	2017170	L	860.-
Gate valve DN 150, EN-GJL-250	1.5.1	made of EN-GJL-250, including 1 set mounting accessories	2017164	L	588.-
90° pipe elbow DN 150	1.1.3	Made of EN-GJS-400-15, with 2 flanges, including 1 installation accessories set	2017186	L	470.-
Sling chain kit PCS-CE, galvanised steel, 400 kg, 5 m	1.4.3	As chain sling with 2 shackles in galvanised steel. Bearing capacity: 400 kg	6063140	L	149.-
Sling chain kit PCS-CE, galvanised steel, 400 kg, 10 m	1.4.3	As chain sling with 2 shackles in galvanised steel. Bearing capacity: 400 kg	6063142	L	277.-
Sling chain kit PCS-CE, stainless steel, 400 kg, 5 m	1.4.3	As chain sling with 2 shackles in 1.4401 stainless steel. Bearing capacity: 400 kg	6063136	L	410.-
Sling chain kit PCS-CE, stainless steel, 400 kg, 10 m	1.4.3	As chain sling with 2 shackles in 1.4401 stainless steel. Bearing capacity: 400 kg	6063138	L	646.-
Y-piece DN 150	1.1.5	Made of steel, galvanised, PN 10/16 flanges in accordance with DIN 2501 with 2 sets of installation accessories	2017181	L	1,308.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Installation drawing portable wet well installation

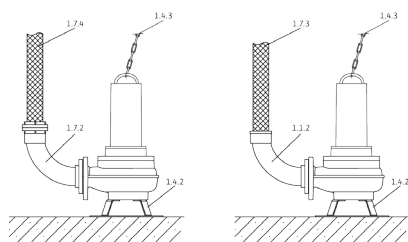

- 1.1.2 90° pipe bend with hose connection
- 1.4.2 Pump foot
- 1.4.3 Chain
- 1.7.3 Pressure hose
- 1.7.4 Pressure hose with Storz coupling
- 1.7.5 90° pipe bend with Storz coupling

Price group: PG14

Accessories for portable wet well installation DN80

Type	Reference number	Description	Art. no.		EUR
Floor supporting foot DN 80/100	1.4.2	Made of steel (S235JR), powder-coated, including fixation material	6065949	L	220.-
Floor supporting foot DN 80/100	1.4.2	Made of stainless steel (1.4571), including fixation material	6065953	C	725.-
Fixed coupling set Storz B/DN 80	1.7.2	with 90° pipe elbow and flange connection; pipe elbow made of EN-GJL-250, Storz coupling made of aluminium, incl. 1 set of mounting accessories	6031385	L	245.-
Synthetic fibre pressure hose 5 m, with Storz B	1.7.4	Inside Ø 75 mm, including coupling, 12/40 bar	6003052	A	89.-
Synthetic fibre pressure hose 10 m, with Storz B	1.7.4	Inside Ø 75 mm, including coupling, 12/40 bar	6003051	A	116.-
Synthetic fibre pressure hose 20 m, with Storz B	1.7.4	Inside Ø 75 mm, including coupling, 12/40 bar	6003050	A	204.-
Sling chain kit PCS-CE, galvanised steel, 400 kg, 5 m	1.4.3	As chain sling with 2 shackles in galvanised steel. Bearing capacity: 400 kg	6063140	L	149.-
Sling chain kit PCS-CE, galvanised steel, 400 kg, 10 m	1.4.3	As chain sling with 2 shackles in galvanised steel. Bearing capacity: 400 kg	6063142	L	277.-
Sling chain kit PCS-CE, stainless steel, 400 kg, 5 m	1.4.3	As chain sling with 2 shackles in 1.4401 stainless steel. Bearing capacity: 400 kg	6063136	L	410.-
Sling chain kit PCS-CE, stainless steel, 400 kg, 10 m	1.4.3	As chain sling with 2 shackles in 1.4401 stainless steel. Bearing capacity: 400 kg	6063138	L	646.-


Price group: PG14

Accessories for portable wet well installation DN100


Type	Reference number	Description	Art. no.		EUR
Floor supporting foot DN 80/100	1.4.2	Made of steel (S235JR), powder-coated, including fixation material	6065949	L	220.-
Floor supporting foot DN 80/100	1.4.2	Made of stainless steel (1.4571), including fixation material	6065953	C	725.-
Fixed coupling set Storz A/DN 100	1.7.2	with 90° pipe elbow and flange connection; pipe elbow made of EN-GJL-250, Storz coupling made of aluminium, incl. 1 set of mounting accessories	6031672	L	327.-

= ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG14

Accessories for portable wet well installation DN100					
Type	Reference number	Description	Art. no.		EUR
Synthetic fibre pressure hose 5 m, with Storz A	1.7.4	Inside Ø 102 mm, including coupling, 8/20 bar	6022391	 K	167.-
Synthetic fibre pressure hose 10 m, with Storz A	1.7.4	Inside Ø 102 mm, including coupling, 8/20 bar	6022392	K	327.-
Synthetic fibre pressure hose 20 m, with Storz A	1.7.4	Inside Ø 102 mm, including coupling, 8/20 bar	6022393	L	338.-
Sling chain kit PCS-CE, galvanised steel, 400 kg, 5 m	1.4.3	As chain sling with 2 shackles in galvanised steel. Bearing capacity: 400 kg	6063140	L	149.-
Sling chain kit PCS-CE, galvanised steel, 400 kg, 10 m	1.4.3	As chain sling with 2 shackles in galvanised steel. Bearing capacity: 400 kg	6063142	L	277.-
Sling chain kit PCS-CE, stainless steel, 400 kg, 5 m	1.4.3	As chain sling with 2 shackles in 1.4401 stainless steel. Bearing capacity: 400 kg	6063136	L	410.-
Sling chain kit PCS-CE, stainless steel, 400 kg, 10 m	1.4.3	As chain sling with 2 shackles in 1.4401 stainless steel. Bearing capacity: 400 kg	6063138	L	646.-

Price group: PG14

Accessories for portable wet well installation DN150					
Type	Reference number	Description	Art. no.		EUR
Floor supporting foot FA 15.52	1.4.2	Made of steel (S235JR), lacquered, including fixation material	6024243	 C	569.-
Fixed coupling set Storz F/DN 150	1.7.2	with 90° pipe elbow and flange connection; pipe elbow made of EN-GJL-250, Storz coupling made of aluminium, incl. 1 set of mounting accessories	6040247	A	890.-
Synthetic fibre pressure hose 10 m, with Storz F	1.7.4	Inside Ø 150 mm, including coupling, 6/15 bar	6003648	K	571.-
Synthetic fibre pressure hose 20 m, with Storz F	1.7.4	Inside Ø 150 mm, including coupling, 6/15 bar	6003647	K	865.-
Sling chain kit PCS-CE, galvanised steel, 400 kg, 5 m	1.4.3	As chain sling with 2 shackles in galvanised steel. Bearing capacity: 400 kg	6063140	L	149.-
Sling chain kit PCS-CE, galvanised steel, 400 kg, 10 m	1.4.3	As chain sling with 2 shackles in galvanised steel. Bearing capacity: 400 kg	6063142	L	277.-
Sling chain kit PCS-CE, stainless steel, 400 kg, 5 m	1.4.3	As chain sling with 2 shackles in 1.4401 stainless steel. Bearing capacity: 400 kg	6063136	L	410.-
Sling chain kit PCS-CE, stainless steel, 400 kg, 10 m	1.4.3	As chain sling with 2 shackles in 1.4401 stainless steel. Bearing capacity: 400 kg	6063138	L	646.-


 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG14

Electrical accessories – level control with dynamic pressure system

Level measurement via an open dynamic pressure system with the option of a separate dynamic pressure bell for the high water level.

Type	Description	Art. no.		EUR
				
EC-L-1x12A-DOL-MT34-WM-EMS-IPS	Microcontroller-controlled switchgear with LC display, symbol-based menu navigation and integrated pressure transducer for level-dependent control of a submersible pump by means of float switches, level sensor or immersion bell. WITHOUT main switch, mains isolator must be provided on-site! Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543212	L	892.-
EC-L-2x12A-DOL-MT34-WM-EMS-IPS	Microcontroller-controlled switchgear with LC display, symbol-based menu navigation and integrated pressure transducer for level-dependent control of two submersible pumps by means of float switches, level sensor or immersion bell. WITHOUT main switch, mains isolator must be provided on-site! Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543222	L	1,372.-
Dynamic pressure bell with 10 m hose	Pneumatic signal transmitter for media containing faeces with a max. temperature of 60 °C. The signal transmitter is open in direction of the fluid and must be ventilated after each pumping out (OFF depending on time).	2516976	L	88.-
Bubbling-through system	Small compressor for constant aeration of the dynamic pressure bell, including non-return valve, 3 m hose and T-connector.	2516977	L	216.-
Flash light 24 VDC	Xenon flashing light for wall mounting for indoor and outdoor installation. Luminous color: red, flash frequency: 0,75 Hz	2551612	A	☞
Flash light 1~230 VAC	Xenon flashing light for wall mounting for indoor and outdoor installation. Luminous color: red, flash frequency: 0,75 Hz	2551613	L	140.-
Signal horn 12-24 VDC	Horn with a bell mouth for wall mounting for indoor and outdoor use. Alarm signal by electromechanical sound generation with steel diaphragm (92 dBA).	2017208	A	☞
Signal horn 1~230 V	Horn with a bell mouth for wall mounting for indoor and outdoor use. Alarm signal by electromechanical sound generation with steel diaphragm (88 dBA).	501459398	L	84.-
NiMh rechargeable battery, 9 V/200 mAh	Rechargeable battery to be installed in the switchgears Wilo-control MS-L and EC-L for a mains-independent alarm	2522850	L	25.-


You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

Price group: PG14

Electrical accessories – level control with float switch

Level measurement using several float switches for the different water levels, including high water alarm signal. The breakdown barrier and the Ex cutoff relays are not required except for the connection of signal transmitters in potentially explosive areas! These can also be dispensed with when the SC-L...-Ex switchgear is used!

Type	Description	Art. no.		EUR
				
EC-L-1x12A-DOL-MT34-WM	Microcontroller-controlled switchgear with LC display and symbol-based menu navigation for level-dependent control of a submersible pump by means of float switches or level sensor. Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543210	L	914.-
EC-L-1x12A-DOL-MT34-WM-EMS	Microcontroller-controlled switchgear with LC display and symbol-based menu navigation for level-dependent control of a submersible pump by means of float switches or level sensor. WITHOUT main switch, mains isolator must be provided on-site! Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543211	L	832.-

You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☞ = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Electrical accessories – level control with float switch

Level measurement using several float switches for the different water levels, including high water alarm signal. The breakdown barrier and the Ex cutoff relays are not required except for the connection of signal transmitters in potentially explosive areas! These can also be dispensed with when the SC-L...-Ex switchgear is used!

Type	Description	Art. no.		EUR
EC-L-2x12A-DOL-MT34-WM	Microcontroller-controlled switchgear with LC display and symbol-based menu navigation for level-dependent control of submersible pumps by means of float switches or level sensor. Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543220	L	1,444.-
EC-L-2x12A-DOL-MT34-WM-EMS	Microcontroller-controlled switchgear with LC display and symbol-based menu navigation for level-dependent control of submersible pumps by means of float switches or level sensor. WITHOUT main switch, mains isolator must be provided on-site! Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543221	L	1,269.-
EC-L-3x12A-DOL-MT34-WM	Microcontroller-controlled switchgear with LCD display and symbol-based menu navigation for level-dependent control of three submersible pumps by means of a level sensor. Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543230	L	2,107.-
SC-L-1x24A-T34-SD-WM	Microprocessor-controlled switchgear for level-dependent control of one submersible motor pump via level sensor or float switches.	2538956	C	3,178.-
SC-L-2x24A-T34-SD-WM	Microprocessor-controlled switchgear for level-dependent control of two submersible motor pumps via level sensor or float switches.	2538957	C	3,713.-
SC-L-1x32A-T34-SD-WM	Microprocessor-controlled switchgear for level-dependent control of one submersible motor pump via level sensor or float switches.	2538960	C	3,672.-
SC-L-2x32A-T34-SD-WM	Microprocessor-controlled switchgear for level-dependent control of two submersible pumps via level sensor or float switches.	2538961	C	4,319.-
Float switch MS1 with 10 m cable	Signal transmitters for aggressive fluids and fluids containing faeces up to a max. temperature of 80 °C. Switching: up „ON“/down „OFF“.	2004593	L	114.-
Ex cut-off relay (2-circuit)	Ex cut-off relay for the connection of 2 float switches for level control in explosive atmospheres.	2513059	L	721.-
Ex cut-off relay (3-circuit)	Ex cut-off relay for the connection of 3 float switches for level control in explosive atmospheres.	2510698	K	909.-
Ex cut-off relay (4-circuit)	Ex cut-off relay for the connection of 4 float switches for level control in explosive atmospheres.	2510699	K	853.-
Ex cut-off relay (5-circuit)	Ex cut-off relay for the connection of 5 float switches for level control in explosive atmospheres.	2510674	K	1,153.-
Flash light 24 VDC	Xenon flashing light for wall mounting for indoor and outdoor installation. Luminous color: red, flash frequency: 0,75 Hz	2551612	A	☞
Flash light 1~230 VAC	Xenon flashing light for wall mounting for indoor and outdoor installation. Luminous color: red, flash frequency: 0,75 Hz	2551613	L	140.-
Signal horn 12~24 VDC	Horn with a bell mouth for wall mounting for indoor and outdoor use. Alarm signal by electromechanical sound generation with steel diaphragm (92 dBA).	2017208	A	☞
Signal horn 1~230 V	Horn with a bell mouth for wall mounting for indoor and outdoor use. Alarm signal by electromechanical sound generation with steel diaphragm (88 dBA).	501459398	L	84.-
NiMH rechargeable battery, 9 V/200 mAh	Rechargeable battery to be installed in the switchgears Wilo-control MS-L and EC-L for a mains-independent alarm	2522850	L	25.-
Communication module GSM (SC)	Additional module for equipping the switchgear series SC/SCe for dialling into GSM mobile phone networks.	2542216	A	444.-
GSM/GPRS aerial with cable 15 m	Antenna with plastic coating, including bracket for outdoor installation and shielded antenna cable with FME plug.	2533864	A	438.-

You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☞ = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG14

Electrical accessories – level control with float switch

Level measurement using several float switches for the different water levels, including high water alarm signal. The breakdown barrier and the Ex cutoff relays are not required except for the connection of signal transmitters in potentially explosive areas! These can also be dispensed with when the SC-L...-Ex switchgear is used!

Type	Description	Art. no.		EUR
GSM/GPRS aerial with cable 10 m	Antenna with plastic coating, including bracket for outdoor installation and shielded antenna cable with FME plug.	2533863	A	395.-
GSM/GPRS aerial with cable 2.5 m	Flexible antenna with plastic coating, magnetic stand and shielded aerial cable with FEM plug.	2533862	A	131.-

You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

Price group: PG14

Electrical accessories – level control with level sensor

Level measurement using a level sensor with various measurement ranges, including high water alarm and dry-running protection. The breakdown barrier and the Ex cut-off relays are not required except for the connection of signal transmitters in potentially explosive areas! These can also be dispensed with when the SC-L...-Ex switchgear is used!

Type	Description	Art. no.		EUR
SC-L-1x9A-T34-DOL-WM	Microprocessor-controlled switchgear for level-dependent control of one submersible motor pump via level sensor or float switches.	2538924	C	2,206.-
SC-L-1x12A-T34-DOL-WM	Microprocessor-controlled switchgear for level-dependent control of one submersible motor pump via level sensor or float switches.	2538928	C	2,235.-
SC-L-1x24A-T34-SD-WM	Microprocessor-controlled switchgear for level-dependent control of one submersible motor pump via level sensor or float switches.	2538956	C	3,178.-
SC-L-1x32A-T34-SD-WM	Microprocessor-controlled switchgear for level-dependent control of one submersible motor pump via level sensor or float switches.	2538960	C	3,672.-
SC-L-2x9A-T34-DOL-WM	Microprocessor-controlled switchgear for level-dependent control of two submersible motor pumps via level sensor or float switches.	2538925	C	2,540.-
SC-L-2x12A-T34-DOL-WM	Microprocessor-controlled switchgear for level-dependent control of two submersible motor pumps via level sensor or float switches.	2538929	C	2,595.-
SC-L-2x24A-T34-SD-WM	Microprocessor-controlled switchgear for level-dependent control of two submersible motor pumps via level sensor or float switches.	2538957	C	3,713.-
SC-L-2x32A-T34-SD-WM	Microprocessor-controlled switchgear for level-dependent control of two submersible pumps via level sensor or float switches.	2538961	C	4,319.-
Level sensor 0-1 mWS, with 10 m cable	Signal transmitter with ATEX approval for fluids containing faeces with a maximum temperature of 60 °C. Output signal: 4...20 mA	2519924	L	442.-
Level sensor 0-1 mWS, with 30 m cable	Signal transmitter with ATEX approval for fluids containing faeces with a maximum temperature of 60 °C. Output signal: 4...20 mA	2519925	L	522.-
Level sensor 0-1 mWS, with 50 m cable	Signal transmitter with ATEX approval for fluids containing faeces with a maximum temperature of 60 °C. Output signal: 4...20 mA	2519926	L	632.-
Level sensor 0-2.5 mWS with 10 m cable	Signal transmitter with ATEX approval for fluids containing faeces with a maximum temperature of 60 °C. Output signal: 4...20 mA	2519921	L	442.-
Level sensor 0-2.5 mWS, with 30 m cable	Signal transmitter with ATEX approval for fluids containing faeces with a maximum temperature of 60 °C. Output signal: 4...20 mA	2519922	L	522.-
Level sensor 0-2.5 mWS, with 50 m cable	Signal transmitter with ATEX approval for fluids containing faeces with a maximum temperature of 60 °C. Output signal: 4...20 mA	2519923	L	632.-
Cable clamp	For fixation of a signal transmitter in the pump chamber. The clamp is fixed in the pump chamber with a hook; the cable of the signal transmitter is clamped and fixed via the intrinsic weight of the signal transmitter.	2519927	L	22.-
Zener barrier	Breakdown barrier (Zener barrier) for the connection of one level sensor in an explosive atmosphere.	2541372	L	277.-

You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.


🚚 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, 📞 = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG14

Electrical accessories – level control with level sensor

Level measurement using a level sensor with various measurement ranges, including high water alarm and dry-running protection. The breakdown barrier and the Ex cut-off relays are not required except for the connection of signal transmitters in potentially explosive areas! These can also be dispensed with when the SC-L...-Ex switchgear is used!

Type	Description	Art. no.		EUR
Communication module GSM (SC)	Additional module for equipping the switchgear series SC/SCe for dialling into GSM mobile phone networks.	2542216	 A	444.-


You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

Price group: PG14


Electrical accessories – mains-independent alarm signal

Alarm signal for detection of flooding in rooms and buildings. The alarm signal is acoustic, optical or wireless. In addition, other consumers can be controlled directly.

Type	Description	Art. no.		EUR
DrainAlarm 2	Network-independent alarm switchgear with optical and acoustic alarm signal and with a connection for one float switch.	2545133	 L	412.-
DrainAlarm GSM	Network-independent alarm switchgear with optical, acoustic and wireless (per GSM) alarm signal and with a connection for one float switch.	2542911	L	1,111.-
Float switch MS1 with 10 m cable	Signal transmitters for aggressive fluids and fluids containing faeces up to a max. temperature of 80 °C. Switching: up „ON“/down „OFF“.	2004593	L	114.-
Flash light 1~230 VAC	Xenon flashing light for wall mounting for indoor and outdoor installation. Luminous color: red, flash frequency: 0,75 Hz	2551613	L	140.-
Signal horn 1~230 V	Horn with a bell mouth for wall mounting for indoor and outdoor use. Alarm signal by electromechanical sound generation with steel diaphragm (88 dBA).	501459398	L	84.-

You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

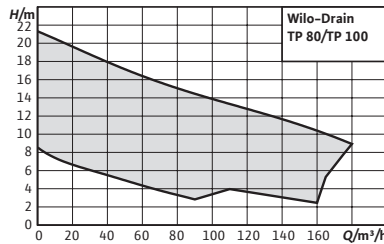

Accessories

Commissioning/maintenance

Page

683

Select 4 online

All information at www.wilo-select.com

Wilo-Drain TP 80/TP 100



Construction

Submersible sewage pump for continuous duty for stationary and portable wet well installation, as well as stationary dry well installation.

Application

Pumping of

- Sewage containing faeces
- Pre-cleaned sewage without faeces and long-fibre components
- Process water
- Wastewater

Your advantages

- Self-cooling motor for use in wet well and dry well installation
- Corrosion-resistant stainless steel motor housing made of 1.4404
- Patented clogging-free hydraulics
- Longitudinally watertight cable inlet
- Lightweight

Scope of delivery


- Pump ready for connection with 10 m connection cable (bare cable end)
- Installation and operating instructions

Price group: PG8

Ordering information								
Type	Pressure port	Rated power	Connection cable length	Mains connection	Explosion protection	Art. no.		
		P_2 kW	D m		ATEX			EUR
Drain TP 80E160/17	DN 80	1.70	10	3~400 V, 50 Hz	yes	6043950	C	3,992.-
Drain TP 80E170/21	DN 80	2.10	10	3~400 V, 50 Hz	yes	6043957	C	4,294.-
Drain TP 80E190/29	DN 80	2.90	10	3~400 V, 50 Hz	yes	6043963	L	4,479.-
Drain TP 80E210/37	DN 80	3.70	10	3~400 V, 50 Hz	yes	6043971	C	4,755.-
Drain TP 80E230/40	DN 80	4.00	10	3~400 V, 50 Hz	yes	6043983	L	5,269.-
Drain TP 100E190/39	DN 100	3.90	10	3~400 V, 50 Hz	yes	2008469	C	5,893.-
Drain TP 100E210/52	DN 100	5.20	10	3~400 V, 50 Hz	yes	2003559	L	6,199.-
Drain TP 100E230/70	DN 100	7.00	10	3~400 V, 50 Hz	yes	2003561	L	6,994.-
Drain TP 100E250/84	DN 100	8.40	10	3~400 V, 50 Hz	yes	2003563	L	7,647.-

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Installation drawing stationary wet well installation



- 1.1.3 90° pipe bend
- 1.4.1 Suspension unit
- 1.4.3 Chain
- 1.5.1 Shut-off valve
- 1.5.2 Non-return valve

Price group: PG14

Accessories for stationary wet well installation DN80

Type	Reference number	Description	Art. no.		EUR
Suspension unit TP 80	1.4.1	Made of EN-GJL-250, painted, with free passage in DN 80, foot elbow including pump holder, profile joint, installation and floor fixation accessories and double-pipe guide pipe bracket (42.4x3.25 mm) without guide pipes.	2029039	L	489.-
Non-return valve DN 80	1.5.2	made of EN-GJL-250, according to DIN EN 12050-4, including 1 set mounting accessories	2017168	L	333.-
Gate valve DN 80, EN-GJL-250	1.5.1	made of EN-GJL-250, including 1 set mounting accessories	2017162	L	301.-
90° pipe elbow DN 80	1.1.3	Made of EN-GJS-400-15, with 2 flanges, including 1 set installation accessories	2012064	L	203.-
Sling chain kit PCS-CE, stainless steel, 400 kg, 5 m	1.4.3	As chain sling with 2 shackles in 1.4401 stainless steel. Bearing capacity: 400 kg	6063136	L	410.-
Sling chain kit PCS-CE, stainless steel, 400 kg, 10 m	1.4.3	As chain sling with 2 shackles in 1.4401 stainless steel. Bearing capacity: 400 kg	6063138	L	646.-
Y-piece DN 80	1.1.5	Made of steel, galvanised, PN 10/16 flanges in accordance with DIN 2501 with 2 sets of installation accessories	2017179	L	737.-
Mounting accessories DN 80/100, PN 10	1.4.12	For one flange connection, with screws, nuts and flat gasket	6077521	L	27.-

Price group: PG14

Accessories for stationary wet well installation DN100


Type	Reference number	Description	Art. no.		EUR
Suspension unit TP 100	1.4.1	Made of EN-GJL-250, painted, with free passage in DN 100, foot elbow including pump holder, profile joint, installation and floor fixation accessories and double-pipe guide pipe bracket (48.3x3.25 mm) without guide pipes.	2029040	L	552.-
Non-return valve DN 100	1.5.2	made of EN-GJL-250, according to DIN EN 12050-4, including 1 set mounting accessories	2017169	L	399.-
Gate valve DN 100, EN-GJL-250	1.5.1	made of EN-GJL-250, including 1 set mounting accessories	2017163	L	355.-
90° pipe elbow DN 100	1.1.3	Made of EN-GJS-400-15, with 2 flanges, including 1 set installation accessories	2004669	L	245.-
Sling chain kit PCS-CE, stainless steel, 400 kg, 5 m	1.4.3	As chain sling with 2 shackles in 1.4401 stainless steel. Bearing capacity: 400 kg	6063136	L	410.-
Sling chain kit PCS-CE, stainless steel, 400 kg, 10 m	1.4.3	As chain sling with 2 shackles in 1.4401 stainless steel. Bearing capacity: 400 kg	6063138	L	646.-

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG14

Accessories for stationary wet well installation DN100					
Type	Reference number	Description	Art. no.		
					EUR
Y-piece DN 100	1.1.5	Made of steel, galvanised, PN 10/16 flanges in accordance with DIN 2501 with 2 sets of installation accessories	2017180	L	879.-
Mounting accessories DN 80/100, PN 10	1.4.12	For one flange connection, with screws, nuts and flat gasket	6077521	L	27.-

Installation drawing portable wet well installation

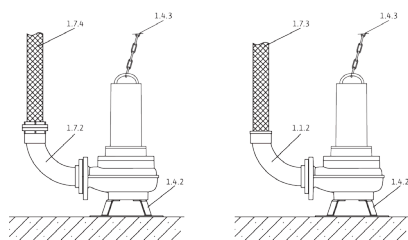

- 1.1.2 90° pipe bend with hose connection
- 1.4.2 Pump foot
- 1.4.3 Chain
- 1.7.3 Pressure hose
- 1.7.4 Pressure hose with Storz coupling
- 1.7.5 90° pipe bend with Storz coupling


Price group: PG14

Accessories for portable wet well installation DN80					
Type	Reference number	Description	Art. no.		
					EUR
Floor supporting foot TP 80/100	1.4.2	Made of stainless steel (AISI 304), including fixation material	2004672	A	439.-
90° pipe elbow DN 80/90 mm	1.1.2	Made of stainless steel, with hose nozzle (Ø 90 mm) and G 3 male thread, flange on pump side, including 1 set of installation accessories	2017207	A	550.-
Fixed coupling Storz 90 mm/G 3	1.7.5	made of aluminium, Storz 90 connection, with female thread	2017203	C	71.-
Hose coupling Storz 90/Ø 90 mm	1.7.6	Made of aluminium, with hose nozzle Ø 90 mm, including hose clip	2017204	C	71.-
Synthetic pressure hose 10 m, Ø 90 mm	1.7.3	Inside Ø 90 mm, PN 8, including 2 hose clips	2017152	A	218.-
Synthetic pressure hose 20 m, Ø 90 mm	1.7.3	Inside Ø 90 mm, PN 8, including 2 hose clips	2017193	C	412.-
Synthetic pressure hose 30 m, Ø 90 mm	1.7.3	Inside Ø 90 mm, PN 8, including 2 hose clips	2017194	A	572.-
Sling chain kit PCS-CE, stainless steel, 400 kg, 5 m	1.4.3	As chain sling with 2 shackles in 1.4401 stainless steel. Bearing capacity: 400 kg	6063136	L	410.-
Sling chain kit PCS-CE, stainless steel, 400 kg, 10 m	1.4.3	As chain sling with 2 shackles in 1.4401 stainless steel. Bearing capacity: 400 kg	6063138	L	646.-


Price group: PG14

Accessories for portable wet well installation DN100					
Type	Reference number	Description	Art. no.		
					EUR
Floor supporting foot TP 80/100,	1.4.2	Made of stainless steel (AISI 304), including fixation material	2004672	A	439.-
90° pipe elbow DN 100/110 mm	1.1.2	Made of stainless steel, with hose nozzle (Ø 110 mm) and G 4 male thread, flange on pump side, including 1 set of installation accessories	2017184	A	690.-


= ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.



Accessories for portable wet well installation DN100					
Type	Reference number	Description	Art. no.		
					EUR
Fixed coupling Storz A/G 4	1.7.5	made of aluminium, Storz A connection, with female thread	2016161	C	71.-
Hose coupling Storz A/Ø 110 mm	1.7.6	made of aluminium, with hose nozzle Ø 110 mm, incl. hose clip	2004675	C	71.-
Synthetic pressure hose 10 m, Ø 110 mm	1.7.3	Inside Ø 110 mm, PN 8, including 2 hose clips	2017196	A	244.-
Synthetic pressure hose 20 m, Ø 110 mm	1.7.3	Inside Ø 110 mm, PN 8, including 2 hose clips	2017197	A	487.-
Synthetic pressure hose 30 m, Ø 110 mm	1.7.3	Inside Ø 110 mm, PN 8, including 2 hose clips	2017198	A	731.-
Sling chain kit PCS-CE, stainless steel, 400 kg, 5 m	1.4.3	As chain sling with 2 shackles in 1.4401 stainless steel. Bearing capacity: 400 kg	6063136	L	410.-
Sling chain kit PCS-CE, stainless steel, 400 kg, 10 m	1.4.3	As chain sling with 2 shackles in 1.4401 stainless steel. Bearing capacity: 400 kg	6063138	L	646.-

Installation drawing stationary dry well installation



- 1.1.4 Compensator
- 1.4.3 Chain
- 1.4.4 Installation set
- 1.5.1 Shut-off valve
- 1.5.2 Non-return valve

Accessories for stationary dry well installation DN80					
Type	Reference number	Description	Art. no.		
					EUR
Installation set TP 80	1.4.4	Made of stainless steel (AISI 304), including installation and floor fixation accessories	2036896	A	1,807.-
Non-return valve DN 80	1.5.2	made of EN-GJL-250, according to DIN EN 12050-4, including 1 set mounting accessories	2017168	L	333.-
Gate valve DN 80, EN-GJL-250	1.5.1	made of EN-GJL-250, including 1 set mounting accessories	2017162	L	301.-
Compensator DN 80	1.1.4	Made of steel, zinc-coated/neoprene, length 130 mm, incl. installation accessories	2017189	C	234.-
Sling chain kit PCS-CE, stainless steel, 400 kg, 5 m	1.4.3	As chain sling with 2 shackles in 1.4401 stainless steel. Bearing capacity: 400 kg	6063136	L	410.-
Sling chain kit PCS-CE, stainless steel, 400 kg, 10 m	1.4.3	As chain sling with 2 shackles in 1.4401 stainless steel. Bearing capacity: 400 kg	6063138	L	646.-
Y-piece DN 80	1.1.5	Made of steel, galvanised, PN 10/16 flanges in accordance with DIN 2501 with 2 sets of installation accessories	2017179	L	737.-
Installation accessories TP 80	1.4.12	For one flange connection, with screws, nuts and flat gasket	2012067	L	24.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG14

Accessories for stationary dry well installation DN80

Type	Reference number	Description	Art. no.		
					EUR
Mounting accessories DN 80/100, PN 10	1.4.12	For one flange connection, with screws, nuts and flat gasket	6077521	L	27.-

Price group: PG14

Accessories for stationary dry well installation DN100

Type	Reference number	Description	Art. no.		
					EUR
Installation set TP 100	1.4.4	Made of stainless steel (AISI 304), including installation and floor fixation accessories	2026541	A	2,012.-
Non-return valve DN 100	1.5.2	made of EN-GJL-250, according to DIN EN 12050-4, including 1 set mounting accessories	2017169	L	399.-
Gate valve DN 100, EN-GJL-250	1.5.1	made of EN-GJL-250, including 1 set mounting accessories	2017163	L	355.-
Compensator DN 100	1.1.4	Made of steel, zinc-coated/neoprene, length 135 mm, incl. installation accessories	2017190	A	243.-
Sling chain kit PCS-CE, stainless steel, 400 kg, 5 m	1.4.3	As chain sling with 2 shackles in 1.4401 stainless steel. Bearing capacity: 400 kg	6063136	L	410.-
Sling chain kit PCS-CE, stainless steel, 400 kg, 10 m	1.4.3	As chain sling with 2 shackles in 1.4401 stainless steel. Bearing capacity: 400 kg	6063138	L	646.-
Y-piece DN 100	1.1.5	Made of steel, galvanised, PN 10/16 flanges in accordance with DIN 2501 with 2 sets of installation accessories	2017180	L	879.-
Installation accessories TP 100	1.4.12	For one flange connection, with screws, nuts and flat gasket	2017176	L	27.-
Mounting accessories DN 80/100, PN 10	1.4.12	For one flange connection, with screws, nuts and flat gasket	6077521	L	27.-

Price group: PG14

Electrical accessories – level control with dynamic pressure system

Level measurement via an open dynamic pressure system with the option of a separate dynamic pressure bell for the high water level.


Type	Description	Art. no.		
				EUR
EC-L-1x12A-DOL-MT34-WM-EMS-IPS	Microcontroller-controlled switchgear with LC display, symbol-based menu navigation and integrated pressure transducer for level-dependent control of a submersible pump by means of float switches, level sensor or immersion bell. WITHOUT main switch, mains isolator must be provided on-site! Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543212	L	892.-
EC-L-2x12A-DOL-MT34-WM-EMS-IPS	Microcontroller-controlled switchgear with LC display, symbol-based menu navigation and integrated pressure transducer for level-dependent control of two submersible pumps by means of float switches, level sensor or immersion bell. WITHOUT main switch, mains isolator must be provided on-site! Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543222	L	1,372.-
Dynamic pressure bell with 10 m hose	Pneumatic signal transmitter for media containing faeces with a max. temperature of 60 °C. The signal transmitter is open in direction of the fluid and must be ventilated after each pumping out (OFF depending on time).	2516976	L	88.-

You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.


🚚 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, 📞 = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Electrical accessories – level control with dynamic pressure system				
Level measurement via an open dynamic pressure system with the option of a separate dynamic pressure bell for the high water level.				
Type	Description	Art. no.		
				EUR
Bubbling-through system	Small compressor for constant aeration of the dynamic pressure bell, including non-return valve, 3 m hose and T-connector.	2516977	L	216.-
Flash light 1~230V	Optical alarm signal for connection to a switchgear. Suitable for outside installation.	2551613	L	140.-
Signal horn 1~230V	Acoustic alarm signal (88 dBA) for connection to a switchgear. Suitable for outside installation.	501459398	L	84.-
NiMH rechargeable battery, 9 V/200 mAh	Rechargeable battery to be installed in the switchgears Wilo-control MS-L and EC-L for a mains-independent alarm	2522850	L	25.-

You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

Electrical accessories – level control with float switch				
Level measurement using several float switches for the different water levels, including high water alarm signal. The breakdown barrier and the Ex cutoff relays are not required except for the connection of signal transmitters in potentially explosive areas! These can also be dispensed with when the SC-L...-Ex switchgear is used!				
Type	Description	Art. no.		
				EUR
EC-L-1x12A-DOL-MT34-WM	Microcontroller-controlled switchgear with LC display and symbol-based menu navigation for level-dependent control of a submersible pump by means of float switches or level sensor. Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543210	L	914.-
EC-L-1x12A-DOL-MT34-WM-EMS	Microcontroller-controlled switchgear with LC display and symbol-based menu navigation for level-dependent control of a submersible pump by means of float switches or level sensor. WITHOUT main switch, mains isolator must be provided on-site! Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543211	L	832.-
EC-L-2x12A-DOL-MT34-WM	Microcontroller-controlled switchgear with LC display and symbol-based menu navigation for level-dependent control of submersible pumps by means of float switches or level sensor. Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543220	L	1,444.-
EC-L-2x12A-DOL-MT34-WM-EMS	Microcontroller-controlled switchgear with LC display and symbol-based menu navigation for level-dependent control of submersible pumps by means of float switches or level sensor. WITHOUT main switch, mains isolator must be provided on-site! Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543221	L	1,269.-
EC-L-3x12A-DOL-MT34-WM	Microcontroller-controlled switchgear with LCD display and symbol-based menu navigation for level-dependent control of three submersible pumps by means of a level sensor. Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543230	L	2,107.-
SC-L-1x18A-T34-SD-WM	Microprocessor-controlled switchgear for level-dependent control of one submersible motor pump via level sensor or float switches.	2538952	C	2,633.-

You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

Price group: PG14

Electrical accessories – level control with float switch

Level measurement using several float switches for the different water levels, including high water alarm signal. The breakdown barrier and the Ex cutoff relays are not required except for the connection of signal transmitters in potentially explosive areas! These can also be dispensed with when the SC-L.-Ex switchgear is used!

Type	Description	Art. no.		EUR
SC-L-2x18A-T34-SD-WM	Microprocessor-controlled switchgear for level-dependent control of two submersible motor pumps via level sensor or float switches.	2538953	C	3,422.-
Float switch MS1 with 10 m cable	Signal transmitters for aggressive fluids and fluids containing faeces up to a max. temperature of 80 °C. Switching: up „ON"/down „OFF".	2004593	L	114.-
Ex cut-off relay (2-circuit)	Ex cut-off relay for the connection of 2 float switches for level control in explosive atmospheres.	2513059	L	721.-
Ex cut-off relay (3-circuit)	Ex cut-off relay for the connection of 3 float switches for level control in explosive atmospheres.	2510698	K	909.-
Ex cut-off relay (4-circuit)	Ex cut-off relay for the connection of 4 float switches for level control in explosive atmospheres.	2510699	K	853.-
Ex cut-off relay (5-circuit)	Ex cut-off relay for the connection of 5 float switches for level control in explosive atmospheres.	2510674	K	1,153.-
Flash light 24 VDC	Xenon flashing light for wall mounting for indoor and outdoor installation. Luminous color: red, flash frequency: 0,75 Hz	2551612	A	☞
Flash light 1~230 VAC	Xenon flashing light for wall mounting for indoor and outdoor installation. Luminous color: red, flash frequency: 0,75 Hz	2551613	L	140.-
Signal horn 12-24 VDC	Horn with a bell mouth for wall mounting for indoor and outdoor use. Alarm signal by electromechanical sound generation with steel diaphragm (92 dBA).	2017208	A	☞
Signal horn 1~230 V	Horn with a bell mouth for wall mounting for indoor and outdoor use. Alarm signal by electromechanical sound generation with steel diaphragm (88 dBA).	501459398	L	84.-
Communication module GSM (SC)	Additional module for equipping the switchgear series SC/SCe for dialling into GSM mobile phone networks.	2542216	A	444.-
GSM/GPRS aerial with cable 2.5 m	Flexible antenna with plastic coating, magnetic stand and shielded aerial cable with FEM plug.	2533862	A	131.-
GSM/GPRS aerial with cable 10 m	Antenna with plastic coating, including bracket for outdoor installation and shielded antenna cable with FME plug.	2533863	A	395.-
GSM/GPRS aerial with cable 15 m	Antenna with plastic coating, including bracket for outdoor installation and shielded antenna cable with FME plug.	2533864	A	438.-
NiMh rechargeable battery, 9 V/200 mAh	Rechargeable battery to be installed in the switchgears Wilo-control MS-L and EC-L for a mains-independent alarm	2522850	L	25.-

You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

Price group: PG14

Electrical accessories – level control with level sensor

Level measurement using a level sensor with various measurement ranges, including high water alarm and dry-running protection. The breakdown barrier and the Ex cut-off relays are not required except for the connection of signal transmitters in potentially explosive areas! These can also be dispensed with when the SC-L.-Ex switchgear is used!

Type	Description	Art. no.		EUR
EC-L-1x12A-DOL-MT34-WM	Microcontroller-controlled switchgear with LC display and symbol-based menu navigation for level-dependent control of a submersible pump by means of float switches or level sensor. Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543210	L	914.-

You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☞ = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Electrical accessories – level control with level sensor

Level measurement using a level sensor with various measurement ranges, including high water alarm and dry-running protection. The breakdown barrier and the Ex cut-off relays are not required except for the connection of signal transmitters in potentially explosive areas! These can also be dispensed with when the SC-L...-Ex switchgear is used!

Type	Description	Art. no.		EUR
EC-L-1x12A-DOL-MT34-WM-EMS	Microcontroller-controlled switchgear with LC display and symbol-based menu navigation for level-dependent control of a submersible pump by means of float switches or level sensor. WITHOUT main switch, mains isolator must be provided on-site! Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543211	L	832.-
EC-L-2x12A-DOL-MT34-WM	Microcontroller-controlled switchgear with LC display and symbol-based menu navigation for level-dependent control of submersible pumps by means of float switches or level sensor. Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543220	L	1,444.-
EC-L-2x12A-DOL-MT34-WM-EMS	Microcontroller-controlled switchgear with LC display and symbol-based menu navigation for level-dependent control of submersible pumps by means of float switches or level sensor. WITHOUT main switch, mains isolator must be provided on-site! Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543221	L	1,269.-
SC-L-1x18A-T34-SD-WM	Microprocessor-controlled switchgear for level-dependent control of one submersible motor pump via level sensor or float switches.	2538952	C	2,633.-
SC-L-2x18A-T34-SD-WM	Microprocessor-controlled switchgear for level-dependent control of two submersible motor pumps via level sensor or float switches.	2538953	C	3,422.-
Level sensor 0-1 mWS, with 10 m cable	Signal transmitter with ATEX approval for fluids containing faeces with a maximum temperature of 60 °C. Output signal: 4...20 mA	2519924	L	442.-
Level sensor 0-1 mWS, with 30 m cable	Signal transmitter with ATEX approval for fluids containing faeces with a maximum temperature of 60 °C. Output signal: 4...20 mA	2519925	L	522.-
Level sensor 0-1 mWS, with 50 m cable	Signal transmitter with ATEX approval for fluids containing faeces with a maximum temperature of 60 °C. Output signal: 4...20 mA	2519926	L	632.-
Level sensor 0-2.5 mWS with 10 m cable	Signal transmitter with ATEX approval for fluids containing faeces with a maximum temperature of 60 °C. Output signal: 4...20 mA	2519921	L	442.-
Level sensor 0-2.5 mWS, with 30 m cable	Signal transmitter with ATEX approval for fluids containing faeces with a maximum temperature of 60 °C. Output signal: 4...20 mA	2519922	L	522.-
Level sensor 0-2.5 mWS, with 50 m cable	Signal transmitter with ATEX approval for fluids containing faeces with a maximum temperature of 60 °C. Output signal: 4...20 mA	2519923	L	632.-
Cable clamp	For fixation of a signal transmitter in the pump chamber. The clamp is fixed in the pump chamber with a hook; the cable of the signal transmitter is clamped and fixed via the intrinsic weight of the signal transmitter.	2519927	L	22.-
Zener barrier	Breakdown barrier (Zener barrier) for the connection of one level sensor in an explosive atmosphere.	2541372	L	277.-
Communication module GSM (SC)	Additional module for equipping the switchgear series SC/SCe for dialling into GSM mobile phone networks.	2542216	A	444.-
GSM/GPRS aerial with cable 2.5 m	Flexible antenna with plastic coating, magnetic stand and shielded aerial cable with FEM plug.	2533862	A	131.-
GSM/GPRS aerial with cable 10 m	Antenna with plastic coating, including bracket for outdoor installation and shielded antenna cable with FME plug.	2533863	A	395.-
GSM/GPRS aerial with cable 15 m	Antenna with plastic coating, including bracket for outdoor installation and shielded antenna cable with FME plug.	2533864	A	438.-
NiMH rechargeable battery, 9 V/200 mAh	Rechargeable battery to be installed in the switchgears Wilo-control MS-L and EC-L for a mains-independent alarm	2522850	L	25.-

You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive


areas, please refer to the relevant ATEX approval documents. C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG14


Electrical accessories – mains-independent alarm signal

Alarm signal for detection of flooding in rooms and buildings. The alarm signal is acoustic, optical or wireless. In addition, other consumers can be controlled directly.

Type	Description	Art. no.		EUR
DrainAlarm 2	Network-independent alarm switchgear with optical and acoustic alarm signal and with a connection for one float switch.	2545133	 L	412.-
DrainAlarm GSM	Network-independent alarm switchgear with optical, acoustic and wireless (per GSM) alarm signal and with a connection for one float switch.	2542911	L	1,111.-
Float switch MS1 with 10 m cable	Signal transmitters for aggressive fluids and fluids containing faeces up to a max. temperature of 80 °C. Switching: up „ON“/down „OFF“.	2004593	L	114.-
Flash light 1~230 VAC	Xenon flashing light for wall mounting for indoor and outdoor installation. Luminous color: red, flash frequency: 0,75 Hz	2551613	L	140.-
Signal horn 1~230 V	Horn with a bell mouth for wall mounting for indoor and outdoor use. Alarm signal by electromechanical sound generation with steel diaphragm (88 dBA).	501459398	L	84.-

You can find more accessories at the end in the chapter **Electric accessories!**

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

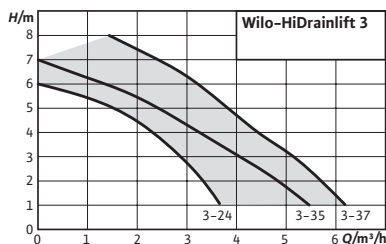

Accessories **Page**
Commissioning/maintenance 683

Select 4 online

All information at www.wilo-select.com

Wilo-HiDrainlift 3



Construction

Small sewage lifting unit for floor-mounted installation

Application

Pumping of sewage **without** faeces (according to DIN EN 12050-2) that cannot be piped to the sewer system through the use of natural falls.

Scope of delivery

- Ready for connection wastewater lifting unit with macerator, active carbon filter and integrated non-return valves
- Installation and operating instructions
- Connection set for inlet and pressure pipes

Your advantages

- Very compact construction for installation in a wet area or under the shower tray (HiDrainlift 3-24)
- Low-noise operation and installed active carbon filter for high user comfort
- Reliable capacity and low electricity consumption for efficient wastewater disposal
- Simple installation with flexible connection options
- Systems ready for connection (HiDrainlift 3-35 and HiDrainlift 3-37)

Price group: PG7


Ordering information							
Type	Width without packaging	Height without packaging	Overall length	Net weight, approx.	Mains connection	Art. no.	
	L	H	L	m			
	mm	mm	mm	kg			EUR
HiDrainlift 3-24	177	188	372	4	1~230 V, 50 Hz	4191678	L 507.-
HiDrainlift 3-35	186	353	622	5	1~230 V, 50 Hz	4191679	L 594.-
HiDrainlift 3-37	186	353	622	6	1~230 V, 50 Hz	4191680	L 630.-

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☞ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG14


Electrical accessories – mains-independent alarm signal

Alarm signal for detection of flooding in rooms and buildings. The alarm signal is acoustic, optical or wireless. In addition, other consumers can be controlled directly.

Type	Description	Art. no.		EUR
				
Small alarm switch-gear KAS	Network-independent small alarm switchgear in ISO plug housing with shock-proof plug, acoustic alarm signal and attached electrode with 3 m cable for level measurement.	501534094	L	354.-
AlarmControl 1	Network-independent alarm system with shockproof plug, acoustic alarm signal and attached mini float switch with 3 m cable for level measurement.	2522846	L	138.-
AlarmControl 2	Network-independent alarm system with shock-proof adapter plug for the direct connection of a consumer, acoustic alarm signal and attached mini float switch with 3 m cable for level measurement.	2522847	L	171.-

You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

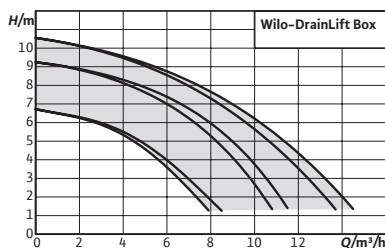

Accessories **Page**
Commissioning/maintenance 683

Series extension

Select 4 online

All information at www.wilo-select.com

Wilo-DrainLift Box



Construction

Small sewage lifting unit for concealed floor installation

Application

Pumping of sewage **without** faeces (according to DIN EN 12050-2) that cannot be piped to the sewer system through the use of natural falls.

Scope of delivery

- Lifting unit for concealed floor installation with complete pipework, non-return valve and pre-installed pump
- Standard version and „D” version incl. shock-proof plug
- “DS” version incl. switchgear
- Container cover with tile frame and floor drain

Your advantages

- Easy to install due to integrated pump and non-return valve
- The large tank volume ensures a low number of switching processes
- Easy maintenance
- Stainless steel tile frame with trap


- Shell cover
- O-ring to seal shell cover and as anti-syphon trap
- Pressure hose (inside diameter: 40 mm) including hose clips
- Installation and operating instructions

Price group: PG7


Ordering information							EUR
Type	Description	Volume	Switching volume	Mains connection	Art. no.		
		V l	V l				
DrainLift Box 32/8	Integrated pump with non-return valve, cover with floor drain and tile frame.	113	26	1~230 V, 50 Hz	2521820	L	1,148.-
DrainLift Box 32/8D	Two integrated pumps with non-return valve, cover with floor drain and tile frame.	113	24	1~230 V, 50 Hz	2546470	L	1,651.-
DrainLift Box 32/8DS	Two integrated pumps with non-return valve, cover with floor drain and tile frame. Pump control via switchgear and separate float switch.	113	30	1~230 V, 50 Hz	2546471	L	2,314.-

= ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.


Price group: PG7

Ordering information							
Type	Description	Volume	Switching volume	Mains connection	Art. no.		
		V l	V l				EUR
DrainLift Box 32/11	Integrated pump with non-return valve, cover with floor drain and tile frame.	113	24	1~230 V, 50 Hz	2521821	L	1,477.-
DrainLift Box 32/11D	Two integrated pumps with non-return valve, cover with floor drain and tile frame.	113	22	1~230 V, 50 Hz	2546472	L	2,058.-
DrainLift Box 32/11DS	Two integrated pumps with non-return valve, cover with floor drain and tile frame. Pump control via switchgear and separate float switch.	113	31	1~230 V, 50 Hz	2546473	L	2,721.-
DrainLift Box 32/11HD D	Two integrated pumps with non-return valve, cover with floor drain and tile frame.	113	22	1~230 V, 50 Hz	2546508	L	1,665.-
DrainLift Box 32/11HD DS	Two integrated pumps with non-return valve, cover with floor drain and tile frame. Pump control via switchgear and separate float switch.	113	31	1~230 V, 50 Hz	2546509	L	2,888.-
DrainLift Box 40/10	Integrated pump with non-return valve, cover with floor drain and tile frame.	113	29	1~230 V, 50 Hz	2521822	L	1,531.-
DrainLift Box 40/10D	Two integrated pumps with non-return valve, cover with floor drain and tile frame.	113	27	1~230 V, 50 Hz	2546474	L	2,332.-
DrainLift Box 40/10DS	Two integrated pumps with non-return valve, cover with floor drain and tile frame. Pump control via switchgear and separate float switch.	113	29	1~230 V, 50 Hz	2546475	L	2,996.-

Price group: PG14


Mechanical accessories							
Type	Description			Art. no.			
							EUR
Collar	Collar for securing the baseplate against pressing ground water, with corrosion-resistant clamps.			2546476		L	49.-

Price group: PG14

Electrical accessories – mains-independent alarm signal							
Alarm signal for detection of flooding in rooms and buildings. The alarm signal is acoustic, optical or wireless. In addition, other consumers can be controlled directly.							
Type	Description			Art. no.			
							EUR
Small alarm switch-gear KAS	Network-independent small alarm switchgear in ISO plug housing with shock-proof plug, acoustic alarm signal and attached electrode with 3 m cable for level measurement.			501534094		L	354.-
AlarmControl 1	Network-independent alarm system with shockproof plug, acoustic alarm signal and attached mini float switch with 3 m cable for level measurement.			2522846		L	138.-
AlarmControl 2	Network-independent alarm system with shock-proof adapter plug for the direct connection of a consumer, acoustic alarm signal and attached mini float switch with 3 m cable for level measurement.			2522847		L	171.-

You can find more accessories at the end in the chapter **Electric accessories!**

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

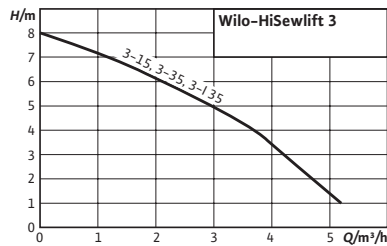

Accessories **Page**
Commissioning/maintenance 683

Select 4 online

All information at www.wilo-select.com

Wilo-HiSewlift 3



Construction

Small sewage lifting unit with macerator

Application

Pumping of sewage containing faeces (according to DIN EN 12050-3) that cannot be piped to the sewer system through the use of natural falls.

Scope of delivery

- Ready for connection sewage lifting unit with macerator, active carbon filter and integrated non-return valves
- Installation and operating instructions
- Connection set for inlet and pressure pipes

Your advantages

- HiSewlift 3-135 in particularly narrow version (less than 149 mm width) for a simple front-wall installation
- Low-noise operation and installed active carbon filter for high user comfort
- Reliable capacity and low electricity consumption for efficient sewage disposal
- Simple installation with flexible connection options
- Ready for connection

Price group: PG7


Ordering information								
Type	Width without packaging	Height without packaging	Overall length	Net weight, approx.	Mains connection	Art. no.		
	L mm	H mm	L mm	m kg				EUR
HiSewlift 3-15	243	353	511	6	1~230 V, 50 Hz	4191675	L	558.-
HiSewlift 3-35	243	353	622	6	1~230 V, 50 Hz	4191677	L	658.-
HiSewlift 3-135	149	378	520	5	1~230 V, 50 Hz	4191674	L	846.-

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☞ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG14


Electrical accessories – mains-independent alarm signal

Alarm signal for detection of flooding in rooms and buildings. The alarm signal is acoustic, optical or wireless. In addition, other consumers can be controlled directly.

Type	Description	Art. no.		EUR
				
Small alarm switch-gear KAS	Network-independent small alarm switchgear in ISO plug housing with shock-proof plug, acoustic alarm signal and attached electrode with 3 m cable for level measurement.	501534094	L	354.-
AlarmControl 1	Network-independent alarm system with shockproof plug, acoustic alarm signal and attached mini float switch with 3 m cable for level measurement.	2522846	L	138.-
AlarmControl 2	Network-independent alarm system with shock-proof adapter plug for the direct connection of a consumer, acoustic alarm signal and attached mini float switch with 3 m cable for level measurement.	2522847	L	171.-

You can find more accessories at the end in the chapter **Electric accessories!**

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

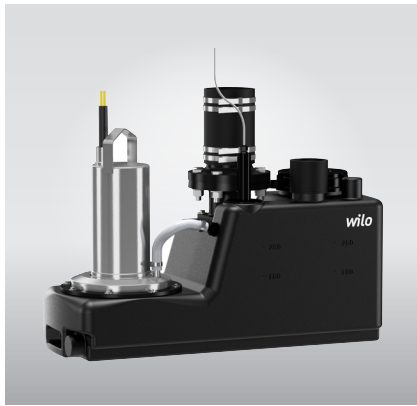

Accessories **Page**
Commissioning/maintenance 683

Select 4 online

All information at www.wilo-select.com

Wilo-DrainLift S



Construction

Compact sewage lifting unit as single pump system

Application

Pumping of sewage containing faeces (according to DIN EN 12050-1) that cannot be returned to the sewer system using natural falls, and backflow resistant drainage of discharge points below the backflow level (according to DIN EN 12056-1).

Scope of delivery

Sewage lifting unit ready for connection with connected switchgear and plug:

- Switchgear with mains-independent alarm and plug:
- 1x inlet seal DN 100
- 1x hole saw for inlet connection DN 100
- 1x non-return valve DN 80 (version "RV")
- 1x collar for connection of diaphragm hand pump or inlet connection Ø50 mm

Your advantages


- The lightweight and space-saving compact construction allow easy installation – even in front-wall-like installations
- Maximum connection flexibility thanks to freely selectable inlets on both long faces and one end face
- Corrosion-resistant stainless steel motor, integrated thermal motor protection, non-clog vortex impeller and sound alarm with optional Wilo-SmartHome connection for high operational reliability
- 1x collar for ventilation connection DN 70
- 3x sound absorption strips for sound insulation installation
- Fixation material
- Installation and operating instructions

Price group: PG7


Ordering information						
Type	Volume	Pressure port	Mains connection	Art. no.		
	V I					EUR
DrainLift S 1/6M	45	DN 80	1~230 V, 50 Hz	2544860	L	1,747.-
DrainLift S 1/6M RV	45	DN 80	1~230 V, 50 Hz	2544876	L	2,111.-
DrainLift S 1/6T	45	DN 80	3~400 V, 50 Hz	2544861	L	1,782.-
DrainLift S 1/6T RV	45	DN 80	3~400 V, 50 Hz	2544877	L	2,326.-

= ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG14

Mechanical accessories				
Type	Description	Art. no.		
				EUR
Gate valve DN 80, EN-GJL-250	made of EN-GJL-250, including 1 set mounting accessories	2017162	L	301.-
Flange connector DN 80	Made of PUR, with hose, hose clips and installation accessories	2511595	L	190.-
Gate valve DN 100, EN-GJL-250	made of EN-GJL-250, including 1 set mounting accessories	2017163	L	355.-
Gate valve DN 100, PVC	Made out of PVC, with solid pipe ends DN 100	2529808	L	458.-
Flange connector DN 100	Made of PUR, with hose, hose clips and installation accessories	2511597	L	197.-
Diaphragm hand pump	Double-sided connection, female thread Rp 1½	2060166	L	307.-
3-way ball valve Rp 1½	made of brass, chrome-plated, 3x connections with female thread	2511607	L	229.-
Inlet seal set DN 100	Gasket made of NBR, hose clip and hole saw	2521841	L	129.-
Mounting accessories DN 80/100, PN 10	For one flange connection, with screws, nuts and flat gasket	6077521	L	27.-

Price group: PG14

Electrical accessories – mains-independent alarm signal				
Alarm signal for detection of flooding in rooms and buildings. The alarm signal is acoustic, optical or wireless. In addition, other consumers can be controlled directly.				
Type	Description	Art. no.		
				EUR
DrainAlarm 2	Network-independent alarm switchgear with optical and acoustic alarm signal and with a connection for one float switch.	2545133	L	412.-
DrainAlarm GSM	Network-independent alarm switchgear with optical, acoustic and wireless (per GSM) alarm signal and with a connection for one float switch.	2542911	L	1,111.-
Flash light 1~230V	Optical alarm signal for connection to a switchgear. Suitable for outside installation.	2551613	L	140.-
Signal horn 1~230V	Acoustic alarm signal (88 dBA) for connection to a switchgear. Suitable for outside installation.	501459398	L	84.-
SmartHome wireless alarm transmitter	Mains-independent radio transmitter (battery operated) with a digital connection of potential-free contacts for wireless transmission of alarm signals to the "wibutler" in SmartHome applications.	6078632	L	281.-

You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.



Accessories **Page**
Commissioning/maintenance 683

Select 4 online

All information at www.wilo-select.com

Wilo-DrainLift M



Construction

Sewage lifting unit as single pump system or double-pump system

Application

Pumping of sewage containing faeces (according to DIN EN 12050-1) that cannot be returned to the sewer system using natural falls, and backflow resistant drainage of discharge points below the backflow level (according to DIN EN 12056-1).

Scope of delivery

Connection-ready sewage lifting unit, including:

- Switchgear with mains-independent alarm and plug:
- 1x inlet seal DN 100
- 1x hole saw for inlet DN 100
- 1x lip seal for connection of diaphragm hand pump or inlet connection \varnothing 50 mm
- 1x collar for ventilation connection DN 70

Your advantages

- Space-saving installation
- Easy-to-install thanks to low weight and large scope of delivery
- Flexible due to free selection of inlets
- Operationally reliable with integrated thermic motor protection and mains-independent alarm

- 1x flange connector DN 80/100 with flat gasket, flexible hose section and fixing material for discharge pipe connection DN 100
- 1x DN 80 non-return valve (only for M1/8RV and M2/8)
- Sound absorption strips for sound insulation installation
- 9 V rechargeable battery
- Fixation material
- Installation and operating instructions


Price group: PG7

Ordering information


Type	Volume	Pressure port	Art. no.	Art. no.				
			1~230 V, 50 Hz			3~400 V, 50 Hz		
	V I				EUR		EUR	
DrainLift M 1/8	62	DN 80	2528650	L	2,286.-	2528651	L	2,413.-
DrainLift M 1/8 RV	62	DN 80	2528940	L	2,497.-	2528941	L	2,623.-
DrainLift M 2/8 RV	115	DN 80	2531400	L	5,600.-	2531401	L	5,489.-

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☞ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG14


Mechanical accessories				
Type	Description	Art. no.		
				EUR
Gate valve DN 80, EN-GJL-250	made of EN-GJL-250, including 1 set mounting accessories	2017162	L	301.-
Flange connector DN 80	Made of PUR, with hose, hose clips and installation accessories	2511595	L	190.-
Gate valve DN 100, EN-GJL-250	made of EN-GJL-250, including 1 set mounting accessories	2017163	L	355.-
Gate valve DN 100, PVC	Made out of PVC, with solid pipe ends DN 100	2529808	L	458.-
Flange connector DN 100	Made of PUR, with hose, hose clips and installation accessories	2511597	L	197.-
Gate valve DN 150, EN-GJL-250	made of EN-GJL-250, including 1 set mounting accessories	2017164	L	588.-
Gate valve DN 150, PVC	made out of PVC, with solid pipe ends DN 150	2529809	L	804.-
Flange connector DN 150	Made of PUR, with hose, hose clips and installation accessories	2511598	L	219.-
Inlet seal set DN 100	Gasket made of NBR, hose clip and hole saw	2521841	L	129.-
Inlet seal set DN 150	Gasket made of NBR, hose clip and hole saw	2515145	L	159.-
Diaphragm hand pump	Double-sided connection, female thread Rp 1½	2060166	L	307.-
3-way ball valve Rp 1½	made of brass, chrome-plated, 3x connections with female thread	2511607	L	229.-
Mounting accessories DN 80/100, PN 10	For one flange connection, with screws, nuts and flat gasket	6077521	L	27.-
Mounting accessories DN 150, PN 10	For one flange connection, with screws, nuts and flat gasket	6077523	L	34.-

Price group: PG14

Electrical accessories – mains-independent alarm signal				
Alarm signal for detection of flooding in rooms and buildings. The alarm signal is acoustic, optical or wireless. In addition, other consumers can be controlled directly.				
Type	Description	Art. no.		
				EUR
DrainAlarm 2	Network-independent alarm switchgear with optical and acoustic alarm signal and with a connection for one float switch.	2545133	L	412.-
DrainAlarm GSM	Network-independent alarm switchgear with optical, acoustic and wireless (per GSM) alarm signal and with a connection for one float switch.	2542911	L	1,111.-
Flash light 1~230V	Optical alarm signal for connection to a switchgear. Suitable for outside installation.	2551613	L	140.-
Signal horn 1~230V	Acoustic alarm signal (88 dBA) for connection to a switchgear. Suitable for outside installation.	501459398	L	84.-
SmartHome wireless alarm transmitter	Mains-independent radio transmitter (battery operated) with a digital connection of potential-free contacts for wireless transmission of alarm signals to the "wibutler" in SmartHome applications.	6078632	L	281.-

You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

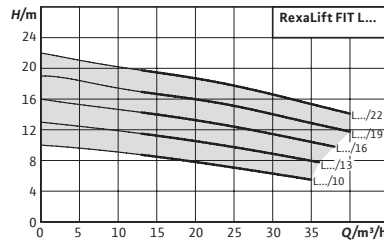

Accessories **Page**
Commissioning/maintenance 683

Select 4 online
All information at www.wilo-select.com

Wilo-RexaLift FIT L



Construction

Sewage lifting unit as single pump system or double-pump system

Application

Pumping of sewage containing faeces (according to DIN EN 12050-1) that cannot be returned to the sewer system using natural falls, and backflow resistant drainage of discharge points below the backflow level (according to DIN EN 12056-1).

Scope of delivery

Connection-ready sewage lifting unit, including:

- Switchgear with mains-independent alarm and plug:
- 1x inlet seal DN 100
- 1x hole saw for inlet connection DN 100
- 1x collar for connection of diaphragm hand pump or inlet connection Ø 50 mm

Your advantages

- Low system weight for easy installation
- Integrated non-return valve
- Flexible due to free selection of inlets
- Operationally reliable with integrated thermic motor protection and mains-independent alarm for SSM and flooding


- 1x collar for ventilation connection DN 70
- 1x flange connector DN 80/100 with flat gasket, collar and fixing material for pressure connection DN 100
- 9 V rechargeable battery
- Sound absorption strips for sound insulation installation
- Fixation material
- Installation and operating instructions

Price group: PG7


Ordering information						
Type	Volume	Mains connection	Art. no.			EUR
RexaLift FIT L 1-10	115	3~400 V, 50 Hz	2536960	L		3,302.-
RexaLift FIT L 1-13	115	3~400 V, 50 Hz	2536961	L		3,604.-
RexaLift FIT L 1-16	115	3~400 V, 50 Hz	2536962	L		3,636.-
RexaLift FIT L 1-19	115	3~400 V, 50 Hz	2536963	L		4,448.-
RexaLift FIT L 1-22	115	3~400 V, 50 Hz	2536964	L		4,636.-
RexaLift FIT L 2-10	140	3~400 V, 50 Hz	2536965	L		5,946.-
RexaLift FIT L 2-13	140	3~400 V, 50 Hz	2536966	L		6,581.-
RexaLift FIT L 2-16	140	3~400 V, 50 Hz	2536967	L		7,042.-
RexaLift FIT L 2-19	140	3~400 V, 50 Hz	2536968	L		7,429.-
RexaLift FIT L 2-22	140	3~400 V, 50 Hz	2536969	L		8,302.-

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☞ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG14


Mechanical accessories				
Type	Description	Art. no.		
				EUR
Gate valve DN 80, EN-GJL-250	made of EN-GJL-250, including 1 set mounting accessories	2017162	L	301.-
Flange connector DN 80	Made of PUR, with hose, hose clips and installation accessories	2511595	L	190.-
Gate valve DN 100, EN-GJL-250	made of EN-GJL-250, including 1 set mounting accessories	2017163	L	355.-
Gate valve DN 100, PVC	Made out of PVC, with solid pipe ends DN 100	2529808	L	458.-
Flange connector DN 100	Made of PUR, with hose, hose clips and installation accessories	2511597	L	197.-
Gate valve DN 150, EN-GJL-250	made of EN-GJL-250, including 1 set mounting accessories	2017164	L	588.-
Gate valve DN 150, PVC	made out of PVC, with solid pipe ends DN 150	2529809	L	804.-
Flange connector DN 150	Made of PUR, with hose, hose clips and installation accessories	2511598	L	219.-
Inlet seal set DN 100	Gasket made of NBR, hose clip and hole saw	2521841	L	129.-
Inlet seal set DN 150	Gasket made of NBR, hose clip and hole saw	2515145	L	159.-
Diaphragm hand pump	Double-sided connection, female thread Rp 1½	2060166	L	307.-
3-way ball valve Rp 1½	made of brass, chrome-plated, 3x connections with female thread	2511607	L	229.-
Mounting accessories DN 80/100, PN 10	For one flange connection, with screws, nuts and flat gasket	6077521	L	27.-
Mounting accessories DN 150, PN 10	For one flange connection, with screws, nuts and flat gasket	6077523	L	34.-

Price group: PG14

Electrical accessories – mains-independent alarm signal				
Alarm signal for detection of flooding in rooms and buildings. The alarm signal is acoustic, optical or wireless. In addition, other consumers can be controlled directly.				
Type	Description	Art. no.		
				EUR
DrainAlarm 2	Network-independent alarm switchgear with optical and acoustic alarm signal and with a connection for one float switch.	2545133	L	412.-
DrainAlarm GSM	Network-independent alarm switchgear with optical, acoustic and wireless (per GSM) alarm signal and with a connection for one float switch.	2542911	L	1,111.-
Flash light 1~230V	Optical alarm signal for connection to a switchgear. Suitable for outside installation.	2551613	L	140.-
Signal horn 1~230V	Acoustic alarm signal (88 dBA) for connection to a switchgear. Suitable for outside installation.	501459398	L	84.-
SmartHome wireless alarm transmitter	Mains-independent radio transmitter (battery operated) with a digital connection of potential-free contacts for wireless transmission of alarm signals to the "wibutler" in SmartHome applications.	6078632	L	281.-

You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

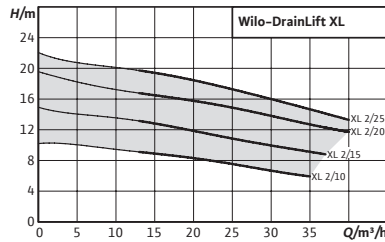

Accessories **Page**
Commissioning/maintenance 683

Select 4 online
All information at www.wilo-select.com

Wilo-DrainLift XL



Construction

Sewage lifting unit as double-pump system

Application

Pumping of sewage containing faeces (according to DIN EN 12050-1) that cannot be returned to the sewer system using natural falls, and backflow resistant drainage of discharge points below the backflow level (according to DIN EN 12056-1).

Scope of delivery

Connection-ready sewage lifting unit, including:

- Switchgear with mains-dependent alarm and plug
- Zener barrier
- 1x inlet seal DN 150
- 1x hole saw for inlet connection DN 150
- 1x collar for diaphragm hand pump connection

Your advantages

- Flexible thanks to a height-adjustable and swivel-capable inlet connection
- Easy to use thanks to built-in switchgear
- Integrated non-return valve
- Operational reliability via high switching volumes and reliable level recording
- Suitable for continuous duty (S1) with the use of self-cooling motors


- 1x collar for ventilation connection DN 70
- 1x flange connector DN 80/100 with flat gasket, collar and fixing material for pressure connection DN 100
- Fixation material
- Installation and operating instructions

Price group: PG8


Ordering information						
Type	Volume	Pressure port	Mains connection	Art. no.		
	V I					EUR
DrainLift XL 2/10	380	DN 80	3~400 V, 50 Hz	2532140	L	9,637.-
DrainLift XL 2/15	380	DN 80	3~400 V, 50 Hz	2532141	L	11,470.-
DrainLift XL 2/20	380	DN 80	3~400 V, 50 Hz	2532142	L	11,748.-
DrainLift XL 2/25	380	DN 80	3~400 V, 50 Hz	2532143	L	12,573.-

= ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG14



Mechanical accessories				
Type	Description	Art. no.		
				EUR
Gate valve DN 80, EN-GJL-250	made of EN-GJL-250, including 1 set mounting accessories	2017162	L	301.-
Flange connector DN 80	Made of PUR, with hose, hose clips and installation accessories	2511595	L	190.-
Gate valve DN 100, EN-GJL-250	made of EN-GJL-250, including 1 set mounting accessories	2017163	L	355.-
Gate valve DN 100, PVC	Made out of PVC, with solid pipe ends DN 100	2529808	L	458.-
Flange connector DN 100	Made of PUR, with hose, hose clips and installation accessories	2511597	L	197.-
Gate valve DN 150, EN-GJL-250	made of EN-GJL-250, including 1 set mounting accessories	2017164	L	588.-
Gate valve DN 150, PVC	made out of PVC, with solid pipe ends DN 150	2529809	L	804.-
Flange connector DN 150	Made of PUR, with hose, hose clips and installation accessories	2511598	L	219.-
Diaphragm hand pump	Double-sided connection, female thread Rp 1½	2060166	L	307.-
3-way ball valve Rp 1½	made of brass, chrome-plated, 3x connections with female thread	2511607	L	229.-
Inlet seal set DN 100	Gasket made of NBR, hose clip and hole saw	2521841	L	129.-
Inlet seal set DN 150	Gasket made of NBR, hose clip and hole saw	2515145	L	159.-
Mounting accessories DN 80/100, PN 10	For one flange connection, with screws, nuts and flat gasket	6077521	L	27.-
Mounting accessories DN 150, PN 10	For one flange connection, with screws, nuts and flat gasket	6077523	L	34.-

Price group: PG14

Mechanical accessories				
Alarm signal for detection of flooding in rooms and buildings. The alarm signal is acoustic, optical or wireless. In addition, other consumers can be controlled directly.				
Type	Description	Art. no.		
				EUR
DrainAlarm 2	Network-independent alarm switchgear with optical and acoustic alarm signal and with a connection for one float switch.	2545133	L	412.-
DrainAlarm GSM	Network-independent alarm switchgear with optical, acoustic and wireless (per GSM) alarm signal and with a connection for one float switch.	2542911	L	1,111.-
Flash light 1~230V	Optical alarm signal for connection to a switchgear. Suitable for outside installation.	2551613	L	140.-
Signal horn 1~230V	Acoustic alarm signal (88 dBA) for connection to a switchgear. Suitable for outside installation.	501459398	L	84.-

You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

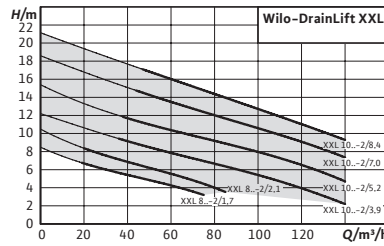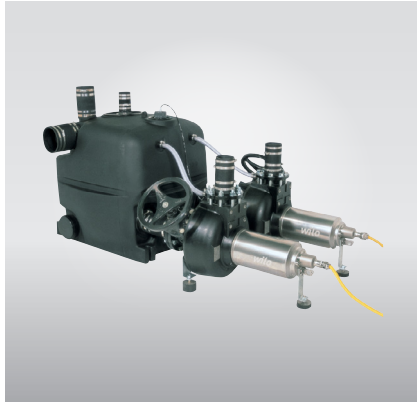

Accessories **Page**
 Commissioning/maintenance 683

Select 4 online

All information at www.wilo-select.com

Wilo-DrainLift XXL



Construction

Sewage lifting unit as double-pump system with two separate, dry-mounted pumps

Application

Pumping of sewage containing faeces (according to DIN EN 12050-1) that cannot be returned to the sewer system using natural falls, and backflow resistant drainage of discharge points below the backflow level (according to DIN EN 12056-1).

Scope of delivery

- Microprocessor-controlled switchgear with automatic duty cycling, standby and peak load operation, potential-free contacts and indicator lights for operation and malfunctions for each pump.

Your advantages

- Flexible use through the use of one or two tanks
- Optimal tank drainage due to deep extraction by suction
- Operational reliability via high performance range and reliable level recording
- Suitable for continuous duty (S1) with the use of self-cooling motors

- Elastic hose connection for ventilation DN 70.
- Elastic hose connection for connecting a diaphragm hand pump. Kit for connecting the tank with a pump (including ventilation flange with hose).

Price group: PG8

Ordering information						
Type	Volume	Pressure port	Mains connection	Art. no.		EUR
	V 				🚚	
DrainLift XXL 840-2/1,7	400	DN 80	3~400 V, 50 Hz	2509000	K	11,069.-
DrainLift XXL 840-2/2,1	400	DN 80	3~400 V, 50 Hz	2509001	K	12,780.-
DrainLift XXL 880-2/1,7	800	DN 80	3~400 V, 50 Hz	2509005	K	13,567.-
DrainLift XXL 880-2/2,1	800	DN 80	3~400 V, 50 Hz	2509006	K	14,486.-
DrainLift XXL 1040-2/3,9	400	DN 100	3~400 V, 50 Hz	2509014	K	15,924.-
DrainLift XXL 1040-2/5,2	400	DN 100	3~400 V, 50 Hz	2509015	K	16,777.-
DrainLift XXL 1040-2/7,0	400	DN 100	3~400 V, 50 Hz	2509016	C	17,118.-
DrainLift XXL 1040-2/8,4	400	DN 100	3~400 V, 50 Hz	2509017	K	17,594.-
DrainLift XXL 1080-2/3,9	800	DN 100	3~400 V, 50 Hz	2509034	K	17,875.-
DrainLift XXL 1080-2/5,2	800	DN 100	3~400 V, 50 Hz	2509035	K	18,064.-
DrainLift XXL 1080-2/7,0	800	DN 100	3~400 V, 50 Hz	2509036	K	18,253.-
DrainLift XXL 1080-2/8,4	800	DN 100	3~400 V, 50 Hz	2509037	K	19,017.-

🚚 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, 📞 = please contact Wilo
 Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG14

Mechanical accessories				
Type	Description	Art. no.		EUR
Gate valve DN 80, EN-GJL-250	made of EN-GJL-250, including 1 set mounting accessories	2017162	L	301.-
Flange connector DN 80	Made of PUR, with hose, hose clips and installation accessories	2511595	L	190.-
Non-return valve DN 80	made of EN-GJL-250, according to DIN EN 12050-4, including 1 set mounting accessories	2017168	L	333.-
Y-piece DN 80 for XXL 840	Made of steel, galvanised, including 1 set of installation accessories	2511605	K	960.-
Gate valve DN 100, EN-GJL-250	made of EN-GJL-250, including 1 set mounting accessories	2017163	L	355.-
Gate valve DN 100, PVC	Made out of PVC, with solid pipe ends DN 100	2529808	L	458.-
Flange connector DN 100	Made of PUR, with hose, hose clips and installation accessories	2511597	L	197.-
Non-return valve DN 100	made of EN-GJL-250, according to DIN EN 12050-4, including 1 set mounting accessories	2017169	L	399.-
Y-piece DN 100 for XXL 1040	Made of steel, galvanised, including 1 set of installation accessories	2511606	L	354.-
Gate valve DN 150, EN-GJL-250	made of EN-GJL-250, including 1 set mounting accessories	2017164	L	588.-
Gate valve DN 150, PVC	made out of PVC, with solid pipe ends DN 150	2529809	L	804.-
Flange connector DN 150	Made of PUR, with hose, hose clips and installation accessories	2511598	L	219.-
Diaphragm hand pump	Double-sided connection, female thread Rp 1½	2060166	L	307.-
3-way ball valve Rp 1½	made of brass, chrome-plated, 3x connections with female thread	2511607	L	229.-
Installation accessories TP 80	For one flange connection, with screws, nuts and flat gasket	2012067	L	24.-
Installation accessories TP 100	For one flange connection, with screws, nuts and flat gasket	2017176	L	27.-
Mounting accessories DN 80/100, PN 10	For one flange connection, with screws, nuts and flat gasket	6077521	L	27.-
Mounting accessories DN 150, PN 10	For one flange connection, with screws, nuts and flat gasket	6077523	L	34.-


Price group: PG14

Electrical accessories – mains-independent alarm signal				
Alarm signal for detection of flooding in rooms and buildings. The alarm signal is acoustic, optical or wireless. In addition, other consumers can be controlled directly.				
Type	Description	Art. no.		EUR
DrainAlarm 2	Network-independent alarm switchgear with optical and acoustic alarm signal and with a connection for one float switch.	2545133	L	412.-
DrainAlarm GSM	Network-independent alarm switchgear with optical, acoustic and wireless (per GSM) alarm signal and with a connection for one float switch.	2542911	L	1,111.-
Flash light 1~230V	Optical alarm signal for connection to a switchgear. Suitable for outside installation.	2551613	L	140.-
Signal horn 1~230V	Acoustic alarm signal (88 dBA) for connection to a switchgear. Suitable for outside installation.	501459398	L	84.-

You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

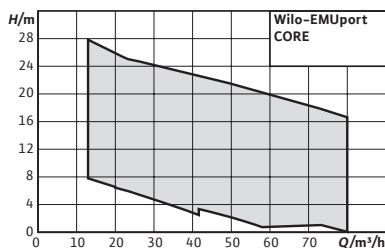

Accessories **Page**
Commissioning/maintenance 683

Select 4 online

All information at www.wilo-select.com

Wilo-EMUport CORE



Construction

Standard sewage lifting unit with solids separation system in accordance with DIN EN 12050-1 for installation in a building or in a pump chamber for outdoor installation.

Application

Pumping of untreated sewage that cannot be returned to the sewer system using natural falls, and for the draining of objects that are below the backflow level (according to DIN EN 12056/DIN 1986-100).

Scope of delivery

Installation-ready sewage lifting unit is completely pre-assembled including Y-piece, level sensor and two pumps.

Options

- Switchgear that has been designed specifically for the solids separation system "SC-L...FTS"
- Inductive flow rate measuring instrument
- Intake and pressure release adapters

Your advantages


- Maximum operational safety with separation of solids from the sewage: Large solids do not have to pass through the pump – no clogging
- Cost-effective thanks to retrofit system for simple renovation of old pumping stations
- Durable and corrosion-free due to the use of PE and PUR material
- Easy maintenance, even during operation – thanks to hygienic dry well installation and easy access from outside and individual blocking
- Future-proof even with increasing solid content in sewage
- Flexible installation in buildings or in chambers from 1,500 mm diameter
- Easy to integrate and ready-for-connection Plug&Pump system
- Energy savings due to efficient submersible sewage pumps optionally with IE3 motors



Price group: PG8

Ordering information						
Type	Volume	Mains connection	Art. no.			
	V /					EUR
EMUport CORE 20.2-10A	440	3~400 V, 50 Hz	6078606	K		17,735.-
EMUport CORE 20.2-10B	440	3~400 V, 50 Hz	6078590	K		19,293.-
EMUport CORE 20.2-14A	440	3~400 V, 50 Hz	6078607	K		17,920.-
EMUport CORE 20.2-14B	440	3~400 V, 50 Hz	6078591	K		19,489.-
EMUport CORE 20.2-17A	440	3~400 V, 50 Hz	6078608	K		18,102.-
EMUport CORE 20.2-17B	440	3~400 V, 50 Hz	6078592	K		19,687.-

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG8

Ordering information						
Type	Volume	Mains connection	Art. no.			
	V l				EUR	
EMUport CORE 20.2-21A	440	3~400 V, 50 Hz	6078609	K	18,286.-	
EMUport CORE 20.2-21B	440	3~400 V, 50 Hz	6078593	K	19,885.-	
EMUport CORE 20.2-25A	440	3~400 V, 50 Hz	6078610	K	18,470.-	
EMUport CORE 20.2-25B	440	3~400 V, 50 Hz	6078594	K	20,083.-	
EMUport CORE 20.2-28A	440	3~400 V, 50 Hz	6078611	K	18,655.-	
EMUport CORE 20.2-28B	440	3~400 V, 50 Hz	6078595	K	20,280.-	
EMUport CORE 20.2-31A	440	3~400 V, 50 Hz	6078612	K	18,838.-	
EMUport CORE 20.2-31B	440	3~400 V, 50 Hz	6078596	K	20,478.-	
EMUport CORE 45.2-9A	1200	3~400 V, 50 Hz	6080600	K	26,489.-	
EMUport CORE 45.2-9B	1200	3~400 V, 50 Hz	6080607	K	28,604.-	
EMUport CORE 45.2-13A	1200	3~400 V, 50 Hz	6080601	K	26,824.-	
EMUport CORE 45.2-13B	1200	3~400 V, 50 Hz	6080608	K	28,937.-	
EMUport CORE 45.2-16A	1200	3~400 V, 50 Hz	6080602	K	27,157.-	
EMUport CORE 45.2-16B	1200	3~400 V, 50 Hz	6080609	K	29,272.-	
EMUport CORE 45.2-20A	1200	3~400 V, 50 Hz	6080603	K	27,491.-	
EMUport CORE 45.2-20B	1200	3~400 V, 50 Hz	6080610	K	29,605.-	
EMUport CORE 45.2-24A	1200	3~400 V, 50 Hz	6080604	K	27,825.-	
EMUport CORE 45.2-24B	1200	3~400 V, 50 Hz	6080611	K	29,939.-	
EMUport CORE 45.2-27A	1200	3~400 V, 50 Hz	6080605	K	28,159.-	
EMUport CORE 45.2-27B	1200	3~400 V, 50 Hz	6080612	K	30,273.-	
EMUport CORE 45.2-30A	1200	3~400 V, 50 Hz	6080606	K	28,492.-	
EMUport CORE 45.2-30B	1200	3~400 V, 50 Hz	6080613	K	30,719.-	
EMUport CORE 50.2-8A	1200	3~400 V, 50 Hz	6080614	K	32,833.-	
EMUport CORE 50.2-8B	1200	3~400 V, 50 Hz	6080623	K	35,059.-	
EMUport CORE 50.2-11A	1200	3~400 V, 50 Hz	6080615	K	33,279.-	
EMUport CORE 50.2-11B	1200	3~400 V, 50 Hz	6080624	K	35,505.-	
EMUport CORE 50.2-12A	1200	3~400 V, 50 Hz	6080616	K	33,724.-	
EMUport CORE 50.2-12B	1200	3~400 V, 50 Hz	6080625	K	35,950.-	
EMUport CORE 50.2-15A	1200	3~400 V, 50 Hz	6080617	K	34,170.-	
EMUport CORE 50.2-15B	1200	3~400 V, 50 Hz	6080626	K	36,395.-	
EMUport CORE 50.2-17A	1200	3~400 V, 50 Hz	6080618	K	34,614.-	
EMUport CORE 50.2-17B	1200	3~400 V, 50 Hz	6080627	K	36,840.-	
EMUport CORE 50.2-20A	1200	3~400 V, 50 Hz	6080619	K	35,059.-	
EMUport CORE 50.2-20B	1200	3~400 V, 50 Hz	6080628	K	37,285.-	
EMUport CORE 50.2-22A	1200	3~400 V, 50 Hz	6080620	K	35,505.-	
EMUport CORE 50.2-22B	1200	3~400 V, 50 Hz	6080629	K	37,731.-	
EMUport CORE 50.2-23A	1200	3~400 V, 50 Hz	6080621	K	36,173.-	
EMUport CORE 50.2-23B	1200	3~400 V, 50 Hz	6080630	K	38,176.-	
EMUport CORE 50.2-27A	1200	3~400 V, 50 Hz	6080622	K	36,617.-	
EMUport CORE 50.2-27B	1200	3~400 V, 50 Hz	6080631	K	38,843.-	

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Mechanical accessories				
Type	Description	Art. no.		EUR
Flange adapter DN200/150	made of grey cast iron, for connecting an inlet pipe DN 150 to a connection DN 200, incl. gasket and installation accessories	6078905	C	1,159.-
Flange adapter DN200/250	made of grey cast iron, for connecting an inlet pipe DN 250 to a connection DN 200, incl. gasket and installation accessories	6078900	C	1,917.-
Flange adapter DN200/300	made of grey cast iron, for connecting an inlet pipe DN 300 to a connection DN 200, incl. gasket and installation accessories	2546492	C	2,336.-
Flange adapter DN200/350	made of grey cast iron, for connecting an inlet pipe DN 350 to a connection DN 200, incl. gasket and installation accessories	2546493	C	2,896.-
Flange adapter DN80/100	made of grey cast iron, for connecting a pressure pipe DN 100 to a connection DN 80, incl. gasket and installation accessories	6079343	C	347.-
Flange adapter DN100/150	made of grey cast iron, for connecting a pressure pipe DN 150 to a connection DN 100, incl. gasket and installation accessories	2546499	C	472.-
Flange connector DN 200/PE-HD 160	made of PE for connecting plastic pipes \varnothing 160 mm to DN 200 flange, including gasket and installation accessories	6078901	C	1,040.-
Flange connector DN 200/PE-HD 225	made of PE for connecting plastic pipes \varnothing 225 mm to DN 200 flange, including gasket and installation accessories	6078904	C	297.-
Flange connector DN 200/PE-HD 280	made of PE for connecting plastic pipes \varnothing 280 mm to DN 200 flange, including gasket and installation accessories	6078902	C	1,249.-
Flange connector DN 200/PE-HD 315	made of PE for connecting plastic pipes \varnothing 315 mm to DN 200 flange, including gasket and installation accessories	2546496	C	1,090.-
Flange connector DN 80/PE-HD 90	made of PE for connecting plastic pipes \varnothing 90 mm to DN 80 flange, including gasket and installation accessories	6079346	C	157.-
Flange connector DN 100/PE-HD 110	made of PE for connecting plastic pipes \varnothing 110 mm to DN 100 flange, including gasket and installation accessories	6079347	C	246.-
Flange connector DN100/PE-HD 110mm	made of PE for connecting plastic pipes \varnothing 110 mm to DN 100 flange, including gasket and installation accessories	2546497	C	161.-
Flange connector DN 150/PE-HD 110	made of PE for connecting plastic pipes \varnothing 110 mm to DN 150 flange, including gasket and installation accessories	2546498	C	270.-
Inlet set DN 150/200	made of grey cast iron, consisting of gate valve DN 150 and flange adapter DN 150/200 for connecting an inlet pipe DN 150 to a connection DN 200, incl. gasket and installation accessories	6078906	C	2,504.-
Inlet set DN 200	made of grey cast iron, consisting of gate valve DN 200 and intermediate flange DN 200 for connecting an inlet pipe to a connection DN 200, incl. gasket and installation accessories	6079342	C	2,319.-
Inlet set DN 250/200	made of grey cast iron, consisting of gate valve DN 250 and flange adapter DN 250/200 for connecting an inlet pipe DN 250 to a connection DN 200, incl. gasket and installation accessories	6079341	C	4,146.-
Inlet set DN 300/200	made of grey cast iron, consisting of gate valve DN 300 and flange adapter DN 300/200 for connecting an inlet pipe DN 300 to a connection DN 200, incl. gasket and installation accessories	2546494	C	5,214.-
Inlet set DN 350/200	made of grey cast iron, consisting of gate valve DN 350 and flange adapter DN 350/200 for connecting an inlet pipe DN 350 to a connection DN 200, incl. gasket and installation accessories	2546495	C	8,814.-
Flow meter set DN 80	comprising gate valve from cast iron and flow meter from coated steel including gasket and mounting accessories	6079344	C	5,056.-
Flow meter set DN 100	comprising gate valve from cast iron and flow meter from coated steel including gasket and mounting accessories	6079345	C	5,105.-
Flow meter set DN 150	comprising gate valve from cast iron and flow meter from coated steel including gasket and mounting accessories	2546500	C	5,811.-

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG14

Electrical accessories – level control with level sensor

Level measurement using a level sensor with various measurement ranges, including high water alarm and dry-running protection. The breakdown barrier and the Ex cut-off relays are not required except for the connection of signal transmitters in potentially explosive areas! These can also be dispensed with when the SC-L...-Ex switchgear is used!

Type	Description	Art. no.		EUR
SC-L-2x1,6A-T34-DOL-WM-FTS	Microprocessor-controlled switchgear for level-dependent control of a lifting unit with solids separation system by means of level sensor in an intrinsically safe circuit. The direct connection of pumps within potentially explosive atmospheres is not permissible!	2543240		
SC-L-2x2,4A-T34-DOL-WM-FTS	Microprocessor-controlled switchgear for level-dependent control of a lifting unit with solids separation system by means of level sensor in an intrinsically safe circuit. The direct connection of pumps within potentially explosive atmospheres is not permissible!	2543241		
SC-L-2x4A-T34-DOL-WM-FTS	Microprocessor-controlled switchgear for level-dependent control of a lifting unit with solids separation system by means of level sensor in an intrinsically safe circuit. The direct connection of pumps within potentially explosive atmospheres is not permissible!	2543242		
SC-L-2x6,3A-T34-DOL-WM-FTS	Microprocessor-controlled switchgear for level-dependent control of a lifting unit with solids separation system by means of level sensor in an intrinsically safe circuit. The direct connection of pumps within potentially explosive atmospheres is not permissible!	2543243		
SC-L-2x10A-T34-DOL-WM-FTS	Microprocessor-controlled switchgear for level-dependent control of a lifting unit with solids separation system by means of level sensor in an intrinsically safe circuit. The direct connection of pumps within potentially explosive atmospheres is not permissible!	2543244		
SC-L-2x12A-T34-DOL-WM-FTS	Microprocessor-controlled switchgear for level-dependent control of a lifting unit with solids separation system by means of level sensor in an intrinsically safe circuit. The direct connection of pumps within potentially explosive atmospheres is not permissible!	2543245		
SC-L-2x16A-T34-DOL-WM-FTS	Microprocessor-controlled switchgear for level-dependent control of a lifting unit with solids separation system by means of level sensor in an intrinsically safe circuit. The direct connection of pumps within potentially explosive atmospheres is not permissible!	2543246		
SC-L-2x20A-T34-DOL-WM-FTS	Microprocessor-controlled switchgear for level-dependent control of a lifting unit with solids separation system by means of level sensor in an intrinsically safe circuit. The direct connection of pumps within potentially explosive atmospheres is not permissible!	2543247		
SC-L-2x24A-T34-DOL-WM-FTS	Microprocessor-controlled switchgear for level-dependent control of a lifting unit with solids separation system by means of level sensor in an intrinsically safe circuit. The direct connection of pumps within potentially explosive atmospheres is not permissible!	2543248		
SC-L-2x32A-T34-DOL-WM-FTS	Microprocessor-controlled switchgear for level-dependent control of a lifting unit with solids separation system by means of level sensor in an intrinsically safe circuit. The direct connection of pumps within potentially explosive atmospheres is not permissible!	2543249		
Flash light 1~230V	Optical alarm signal for connection to a switchgear. Suitable for outside installation.	2551613		
Signal horn 1~230V	Acoustic alarm signal (88 dBA) for connection to a switchgear. Suitable for outside installation.	501459398		
GSM/GPRS aerial with cable 2.5 m	Flexible antenna with plastic coating, magnetic stand and shielded aerial cable with FEM plug.	2533862		
GSM/GPRS aerial with cable 10 m	Antenna with plastic coating, including bracket for outdoor installation and shielded antenna cable with FME plug.	2533863		
GSM/GPRS aerial with cable 15 m	Antenna with plastic coating, including bracket for outdoor installation and shielded antenna cable with FME plug.	2533864		
Communication module GSM (SC)	Additional module for equipping the switchgear series SC/SCe for dialling into GSM mobile phone networks.	2542216		

You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

🚚 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, 📞 = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.



Accessories

Commissioning/maintenance

Page

683

Series extension

Select 4 online

All information at www.wilo-select.com

Wilo-DrainLift WS 40/50 Basic



Construction

Pump chamber made of plastic with integrated pump as concealed pumping station or floor-mounted lifting unit

Application

Pumping of pre-cleaned sewage without faeces that cannot be returned to the sewer system using natural falls, and for the draining of objects that are below the backflow level.

Scope of delivery

- Tank (for single or twin-head pump system)
- Built-in pipework
- Non-return ball valve
- **Including pump**
- Level switching
- Switchgear (for three-phase pump or double-pump system)

Your advantages

- Pressure-tight pump chamber for subterranean and aboveground installation
- Flexible due to free selection of inlets
- Large tank volume
- Including pipework, level control, switchgear and pump


- Cover with seal (can be walked on, supporting a weight up to 200 kg)
- Hole saw Ø 124 mm, inlet seal DN 100 (for pipe Ø 110 mm)
- 1 PVC hose section Ø 50 mm with clamps for connection of a diaphragm hand pump
- Fixation material for floor fixation
- Installation and operating instructions

Price group: PG8


Ordering information								
Type	Volume	Art. no. 1~230 V, 50 Hz	Art. no. 3~400 V, 50 Hz					
			EUR	EUR	EUR			
DrainLift WS 40D Basic/TC 40/8 3~	400	-	A	2525603	L	4,364.-		
DrainLift WS 40D Basic/TC 40/10 1~	400	2534507	A	-	A			
DrainLift WS 40E Basic/TC 40/8 3~	255	-	A	2525601	L	2,107.-		
DrainLift WS 40E Basic/TC 40/10 1~	255	2534506	A	-	A			
DrainLift WS 50D Basic/STS 40/10 1~	400	2547602	A	-	A			
DrainLift WS 50D Basic/UNI V05 1~	400	2547604	A	-	A			
DrainLift WS 50E Basic/STS 40/10 1~	255	2547601	A	-	A			
DrainLift WS 50E Basic/UNI V05 1~	255	2547603	A	-	A			

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
 Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG14

Mechanical accessories				
Type	Description	Art. no.		
				EUR
Gate valve DN 100, PVC	Made out of PVC, with solid pipe ends DN 100	2529808	L	458.-
Gate valve DN 150, PVC	made out of PVC, with solid pipe ends DN 150	2529809	L	804.-
Gate valve DN 100, EN-GJL-250	made of EN-GJL-250, including 1 set mounting accessories	2017163	L	355.-
Gate valve DN 150, EN-GJL-250	made of EN-GJL-250, including 1 set mounting accessories	2017164	L	588.-
Flange connector DN 100	Made of PUR, with hose, hose clips and installation accessories	2511597	L	197.-
Flange connector DN 150	Made of PUR, with hose, hose clips and installation accessories	2511598	L	219.-
Inlet seal set DN 100	Gasket made of NBR, hose clip and hole saw	2521841	L	129.-
Inlet seal set DN 150	Gasket made of NBR, hose clip and hole saw	2515145	L	159.-
Clamp bolting 1½"/50 mm	Made of PE, with female thread (IG), for connecting to a PE pressure pipe	2505044	L	36.-
Clamp bolting 1½"/63 mm	Made of PE, with female thread (IG), for connecting to a PE pressure pipe	2505045	L	42.-
Clamp bolting 2"/63 mm	Made of PE, with female thread (IG), for connecting to a PE pressure pipe	2505046	L	46.-
Clamp bolting 2"/75 mm	Made of PE, with female thread (IG), for connecting to a PE pressure pipe	2525181	C	115.-
Gate valve Rp 1½, G-CuSn10	made of red brass, with female thread	2525187	L	64.-
Gate valve Rp 2, G-CuSn10	made of red brass, with female thread	2525188	L	91.-
Pump chamber extension WS 40/50	Made of PE, Ø 500 x 300, for pump chambers WS40/50, including gasket and installation accessories (note: only one pump chamber possible per pump chamber extension).	2525190	L	132.-
Diaphragm hand pump	Double-sided connection, female thread Rp 1½	2060166	L	307.-
3-way ball valve Rp 1½	made of brass, chrome-plated, 3x connections with female thread	2511607	L	229.-

Price group: PG14

Electrical accessories – mains-independent alarm signal				
Type	Description	Art. no.		
				EUR
DrainAlarm 2	Network-independent alarm switchgear with optical and acoustic alarm signal and with a connection for one float switch.	2545133	L	412.-
DrainAlarm GSM	Network-independent alarm switchgear with optical, acoustic and wireless (per GSM) alarm signal and with a connection for one float switch.	2542911	L	1,111.-
Float switch MS1 with 10 m cable	Signal transmitters for aggressive fluids and fluids containing faeces up to a max. temperature of 80 °C. Switching: up „ON"/down „OFF".	2004593	L	114.-
Float switch WA65 with 10 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 60 °C. Switching: up „ON"/down „OFF".	503211893	L	155.-
Flash light 1~230V	Optical alarm signal for connection to a switchgear. Suitable for outside installation.	2551613	L	140.-
Signal horn 1~230V	Acoustic alarm signal (88 dBA) for connection to a switchgear. Suitable for outside installation.	501459398	L	84.-

You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.



Accessories **Page**
Commissioning/maintenance 683

Wilo-DrainLift WS 40-50



Construction

Pump chamber made of plastic as concealed pumping station or floor-mounted lifting unit

Application

Pumping of sewage containing faeces or pre-cleaned sewage that cannot be returned to the sewer system using natural falls, and for the draining of objects that are below the backflow level.

Scope of delivery

- Tank (for single or twin-head pump system)
- Built-in stainless steel pipework
- Gate valve in red bronze
- Surface coupling made of corrosion-free plastic (PUR) with built-in non-return valve
- Cover with seal (can be walked on, supporting a weight up to 200 kg)

Your advantages

- Pressure-tight pump chamber for subterranean and aboveground installation
- Flexible due to free selection of inlets
- Large tank volume
- Surface coupling made of corrosion-resistant PUR

- Hole saw \varnothing 124 mm, inlet seal DN 100 (for pipe \varnothing 110 mm)
- 1 PVC hose section \varnothing 50 mm with clamps for connection of a diaphragm hand pump
- Fixation material for floor fixation
- Installation and operating instructions

Notice! Pump is not included in the scope of delivery!

Notice


Note! Pump is not included in the scope of delivery!

Price group: PG8


Ordering information					
Type	Volume	For Wilo pumps	Art. no.		EUR
	V I				
DrainLift WS 40D	400	Rexa CUT GI03.26/GI03.29/GE03.20/GE03.25	2525165	L	2,926.-
DrainLift WS 40E	255	Rexa CUT GI03.26/GI03.29/GE03.20/GE03.25	2525164	L	1,782.-
DrainLift WS 50D	400	Rexa UNI V05 (max. 1,5 kW), Rexa UNI V06 (max. 1,5 kW)	2525161	L	2,874.-
DrainLift WS 50E	255	Rexa UNI V05 (max. 1,5 kW), Rexa UNI V06 (max. 1,5 kW)	2525160	L	1,737.-

= ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG14

Mechanical accessories				
Type	Description	Art. no.		
				EUR
Pump chamber extension WS 40/50	Made of PE, Ø 500 x 300, for pump chambers WS40/50, including gasket and installation accessories (note: only one pump chamber possible per pump chamber extension).	2525190	L	132.-
Flange connector DN 100	Made of PUR, with hose, hose clips and installation accessories	2511597	L	197.-
Inlet seal set DN 100	Gasket made of NBR, hose clip and hole saw	2521841	L	129.-
Flange connector DN 150	Made of PUR, with hose, hose clips and installation accessories	2511598	L	219.-
Inlet seal set DN 150	Gasket made of NBR, hose clip and hole saw	2515145	L	159.-
Gate valve Rp 1½, G-CuSn10	made of red brass, with female thread	2525187	L	64.-
Gate valve Rp 2, G-CuSn10	made of red brass, with female thread	2525188	L	91.-
Clamp bolting 1½"/50 mm	Made of PE, with female thread (IG), for connecting to a PE pressure pipe	2505044	L	36.-
Clamp bolting 1½"/63 mm	Made of PE, with female thread (IG), for connecting to a PE pressure pipe	2505045	L	42.-
Clamp bolting 2"/63 mm	Made of PE, with female thread (IG), for connecting to a PE pressure pipe	2505046	L	46.-
Clamp bolting 2"/75 mm	Made of PE, with female thread (IG), for connecting to a PE pressure pipe	2525181	C	115.-
Diaphragm hand pump	Double-sided connection, female thread Rp 1½	2060166	L	307.-

Price group: PG14

Electrical accessories – level control with dynamic pressure system				
Level measurement via an open dynamic pressure system with the option of a separate dynamic pressure bell for the high water level.				
Type	Description	Art. no.		
				EUR
EC-L-1x12A-DOL-MT34-WM-EMS-IPS	Microcontroller-controlled switchgear with LC display, symbol-based menu navigation and integrated pressure transducer for level-dependent control of a submersible pump by means of float switches, level sensor or immersion bell. WITHOUT main switch, mains isolator must be provided on-site! Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543212	L	892.-
EC-L-2x12A-DOL-MT34-WM-EMS-IPS	Microcontroller-controlled switchgear with LC display, symbol-based menu navigation and integrated pressure transducer for level-dependent control of two submersible pumps by means of float switches, level sensor or immersion bell. WITHOUT main switch, mains isolator must be provided on-site! Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543222	L	1,372.-
Dynamic pressure bell with 10 m hose	Pneumatic signal transmitter for media containing faeces with a max. temperature of 60 °C. The signal transmitter is open in direction of the fluid and must be ventilated after each pumping out (OFF depending on time).	2516976	L	88.-
Bubbling-through system	Small compressor for constant aeration of the dynamic pressure bell, including non-return valve, 3 m hose and T-connector.	2516977	L	216.-
Flash light 24 VDC	Xenon flashing light for wall mounting for indoor and outdoor installation. Luminous color: red, flash frequency: 0,75 Hz	2551612	A	☎
Flash light 1~230 VAC	Xenon flashing light for wall mounting for indoor and outdoor installation. Luminous color: red, flash frequency: 0,75 Hz	2551613	L	140.-
Signal horn 12~24 VDC	Horn with a bell mouth for wall mounting for indoor and outdoor use. Alarm signal by electromechanical sound generation with steel diaphragm (92 dBA).	2017208	A	☎
Signal horn 1~230 V	Horn with a bell mouth for wall mounting for indoor and outdoor use. Alarm signal by electromechanical sound generation with steel diaphragm (88 dBA).	501459398	L	84.-
NiMH rechargeable battery, 9 V/200 mAh	Rechargeable battery to be installed in the switchgears Wilo-control MS-L and EC-L for a mains-independent alarm	2522850	L	25.-

You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Electrical accessories – level control with float switch

Level measurement using several float switches for the different water levels, including high water alarm signal. The breakdown barrier and the Ex cutoff relays are not required except for the connection of signal transmitters in potentially explosive areas! These can also be dispensed with when the SC-L...-Ex switchgear is used!

Type	Description	Art. no.		EUR
EC-L-1x12A-DOL-MT34-WM	Microcontroller-controlled switchgear with LC display and symbol-based menu navigation for level-dependent control of a submersible pump by means of float switches or level sensor. Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543210	L	914.-
EC-L-1x12A-DOL-MT34-WM-EMS	Microcontroller-controlled switchgear with LC display and symbol-based menu navigation for level-dependent control of a submersible pump by means of float switches or level sensor. WITHOUT main switch, mains isolator must be provided on-site! Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543211	L	832.-
EC-L-2x12A-DOL-MT34-WM	Microcontroller-controlled switchgear with LC display and symbol-based menu navigation for level-dependent control of submersible pumps by means of float switches or level sensor. Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543220	L	1,444.-
EC-L-2x12A-DOL-MT34-WM-EMS	Microcontroller-controlled switchgear with LC display and symbol-based menu navigation for level-dependent control of submersible pumps by means of float switches or level sensor. WITH-OUT main switch, mains isolator must be provided on-site! Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543221	L	1,269.-
Float switch MS1 with 10 m cable	Signal transmitters for aggressive fluids and fluids containing faeces up to a max. temperature of 80 °C. Switching: up „ON“/down „OFF“.	2004593	L	114.-
Float switch WA65 with 5 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 60 °C. Switching: up „ON“/down „OFF“.	503211390	L	82.-
Float switch WA65 with 10 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 60 °C. Switching: up „ON“/down „OFF“.	503211893	L	155.-
Float switch WA65 with 20 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 60 °C. Switching: up „ON“/down „OFF“.	2004431	L	231.-
Float switch WA65 with 30 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 60 °C. Switching: up „ON“/down „OFF“.	2004432	L	314.-
Ex cut-off relay (2-circuit)	Ex cut-off relay for the connection of 2 float switches for level control in explosive atmospheres.	2513059	L	721.-
Ex cut-off relay (3-circuit)	Ex cut-off relay for the connection of 3 float switches for level control in explosive atmospheres.	2510698	K	909.-
Ex cut-off relay (4-circuit)	Ex cut-off relay for the connection of 4 float switches for level control in explosive atmospheres.	2510699	K	853.-
Ex cut-off relay (5-circuit)	Ex cut-off relay for the connection of 5 float switches for level control in explosive atmospheres.	2510674	K	1,153.-
NiMh rechargeable battery, 9 V/200 mAh	Rechargeable battery to be installed in the switchgears Wilo-control MS-L and EC-L for a mains-independent alarm	2522850	L	25.-
Flash light 24 VDC	Xenon flashing light for wall mounting for indoor and outdoor installation. Luminous color: red, flash frequency: 0,75 Hz	2551612	A	☞
Flash light 1~230 VAC	Xenon flashing light for wall mounting for indoor and outdoor installation. Luminous color: red, flash frequency: 0,75 Hz	2551613	L	140.-
Signal horn 12-24 VDC	Horn with a bell mouth for wall mounting for indoor and outdoor use. Alarm signal by electromechanical sound generation with steel diaphragm (92 dBA).	2017208	A	☞
Signal horn 1~230 V	Horn with a bell mouth for wall mounting for indoor and outdoor use. Alarm signal by electromechanical sound generation with steel diaphragm (88 dBA).	501459398	L	84.-

You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☞ = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG14

Electrical accessories – level control with level sensor

Level measurement using a level sensor with various measurement ranges, including high water alarm and dry-running protection. The breakdown barrier and the Ex cut-off relays are not required except for the connection of signal transmitters in potentially explosive areas! These can also be dispensed with when the SC-L...-Ex switchgear is used!

Type	Description	Art. no.		EUR
EC-L-1x12A-DOL-MT34-WM	Microcontroller-controlled switchgear with LC display and symbol-based menu navigation for level-dependent control of a submersible pump by means of float switches or level sensor. Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543210	L	914.-
EC-L-1x12A-DOL-MT34-WM-EMS	Microcontroller-controlled switchgear with LC display and symbol-based menu navigation for level-dependent control of a submersible pump by means of float switches or level sensor. WITHOUT main switch, mains isolator must be provided on-site! Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543211	L	832.-
EC-L-2x12A-DOL-MT34-WM	Microcontroller-controlled switchgear with LC display and symbol-based menu navigation for level-dependent control of submersible pumps by means of float switches or level sensor. Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543220	L	1,444.-
EC-L-2x12A-DOL-MT34-WM-EMS	Microcontroller-controlled switchgear with LC display and symbol-based menu navigation for level-dependent control of submersible pumps by means of float switches or level sensor. WITHOUT main switch, mains isolator must be provided on-site! Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543221	L	1,269.-
Level sensor 0-1 mWS, with 10 m cable	Signal transmitter with ATEX approval for fluids containing faeces with a maximum temperature of 60 °C. Output signal: 4...20 mA	2519924	L	442.-
Level sensor 0-1 mWS, with 30 m cable	Signal transmitter with ATEX approval for fluids containing faeces with a maximum temperature of 60 °C. Output signal: 4...20 mA	2519925	L	522.-
Level sensor 0-1 mWS, with 50 m cable	Signal transmitter with ATEX approval for fluids containing faeces with a maximum temperature of 60 °C. Output signal: 4...20 mA	2519926	L	632.-
Cable clamp	For fixation of a signal transmitter in the pump chamber. The clamp is fixed in the pump chamber with a hook; the cable of the signal transmitter is clamped and fixed via the intrinsic weight of the signal transmitter.	2519927	L	22.-
Zener barrier	Breakdown barrier (Zener barrier) for the connection of one level sensor in an explosive atmosphere.	2541372	L	277.-
NiMh rechargeable battery, 9 V/200 mAh	Rechargeable battery to be installed in the switchgears Wilo-control MS-L and EC-L for a mains-independent alarm	2522850	L	25.-
Flash light 24 VDC	Xenon flashing light for wall mounting for indoor and outdoor installation. Luminous color: red, flash frequency: 0,75 Hz	2551612	A	☞
Flash light 1~230 VAC	Xenon flashing light for wall mounting for indoor and outdoor installation. Luminous color: red, flash frequency: 0,75 Hz	2551613	L	140.-
Signal horn 12-24 VDC	Horn with a bell mouth for wall mounting for indoor and outdoor use. Alarm signal by electromechanical sound generation with steel diaphragm (92 dBA).	2017208	A	☞
Signal horn 1~230 V	Horn with a bell mouth for wall mounting for indoor and outdoor use. Alarm signal by electromechanical sound generation with steel diaphragm (88 dBA).	501459398	L	84.-

You can find more accessories at the end in the chapter Electric accessories!


Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☞ = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.


Electrical accessories – mains-independent alarm signal

Alarm signal for detection of flooding in rooms and buildings. The alarm signal is acoustic, optical or wireless. In addition, other consumers can be controlled directly.

Type	Description	Art. no.		EUR
AlarmControl 1	Network-independent alarm system with shockproof plug, acoustic alarm signal and attached mini float switch with 3 m cable for level measurement.	2522846	 L	138.-
AlarmControl 2	Network-independent alarm system with shock-proof adapter plug for the direct connection of a consumer, acoustic alarm signal and attached mini float switch with 3 m cable for level measurement.	2522847	L	171.-
DrainAlarm 2	Network-independent alarm switchgear with optical and acoustic alarm signal and with a connection for one float switch.	2545133	L	412.-
DrainAlarm GSM	Network-independent alarm switchgear with optical, acoustic and wireless (per GSM) alarm signal and with a connection for one float switch.	2542911	L	1,111.-
Float switch MS1 with 10 m cable	Signal transmitters for aggressive fluids and fluids containing faeces up to a max. temperature of 80 °C. Switching: up „ON“/down „OFF“.	2004593	L	114.-
Float switch WA65 with 10 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 60 °C. Switching: up „ON“/down „OFF“.	503211893	L	155.-
Flash light 1~230V	Optical alarm signal for connection to a switchgear. Suitable for outside installation.	2551613	L	140.-
Signal horn 1~230V	Acoustic alarm signal (88 dBA) for connection to a switchgear. Suitable for outside installation.	501459398	L	84.-

You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

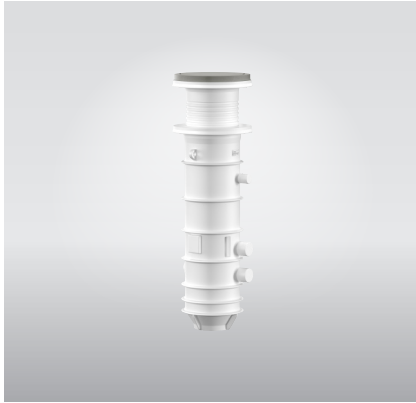

Wilo-Port 600



Construction

Plastic pump chamber for insertion into the ground

Application

Pumping of sewage containing faeces or pre-cleaned sewage that cannot be returned to the sewer system using natural falls, and for the draining of objects that are below the backflow level.

Scope of delivery

- Pump chamber with premounted pipework
- Surface coupling
- Non-return valve
- Gate valve
- Chain

Notice: Floor-installed TMW pumps without surface coupling.

Notice! Pump is not included in the scope of delivery!

Your advantages

- Can be driven over – even by heavy-duty vehicles – thanks to chamber covers that are directly mountable on the chamber
- Flexible adaptability during the installation phase due to a variable pump chamber extension up to 2.75 m
- Maximum operational reliability and protection against leakage via the one-piece chamber body up to 2.25 m
- Long service life thanks to the use of corrosion-free materials
- Simple maintenance with easily accessible valves thanks to the surface coupling
- Easy installation thanks to the light polyethylene chamber body and integrated inlet connecting pieces
- Anti-buoyant chamber body without additional weights due to circumferential chamber ribs.

Price group: PG8

Type	For Wilo pumps	Height without packaging	Art. no.		EUR
		H mm			
Port 600.1-1500-03B	Rexa CUT, Drain MTC 32F39, Drain MTC 40	1500	2543045	C	1,437.-
Port 600.1-1500-03E	Drain TMW 32	1500	2543048	C	871.-
Port 600.1-1500-04D	Drain TS 40, Drain TC 40, Drain STS 40	1500	2544150	C	1,294.-
Port 600.1-1800-03B	Rexa CUT, Drain MTC 32F39, Drain MTC 40	1800	2543046	C	1,573.-
Port 600.1-1800-03E	Drain TMW 32	1800	2543049	C	1,012.-
Port 600.1-1800-04D	Drain TS 40, Drain TC 40, Drain STS 40	1800	2544151	C	1,425.-

= ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG8

Type	For Wilo pumps	Height without packaging H mm	Art. no.		EUR
Port 600.1-2250-03B	Rexa CUT, Drain MTC 32F39, Drain MTC 40	2250	2543047	C	1,721.-
Port 600.1-2250-03E	Drain TMW 32	2250	2544148	C	1,166.-
Port 600.1-2250-04D	Drain TS 40, Drain TC 40, Drain STS 40	2250	2544152	C	1,573.-

Price group: PG8

Mechanical accessories					
Type	Description	Art. no.		EUR	
Pump chamber extension port 600/800	made of PE, for the extension of the shaft between 200 mm and 500 mm. Note: only one pump chamber extension is possible per pump chamber.	2543003	C	249.-	
Chamber cover port 600/800 class A15	according to EN 124 made of concrete. Incl. support ring, without ventilation.	2543021	L	99.-	
Chamber cover Port 600/800 class B125	according to EN 124 made of cast iron. Incl. support ring, without ventilation.	2543022	C	220.-	
Chamber cover Port 600/800 class D400	according to EN 124 for heavy traffic made of concrete. Incl. support ring, without ventilation. For the installation, a load plate must be provided by the customer!	2543023	C	356.-	
Inlet seal set DN 150	Gasket made of NBR, hose clip and hole saw	2515145	L	159.-	
Vacuum relief valve port 600/800	made of stainless steel to protect the discharge pipe line from underpressure. Caution: Can only be mounted together with „Flush connection Storz C“!	2543032	K	481.-	
Flush connection Storz C port 600/800	made of stainless steel for connection to a discharge pipe flushing station with Storz C-52 coupling. Incl. locked cover in Storz C version.	2543034	C	176.-	
Flush connection extension port 600/800	made of stainless steel for extension of the flush connection by 300 mm	2543035	C	105.-	
Operating key port 600/800	made of stainless steel for easier operation of the gate valve for deep pump chamber depths	2543006	L	35.-	
Clamp bolting 1¼"/40 mm	made of PE, with female thread (IG), for connecting to a PE pressure pipe	2543025	L	27.-	
Clamp bolting 1¼"/50 mm	made of PE, with female thread (IG), for connecting to a PE pressure pipe	2543026	L	31.-	
Clamp bolting 1¼"/63 mm	made of PE, with female thread (IG), for connecting to a PE pressure pipe	2543027	L	35.-	
Clamp bolting 1½"/50 mm	Made of PE, with female thread (IG), for connecting to a PE pressure pipe	2505044	L	36.-	
Clamp bolting 1½"/63 mm	Made of PE, with female thread (IG), for connecting to a PE pressure pipe	2505045	L	42.-	

Price group: PG14

Electrical accessories – level control with dynamic pressure system					
Level measurement via an open dynamic pressure system with the option of a separate dynamic pressure bell for the high water level.					
Type	Description	Art. no.		EUR	
EC-L-1x12A-DOL-MT34-WM-EMS-IPS	Microcontroller-controlled switchgear with LC display, symbol-based menu navigation and integrated pressure transducer for level-dependent control of a submersible pump by means of float switches, level sensor or immersion bell. WITHOUT main switch, mains isolator must be provided on-site! Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543212	L	892.-	

You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.


☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG14

Electrical accessories – level control with dynamic pressure system

Level measurement via an open dynamic pressure system with the option of a separate dynamic pressure bell for the high water level.

Type	Description	Art. no.		EUR
				
Dynamic pressure bell with 10 m hose	Pneumatic signal transmitter for media containing faeces with a max. temperature of 60 °C. The signal transmitter is open in direction of the fluid and must be ventilated after each pumping out (OFF depending on time).	2516976	L	88.-
Bubbling-through system	Small compressor for constant aeration of the dynamic pressure bell, including non-return valve, 3 m hose and T-connector.	2516977	L	216.-
Flash light 1~230V	Optical alarm signal for connection to a switchgear. Suitable for outside installation.	2551613	L	140.-
Signal horn 1~230V	Acoustic alarm signal (88 dBA) for connection to a switchgear. Suitable for outside installation.	501459398	L	84.-
NiMh rechargeable battery, 9 V/200 mAh	Rechargeable battery to be installed in the switchgears Wilo-control MS-L and EC-L for a mains-independent alarm	2522850	L	25.-


You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

Price group: PG14

Electrical accessories – level control with float switch

Level measurement using several float switches for the different water levels, including high water alarm signal. The breakdown barrier and the Ex cutoff relays are not required except for the connection of signal transmitters in potentially explosive areas! These can also be dispensed with when the SC-L...-Ex switchgear is used!

Type	Description	Art. no.		EUR
				
EC-L-1x12A-DOL-MT34-WM	Microcontroller-controlled switchgear with LC display and symbol-based menu navigation for level-dependent control of a submersible pump by means of float switches or level sensor. Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543210	L	914.-
Float switch MS1 with 10 m cable	Signal transmitters for aggressive fluids and fluids containing faeces up to a max. temperature of 80 °C. Switching: up „ON"/down „OFF".	2004593	L	114.-
Float switch WA65 with 5 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 60 °C. Switching: up „ON"/down „OFF".	503211390	L	82.-
Float switch WA65 with 10 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 60 °C. Switching: up „ON"/down „OFF".	503211893	L	155.-
Float switch WA65 with 20 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 60 °C. Switching: up „ON"/down „OFF".	2004431	L	231.-
Float switch WA65 with 30 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 60 °C. Switching: up „ON"/down „OFF".	2004432	L	314.-
Ex cut-off relay (2-circuit)	Ex cut-off relay for the connection of 2 float switches for level control in explosive atmospheres.	2513059	L	721.-
Ex cut-off relay (3-circuit)	Ex cut-off relay for the connection of 3 float switches for level control in explosive atmospheres.	2510698	K	909.-
Ex cut-off relay (4-circuit)	Ex cut-off relay for the connection of 4 float switches for level control in explosive atmospheres.	2510699	K	853.-
Ex cut-off relay (5-circuit)	Ex cut-off relay for the connection of 5 float switches for level control in explosive atmospheres.	2510674	K	1,153.-
Flash light 1~230 VAC	Xenon flashing light for wall mounting for indoor and outdoor installation. Luminous color: red, flash frequency: 0,75 Hz	2551613	L	140.-
Signal horn 1~230 V	Horn with a bell mouth for wall mounting for indoor and outdoor use. Alarm signal by electromechanical sound generation with steel diaphragm (88 dBA).	501459398	L	84.-
NiMh rechargeable battery, 9 V/200 mAh	Rechargeable battery to be installed in the switchgears Wilo-control MS-L and EC-L for a mains-independent alarm	2522850	L	25.-

You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.


 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG14

Electrical accessories – level control with level sensor

Level measurement using a level sensor with various measurement ranges, including high water alarm and dry-running protection. The breakdown barrier and the Ex cut-off relays are not required except for the connection of signal transmitters in potentially explosive areas! These can also be dispensed with when the SC-L...-Ex switchgear is used!

Type	Description	Art. no.		EUR
				
EC-L-1x12A-DOL-MT34-WM	Microcontroller-controlled switchgear with LC display and symbol-based menu navigation for level-dependent control of a submersible pump by means of float switches or level sensor. Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543210	L	914.-
Level sensor 0-1 mWS, with 10 m cable	Signal transmitter with ATEX approval for fluids containing faeces with a maximum temperature of 60 °C. Output signal: 4...20 mA	2519924	L	442.-
Level sensor 0-1 mWS, with 30 m cable	Signal transmitter with ATEX approval for fluids containing faeces with a maximum temperature of 60 °C. Output signal: 4...20 mA	2519925	L	522.-
Level sensor 0-1 mWS, with 50 m cable	Signal transmitter with ATEX approval for fluids containing faeces with a maximum temperature of 60 °C. Output signal: 4...20 mA	2519926	L	632.-
Flash light 1~230V	Optical alarm signal for connection to a switchgear. Suitable for outside installation.	2551613	L	140.-
Signal horn 1~230V	Acoustic alarm signal (88 dBA) for connection to a switchgear. Suitable for outside installation.	501459398	L	84.-
Cable clamp	For fixation of a signal transmitter in the pump chamber. The clamp is fixed in the pump chamber with a hook; the cable of the signal transmitter is clamped and fixed via the intrinsic weight of the signal transmitter.	2519927	L	22.-
Zener barrier	Breakdown barrier (Zener barrier) for the connection of one level sensor in an explosive atmosphere.	2541372	L	277.-
NiMh rechargeable battery, 9 V/200 mAh	Rechargeable battery to be installed in the switchgears Wilo-control MS-L and EC-L for a mains-independent alarm	2522850	L	25.-


You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

Price group: PG14

Electrical accessories – mains-independent alarm signal

Alarm signal for detection of flooding in rooms and buildings. The alarm signal is acoustic, optical or wireless. In addition, other consumers can be controlled directly.

Type	Description	Art. no.		EUR
				
DrainAlarm 2	Network-independent alarm switchgear with optical and acoustic alarm signal and with a connection for one float switch.	2545133	L	412.-
DrainAlarm GSM	Network-independent alarm switchgear with optical, acoustic and wireless (per GSM) alarm signal and with a connection for one float switch.	2542911	L	1,111.-
Float switch MS1 with 10 m cable	Signal transmitters for aggressive fluids and fluids containing faeces up to a max. temperature of 80 °C. Switching: up „ON“/down „OFF“.	2004593	L	114.-
Float switch WA65 with 10 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 60 °C. Switching: up „ON“/down „OFF“.	503211893	L	155.-
Flash light 1~230V	Optical alarm signal for connection to a switchgear. Suitable for outside installation.	2551613	L	140.-
Signal horn 1~230V	Acoustic alarm signal (88 dBA) for connection to a switchgear. Suitable for outside installation.	501459398	L	84.-

You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.



Wilo-Port 800



Construction

Plastic pump chamber for insertion into the ground

Application

Pumping of sewage containing faeces that cannot be returned to the sewer system using natural falls, and for the draining of objects that are below the backflow level.

Scope of delivery

- Pump chamber with premounted pipework
- Surface coupling
- Non-return valve
- Gate valve
- Chain

Notice! Pump is not included in the scope of delivery!

Your advantages

- Can be driven over – even by heavy-duty vehicles – thanks to chamber covers that are directly mountable on the chamber
- Flexible adaptability during the installation phase due to a variable pump chamber extension up to 2.75 m
- Maximum operational reliability and protection against leakage via the one-piece chamber body up to 2.25 m
- Long service life thanks to the use of corrosion-free materials
- Simple maintenance with easily accessible valves thanks to the surface coupling
- Easy installation thanks to the light polyethylene chamber body and integrated inlet connecting pieces
- Anti-buoyant chamber body without additional weights due to circumferential chamber ribs.


Price group: PG8

Type	For Wilo pumps	Height without packaging	Art. no.		EUR
		H mm			
Port 800.1-1750-03B	Rexa CUT, Drain MTC 32F39, Drain MTC 40	1750	2543011	C	1,812.-
Port 800.1-1750-03C	Drain MTC 32F39, Drain MTC 32F55	1750	2543012	C	1,815.-
Port 800.1-2250-03B	Rexa CUT, Drain MTC 32F39, Drain MTC 40	2250	2543014	C	1,973.-
Port 800.1-2250-03C	Drain MTC 32F39, Drain MTC 32F55	2250	2543015	C	1,976.-
Port 800.2-1750-03B	Rexa CUT, Drain MTC 32F39, Drain MTC 40	1750	2544205	C	2,581.-
Port 800.2-2250-03B	Rexa CUT, Drain MTC 32F39, Drain MTC 40	2250	2544206	C	2,744.-


= ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG8

Mechanical accessories				
Type	Description	Art. no.		
				EUR
Pump chamber extension port 600/800	made of PE, for the extension of the shaft between 200 mm and 500 mm. Note: only one pump chamber extension is possible per pump chamber.	2543003	C	249.-
Chamber cover port 600/800 class A15	according to EN 124 made of concrete. Incl. support ring, without ventilation.	2543021	L	99.-
Chamber cover Port 600/800 class B125	according to EN 124 made of cast iron. Incl. support ring, without ventilation.	2543022	C	220.-
Chamber cover Port 600/800 class D400	according to EN 124 for heavy traffic made of concrete. Incl. support ring, without ventilation. For the installation, a load plate must be provided by the customer!	2543023	C	356.-
Inlet seal set DN 150	Gasket made of NBR, hose clip and hole saw	2515145	L	159.-
Vacuum relief valve port 600/800	made of stainless steel to protect the discharge pipe line from underpressure. Caution: Can only be mounted together with „Flush connection Storz C“!	2543032	K	481.-
Flush connection Storz C port 600/800	made of stainless steel for connection to a discharge pipe flushing station with Storz C-52 coupling. Incl. locked cover in Storz C version.	2543034	C	176.-
Flush connection extension port 600/800	made of stainless steel for extension of the flush connection by 300 mm	2543035	C	105.-
Operating key port 600/800	made of stainless steel for easier operation of the gate valve for deep pump chamber depths	2543006	L	35.-
Clamp bolting 1¼"/40 mm	made of PE, with female thread (IG), for connecting to a PE pressure pipe	2543025	L	27.-
Clamp bolting 1¼"/50 mm	made of PE, with female thread (IG), for connecting to a PE pressure pipe	2543026	L	31.-
Clamp bolting 1¼"/63 mm	made of PE, with female thread (IG), for connecting to a PE pressure pipe	2543027	L	35.-

Price group: PG14

Electrical accessories – level control with dynamic pressure system				
Level measurement via an open dynamic pressure system with the option of a separate dynamic pressure bell for the high water level.				
Type	Description	Art. no.		
				EUR
EC-L-1x12A-DOL-MT34-WM-EMS-IPS	Microcontroller-controlled switchgear with LC display, symbol-based menu navigation and integrated pressure transducer for level-dependent control of a submersible pump by means of float switches, level sensor or immersion bell. WITHOUT main switch, mains isolator must be provided on-site! Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543212	L	892.-
EC-L-2x12A-DOL-MT34-WM-EMS-IPS	Microcontroller-controlled switchgear with LC display, symbol-based menu navigation and integrated pressure transducer for level-dependent control of two submersible pumps by means of float switches, level sensor or immersion bell. WITHOUT main switch, mains isolator must be provided on-site! Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543222	L	1,372.-
Dynamic pressure bell with 10 m hose	Pneumatic signal transmitter for media containing faeces with a max. temperature of 60 °C. The signal transmitter is open in direction of the fluid and must be ventilated after each pumping out (OFF depending on time).	2516976	L	88.-
Bubbling-through system	Small compressor for constant aeration of the dynamic pressure bell, including non-return valve, 3 m hose and T-connector.	2516977	L	216.-
Flash light 1~230V	Optical alarm signal for connection to a switchgear. Suitable for outside installation.	2551613	L	140.-
Signal horn 1~230V	Acoustic alarm signal (88 dBA) for connection to a switchgear. Suitable for outside installation.	501459398	L	84.-

You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG14

Electrical accessories – level control with dynamic pressure system

Level measurement via an open dynamic pressure system with the option of a separate dynamic pressure bell for the high water level.

Type	Description	Art. no.		EUR
NiMh rechargeable battery, 9 V/200 mAh	Rechargeable battery to be installed in the switchgears Wilo-control MS-L and EC-L for a mains-independent alarm	2522850	L	25.-

You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

Price group: PG14

Electrical accessories – level control with float switch

Level measurement using several float switches for the different water levels, including high water alarm signal. The breakdown barrier and the Ex cutoff relays are not required except for the connection of signal transmitters in potentially explosive areas! These can also be dispensed with when the SC-L...-Ex switchgear is used!

Type	Description	Art. no.		EUR
EC-L-1x12A-DOL-MT34-WM	Microcontroller-controlled switchgear with LC display and symbol-based menu navigation for level-dependent control of a submersible pump by means of float switches or level sensor. Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543210	L	914.-
EC-L-2x12A-DOL-MT34-WM	Microcontroller-controlled switchgear with LC display and symbol-based menu navigation for level-dependent control of submersible pumps by means of float switches or level sensor. Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543220	L	1,444.-
Float switch MS1 with 10 m cable	Signal transmitters for aggressive fluids and fluids containing faeces up to a max. temperature of 80 °C. Switching: up „ON"/down „OFF".	2004593	L	114.-
Float switch WA65 with 5 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 60 °C. Switching: up „ON"/down „OFF".	503211390	L	82.-
Float switch WA65 with 10 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 60 °C. Switching: up „ON"/down „OFF".	503211893	L	155.-
Float switch WA65 with 20 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 60 °C. Switching: up „ON"/down „OFF".	2004431	L	231.-
Float switch WA65 with 30 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 60 °C. Switching: up „ON"/down „OFF".	2004432	L	314.-
Ex cut-off relay (2-circuit)	Ex cut-off relay for the connection of 2 float switches for level control in explosive atmospheres.	2513059	L	721.-
Ex cut-off relay (3-circuit)	Ex cut-off relay for the connection of 3 float switches for level control in explosive atmospheres.	2510698	K	909.-
Ex cut-off relay (4-circuit)	Ex cut-off relay for the connection of 4 float switches for level control in explosive atmospheres.	2510699	K	853.-
Ex cut-off relay (5-circuit)	Ex cut-off relay for the connection of 5 float switches for level control in explosive atmospheres.	2510674	K	1,153.-
Flash light 1~230V	Optical alarm signal for connection to a switchgear. Suitable for outside installation.	2551613	L	140.-
Signal horn 1~230V	Acoustic alarm signal (88 dBA) for connection to a switchgear. Suitable for outside installation.	501459398	L	84.-
NiMh rechargeable battery, 9 V/200 mAh	Rechargeable battery to be installed in the switchgears Wilo-control MS-L and EC-L for a mains-independent alarm	2522850	L	25.-

You can find more accessories at the end in the chapter Electric accessories!


Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Electrical accessories – level control with level sensor

Level measurement using a level sensor with various measurement ranges, including high water alarm and dry-running protection. The breakdown barrier and the Ex cut-off relays are not required except for the connection of signal transmitters in potentially explosive areas! These can also be dispensed with when the SC-L...-Ex switchgear is used!


Type	Description	Art. no.		EUR
				
EC-L-1x12A-DOL-MT34-WM	Microcontroller-controlled switchgear with LC display and symbol-based menu navigation for level-dependent control of a submersible pump by means of float switches or level sensor. Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543210	L	914.-
EC-L-2x12A-DOL-MT34-WM	Microcontroller-controlled switchgear with LC display and symbol-based menu navigation for level-dependent control of submersible pumps by means of float switches or level sensor. Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543220	L	1,444.-
Level sensor 0-1 mWS, with 10 m cable	Signal transmitter with ATEX approval for fluids containing faeces with a maximum temperature of 60 °C. Output signal: 4...20 mA	2519924	L	442.-
Level sensor 0-1 mWS, with 30 m cable	Signal transmitter with ATEX approval for fluids containing faeces with a maximum temperature of 60 °C. Output signal: 4...20 mA	2519925	L	522.-
Level sensor 0-1 mWS, with 50 m cable	Signal transmitter with ATEX approval for fluids containing faeces with a maximum temperature of 60 °C. Output signal: 4...20 mA	2519926	L	632.-
Flash light 1~230V	Optical alarm signal for connection to a switchgear. Suitable for outside installation.	2551613	L	140.-
Signal horn 1~230V	Acoustic alarm signal (88 dBA) for connection to a switchgear. Suitable for outside installation.	501459398	L	84.-
Cable clamp	For fixation of a signal transmitter in the pump chamber. The clamp is fixed in the pump chamber with a hook; the cable of the signal transmitter is clamped and fixed via the intrinsic weight of the signal transmitter.	2519927	L	22.-
Zener barrier	Breakdown barrier (Zener barrier) for the connection of one level sensor in an explosive atmosphere.	2541372	L	277.-
NiMh rechargeable battery, 9 V/200 mAh	Rechargeable battery to be installed in the switchgears Wilo-control MS-L and EC-L for a mains-independent alarm	2522850	L	25.-

You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

Electrical accessories – mains-independent alarm signal

Alarm signal for detection of flooding in rooms and buildings. The alarm signal is acoustic, optical or wireless. In addition, other consumers can be controlled directly.

Type	Description	Art. no.		EUR
				
DrainAlarm 2	Network-independent alarm switchgear with optical and acoustic alarm signal and with a connection for one float switch.	2545133	L	412.-
DrainAlarm GSM	Network-independent alarm switchgear with optical, acoustic and wireless (per GSM) alarm signal and with a connection for one float switch.	2542911	L	1,111.-
Float switch MS1 with 10 m cable	Signal transmitters for aggressive fluids and fluids containing faeces up to a max. temperature of 80 °C. Switching: up „ON"/down „OFF".	2004593	L	114.-
Float switch WA65 with 10 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 60 °C. Switching: up „ON"/down „OFF".	503211893	L	155.-
Flash light 1~230V	Optical alarm signal for connection to a switchgear. Suitable for outside installation.	2551613	L	140.-
Signal horn 1~230V	Acoustic alarm signal (88 dBA) for connection to a switchgear. Suitable for outside installation.	501459398	L	84.-

You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.



Accessories	Page
Commissioning/maintenance	683

Wilo-DrainLift WS 1100



Construction

Plastic pump chamber for insertion into the ground

Application

Pumping of sewage containing faeces or pre-cleaned sewage that cannot be returned to the sewer system using natural falls, and for the draining of objects that are below the backflow level.

Scope of delivery

- Pump chamber with premounted pipework
- Surface coupling
- Non-return valve
- Gate valve
- Flush connection G 1½
- Stainless steel chain including fastening hook
- Supporting bar for level sensor or float switch including mounting accessories

Your advantages

- Deposit-free collecting space
- High stability due to hemispherical shape of the bottom of the pump chamber
- Four inlets can be selected on-site
- Stainless steel pipes in V4A

- Connection material for two DN 150 KG inlet pipes
- Chain
- Installation and operating instructions

For twin-head pump stations, double the number of valves (surface couplings, gate valves,...) are supplied.

Notice! Pump is not included in the scope of delivery!

Price group: PG8

Ordering information						
Type	For Wilo pumps	Height without packaging	Art. no.			
		H mm				
DrainLift WS 1100D/ MTC 32, CUT	Drain MTC 32, Rexa GUT GI	1820	2531442		K	3,397.-
DrainLift WS 1100D/ UNI V05, FIT V05, PRO V05	Rexa UNI V05, Rexa FIT V05, Rexa PRO V05	1820	2506441		K	3,913.-
DrainLift WS 1100D/ UNI V06, PRO V06	Rexa UNI V06, Rexa PRO V06	1820	2506442		K	4,511.-
DrainLift WS 1100E/ MTC 32, CUT	Drain MTC 32, Rexa GUT GI	1820	2531441		K	2,708.-
DrainLift WS 1100E/ TP 80, PRO V06	Drain TP 80, Rexa PRO V06	1820	2506434		K	4,687.-

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG8

Ordering information					
Type	For Wilo pumps	Height without packaging	Art. no.		
		H mm			EUR
DrainLift WS 1100E/ UNI V05, FIT V05, PRO V05	Rexa UNI V05, Rexa FIT V05, Rexa PRO V05	1820	2506432	K	3,103.-
DrainLift WS 1100E/ UNI V06, PRO V06	Rexa UNI V06, Rexa PRO V06	1820	2506433	K	3,547.-

Price group: PG14

Mechanical accessories					
Type	Description	Art. no.			
					EUR
Sump cover WS 900/1100 Standard	Made of PE, with 2 stainless steel locks, can be walked on	2506477		L	246.-
Sump cover WS 900/1100 flood- proof	Made of PE, with gasket and 6 stainless steel locks, can be walked on	2506478		L	492.-
Pump chamber ex- tension WS 900/1100	Made of PE, Ø 730 x 800, for WS900/1100 sumps, including gasket, installation accessories and supporting bar extension for level sensor (note: only one pump chamber possible per pump chamber extension).	2506431		C	481.-
Inlet seal set DN 150	Gasket made of NBR, hose clip and hole saw	2515145		L	159.-
Clamp bolting 1½"/50 mm	Made of PE, with female thread (IG), for connecting to a PE pressure pipe	2505044		L	36.-
Clamp bolting 1½"/63 mm	Made of PE, with female thread (IG), for connecting to a PE pressure pipe	2505045		L	42.-
Clamp bolting 2"/63 mm	Made of PE, with female thread (IG), for connecting to a PE pressure pipe	2505046		L	46.-

Price group: PG14

Electrical accessories – level control with dynamic pressure system					
Level measurement via an open dynamic pressure system with the option of a separate dynamic pressure bell for the high water level.					
Type	Description	Art. no.			
					EUR
EC-L-1x12A-DOL- MT34-WM-EMS-IPS	Microcontroller-controlled switchgear with LC display, symbol-based menu navigation and integrated pressure transducer for level-dependent control of a submersible pump by means of float switches, level sensor or immersion bell. WITHOUT main switch, mains isolator must be provided on-site! Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543212		L	892.-
EC-L-2x12A-DOL- MT34-WM-EMS-IPS	Microcontroller-controlled switchgear with LC display, symbol-based menu navigation and integrated pressure transducer for level-dependent control of two submersible pumps by means of float switches, level sensor or immersion bell. WITHOUT main switch, mains isolator must be provided on-site! Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543222		L	1,372.-
Dynamic pressure bell with 10 m hose	Pneumatic signal transmitter for media containing faeces with a max. temperature of 60 °C. The signal transmitter is open in direction of the fluid and must be ventilated after each pumping out (OFF depending on time).	2516976		L	88.-
Bubbling-through system	Small compressor for constant aeration of the dynamic pressure bell, including non-return valve, 3 m hose and T-connector.	2516977		L	216.-
Flash light 1~230V	Optical alarm signal for connection to a switchgear. Suitable for outside installation.	2551613		L	140.-

You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

= ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG14

Electrical accessories – level control with dynamic pressure system

Level measurement via an open dynamic pressure system with the option of a separate dynamic pressure bell for the high water level.

Type	Description	Art. no.		EUR
Signal horn 1~230V	Acoustic alarm signal (88 dBA) for connection to a switchgear. Suitable for outside installation.	501459398	L	84.-
NiMh rechargeable battery, 9 V/200 mAh	Rechargeable battery to be installed in the switchgears Wilo-control MS-L and EC-L for a mains-independent alarm	2522850	L	25.-

You can find more accessories at the end in the chapter Electric accessories!

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

Price group: PG14

Electrical accessories – level control with float switch

Level measurement using several float switches for the different water levels, including high water alarm signal. The breakdown barrier and the Ex cutoff relays are not required except for the connection of signal transmitters in potentially explosive areas! These can also be dispensed with when the SC-L...-Ex switchgear is used!

Type	Description	Art. no.		EUR
EC-L-1x12A-DOL-MT34-WM	Microcontroller-controlled switchgear with LC display and symbol-based menu navigation for level-dependent control of a submersible pump by means of float switches or level sensor. Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543210	L	914.-
EC-L-2x12A-DOL-MT34-WM	Microcontroller-controlled switchgear with LC display and symbol-based menu navigation for level-dependent control of submersible pumps by means of float switches or level sensor. Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543220	L	1,444.-
Float switch MS1 with 10 m cable	Signal transmitters for aggressive fluids and fluids containing faeces up to a max. temperature of 80 °C. Switching: up „ON“/down „OFF“.	2004593	L	114.-
Float switch WA65 with 5 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 60 °C. Switching: up „ON“/down „OFF“.	503211390	L	82.-
Float switch WA65 with 10 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 60 °C. Switching: up „ON“/down „OFF“.	503211893	L	155.-
Float switch WA65 with 20 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 60 °C. Switching: up „ON“/down „OFF“.	2004431	L	231.-
Float switch WA65 with 30 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 60 °C. Switching: up „ON“/down „OFF“.	2004432	L	314.-
Ex cut-off relay (2-circuit)	Ex cut-off relay for the connection of 2 float switches for level control in explosive atmospheres.	2513059	L	721.-
Ex cut-off relay (3-circuit)	Ex cut-off relay for the connection of 3 float switches for level control in explosive atmospheres.	2510698	K	909.-
Ex cut-off relay (4-circuit)	Ex cut-off relay for the connection of 4 float switches for level control in explosive atmospheres.	2510699	K	853.-
Ex cut-off relay (5-circuit)	Ex cut-off relay for the connection of 5 float switches for level control in explosive atmospheres.	2510674	K	1,153.-
Flash light 1~230V	Optical alarm signal for connection to a switchgear. Suitable for outside installation.	2551613	L	140.-
Signal horn 1~230V	Acoustic alarm signal (88 dBA) for connection to a switchgear. Suitable for outside installation.	501459398	L	84.-
NiMh rechargeable battery, 9 V/200 mAh	Rechargeable battery to be installed in the switchgears Wilo-control MS-L and EC-L for a mains-independent alarm	2522850	L	25.-

You can find more accessories at the end in the chapter Electric accessories!


Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

🚚 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, 📞 = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Electrical accessories – level control with level sensor

Level measurement using a level sensor with various measurement ranges, including high water alarm and dry-running protection. The breakdown barrier and the Ex cut-off relays are not required except for the connection of signal transmitters in potentially explosive areas! These can also be dispensed with when the SC-L...-Ex switchgear is used!


Type	Description	Art. no.		EUR
				
EC-L-1x12A-DOL-MT34-WM	Microcontroller-controlled switchgear with LC display and symbol-based menu navigation for level-dependent control of a submersible pump by means of float switches or level sensor. Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543210	L	914.-
EC-L-2x12A-DOL-MT34-WM	Microcontroller-controlled switchgear with LC display and symbol-based menu navigation for level-dependent control of submersible pumps by means of float switches or level sensor. Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543220	L	1,444.-
Level sensor 0-1 mWS, with 30 m cable	Signal transmitter with ATEX approval for fluids containing faeces with a maximum temperature of 60 °C. Output signal: 4...20 mA	2519925	L	522.-
Level sensor 0-1 mWS, with 50 m cable	Signal transmitter with ATEX approval for fluids containing faeces with a maximum temperature of 60 °C. Output signal: 4...20 mA	2519926	L	632.-
Flash light 1~230V	Optical alarm signal for connection to a switchgear. Suitable for outside installation.	2551613	L	140.-
Signal horn 1~230V	Acoustic alarm signal (88 dBA) for connection to a switchgear. Suitable for outside installation.	501459398	L	84.-
Cable clamp	For fixation of a signal transmitter in the pump chamber. The clamp is fixed in the pump chamber with a hook; the cable of the signal transmitter is clamped and fixed via the intrinsic weight of the signal transmitter.	2519927	L	22.-
Zener barrier	Breakdown barrier (Zener barrier) for the connection of one level sensor in an explosive atmosphere.	2541372	L	277.-
NiMH rechargeable battery, 9 V/200 mAh	Rechargeable battery to be installed in the switchgears Wilo-control MS-L and EC-L for a mains-independent alarm	2522850	L	25.-

You can find more accessories at the end in the chapter **Electric accessories!**

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.


Electrical accessories – mains-independent alarm signal



Alarm signal for detection of flooding in rooms and buildings. The alarm signal is acoustic, optical or wireless. In addition, other consumers can be controlled directly.

Type	Description	Art. no.		EUR
				
DrainAlarm 2	Network-independent alarm switchgear with optical and acoustic alarm signal and with a connection for one float switch.	2545133	L	412.-
DrainAlarm GSM	Network-independent alarm switchgear with optical, acoustic and wireless (per GSM) alarm signal and with a connection for one float switch.	2542911	L	1,111.-
Float switch MS1 with 10 m cable	Signal transmitters for aggressive fluids and fluids containing faeces up to a max. temperature of 80 °C. Switching: up „ON"/down „OFF".	2004593	L	114.-
Float switch WA65 with 10 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 60 °C. Switching: up „ON"/down „OFF".	503211893	L	155.-
Flash light 1~230V	Optical alarm signal for connection to a switchgear. Suitable for outside installation.	2551613	L	140.-
Signal horn 1~230V	Acoustic alarm signal (88 dBA) for connection to a switchgear. Suitable for outside installation.	501459398	L	84.-

You can find more accessories at the end in the chapter **Electric accessories!**

Attention: Switchgears are not protected against explosions and can be used only outside potentially explosive areas. If pumps are used within potentially explosive areas, onsite measures are required.

Electrical accessories – pump control					
Type	Description	Art. no.		Price group	
					EUR
MS-L-1x4kW-DOL	Microprocessor-controlled switchgear for level-dependent control of a submersible pump with float switch.	2539741	L	PG14	504.-
MS-L-2x4kW-DOL	Microprocessor-controlled switchgear for level-dependent control of 2 submersible pumps with float switch.	2539745	L	PG14	681.-
EC-L-1x12A-DOL-MT34-WM	Microcontroller-controlled switchgear with LC display and symbol-based menu navigation for level-dependent control of a submersible pump by means of float switches or level sensor. Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543210	L	PG14	914.-
EC-L-1x12A-DOL-MT34-WM-EMS	Microcontroller-controlled switchgear with LC display and symbol-based menu navigation for level-dependent control of a submersible pump by means of float switches or level sensor. WITHOUT main switch, mains isolator must be provided on-site! Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543211	L	PG14	832.-
EC-L-1x12A-DOL-MT34-WM-EMS-IPS	Microcontroller-controlled switchgear with LC display, symbol-based menu navigation and integrated pressure transducer for level-dependent control of a submersible pump by means of float switches, level sensor or immersion bell. WITHOUT main switch, mains isolator must be provided on-site! Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543212	L	PG14	892.-
EC-L-2x12A-DOL-MT34-WM	Microcontroller-controlled switchgear with LC display and symbol-based menu navigation for level-dependent control of submersible pumps by means of float switches or level sensor. Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543220	L	PG14	1,444.-
EC-L-2x12A-DOL-MT34-WM-EMS	Microcontroller-controlled switchgear with LC display and symbol-based menu navigation for level-dependent control of submersible pumps by means of float switches or level sensor. WITHOUT main switch, mains isolator must be provided on-site! Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543221	L	PG14	1,269.-
EC-L-2x12A-DOL-MT34-WM-EMS-IPS	Microcontroller-controlled switchgear with LC display, symbol-based menu navigation and integrated pressure transducer for level-dependent control of two submersible pumps by means of float switches, level sensor or immersion bell. WITHOUT main switch, mains isolator must be provided on-site! Notice! Printed installation and operating instructions have been enclosed with the product in the following languages: DE, EN, FR, PL, RU. All 28 language versions have been saved as PDF files on an enclosed USB pen drive. A notebook or tablet may be required for installing and commissioning.	2543222	L	PG14	1,372.-
SC-L-1x1,6A-M-DOL-WM	Microprocessor-controlled switchgear for level-dependent control of one submersible motor pump via level sensor or float switches.	2543265	C	PG14	2,039.-
SC-L-1x1,6A-T34-DOL-WM	Microprocessor-controlled switchgear for level-dependent control of one submersible motor pump via level sensor or float switches.	2543269	C	PG14	2,251.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.


Electrical accessories – pump control					
Type	Description	Art. no.	Price group		
					EUR
SC-L-1x6A-M-DOL-WM	Microprocessor-controlled switchgear for level-dependent control of one submersible motor pump via level sensor or float switches.	2538900	C	PG14	1,999.-
SC-L-1x9A-M-DOL-WM	Microprocessor-controlled switchgear for level-dependent control of one submersible motor pump via level sensor or float switches.	2538904	C	PG14	1,999.-
SC-L-1x12A-M-DOL-WM	Microprocessor-controlled switchgear for level-dependent control of one submersible motor pump via level sensor or float switches.	2538908	C	PG14	1,999.-
SC-L-1x2A-T34-DOL-WM	Microprocessor-controlled switchgear for level-dependent control of one submersible motor pump via level sensor or float switches.	2538912	C	PG14	2,206.-
SC-L-1x4A-T34-DOL-WM	Microprocessor-controlled switchgear for level-dependent control of one submersible motor pump via level sensor or float switches.	2538916	C	PG14	2,206.-
SC-L-1x6A-T34-DOL-WM	Microprocessor-controlled switchgear for level-dependent control of one submersible motor pump via level sensor or float switches.	2538920	C	PG14	2,206.-
SC-L-1x9A-T34-DOL-WM	Microprocessor-controlled switchgear for level-dependent control of one submersible motor pump via level sensor or float switches.	2538924	C	PG14	2,206.-
SC-L-1x12A-T34-DOL-WM	Microprocessor-controlled switchgear for level-dependent control of one submersible motor pump via level sensor or float switches.	2538928	C	PG14	2,235.-
SC-L-1x16A-T34-DOL-WM	Microprocessor-controlled switchgear for level-dependent control of one submersible motor pump via level sensor or float switches.	2538932	C	PG14	2,365.-
SC-L-1x20A-T34-DOL-WM	Microprocessor-controlled switchgear for level-dependent control of one submersible motor pump via level sensor or float switches.	2538936	C	PG14	2,731.-
SC-L-1x12A-T34-SD-WM	Microprocessor-controlled switchgear for level-dependent control of one submersible motor pump via level sensor or float switches.	2538948	C	PG14	2,611.-
SC-L-1x18A-T34-SD-WM	Microprocessor-controlled switchgear for level-dependent control of one submersible motor pump via level sensor or float switches.	2538952	C	PG14	2,633.-
SC-L-1x24A-T34-SD-WM	Microprocessor-controlled switchgear for level-dependent control of one submersible motor pump via level sensor or float switches.	2538956	C	PG14	3,178.-
SC-L-1x32A-T34-SD-WM	Microprocessor-controlled switchgear for level-dependent control of one submersible motor pump via level sensor or float switches.	2538960	C	PG14	3,672.-
SC-L-1x37,5A-T34-SD-WM	Microprocessor-controlled switchgear for level-dependent control of one submersible motor pump via level sensor or float switches.	2543277	K	PG14	3,833.-
SC-L-1x42A-T34-SD-WM	Microprocessor-controlled switchgear for level-dependent control of one submersible motor pump via level sensor or float switches.	2538964	C	PG14	3,842.-
SC-L-1x72A-T34-SD-WM	Microprocessor-controlled switchgear for level-dependent control of one submersible motor pump via level sensor or float switches.	2538972	C	PG14	5,122.-
SC-L-2x1,6A-M-DOL-WM	Microprocessor-controlled switchgear for level-dependent control of two submersible motor pumps via level sensor or float switches.	2543266	C	PG14	2,343.-
SC-L-2x1,6A-T34-DOL-WM	Microprocessor-controlled switchgear for level-dependent control of two submersible motor pumps via level sensor or float switches.	2543270	C	PG14	2,591.-
SC-L-2x6A-M-DOL-WM	Microprocessor-controlled switchgear for level-dependent control of two submersible motor pumps via level sensor or float switches.	2538901	C	PG14	2,297.-
SC-L-2x9A-M-DOL-WM	Microprocessor-controlled switchgear for level-dependent control of two submersible motor pumps via level sensor or float switches.	2538905	C	PG14	2,297.-
SC-L-2x12A-M-DOL-WM	Microprocessor-controlled switchgear for level-dependent control of two submersible motor pumps via level sensor or float switches.	2538909	C	PG14	2,297.-
SC-L-2x2A-T34-DOL-WM	Microprocessor-controlled switchgear for level-dependent control of two submersible motor pumps via level sensor or float switches.	2538913	C	PG14	2,540.-
SC-L-2x4A-T34-DOL-WM	Microprocessor-controlled switchgear for level-dependent control of two submersible motor pumps via level sensor or float switches.	2538917	C	PG14	2,540.-
SC-L-2x6A-T34-DOL-WM	Microprocessor-controlled switchgear for level-dependent control of two submersible motor pumps via level sensor or float switches.	2538921	C	PG14	2,540.-
SC-L-2x9A-T34-DOL-WM	Microprocessor-controlled switchgear for level-dependent control of two submersible motor pumps via level sensor or float switches.	2538925	C	PG14	2,540.-
SC-L-2x12A-T34-DOL-WM	Microprocessor-controlled switchgear for level-dependent control of two submersible motor pumps via level sensor or float switches.	2538929	C	PG14	2,595.-


☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.



Electrical accessories – pump control					
Type	Description	Art. no.	Price group		
					EUR
SC-L-2x16A-T34-DOL-WM	Microprocessor-controlled switchgear for level-dependent control of two submersible motor pumps via level sensor or float switches.	2538933	C	PG14	2,972.-
SC-L-2x20A-T34-DOL-WM	Microprocessor-controlled switchgear for level-dependent control of two submersible motor pumps via level sensor or float switches.	2538937	C	PG14	3,043.-
SC-L-2x12A-T34-SD-WM	Microprocessor-controlled switchgear for level-dependent control of two submersible motor pumps via level sensor or float switches.	2538949	K	PG14	3,343.-
SC-L-2x18A-T34-SD-WM	Microprocessor-controlled switchgear for level-dependent control of two submersible motor pumps via level sensor or float switches.	2538953	C	PG14	3,422.-
SC-L-2x24A-T34-SD-WM	Microprocessor-controlled switchgear for level-dependent control of two submersible motor pumps via level sensor or float switches.	2538957	C	PG14	3,713.-
SC-L-2x32A-T34-SD-WM	Microprocessor-controlled switchgear for level-dependent control of two submersible motor pumps via level sensor or float switches.	2538961	C	PG14	4,319.-
SC-L-2x37,5A-T34-SD-WM	Microprocessor-controlled switchgear for level-dependent control of two submersible motor pumps via level sensor or float switches.	2543278	K	PG14	4,515.-
SC-L-2x42A-T34-SD-WM	Microprocessor-controlled switchgear for level-dependent control of two submersible motor pumps via level sensor or float switches.	2538965	C	PG14	4,532.-
SC-L-2x55A-T34-SD-WM	Microprocessor-controlled switchgear for level-dependent control of two submersible motor pumps via level sensor or float switches.	2538969	C	PG14	5,236.-
SC-L-2x72A-T34-SD-WM	Microprocessor-controlled switchgear for level-dependent control of two submersible motor pumps via level sensor or float switches.	2538973	C	PG14	6,421.-

Electrical accessories – pump control					
Type	Description	Art. no.	Price group		
					EUR
Evaluation relay NIV 101/A	Evaluation relay for the connection of one pencil electrode for sealing chamber control. Additional connection for bimetal or PTC sensor for winding temperature monitoring. For installation in switch cabinet	6045175	L	PG14	152.-
Evaluation relay NIV 105/S	Evaluation relay for the connection of 3 electrodes or 2 float switches for level control. For installation in switch cabinet	6003270	L	PG14	185.-
Phase asymmetry relay PS2DF	Relay for monitoring the power supply for phase failure, phase asymmetry and undervoltage. For installation in switch cabinet	6003283	A	PG14	☺
Evaluation relay DGW 2.01	Evaluation relay for the connection of one PT100 sensor for temperature monitoring and control.	6002962	L	PG14	509.-
Evaluation relay SK 545	Evaluation relay to connect the moisture probe for motor chamber monitoring and winding temperature monitoring with bimetallic strip (Wilo-Drain TP 80, TP 100 only). For installation in switch cabinet	2015577	A	PG14	326.-
Communication module ModBus RTU (SC)	For connection of Wilo-Control SC series with Modbus RTU networks.	2538241	L	PG14	473.-
Communication module BACnet (SC)	For connection of Wilo-Control SC series with BACnet MSTP networks.	2538242	L	PG14	503.-
Communication module LON (SC)	For connection of Wilo-Control SC series with Modbus LON networks.	2538243	K	PG14	489.-
Communication module GSM (SC)	Additional module for equipping the switchgear series SC/SCe for dialling into GSM mobile phone networks.	2542216	A	PG14	444.-
GSM/GPRS aerial with cable 2.5 m	Flexible antenna with plastic coating, magnetic stand and shielded aerial cable with FEM plug.	2533862	A	PG14	131.-
GSM/GPRS aerial with cable 10 m	Antenna with plastic coating, including bracket for outdoor installation and shielded antenna cable with FME plug.	2533863	A	PG14	395.-
GSM/GPRS aerial with cable 15 m	Antenna with plastic coating, including bracket for outdoor installation and shielded antenna cable with FME plug.	2533864	A	PG14	438.-
NiMh rechargeable battery, 9 V/200 mAh	Rechargeable battery to be installed in the switchgears Wilo-control MS-L and EC-L for a mains-independent alarm	2522850	L	PG15	25.-

☺ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☺ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Electrical accessories – pump control					
Type	Description	Art. no.		Price group	
					EUR
Pencil electrode (30 mm) with 10 m cable	External pencil electrode in stainless steel housing with 10 m cable for monitoring leakage in the sealing chamber.	6065216	 L	PG14	99.-
Pencil electrode (210 mm) with 10 m cable	External pencil electrode in stainless steel housing with 10 m cable for monitoring leakage in the sealing chamber.	6042222	L	PG14	99.-

Electrical accessories – level control					
Type	Description	Art. no.		Price group	
					EUR
Dynamic pressure bell with 10 m hose	Pneumatic signal transmitter for media containing faeces with a max. temperature of 60 °C. The signal transmitter is open in direction of the fluid and must be ventilated after each pumping out (OFF depending on time).	2516976	 L	PG14	88.-
Bubbling-through system	Small compressor for constant aeration of the dynamic pressure bell, including non-return valve, 3 m hose and T-connector.	2516977	L	PG14	216.-
Float switch WA65 with 5 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 60 °C. Switching: up „ON”/down „OFF”.	503211390	L	PG14	82.-
Float switch WA65 with 10 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 60 °C. Switching: up „ON”/down „OFF”.	503211893	L	PG14	155.-
Float switch WA65 with 20 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 60 °C. Switching: up „ON”/down „OFF”.	2004431	L	PG14	231.-
Float switch WA65 with 30 m cable	Signal transmitters for contaminated fluids without faeces with a maximum temperature of 60 °C. Switching: up „ON”/down „OFF”.	2004432	L	PG14	314.-
Float switch MS1 with 10 m cable	Signal transmitters for aggressive fluids and fluids containing faeces up to a max. temperature of 80 °C. Switching: up „ON”/down „OFF”.	2004593	L	PG14	114.-
Level sensor 0–1 mWS, with 10 m cable	Signal transmitter with ATEX approval for fluids containing faeces with a maximum temperature of 60 °C. Output signal: 4...20 mA	2519924	L	PG14	442.-
Level sensor 0–1 mWS, with 30 m cable	Signal transmitter with ATEX approval for fluids containing faeces with a maximum temperature of 60 °C. Output signal: 4...20 mA	2519925	L	PG14	522.-
Level sensor 0–1 mWS, with 50 m cable	Signal transmitter with ATEX approval for fluids containing faeces with a maximum temperature of 60 °C. Output signal: 4...20 mA	2519926	L	PG14	632.-
Level sensor 0–2.5 mWS with 10 m cable	Signal transmitter with ATEX approval for fluids containing faeces with a maximum temperature of 60 °C. Output signal: 4...20 mA	2519921	L	PG14	442.-
Level sensor 0–2.5 mWS, with 30 m cable	Signal transmitter with ATEX approval for fluids containing faeces with a maximum temperature of 60 °C. Output signal: 4...20 mA	2519922	L	PG14	522.-
Level sensor 0–2.5 mWS, with 50 m cable	Signal transmitter with ATEX approval for fluids containing faeces with a maximum temperature of 60 °C. Output signal: 4...20 mA	2519923	L	PG14	632.-
Level sensor 0–10 mWS, with 20 m cable	Signal transmitter with ATEX approval for fluids containing faeces with a maximum temperature of 60 °C. Output signal: 4...20 mA	6033106	L	PG14	492.-
Level sensor 0–10 mWS, with 30 m cable	Signal transmitter with ATEX approval for fluids containing faeces with a maximum temperature of 60 °C. Output signal: 4...20 mA	6033107	L	PG14	503.-
Level sensor 0–10 mWS, with 50 m cable	Signal transmitter with ATEX approval for fluids containing faeces with a maximum temperature of 60 °C. Output signal: 4...20 mA	6033108	L	PG14	1,028.-
ZSE shock-proof with 5 m cable	Intermediate float switch with shockproof plug/coupling for level-dependent control of single-phase consumers.	6017150	C	PG14	77.-
ZSE shock-proof with 10 m cable	Intermediate float switch with shockproof plug/coupling for level-dependent control of single-phase consumers.	6017313	C	PG14	83.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Electrical accessories – level control					
Type	Description	Art. no.		Price group	
					EUR
ZSE shock-proof with 20 m cable	Intermediate float switch with shockproof plug/coupling for level-dependent control of single-phase consumers.	6021204	C	PG14	124.-
ZSD CEE16 with 5 m cable, 5 m	Intermediate float switch with CEE plug/coupling for level-dependent control of three-phase consumers	6023412	A	PG14	513.-
ZSD CEE16 with 10 m cable, 10 m	Intermediate float switch with CEE plug/coupling for level-dependent control of three-phase consumers	6021206	C	PG14	549.-
ZSD CEE16 with 20 m cable, 20 m	Intermediate float switch with CEE plug/coupling for level-dependent control of three-phase consumers	6021205	C	PG14	558.-
ZSD CEE32 with 5 m cable, 5 m	Intermediate float switch with CEE plug/coupling for level-dependent control of three-phase consumers	6027185	C	PG14	575.-
ZSD CEE32 with 10 m cable, 10 m	Intermediate float switch with CEE plug/coupling for level-dependent control of three-phase consumers	6027184	C	PG14	595.-
ZSD CEE32 with 20 m cable, 20 m	Intermediate float switch with CEE plug/coupling for level-dependent control of three-phase consumers	6001283	C	PG14	616.-

Electrical accessories – accessories for level control					
Type	Description	Art. no.		Price group	
					EUR
Ex cut-off relay (2-circuit)	Ex cut-off relay for the connection of 2 float switches for level control in explosive atmospheres.	2513059	L	PG14	721.-
Ex cut-off relay (3-circuit)	Ex cut-off relay for the connection of 3 float switches for level control in explosive atmospheres.	2510698	K	PG14	909.-
Ex cut-off relay (4-circuit)	Ex cut-off relay for the connection of 4 float switches for level control in explosive atmospheres.	2510699	K	PG14	853.-
Ex cut-off relay (5-circuit)	Ex cut-off relay for the connection of 5 float switches for level control in explosive atmospheres.	2510674	K	PG14	1,153.-
Ex cut-off relay XR-42x	Ex cut-off relay for the connection of 2 float switches or 6 electrodes for level control in explosive atmospheres. For installation in switch cabinet	6069164	C	PG14	271.-
Cable clamp	For fixation of a signal transmitter in the pump chamber. The clamp is fixed in the pump chamber with a hook; the cable of the signal transmitter is clamped and fixed via the intrinsic weight of the signal transmitter.	2519927	L	PG14	22.-
Zener barrier	Breakdown barrier (Zener barrier) for the connection of one level sensor in an explosive atmosphere.	2541372	L	PG14	277.-
CEE motor protection plug 1.2...1.8 A	CEE phase inverter plug with indication of the direction of rotation and thermal motor protection Connection for a float switch. With On/Off switch for „manual/automatic mode”	2525864	C	PG14	369.-
CEE motor protection plug 1.8...2.6 A	CEE phase inverter plug with indication of the direction of rotation and thermal motor protection Connection for a float switch. With On/Off switch for „manual/automatic mode”	2525865	L	PG14	359.-
CEE motor protection plug 2.6...3.7 A	CEE phase inverter plug with indication of the direction of rotation and thermal motor protection Connection for a float switch. With On/Off switch for „manual/automatic mode”	2017211	C	PG14	375.-
CEE motor protection plug 3.7...5.5 A	CEE phase inverter plug with indication of the direction of rotation and thermal motor protection Connection for a float switch. With On/Off switch for „manual/automatic mode”	2017212	C	PG14	375.-
CEE motor protection plug 5.5...8.0 A	CEE phase inverter plug with indication of the direction of rotation and thermal motor protection Connection for a float switch. With On/Off switch for „manual/automatic mode”	2017213	C	PG14	390.-
CEE motor protection plug 8.0...11.5 A	CEE phase inverter plug with indication of the direction of rotation and thermal motor protection Connection for a float switch. With On/Off switch for „manual/automatic mode”	2017214	C	PG14	375.-
CEE motor protection plug incl. WSK/DI 3.7...5.5 A	CEE phase inverter plug with indication of the direction of rotation and thermal motor protection Connections for a float switch as well as leakage detection and winding temperature monitoring. With On/Off switch for „manual/automatic mode”	2515561	C	PG14	476.-

🚚 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, 📞 = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.


Drainage and sewage


Electrical accessories – accessories for level control					
Type	Description	Art. no.	Price group		
					EUR
CEE motor protection plug incl. WSK/DI 5.5...8.0 A	CEE phase inverter plug with indication of the direction of rotation and thermal motor protection Connections for a float switch as well as leakage detection and winding temperature monitoring. With On/Off switch for „manual/automatic mode”	2515562	C	PG14	479.-
CEE motor protection plug incl. WSK/DI 8.0...11.5 A	CEE phase inverter plug with indication of the direction of rotation and thermal motor protection Connections for a float switch as well as leakage detection and winding temperature monitoring. With On/Off switch for „manual/automatic mode”	2515563	K	PG14	476.-

Electrical accessories – motor protection					
Type	Description	Art. no.	Price group		
					EUR
CEE motor protection plug 1.2...1.8 A	CEE phase inverter plug with indication of the direction of rotation and thermal motor protection Connection for a float switch. With On/Off switch for „manual/automatic mode”	2525864	C	PG14	369.-
CEE motor protection plug 1.8...2.6 A	CEE phase inverter plug with indication of the direction of rotation and thermal motor protection Connection for a float switch. With On/Off switch for „manual/automatic mode”	2525865	L	PG14	359.-
CEE motor protection plug 2.6...3.7 A	CEE phase inverter plug with indication of the direction of rotation and thermal motor protection Connection for a float switch. With On/Off switch for „manual/automatic mode”	2017211	C	PG14	375.-
CEE motor protection plug 3.7...5.5 A	CEE phase inverter plug with indication of the direction of rotation and thermal motor protection Connection for a float switch. With On/Off switch for „manual/automatic mode”	2017212	C	PG14	375.-
CEE motor protection plug 5.5...8.0 A	CEE phase inverter plug with indication of the direction of rotation and thermal motor protection Connection for a float switch. With On/Off switch for „manual/automatic mode”	2017213	C	PG14	390.-
CEE motor protection plug 8.0...11.5 A	CEE phase inverter plug with indication of the direction of rotation and thermal motor protection Connection for a float switch. With On/Off switch for „manual/automatic mode”	2017214	C	PG14	375.-
CEE motor protection plug incl. WSK/DI 3.7...5.5 A	CEE phase inverter plug with indication of the direction of rotation and thermal motor protection Connections for a float switch as well as leakage detection and winding temperature monitoring. With On/Off switch for „manual/automatic mode”	2515561	C	PG14	476.-
CEE motor protection plug incl. WSK/DI 5.5...8.0 A	CEE phase inverter plug with indication of the direction of rotation and thermal motor protection Connections for a float switch as well as leakage detection and winding temperature monitoring. With On/Off switch for „manual/automatic mode”	2515562	C	PG14	479.-
CEE motor protection plug incl. WSK/DI 8.0...11.5 A	CEE phase inverter plug with indication of the direction of rotation and thermal motor protection Connections for a float switch as well as leakage detection and winding temperature monitoring. With On/Off switch for „manual/automatic mode”	2515563	K	PG14	476.-

Electrical accessories – alarm control					
Type	Description	Art. no.	Price group		
					EUR
Small alarm switch-gear KAS	Network-independent small alarm switchgear in ISO plug housing with shock-proof plug, acoustic alarm signal and attached electrode with 3 m cable for level measurement.	501534094	L	PG14	354.-
AlarmControl 1	Network-independent alarm system with shockproof plug, acoustic alarm signal and attached mini float switch with 3 m cable for level measurement.	2522846	L	PG14	138.-
AlarmControl 2	Network-independent alarm system with shock-proof adapter plug for the direct connection of a consumer, acoustic alarm signal and attached mini float switch with 3 m cable for level measurement.	2522847	L	PG14	171.-

= ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.


Electrical accessories – alarm control					
Type	Description	Art. no.	Price group		
					EUR
DrainAlarm 2	Network-independent alarm switchgear with optical and acoustic alarm signal and with a connection for one float switch.	2545133	L	PG14	412.-
DrainAlarm GSM	Network-independent alarm switchgear with optical, acoustic and wireless (per GSM) alarm signal and with a connection for one float switch.	2542911	L	PG14	1,111.-
Flash light 1~230V	Optical alarm signal for connection to a switchgear. Suitable for outside installation.	2551613	L	PG14	140.-
Signal horn 1~230V	Acoustic alarm signal (88 dBA) for connection to a switchgear. Suitable for outside installation.	501459398	L	PG14	84.-



Electrical accessories – cables					
Type	Description	Art. no.	Price group		
					EUR
cable distribution cabinet Two-part, size 1	Two-part cable distribution cabinet for outdoor installation, (protection IP 44), made of fibreglass-reinforced polyester, including mounting plate.	2523674	K	PG14	1,847.-
cable distribution cabinet Two-part, size 00	Two-part cable distribution cabinet for outdoor installation, (protection IP 44), made of fibreglass-reinforced polyester, including mounting plate.	2523672	K	PG14	1,174.-
cable distribution cabinet Two-part, size 2	Two-part cable distribution cabinet for outdoor installation, (protection IP 44), made of fibreglass-reinforced polyester, including mounting plate.	2523675	K	PG14	2,553.-
cable distribution cabinet One-part, size 00	One-part cable distribution cabinet for outdoor installation, (protection IP 34D), made of fibreglass-reinforced polyester, including mounting plate.	2523791	K	PG14	1,020.-
cable distribution cabinet Two-part, size 0	Two-part cable distribution cabinet for outdoor installation, (protection IP 44), made of fibreglass-reinforced polyester, including mounting plate.	2523673	L	PG14	1,201.-
Cable distribution cabinet one part, size 00, including MS-L 1 x 4 kW	One-part cable distribution cabinet for outdoor installation, (protection class IP34D), made of fibreglass-reinforced polyester, including Micro Control MS-L 1x4 kW switchgear, electrical distribution, heating and flash light.	2533127	K	PG14	3,283.-


Mechanical accessories – valves					
Type	Description	Art. no.	Price group		
					EUR
Non-return valve Rp 1¼	made of plastic, with female thread	501533696	L	PG14	88.-
Non-return valve Rp 1½	made of EN-GJL-250, with female thread	4027330	L	PG14	148.-
Non-return valve G 2	made of EN-GJL-250, with female thread	4027331	L	PG14	182.-
Non-return valve G 2½	made of EN-GJL-250, with female thread	4019225	L	PG14	250.-
Non-return valve DN 50	made of EN-GJL-250, according to DIN EN 12050-4, including 1 set mounting accessories	2017166	L	PG14	259.-
Non-return valve DN 65	made of EN-GJL-250, according to DIN EN 12050-4, including 1 set mounting accessories	2017167	L	PG14	297.-
Non-return valve DN 80	made of EN-GJL-250, according to DIN EN 12050-4, including 1 set mounting accessories	2017168	L	PG14	333.-
Non-return valve DN 100	made of EN-GJL-250, according to DIN EN 12050-4, including 1 set mounting accessories	2017169	L	PG14	399.-
Non-return valve DN 150	made of EN-GJL-250, according to DIN EN 12050-4, including 1 set mounting accessories	2017170	L	PG14	860.-
Shut-off ball cock Rp 1½, G-CuSn10	made of brass, nickel-plated, with female thread	4027337	L	PG14	62.-
Shut-off ball cock Rp 2, G-CuSn10	made of brass, nickel-plated, with female thread	4027338	L	PG14	84.-
Shut-off ball cock Rp 2½, G-CuSn10	made of brass, nickel-plated, with female thread	4019227	C	PG14	176.-
Gate valve DN 50, EN-GJL-250	made of EN-GJL-250, including 1 set mounting accessories	2017160	L	PG14	184.-
Gate valve DN 65, EN-GJL-250	made of EN-GJL-250, including 1 set mounting accessories	2017161	L	PG14	218.-
Gate valve DN 80, EN-GJL-250	made of EN-GJL-250, including 1 set mounting accessories	2017162	L	PG14	301.-
Gate valve DN 100, EN-GJL-250	made of EN-GJL-250, including 1 set mounting accessories	2017163	L	PG14	355.-
Gate valve DN 150, EN-GJL-250	made of EN-GJL-250, including 1 set mounting accessories	2017164	L	PG14	588.-
Gate valve Rp 1½, G-CuSn10	made of red brass, with female thread	2525187	L	PG14	64.-
Gate valve Rp 2, G-CuSn10	made of red brass, with female thread	2525188	L	PG14	91.-
Gate valve DN 100, PVC	Made out of PVC, with solid pipe ends DN 100	2529808	L	PG14	458.-
Gate valve DN 150, PVC	made out of PVC, with solid pipe ends DN 150	2529809	L	PG14	804.-



Mechanical accessories – hose connections					
Type	Description	Art. no.	Price group		
					EUR
Geka rigid coupling DN 40	made of brass, with male thread	2018100	L	PG14	20.-
Fixed coupling Storz C/G 2	made of aluminium, Storz C connection, with male thread	2018102	L	PG14	22.-
Fixed coupling Storz C/G 2½	made of aluminium, Storz C connection, with male thread	2015234	L	PG14	32.-
Fixed coupling Storz 90 mm/G 3	made of aluminium, Storz 90 connection, with female thread	2017203	C	PG14	71.-

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Mechanical accessories – hose connections					
Type	Description	Art. no.	Price group		
					EUR
Fixed coupling Storz A/G 4	made of aluminium, Storz A connection, with female thread	2016161	C	PG14	71.-
Fixed coupling Storz 90 mm/G 2½	made of aluminium, Storz 90 connection, with male thread	6003069	C	PG14	21.-
Geka hose coupling DN 40	Made of brass, with hose nozzle Ø 40 mm including hose clip	2018101	L	PG14	18.-
Hose coupling Storz C/Ø 52 mm	made of aluminium, with hose nozzle Ø 52 mm	2015235	C	PG14	25.-
Hose coupling Storz A/Ø 110 mm	made of aluminium, with hose nozzle Ø 110 mm, incl. hose clip	2004675	C	PG14	71.-
Hose coupling Storz 90/Ø 90 mm	Made of aluminium, with hose nozzle Ø 90 mm, including hose clip	2017204	C	PG14	71.-
Hose nozzle Ø 60 mm/G 2	with male thread made of plastic, incl. hose clip	4027334	C	PG14	36.-
Hose nozzle G 1½/Ø 40 mm	made of brass with gland nut for bowl cover and flat hose connection with safety collar. Incl. PU thread seal and hose clip.	2083109	K	PG14	56.-
Hose nozzle G 2/Ø 50 mm	made of brass with male thread for clamp binding. Incl. hose clip.	2083111	K	PG14	59.-
Hose nozzle R 3/Ø 90 mm	made of steel with conical male thread without collar. Incl. hose clip.	2083112	K	PG14	162.-
Hose nozzle Ø 70 mm/G 2½	with male thread made of brass, incl. hose clip	4015210	C	PG14	118.-
Hose nozzle Ø 40 mm/R 1½	with male thread made of plastic, incl. hose clip	4027335	L	PG14	36.-
Fixed coupling set Storz B/DN 80	with 90° pipe elbow and flange connection; pipe elbow made of EN-GJL-250, Storz coupling made of aluminium, incl. 1 set of mounting accessories	6031385	L	PG14	245.-
Fixed coupling set Storz A/DN 100	with 90° pipe elbow and flange connection; pipe elbow made of EN-GJL-250, Storz coupling made of aluminium, incl. 1 set of mounting accessories	6031672	L	PG14	327.-
Fixed coupling set Storz C/G 2	with 90° pipe elbow and threaded connection; pipe elbow made of EN-GJL-250, Storz coupling made of aluminium, incl. 1 set of mounting accessories	6021799	C	PG14	53.-
Fixed coupling set Storz C/DN 50	with 90° pipe elbow and flange connection; pipe elbow made of EN-GJL-250, Storz coupling made of aluminium, incl. 1 set of mounting accessories	6031671	L	PG14	186.-
Fixed coupling set Storz F/DN 150	with 90° pipe elbow and flange connection; pipe elbow made of EN-GJL-250, Storz coupling made of aluminium, incl. 1 set of mounting accessories	6040247	A	PG14	890.-
Synthetic pressure hose 3 m, Ø 42 mm	Inside Ø 42 mm, PN 6, including hose clip	2027641	K	PG14	41.-
Synthetic pressure hose 5 m, Ø 42 mm	Inside Ø 42 mm, PN 6, including hose clip	2027642	L	PG14	70.-
Synthetic pressure hose 15 m, Ø 42 mm	Inside Ø 42 mm, PN 6, including hose clip	2027643	K	PG14	129.-
Synthetic pressure hose 10 m, Ø 52 mm	Inside Ø 52 mm, PN 8, including hose clip	2017192	A	PG14	171.-
Synthetic pressure hose 3 m, Ø 60 mm	Inside Ø 60 mm, PN 6, including hose clip	2027644	A	PG14	109.-
Synthetic pressure hose 5 m, Ø 60 mm	Inside Ø 60 mm, PN 6, including hose clip	2027645	A	PG14	164.-
Synthetic pressure hose 15 m, Ø 60 mm	Inside Ø 60 mm, PN 6, including hose clip	2027646	A	PG14	215.-
Synthetic pressure hose 10 m, Ø 60 mm	Inside Ø 60 mm, PN 6, including hose clip	2018106	A	PG14	305.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.


Mechanical accessories – hose connections					
Type	Description	Art. no.	Price group		
					EUR
Synthetic pressure hose 10 m, Ø 70 mm	Inside Ø 70 mm, PN 8, including hose clip	2014151	C	PG14	182.-
Synthetic pressure hose 10 m, Ø 90 mm	Inside Ø 90 mm, PN 8, including 2 hose clips	2017152	A	PG14	218.-
Synthetic pressure hose 20 m, Ø 90 mm	Inside Ø 90 mm, PN 8, including 2 hose clips	2017193	C	PG14	412.-
Synthetic pressure hose 30 m, Ø 90 mm	Inside Ø 90 mm, PN 8, including 2 hose clips	2017194	A	PG14	572.-
Synthetic pressure hose 10 m, Ø 110 mm	Inside Ø 110 mm, PN 8, including 2 hose clips	2017196	A	PG14	244.-
Synthetic pressure hose 20 m, Ø 110 mm	Inside Ø 110 mm, PN 8, including 2 hose clips	2017197	A	PG14	487.-
Synthetic pressure hose 30 m, Ø 110 mm	Inside Ø 110 mm, PN 8, including 2 hose clips	2017198	A	PG14	731.-
Plastic spiral hose 5 m, with Storz C	Inside Ø 52 mm, including coupling, 4.5/13.5 bar	6022269	L	PG14	308.-
Plastic spiral hose 10 m, with Storz C	Inside Ø 52 mm, including coupling, 4.5/13.5 bar	6022270	K	PG14	496.-
Plastic spiral hose 20 m, with Storz C	Inside Ø 52 mm, including coupling, 4.5/13.5 bar	6022271	K	PG14	696.-
Plastic spiral hose 5 m, with Storz B	Inside Ø 75 mm, including coupling, 3.5/10.5 bar	6022272	C	PG14	178.-
Plastic spiral hose 10 m, with Storz B	Inside Ø 75 mm, including coupling, 3.5/10.5 bar	6035187	A	PG14	264.-
Plastic spiral hose 20 m, with Storz B	Inside Ø 75 mm, including coupling, 3.5/10.5 bar	6022274	A	PG14	519.-
Plastic spiral hose 5 m, with Storz A	Inside Ø 102 mm, including coupling, 3/9 bar	6022275	K	PG14	286.-
Plastic spiral hose 10 m, with Storz A	Inside Ø 102 mm, including coupling, 3/9 bar	6022276	A	PG14	470.-
Plastic spiral hose 20 m, with Storz A	Inside Ø 102 mm, including coupling, 3/9 bar	6022277	K	PG14	835.-
Plastic spiral hose 5 m, with Storz F	Inside Ø 150 mm, including coupling, 1.8/5.5 bar	6022278	K	PG14	982.-
Plastic spiral hose 5 m, with Storz F	Inside Ø 150 mm, including coupling, 8/- bar	6044660	K	PG14	1,601.-
Synthetic fibre pressure hose 5 m, with Storz C	Inside Ø 52 mm, including coupling, 12/40 bar	6003651	C	PG14	54.-
Synthetic fibre pressure hose 20 m, with Storz B	Inside Ø 75 mm, including coupling, 12/40 bar	6003050	A	PG14	204.-
Synthetic fibre pressure hose 20 m, with Storz C	Inside Ø 52 mm, including coupling, 12/40 bar	6003649	C	PG14	117.-
Synthetic fibre pressure hose 5 m, with Storz B	Inside Ø 75 mm, including coupling, 12/40 bar	6003052	A	PG14	89.-
Synthetic fibre pressure hose 10 m, with Storz B	Inside Ø 75 mm, including coupling, 12/40 bar	6003051	A	PG14	116.-
Synthetic fibre pressure hose 10 m, with Storz C	Inside Ø 52 mm, including coupling, 12/40 bar	6003650	C	PG14	78.-
Synthetic fibre pressure hose 20 m, with Storz A	Inside Ø 102 mm, including coupling, 8/20 bar	6022393	L	PG14	338.-



 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.


Mechanical accessories – hose connections					
Type	Description	Art. no.		Price group	
					EUR
Synthetic fibre pressure hose 10 m, with Storz A	Inside Ø 102 mm, including coupling, 8/20 bar	6022392	K	PG14	327.-
Synthetic fibre pressure hose 5 m, with Storz A	Inside Ø 102 mm, including coupling, 8/20 bar	6022391	K	PG14	167.-
Synthetic fibre pressure hose 10 m, with Storz F	Inside Ø 150 mm, including coupling, 6/15 bar	6003648	K	PG14	571.-
Synthetic fibre pressure hose 20 m, with Storz F	Inside Ø 150 mm, including coupling, 6/15 bar	6003647	K	PG14	865.-



Mechanical accessories – setup/installation					
Type	Description	Art. no.		Price group	
					EUR
Lifting chain kit PCS-LU, stainless steel, 200 kg, 1 m	Lifting chain for raising and lowering pumps; incl. 1 shackle.	6084895	L	PG14	79.-
Lifting chain kit PCS-LU, stainless steel, 200 kg, 3 m	Lifting chain for raising and lowering pumps; incl. 1 shackle; with connecting links each metre for suspension.	6084894	L	PG14	178.-
Lifting chain kit PCS-LU, stainless steel, 200 kg, 6 m	Lifting chain for raising and lowering pumps; incl. 1 shackle; with connecting links each metre for suspension.	6084893	L	PG14	240.-
Sling chain kit PCS-CE, galvanised steel, 400 kg, 3 m	Sling chain for raising, lowering and transporting pumps; incl. 2 shackles; without connecting links for suspension.	6063139	L	PG14	98.-
Sling chain kit PCS-CE, galvanised steel, 400 kg, 5 m	As chain sling with 2 shackles in galvanised steel. Bearing capacity: 400 kg	6063140	L	PG14	149.-
Sling chain kit PCS-CE, galvanised steel, 400 kg, 6 m	Sling chain for raising, lowering and transporting pumps; incl. 2 shackles; with connecting links for suspension.	6063141	L	PG14	169.-
Sling chain kit PCS-CE, galvanised steel, 400 kg, 10 m	As chain sling with 2 shackles in galvanised steel. Bearing capacity: 400 kg	6063142	L	PG14	277.-
Sling chain kit PCS-CE, galvanised steel, 800 kg, 3 m	Sling chain for raising, lowering and transporting pumps; incl. 2 shackles; without connecting links for suspension.	6063147	K	PG14	187.-
Sling chain kit PCS-CE, galvanised steel, 800 kg, 5 m	Sling chain for raising, lowering and transporting pumps; incl. 2 shackles; with connecting links for suspension.	6063148	L	PG14	296.-
Sling chain kit PCS-CE, galvanised steel, 800 kg, 6 m	Sling chain for raising, lowering and transporting pumps; incl. 2 shackles; with connecting links for suspension.	6063149	L	PG14	352.-
Sling chain kit PCS-CE, galvanised steel, 800 kg, 10 m	Sling chain for raising, lowering and transporting pumps; incl. 2 shackles; with connecting links for suspension.	6063150	L	PG14	506.-
Sling chain kit PCS-CE, galvanised steel, 2000 kg, 10 m	Sling chain for raising, lowering and transporting pumps; incl. 2 shackles; with connecting links for suspension.	6063152	C	PG14	858.-
Sling chain kit PCS-CE, galvanised steel, 5000 kg, 10 m	Sling chain for raising, lowering and transporting pumps; incl. 2 shackles; with connecting links for suspension.	6063154	K	PG14	1,799.-

= ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Mechanical accessories – setup/installation					
Type	Description	Art. no.		Price group	
					EUR
Sling chain kit PCS-CE, galvanised steel, 7000 kg, 10 m	Sling chain for raising, lowering and transporting pumps; incl. 2 shackles; with connecting links for suspension.	6063156	K	PG14	2,411.-
Sling chain kit PCS-CE, galvanised steel, 9000 kg, 10 m	Sling chain for raising, lowering and transporting pumps; incl. 2 shackles; with connecting links for suspension.	6063518	K	PG14	2,921.-
Sling chain kit PCS-CE, stainless steel, 400 kg, 3 m	Sling chain for raising, lowering and transporting pumps; incl. 2 shackles; without connecting links for suspension.	6063135	L	PG14	291.-
Sling chain kit PCS-CE, stainless steel, 400 kg, 5 m	As chain sling with 2 shackles in 1.4401 stainless steel. Bearing capacity: 400 kg	6063136	L	PG14	410.-
Sling chain kit PCS-CE, stainless steel, 400 kg, 6 m	Sling chain for raising, lowering and transporting pumps; incl. 2 shackles; with connecting links each metre for suspension.	6063137	L	PG14	424.-
Sling chain kit PCS-CE, stainless steel, 400 kg, 10 m	As chain sling with 2 shackles in 1.4401 stainless steel. Bearing capacity: 400 kg	6063138	L	PG14	646.-
Sling chain kit PCS-CE, stainless steel, 800 kg, 3 m	Sling chain for raising, lowering and transporting pumps; incl. 2 shackles; without connecting links for suspension.	6063143	K	PG14	408.-
Sling chain kit PCS-CE, stainless steel, 800 kg, 5 m	Sling chain for raising, lowering and transporting pumps; incl. 2 shackles; with connecting links each metre for suspension.	6063144	L	PG14	604.-
Sling chain kit PCS-CE, stainless steel, 800 kg, 6 m	Sling chain for raising, lowering and transporting pumps; incl. 2 shackles; with connecting links each metre for suspension.	6063145	L	PG14	700.-
Sling chain kit PCS-CE, stainless steel, 800 kg, 10 m	Sling chain for raising, lowering and transporting pumps; incl. 2 shackles; with connecting links each metre for suspension.	6063146	L	PG14	1,025.-
Sling chain kit PCS-CE, stainless steel, 2000 kg, 10 m	Sling chain for raising, lowering and transporting pumps; incl. 2 shackles; with connecting links each metre for suspension.	6063151	C	PG14	2,806.-
Sling chain kit PCS-CE, stainless steel, 5000 kg, 10 m	Sling chain for raising, lowering and transporting pumps; incl. 2 shackles; with connecting links each metre for suspension.	6063153	K	PG14	6,906.-
Sling chain kit PCS-CE, stainless steel, 7000 kg, 10 m	Sling chain for raising, lowering and transporting pumps; incl. 2 shackles; with connecting links each metre for suspension.	6063155	K	PG14	9,216.-
Floor supporting foot TP 80/100, made of stainless steel (AISI 304), including fixation material	Made of stainless steel (AISI 304), including fixation material	2004672	A	PG14	439.-
Floor supporting foot MTC 32F39, made of steel (S235JR), painted, including fixation material	Made of steel (S235JR), lacquered, including fixation material	2098295	L	PG14	176.-
Floor supporting foot MTC 32F49, MTC 32F55, made of steel (S235JR), painted, including fixation material	Made of steel (S235JR), lacquered, including fixation material	2098296	L	PG14	638.-
Baseplate TP 65, made of galvanised steel, consisting of 1 baseplate and fixation material	Made of galvanised steel, consisting of 1 baseplate and fixation material	4015206	L	PG14	98.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.


Mechanical accessories – setup/installation					
Type	Description	Art. no.	Price group		
					EUR
Floor supporting foot DN 50/65	Made of steel (S235JR), powder-coated, including fixation material	6064666	L	PG14	151.-
Floor supporting foot DN 80/100	Made of steel (S235JR), powder-coated, including fixation material	6065949	L	PG14	220.-
Floor supporting foot DN 80/100	Made of stainless steel (1.4571), including fixation material	6065953	C	PG14	725.-
Floor supporting foot DN 40	Made of steel (S235JR), powder-coated, including fixation material	6069669	L	PG14	88.-
Suspension unit DN 40/50	Made of EN-GJL-250, painted, with free passage in DN 40, foot elbow including pump holder, profile joint, installation and floor fixation accessories and double-pipe guide pipe bracket (26.9x2 mm) without guide pipes.	2057179	L	PG14	365.-
Suspension unit DN 32	Made of EN-GJL-250, painted, with free passage in DN 32, foot elbow including pump holder, profile joint, installation and floor fixation accessories and single-pipe guide pipe bracket (26.9x2 mm) without guide pipe.	2082630	L	PG14	477.-
Suspension unit DN 50	For 2-pipe guide of EN-GJL-250, cataphoretic-coated, with free passage in DN 50, coupling base with 90° pipe elbow, including coupling connection, guide pipe bracket of stainless steel for pump chamber fixation, profile joint and mounting accessories; two guide pipes (26.9 x 2 mm) are to be provided by the customer!	6070146	L	PG14	291.-
Suspension unit DN 65	For 2-pipe guide of EN-GJL-250, cataphoretic coating, with free passage in DN 65, coupling base with 90° pipe elbow, including coupling connection, guide pipe bracket of stainless steel for pump chamber fixation, profile joint and installation accessories; 2 guide pipes (26.9 x 2 mm) are to be provided by the customer!	6070150	L	PG14	318.-
Suspension unit TP 80	Made of EN-GJL-250, painted, with free passage in DN 80, foot elbow including pump holder, profile joint, installation and floor fixation accessories and double-pipe guide pipe bracket (42.4x3.25 mm) without guide pipes.	2029039	L	PG14	489.-
Suspension unit TP 100	Made of EN-GJL-250, painted, with free passage in DN 100, foot elbow including pump holder, profile joint, installation and floor fixation accessories and double-pipe guide pipe bracket (48.3x3.25 mm) without guide pipes.	2029040	L	PG14	552.-
Suspension unit DN 100	Made of EN-GJL-250, painted, with free passage in DN 100, foot elbow including pump holder, profile joint, installation and floor fixation accessories and double-pipe guide pipe bracket (42.4x2 mm) without guide pipes.	6082336	L	PG14	456.-
Suspension unit DN 150	Made of EN-GJL-250, painted, with free passage in DN 150, foot elbow including pump holder, profile joint, installation and floor fixation accessories and double-pipe guide pipe bracket (42.4x2 mm) without guide pipes.	6036890	A	PG14	943.-
Guide pipe bracket DN 50 for GG pipe	for 2-pipe guide, of stainless steel, for pipe attachment on a cast-iron pipe, including mounting accessories	6066851	K	PG14	70.-
Guide pipe bracket DN 50 for ST pipe	for 2-pipe guide, of stainless steel, for pipe attachment on a steel pipe, including mounting accessories	6061084	A	PG14	70.-
Bracket for guide pipe extension DN 50 for GG pipe	for 2-pipe guide, of stainless steel, for pipe attachment on a cast-iron pipe, including mounting accessories	6066852	A	PG14	93.-
Bracket for guide pipe extension DN 50 for ST pipe	for 2-pipe guide, of stainless steel, for pipe attachment on a steel pipe, including mounting accessories	6066846	A	PG14	91.-
Guide pipe bracket DN 65 for GG pipe	for 2-pipe guide, of stainless steel, for pipe attachment on a cast-iron pipe, including mounting accessories	6066847	A	PG14	95.-
Guide pipe bracket DN 65 for ST pipe	for 2-pipe guide, of stainless steel, for pipe attachment on a steel pipe, including mounting accessories	6066848	L	PG14	95.-



 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Mechanical accessories – setup/installation					
Type	Description	Art. no.	Price group		
					EUR
Bracket for guide pipe extension DN 65 for GG pipe	for 2-pipe guide, of stainless steel, for pipe attachment on a cast-iron pipe, including mounting accessories	6066849	A	PG14	115.-
Bracket for guide pipe extension DN 65 for ST pipe	for 2-pipe guide, of stainless steel, for pipe attachment on a steel pipe, including mounting accessories	6066850	K	PG14	115.-
Installation accessories TP 100	For one flange connection, with screws, nuts and flat gasket	2017176	L	PG14	27.-
Installation accessories TP 150	For attaching the piping to the pump flange	2390488	L	PG14	36.-
Installation accessories TP 80	For one flange connection, with screws, nuts and flat gasket	2012067	L	PG14	24.-
Mounting accessories DN 40/50/65, PN 10	For one flange connection, with screws, nuts and flat gasket	6076963	L	PG14	25.-
Mounting accessories DN 80/100, PN 10	For one flange connection, with screws, nuts and flat gasket	6077521	L	PG14	27.-
Mounting accessories DN 150, PN 10	For one flange connection, with screws, nuts and flat gasket	6077523	L	PG14	34.-
Diaphragm hand pump	Double-sided connection, female thread Rp 1½	2060166	L	PG14	307.-
Suspension unit DN 80	Made of EN-GJL-250, painted, with free passage in DN 80, foot elbow including pump holder, profile joint, installation and floor fixation accessories and double-pipe guide pipe bracket (42.4x2 mm) without guide pipes.	6082333	L	PG14	318.-

Mechanical accessories – pipe connections					
Type	Description	Art. no.	Price group		
					EUR
Compensator DN 80	Made of steel, zinc-coated/neoprene, length 130 mm, incl. installation accessories	2017189	C	PG14	234.-
Compensator DN 100	Made of steel, zinc-coated/neoprene, length 135 mm, incl. installation accessories	2017190	A	PG14	243.-
Flange connector DN 150	Made of PUR, with hose, hose clips and installation accessories	2511598	L	PG14	219.-
Flange connector DN 100	Made of PUR, with hose, hose clips and installation accessories	2511597	L	PG14	197.-
Flange connector DN 80	Made of PUR, with hose, hose clips and installation accessories	2511595	L	PG14	190.-
90° pipe elbow DN 50	Made of EN-GJS-400-15, with 2 flanges, including 1 set installation accessories	2018053	L	PG14	185.-
90° pipe elbow DN 80	Made of EN-GJS-400-15, with 2 flanges, including 1 set installation accessories	2012064	L	PG14	203.-
90° pipe elbow DN 100	Made of EN-GJS-400-15, with 2 flanges, including 1 set installation accessories	2004669	L	PG14	245.-
90° pipe elbow DN 65	Made of EN-GJS-400-15, with 2 flanges, including 1 set installation accessories	2017183	L	PG14	188.-
90° pipe elbow DN 150	Made of EN-GJS-400-15, with 2 flanges, including 1 installation accessories set	2017186	L	PG14	470.-
90° pipe elbow G 1½	Made of steel, galvanised with G 1½ / R 1½ female/male thread	2083117	L	PG14	53.-
90° pipe elbow G 2	Made of steel, galvanised with G 2 / R 2 male thread	2083118	C	PG14	64.-
90° pipe elbow G 3	Made of steel, galvanised with G 3 / R 3 male thread	2083119	C	PG14	202.-
90° pipe elbow G 1¼	Made of EN-GJMW-400-5, with female/male thread G 1¼ / R 1¼	2057400	L	PG14	43.-

🚚 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, 📞 = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Mechanical accessories – pipe connections					
Type	Description	Art. no.	Price group		
					EUR
90° pipe elbow DN 40/Rp 1½	consisting of threaded flange DN 40/Rp 1½ (galvanized steel), 90° elbow R 1½/Rp 1½ (cast iron) and mounting accessories.	2057401	L	PG14	99.-
90° pipe elbow G 2½	Made of steel, galvanised with G 2½ / R 2½ female/male thread	4015212	L	PG14	98.-
90° pipe elbow DN 65/70 mm	Made of EN-GJL-250, with hose connector Ø 70 mm, flange on pump side, including 1 set of installation accessories	4027346	L	PG14	88.-
90° pipe elbow DN 80/90 mm	Made of stainless steel, with hose nozzle (Ø 90 mm) and G 3 male thread, flange on pump side, including 1 set of installation accessories	2017207	A	PG14	550.-
90° pipe elbow DN 100/110 mm	Made of stainless steel, with hose nozzle (Ø 110 mm) and G 4 male thread, flange on pump side, including 1 set of installation accessories	2017184	A	PG14	690.-
90° pipe elbow DN 50/60 mm	Made of PVC, with hose connector Ø 60 mm, flange on pump side, including 1 set of installation accessories	4027344	L	PG14	96.-
Y-piece DN 65	Made of steel, galvanised, PN 10/16 flanges in accordance with DIN 2501 with 2 sets of installation accessories	2017178	L	PG14	479.-
Y-piece DN 50	Made of steel, galvanised, PN 10/16 flanges in accordance with DIN 2501 with 2 sets of installation accessories	2019042	L	PG14	412.-
Y-piece DN 100	Made of steel, galvanised, PN 10/16 flanges in accordance with DIN 2501 with 2 sets of installation accessories	2017180	L	PG14	879.-
Y-piece DN 80	Made of steel, galvanised, PN 10/16 flanges in accordance with DIN 2501 with 2 sets of installation accessories	2017179	L	PG14	737.-
Y-piece DN 150	Made of steel, galvanised, PN 10/16 flanges in accordance with DIN 2501 with 2 sets of installation accessories	2017181	L	PG14	1,308.-

 = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request,  = please contact Wilo
Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.



Your complete and convenient unit checkup. You get maximum operational safety and cost certainty with WilocalCare. A complete package that provides you monthly reports on the current unit status, energy consumption, optimisation options and the upcoming maintenance interval. At a fixed monthly price. This means maximum convenience for you. Individually selectable in the versions **Basic**, **Comfort** and **Premium**.

The advantages to you

- **Wide-ranging unit check:** Your WilocalCare technician regularly determines the current status and the required unit optimisations. Depending on the scope of service of the selected packet.
- **Monthly status report:** We document the status of your unit continuously, inform you and demonstrate the optimisation measures at regular interval.
- **Regular maintenance and repair measures** for early rectification of errors and faults.
- **More cost control and transparency** through suitable and individual WilocalCare packet.

WilocalCare			
Services	Basic	Comfort	Premium
Communication electronics	•	•	•
Monthly status report	•	•	•
Monthly flat rate	•	•	•
24 hours accessible toll-free emergency number	•	•	•
Minor repairs included in the monthly flat rate		•	•
Nitrogen fillings for all diaphragm pressure vessel belonging to the pump/system		•	•
Elimination of payroll and travel expenses between maintenance intervals (during normal service hours)		•	•
Consumables included in the monthly flat rate		•	•
Maintenance and repair of the pump/installation		•	•
Includes wearing parts			•
Elimination of payroll and travel expenses between maintenance intervals (outside normal service hours incl. weekends)			•

Prices are to be agreed individually with service.

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☎ = please contact WilocalCare
 Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Commissioning and function check

by trained Wilo after-sales service technicians within Germany.

The costs for materials that may be necessary are not included in the quoted net prices, which do not include the statutory VAT. The prices apply to correctly installed systems.

On request

Special net prices for commissioning and maintenance/repair of more than one pump or system at one facility as well as commissioning and integration of pumps in building automation BA.

Wilo maintenance contracts			
Services	Basic	Comfort	Premium
No minimum contract period	•	•	•
24 hour telephone emergency service	•	•	•
Toll-free telephone number for contract customers	•	•	•
Flat fee including work time and travel time	•	•	•
Detailed documentation according to check list	•	•	•
Visual inspection of the pump/installation	•	•	•
Function check	•	•	•
Small repairs included in flat fee		•	•
Nitrogen fillings for all diaphragm pressure vessel belonging to the pump/system		•	•
Elimination of payroll and travel expenses between maintenance intervals (during normal service hours)		•	•
Consumables included in the price		•	•
Maintenance and repair of the pump/installation		•	•
Optimisation of the pump/installation		•	•
Software updates			•
Includes wearing parts			•
Elimination of payroll and travel expenses between maintenance intervals (outside normal service hours incl. weekends)			•

Prices for the premium contract package are to be agreed individually with Service.

Price group: PG16

Commissioning		
Type	Art no.	EUR
Commissioning DEA systems 1–2 pumps	2158804	☞
Commissioning DEA systems 3–6 pumps	2158805	☞
Commissioning FLA system	2158806	☞
Commissioning FLA system DIN14462	2158807	☞
Commissioning sewage treatment system DL S	2158808	☞
Commissioning of sewage treatment system DL M/L	2158809	☞
Commissioning of sewage treatment system DL XL/XXL	2160444	☞
Commissioning RainSystem AF22	2160445	☞
Commissioning RainSystem AF150	2160446	☞
Commissioning RainSystem AF400	2160447	☞
Commissioning sewage pumps DN32–DN65	2160448	☞
Commissioning sewage pumps > DN65	2160449	☞
Commissioning mixer	2160450	☞
Commissioning glandless/glanded pumps	2160451	☞
Commissioning of NORM/SCP pumps	2160452	☞

☞ = ready for delivery, L = supply availability, C = approx. 2 weeks, K = approx. 4 weeks, A = on request, ☞ = please contact Wilo

Subject to change – all prices do not include VAT. Our General Terms of Delivery and Service apply (see www.wilo.com/legal) – valid from 01/01/2020 in Germany.

Price group: PG16

Maintenance		
Type	Art no.	EUR
Maintenance BASIC DEA systems 1–2 pumps	2160453	☞
Maintenance BASIC DEA systems 3–6 pumps	2160454	☞
Maintenance BASIC sewage treatment system DL S	2160457	☞
Maintenance BASIC sewage treatment system DL M/L	2160458	☞
Maintenance BASIC sewage treatment system DL XL/XXL	2160459	☞
Maintenance BASIC RainSystem AF22	2160460	☞
Maintenance BASIC RainSystem AF150	2160461	☞
Maintenance BASIC RainSystem AF400	2160462	☞
Maintenance BASIC sewage pumps DN32–DN65	2160463	☞
Maintenance BASIC sewage pumps >DN65	2160464	☞
Maintenance BASIC mixer	2160465	☞
Maintenance BASIC glandless/glanded pumps	2160466	☞

Price group: PG16

Maintenance		
Type	Art no.	EUR
Maintenance & repair COMFORT DEA systems 1–2 pumps	2160468	☞
Maintenance & repair COMFORT DEA systems 3–6 pumps	2160469	☞
Maintenance & repair COMFORT FLA systems	2160470	☞
Maintenance & repair COMFORT FLA systems DIN14462	2160471	☞
Maintenance & repair COMFORT sewage treatment system DL S	2160472	☞
Maintenance & repair COMFORT sewage treatment system DL M/L	2160473	☞
Maintenance & repair COMFORT sewage treatment system DL XL/XXL	2160474	☞
Maintenance & repair COMFORT RainSystem AF22	2160475	☞
Maintenance & repair COMFORT RainSystem AF150	2160476	☞
Maintenance & repair COMFORT RainSystem AF400	2160477	☞
Maintenance & repair COMFORT sewage pumps DN32–DN65	2160478	☞
Maintenance & repair COMFORT sewage pumps >DN65	2160479	☞
Maintenance & repair COMFORT mixer	2160480	☞
Maintenance & repair COMFORT glandless/glanded pumps	2160481	☞

NOW. CONNECTED TO THE FUTURE.

UNIQUELY CONNECTED: YOUR ADVANTAGES IN TERMS OF TIME, MONEY AND KNOWLEDGE.

Make the most of digital dynamics: We connect you smartly to your pumps and pump systems. Wilo's solutions provide you with a mobile overview of installation sites, operating conditions and maintenance requirements. You can also adopt different configurations, evaluate systems and even update your operational planning on the move. This allows you to maintain an overview and keep control at all times – any time and anywhere, as if you were on site.

WILO BRINGS THE FUTURE.

Experience the connectivity of tomorrow:
www.wilo.com/future



Effective – 1 January 2020
Value Added Tax not included.
Subject to change. In appliance of our
General Terms of Delivery and Service
(see www.wilo.com/legal)

WILO SE
Nortkirchenstraße 100
44263 Dortmund
Germany
T +49 231 4102-0
F +49 231 4102-7363
wilo@wilo.com
www.wilo.com