

WILO-PD SERIES

Submersible Drainage Pumps

wilo



WILO-PD SERIES



Submersible Drainage Pumps



Product Features

- Minimum residual water-level.
- Integrated motor cooling
- Weight lightning and easy transportation
- Powerful performance up to max head (21m) and flow rate (ℓ 550) in 2HP range.
- Stainless steel shaft.
- Perfect selling wit double mechanical seal and oil seal.
- Thermal protection.

Application

- Drainage for water tank, basement and handy sewage facility, general usages, wastewater treatment, construction site agriculture and flood control.
- General drainage with solids (solid size: under strainer suction bore)
- Drainage for waste water treatment and small disposal facility.
- Drainage for small fountain and artificial water falls.
- Drainage for agriculture and horticulture.
- Drainage for underground commercial facility, building basement, mahine room and sanitation as well as underground leachate.

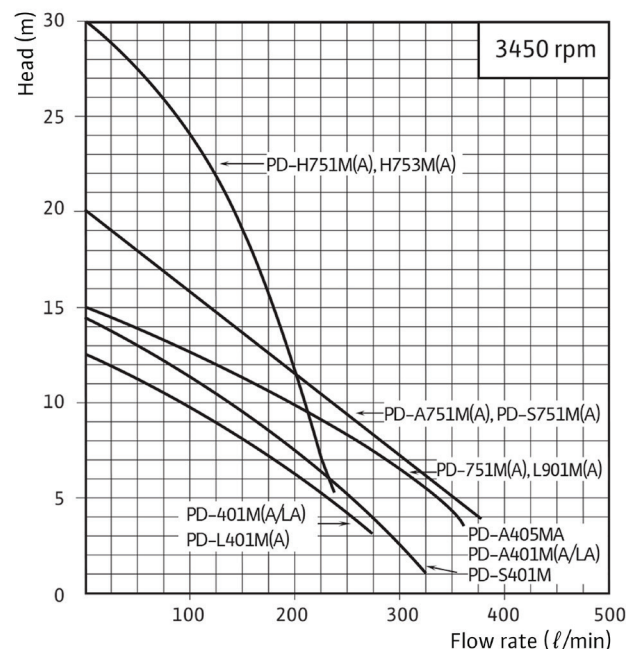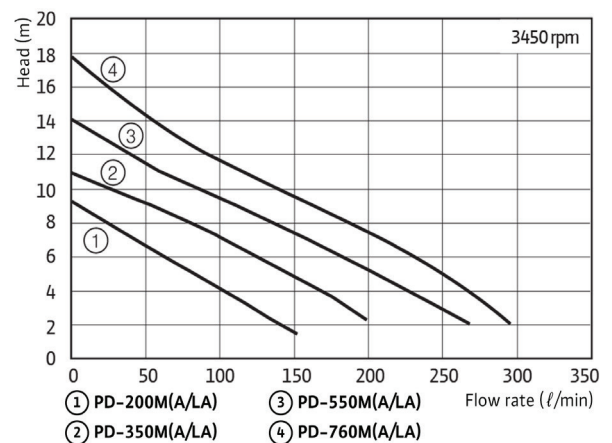

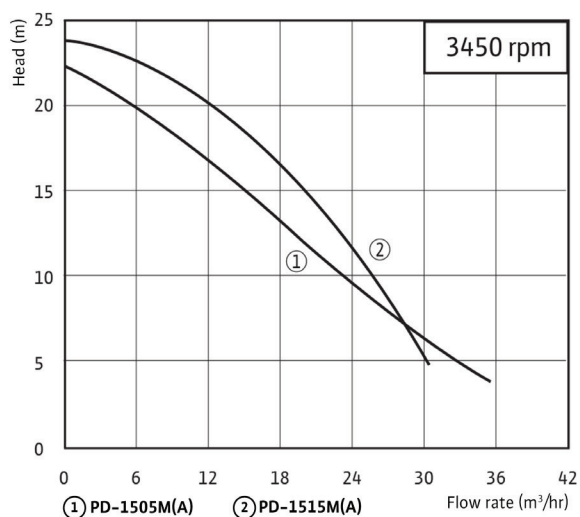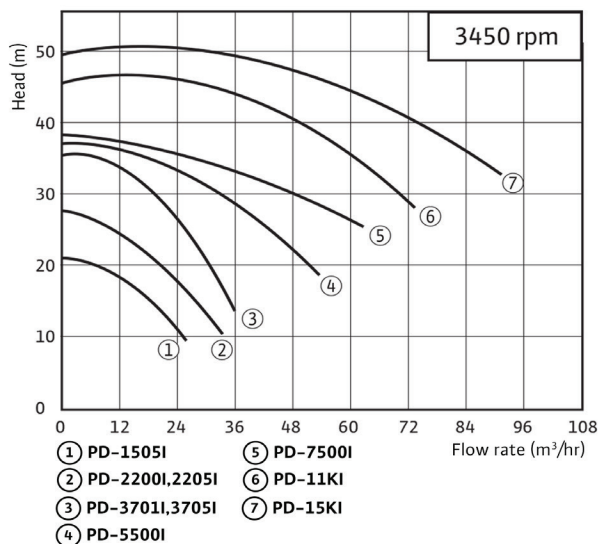

Technical Data

Model	Power Source	Output (W)	Discharge (mm)	Auto Coupling	Head (m)	Flowrate (l/min)	Max. Head	Max. Flowrate (l/min)
PD-200M(A/LA)	Single Phase 220V 60Hz	200	20, 25, 32, 1 1/4"	-	1	130	9	140
PD-350M(A/LA)		350	25, 32, 1 1/4"			180	11	190
PD-550M(A/LA)		700	50(2")		7	145	14	250
PD-760M(A/LA)		1,100	50(2")			200	18	300
PD-S401M		600	50(2")	-	7	200	14	290
PD-S751M(A)		950				300	18	370
PD-A401M(A/LA)		600				200	13	290
PD-A751M(A)		950				250	18	370
PD-401M(A/LA)		400	40(1 1/2")	AD-50	7	150	11	250
PD-L401M(A)				-				
PD-405M(A)		950	50(2")	AD-50	7	250	14	350
PD-751M(A)				-				
PD-L901M(A)		950	40(1 1/2")	-	20	120	28	230
PD-H751M(A)			50(2")					
PD-H753M(A)		80	20,25 (1")	-	-	-	5	70
PD-G050M/MA								
PD-1505M(A)		1.5(2HP)	Ø80(3")	-	10	350	-	-
PD-1515M(A)			Ø50(2")	AD-50	14	300	-	-
PD-1505I	3Phase 380V, 60Hz	1.5(2HP)	Ø50(2")	AD-50	17	15	-	-
PD-2200I		2.2(3HP)	Ø80(3")	AD-65/80	21	18	-	-
PD-2205I			Ø65				-	-
PD-3701I		3.7(5HP)	Ø80(3")			30	-	-
PD-3705I			Ø65				-	-
PD-5500I		5.5(7.5HP)	Ø80(3")	AD-80	25	36	-	-
PD-7500I		7.5(10HP)	Ø100(4")	AD-100	30	48	-	-
PD-11KI		11(15HP)			33	66	-	-
PD-15KI		15(20HP)			40	72	-	-

***For more pump details contact Wilo Philippines



WILO SE
 Representative Office (Philippines)
 Level 24, BGC Corporate Center
 30th St. Cor. 11th Ave.,
 Bonifacio Global City
 Taguig 1634, Philippines

T +632 8790 0178
 sales.ph@wilo.com
 www.wilo.ph

Stay connected with us!

