


Pioneering for You

*wilo*

## UL/FM Certified Pumps


Wilo - SCPFF, CME

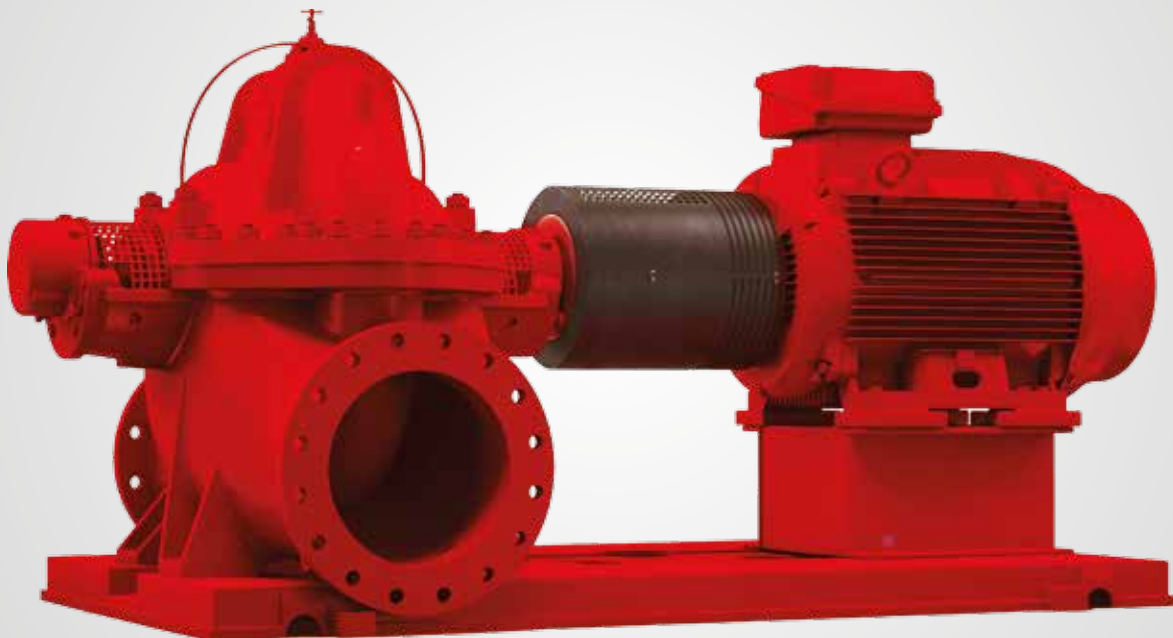



Field of application Fire fighting

Duty chart

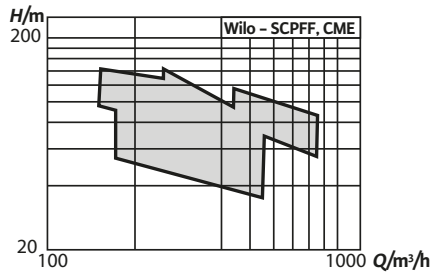

Construction Low-pressure centrifugal pump with axially split housing mounted on a baseplate

Application Motor/Engine driven pumps suitable for :  
 → Hydrant  
 → Sprinkler

Volume flow  $Q_{max}$  568 m<sup>3</sup>/hr

Delivery head  $H_{max}$  140 m

Special features  
 → Pump designed in accordance with US  
 → NFPA standards with UL/FM-certified components.  
 → Complete set with ULFM approved mandatory accessories.

Technical data  
 → Fluid temperature: Upto +105 °C  
 → Prime mover : Motor/Engine  
 → Nominal diameters: DN 125 to DN 200  
 → Operating pressure: 16 bar

Equipment/function  
 → Optional Features for Engine set :  
 → Can be supplied with RC/HE cooling options.  
 → Lose supply - Battery, battery cable  
 → Auto Engine (ADEP), Residential silencer

**WILO Mather and Platt Pumps Pvt. Ltd.**  
 1<sup>st</sup> Floor, "One Elpro Park",  
 Elpro Compound, CTS No.4270,  
 Chinchwad, Pune – 411033.  
 Maharashtra (India)

T +91 20 67347100 / 200  
 Service Toll Free: 1800 266 8866

[www.wilo.in](http://www.wilo.in)  
[sales.in@wilo.com](mailto:sales.in@wilo.com)

[www.facebook.com/WiloIndia](https://www.facebook.com/WiloIndia)

Tech. matter subject to change without prior notice  
 Images are for representation purpose only, actual product may differ.