


Pioneering for You

wilo

PB

Inline pressure booster

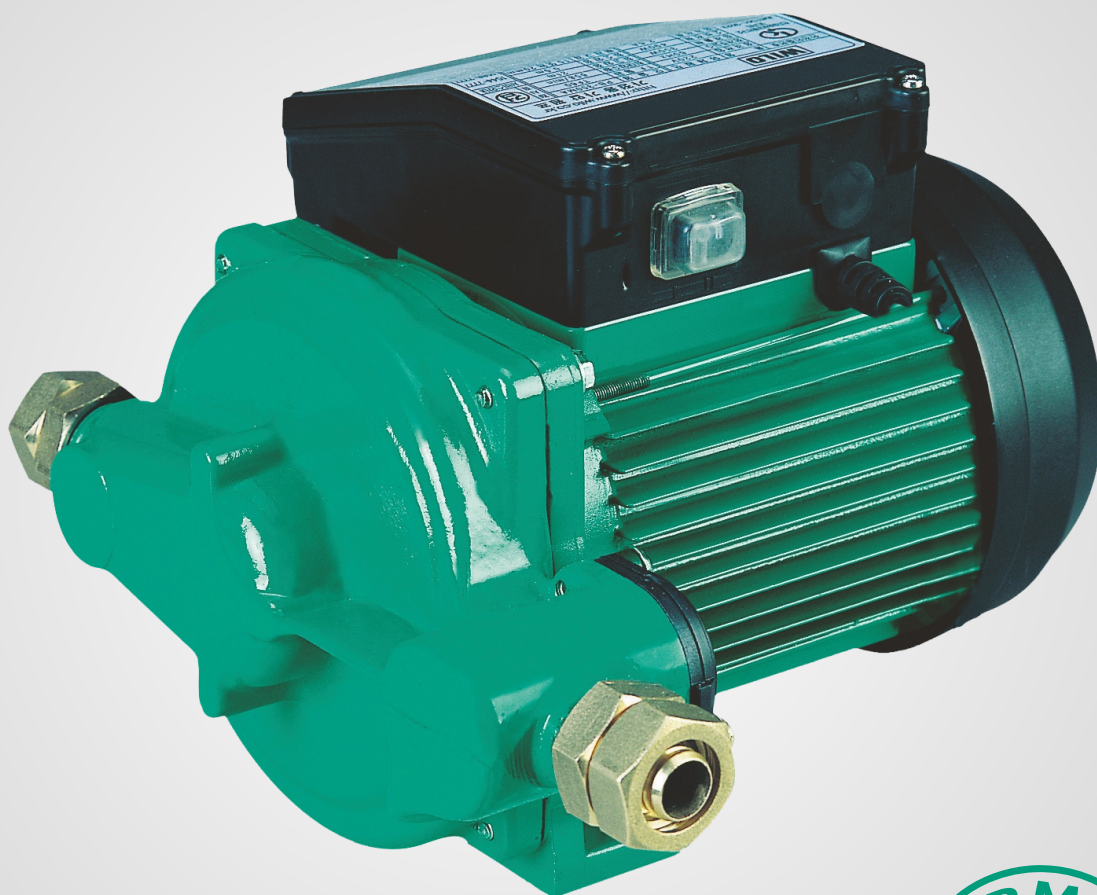

PB

Inline pressure booster

**Technical Data:****Flow:** upto 65 LPM**Head:** upto 19 m**Power:** upto 400 Watt

Available in 1 Ph

Application:

- Pressure boosting water transfer from roof tank to tap
- Silent operation

Standard Features:

- Automatic/manual operation
- Easy to carry, install and operate Motor built with Thermal Protector for safety
- Rust-proof casting by electric coating
- Inline installation requires less space

Selection Table

Pump Model	Article No.	Pipe Size		Power Rating		Head (m)	LPM													
		Suction mm	Delivery mm	kW	hp		0	5	10	15	20	25	30	35	40	45	50	55	60	65
PB-088	8224495	15	15	0.1	0.13	10	9	8	7	6	5	4	1							
PB-200	8196050	25	25	0.2	0.26	16	15	14	13	12	11	10	9	6	3	1				
PB-400	8196051	40	40	0.4	0.53	20	19	18	17	16	15	14	13	12	11	10	8	6	4	

Conversion Table: 1m = 3.281 ft and 1 m³/hr = 16.67 LPM = 3.67 GPM

The above performance is based on mean supply voltage of 220V/415V at 50 Hz and subject to change due to continuous R&D.

WILO Mather and Platt Pumps Pvt. Ltd.1st Floor, "One Elpro Park",
Elpro Compound, CTS No. 4270,
Chinchwad, Pune - 411033.
Maharashtra (India)T + 91 20 67347100 / 200
Service Toll Free: 1800 266 8866www.wilo.in
sales.in@wilo.comwww.facebook.com/WiloIndiaTech. matter subject to change without prior notice
Images are for representation purpose only, actual product may differ.