


Pioneering for You

**wilo**

**PW**

Peripheral inline booster

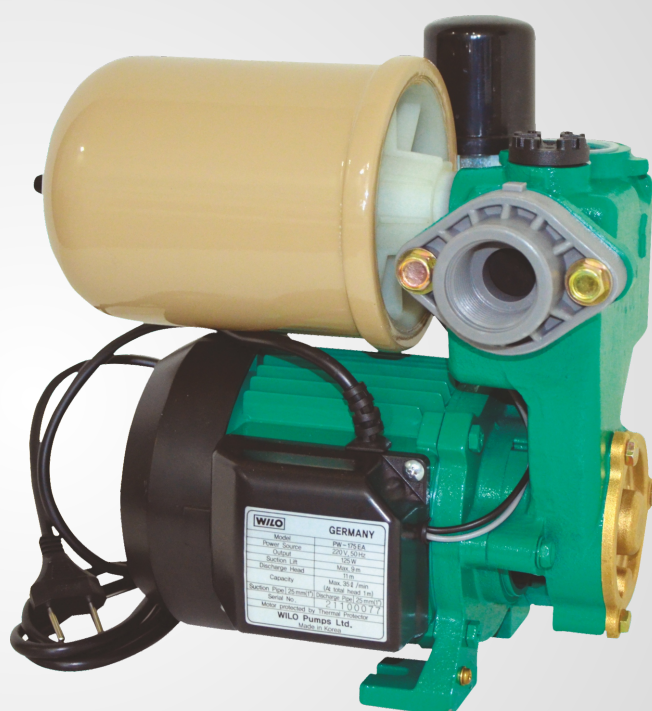

## PW

### Peripheral inline booster



#### Technical Data:

**Flow:** 40 LPM

**Head:** 45 mts

**Pipe Size :** 25 mm

#### Application:

- Boosting water pressure at taps and showers
- Water supply for household use
- Water transfer for small machines and instruments
- Sprinkler systems
- Gardening and car washing

#### Standard Features:

- Self priming function
- Automatic operation
- Thermal protector to avoid motor burn out
- Efficient cooling for motor by specially designed cooling fan
- Easy to carry, install and operate

#### Selection Table

Pump Model	Article No.	Pipe Size		Power Rating			LPM									
		Suction mm	Delivery mm	kW	hp		0	5	10	15	20	25	30	35	40	45
PW-122	2809KP0233B	25	25	0.13	0.17	Head (m)	39	57	35	30	25	20	12	4	1	
PW-175	3005384	25	25	0.13	0.17		35	33	30	29	27	18	12	6		
PW-252	3047948	25	25	0.25	0.33		43	39	35	31	26	22	18	13	9	4

**Conversion Table:** 1m = 3.281 ft and 1 m<sup>3</sup>/hr = 16.67 LPM = 3.67 GPM

The above performance is based on mean supply voltage of 220V/415V at 50 Hz and subject to change due to continuous R&D.

#### WILO Mather and Platt Pumps Pvt. Ltd.

1st Floor, "One Elpro Park",  
Elpro Compound, CTS No. 4270,  
Chinchwad, Pune - 411033.  
Maharashtra (India)

T + 91 20 67347100 / 200  
Service Toll Free: 1800 266 8866

[www.wilo.in](http://www.wilo.in)  
[sales.in@wilo.com](mailto:sales.in@wilo.com)

[www.facebook.com/WiloIndia](https://www.facebook.com/WiloIndia)

Tech. matter subject to change without prior notice  
Images are for representation purpose only, actual product may differ.