

2021 Product Brochure - 60 Hz

Wilo-Z 15+

Timed and Constant Speed Circulating Pump



Timer Type Circulation Pump

Wilo- Z 15+




Applications

→ Domestic Hot Water Recirculation

Max Head: 9 feet

Max. Flow: 5.5 gpm

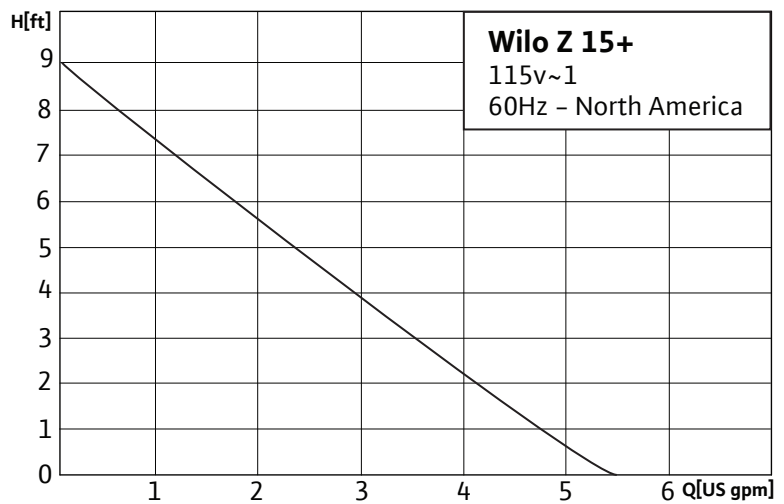

Features & Benefits

- Compact design
- Conserves energy and power
- CSA compliant to NSF-372 & NSF-61
- Optional digital timer
- Quick installation
- 115V power cord included
- Optional Jet Valve accessory available

Technical Data

- Water temperature range: 32°F to 160°F (0°C to 71°C)
- Maximum working pressure: 145 PSI (10 Bar)
- Electrical connections: 1~115V, 60Hz
- Protection class: NEMA 12
- Impeller: Composite /40% Glass filled (PA66G40)
- Shaft: Ceramics
- Rotor core: Silicone steel sheet + copper strip

Wilo JetValve™



- Adjustable temp. setpoint screw
- 1/2" Hot and cold Male IPS inlets
- 3/8" Hot and cold male compression thread outlets
- Available as standalone valve or with 20" SS flex connectors