


Durability by Design Since 1873



2022 Product Brochure

480 Series Vertical Turbine NSF/ANSI/CAN 61 & 372

Open Lineshaft Pumps

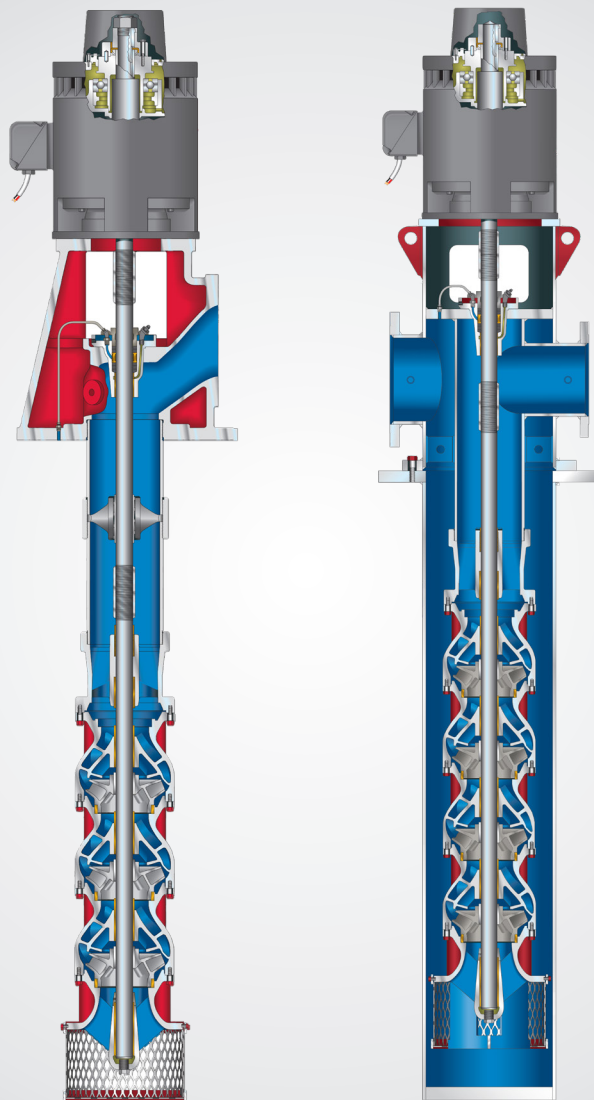

Certified to
NSF/ANSI/CAN 61
& 372

480 Series Vertical Turbine NSF/ANSI/CAN 61 & 372

Open Lineshaft Pumps



Certified to
NSF/ANSI/CAN 61
& 372

Applications

- Potable Water
- Water Well

Max Head: 600 feet

Max Flow: 30,000 GPM

Product Features

- Lead free construction*
- Cold (73 °F / 23 °C) water contact temperature
- Open lineshaft design
- Enclosed 304 or 316 stainless steel impellers
- Colleted impellers 6" – 15"
- Keyed impellers 16" – 42"
- Cast iron bowls
- Bowl sizes 6" – 42"
- Enamel lined bowls up to 15"
- Fabricated steel & cast iron discharge heads
- Packing and cartridge seal options
- Threaded column pipe up to 12"
- Flanged column pipe up to 24"
- Drop in or fabricated bearing retainers
- Threaded or keyed lineshafts up to 2-15/16"
- Optional suction can / barrel
- Epoxy coatings



(*) Product is certified to NSF/ANSI/CAN 61 & 372 and conforms with the lead content requirements for "lead free" plumbing as defined by California, Vermont, Maryland, and Louisiana state laws and the U.S. Safe Drinking Water Act.