


Meeting Your Needs.  
Exceeding Your Expectations.



*Heavy-Duty 304 Stainless Steel Construction*

## Centri-Boost Max

Pressure Boosting Systems

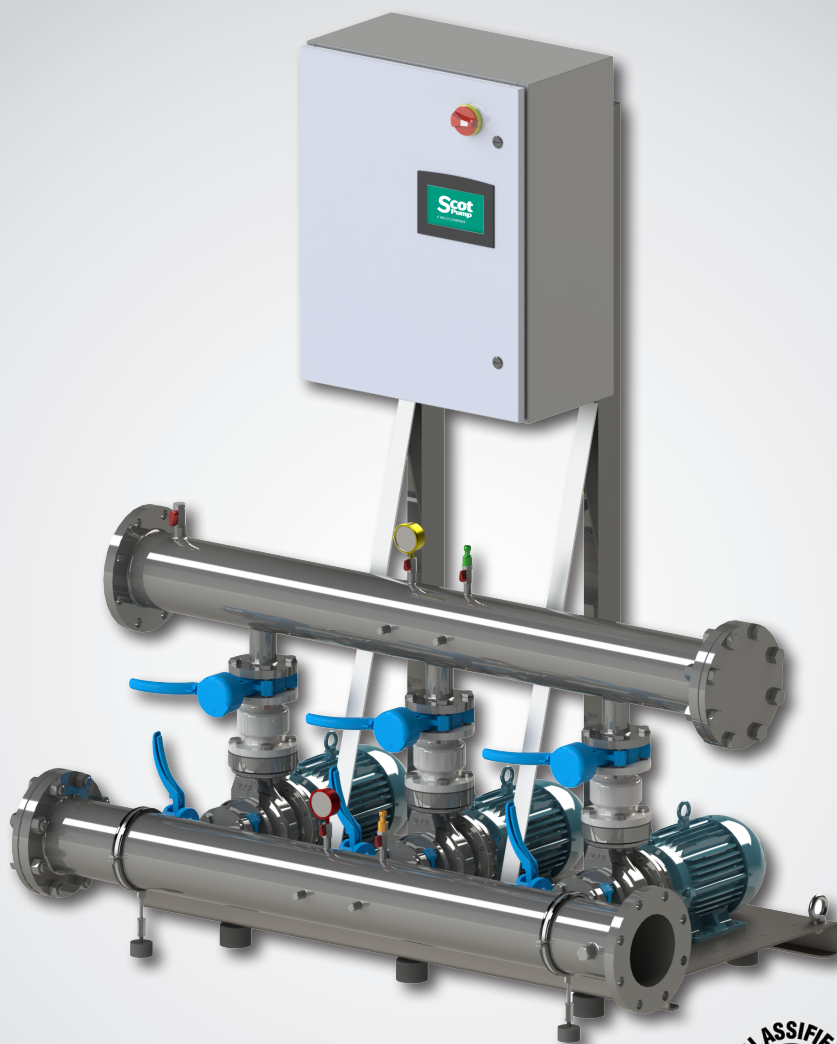

Drinking Water System Component  
NSF/ANSI 61  
ALSO CERTIFIED TO NSF/ANSI 372  
MH60113



Packaged Pumping Systems  
MH60113

# Scot Centri-Boost Max

## Pressure Boosting Systems



### Applications

- Water Supply
- Pressure Boosting
- Agriculture
- Washing / Sprinkling Systems
- Cooling Circuits
- Condensate Return

**Max Head:** 275 feet

**Max. Flow:** 1600 GPM

### Features & Benefits

- Includes Scot 320–328 series Stainless Steel pumps
- Real-time diagnostics and remote monitoring
- Full system kWh energy reporting
- Easy to use 7" touchscreen interface
- Onboard Modbus, and optional BACnet™, LonWorks® interface modules
- Adjustable low pressure cut-out
- Balanced run time for all pumps

### Technical Data

- Fluid Temp Range: -4°F to 140°F (-20°C to 60°C) with a minimum of 32°F for domestic water
- Premium efficient NEMA motors
- VFD-Controlled system operation
- 4–20 mA, ¼" Stainless Steel Pressure Transducers
- Rated Pressure: 150 PSI
- Flange Connection: 150 Class ANSI

### Materials of Construction

- All wetted components are of 304 Stainless Steel Construction
- Entire packaged systems are listed under UL for NSF 61 and NSF 372
- Entire packaged systems are listed under UL for QCZJ “packaged pumping systems”
- EPDM/FKM Elastomers
- Type 21 Mechanical Seal

