

TOTAL HEAD

REPRIMING LIFTS

PERFORMANCE CURVE

M PSI FT

RPM 1950-1750 1450 1150 850  
 FEET 15 14 8 6  
 METERS 4,6 4,3 2,4 1,8


VOLUTE \_\_\_\_\_ CURVE \_\_\_\_\_  
 IMPELLER \_\_\_\_\_ MODEL \_\_\_\_\_

1.25"/[31,8] DIA. MAX. SPHERICAL SOLIDS

Notes  
 Select performance with the  
 operating range of curve.

SIZE 6"X6" IMP.DIA. 12 1/2"

SP.GR. 1.0 RPM VARIOUS

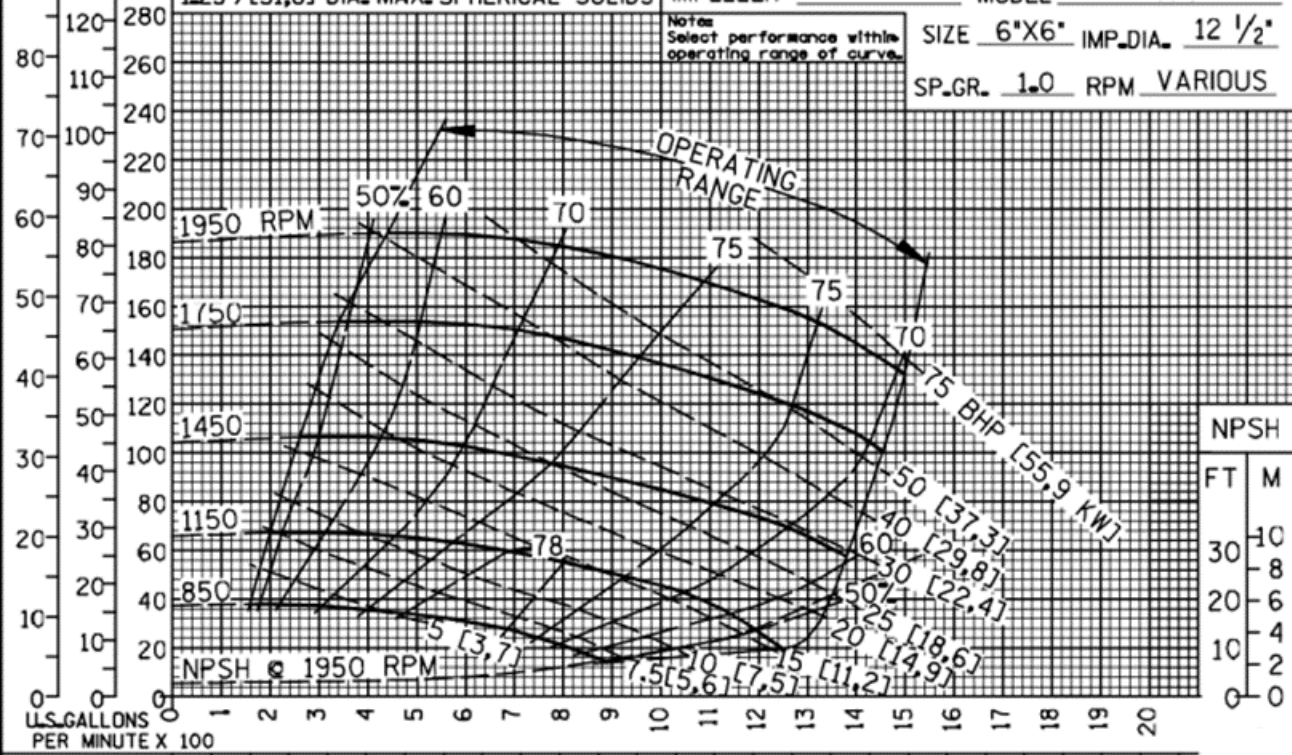

NPSH

FT M

U.S. GALLONS PER MINUTE X 100

LITRES PER SECOND X 10

CUBIC METRES PER HOUR X 10

0 10 20 30 40 50 60 70 80 90 100 110 120 130 140 150 160 170 180 190 200 210 220 230 240

0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20

0 2 4 6 8 10 12 14 16 18 20 22 24 26 28 30 32 34 36 38 40 42 44 46