


Pioneering for You

wilo

Pumps and Pumping Systems

Drainage & Sewage Pump Wilo-FA / FAJ

**Transporting Waste Water.
With Passion.**

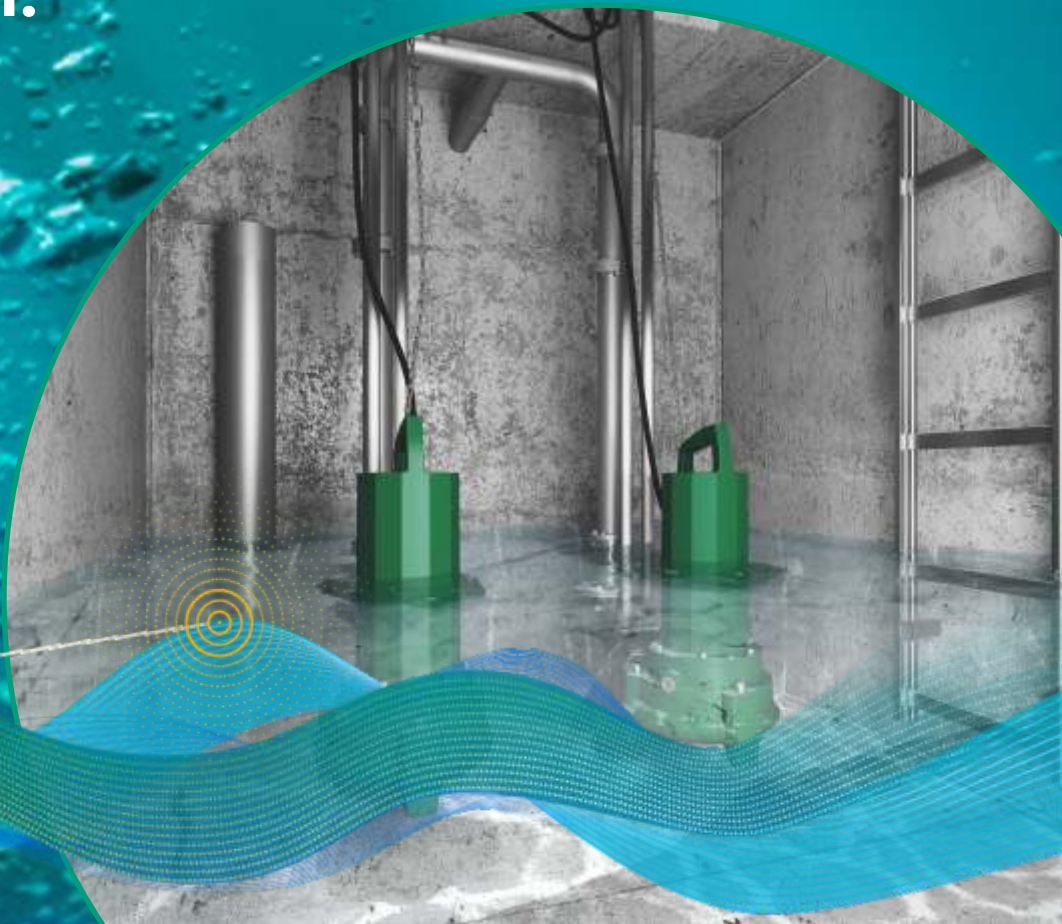



Construction Design :	Submersible sewage pump
Application :	<ul style="list-style-type: none"> → Municipal raw sewage transfer → Sewage treatment plants → Effluent treatment plants → Dirty water in Industry
Volume Flow Q Max :	8000 m ³ /hr
Delivery Head Max :	100 mtr
Special features :	<ul style="list-style-type: none"> → Energy-efficient thanks to optional IE3 motor technology → Protected against abrasion and corrosion with Ceram coating and special materials → Suitable for immersed and non-immersed applications, even in continuous duty → Explosion proof protection → Solid impeller → Motor with IP68 protection → Temp up to 60 Deg C.
Product/Design Features :	<ul style="list-style-type: none"> → Max. immersion depth 20 m → Mains Connection: 415 V, 50Hz → Vertical Submersible Sewage pump → Stage: Single → Non-clog impeller → Large free passage size upto 200 mm → Oil barrier chamber with float switch winding/bearing temp indicators/moisture sensor → Optional External sealing chamber monitoring
Material of Construction :	<ul style="list-style-type: none"> → Casing: Cast-Iron / NiCi → Impeller: Cast Iron / SS / NiCi → Other material on request