


Pioneering for You

wilo

Pumps and Pumping Systems

Wilo Vertical Turbine Pumps

**Transporting Water.
With Passion.**

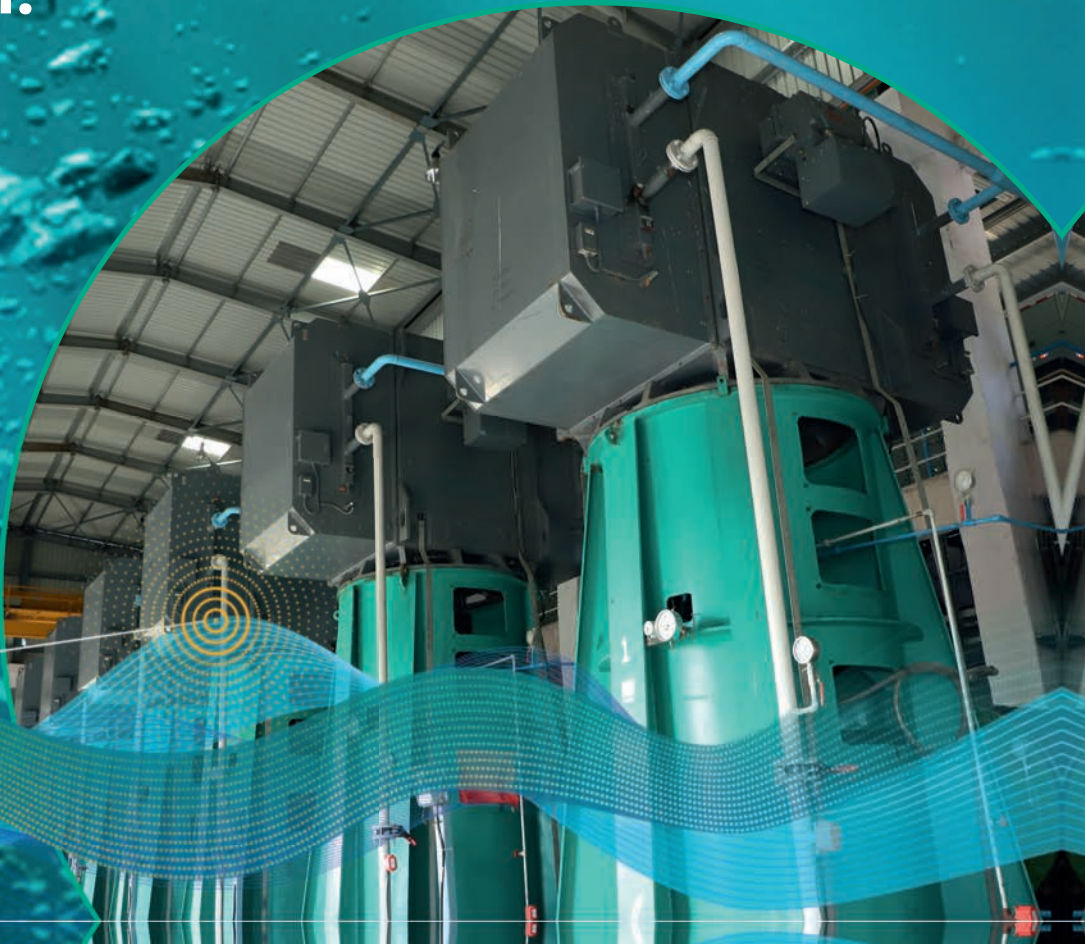

	Volume Flow Q Max	: 50000 m3/hr
	Delivery Head Max	: 450 mtr
	Vertical Turbine Pumps	: 87 models
	Series	: CNE, VMF, VAF, VMP
	Operating Temperature	: 0°C to 80°C, Higher on request
	Mounting	: Vertical
	Orientation	: Above Floor, Below Floor
	Thrust Bearing Lubrication	: Grease , Oil
	Line Shaft Bearing	: Self, Forced [external]
	Lubrication	
	Direction of Rotation	: Clockwise, Counter Clockwise
	Bowl Assembly	: Pull out or Non-pull out
Material of Construction :	Casing : Cast Iron, Stainless Steel, Duplex SS, Cast steel Impeller : Cast Iron, Stainless Steel, Bronze, Cast Steel, Duplex SS	
Application :	→ Water Supply/Irrigation → Cooling water for power plant → Flood Control/Condensate → Extraction → General Industry/Fire fighting → Sea water/offshore/onshore	
Special features :	→ Above floor/below floor → Single/multistage → Caisson/canister construction → Tilted pad thrust bearings with cooling arrangement, semi-open impellers → Intermediate bearings lubrications-Pumped medium/oil/external water → Engine driven with right angle gear box	



WILO Mather and Platt Pumps Pvt. Ltd.
1st Floor, "One Elpro Park",
Elpro Compound, CTS No.4270,
Chinchwad, Pune – 411033.
Maharashtra (India)

T +91 20 67347100 / 200
Service Toll Free: 1800 266 8866

www.wilo.in
sales.in@wilo.com

www.facebook.com/WiloIndia

Tech. matter subject to change without prior notice
Images are for representation purpose only, actual product may differ.

SB_WILO_VT_01_A4_12092022_E