

Pioneering for You

wilo

Submersible Pumpset


Wilo – CIFAC





Field of application Dewatering /Wastewater/Sewage collection and transport

Duty chart

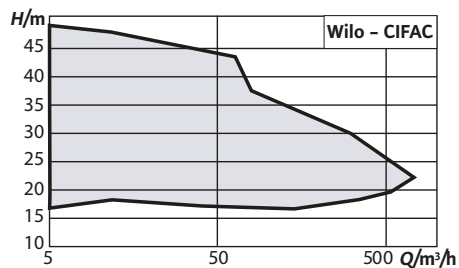

Construction Submersible drainage/sewage pump

Application Pumping of
Sewage containing faeces
Wastewater
Untreated Sewage

Volume flow Q_{max} 700 m³/hr

Delivery head H_{max} 48 m

Special features → IE3 motor self-cooling motors for use in wet well.
→ Protection class IP68
→ Reliable semi-open single-vane with alloy cutter at impeller tip.
→ Integrated pump support foot for easy installation
→ Motor overload protection and leakage in oil chamber protection
→ Large free ball passage upto 100 mm

Technical data → Mains connection: 3~415 V, 50 Hz
→ Pump housing : Cast Iron
→ Impeller: Cast Iron /Stainless steel
→ Also available in other MOC like duplex stainless steel

Equipment/function Optional features :
→ H class insulation
→ Stationary wet sump installation
→ Auto-coupler (Suspension device)

WILO Mather and Platt Pumps Pvt. Ltd.
1st Floor, "One Elpro Park",
Elpro Compound, CTS No.4270,
Chinchwad, Pune – 411033.
Maharashtra (India)

T +91 20 67347100 / 200
Service Toll Free: 1800 266 8866

www.wilo.in
sales.in@wilo.com

www.facebook.com/WiloIndia

Tech. matter subject to change without prior notice
Images are for representation purpose only, actual product may differ.