

Product Brochure - 60 Hz

460 Series OSG

ANSI B73.1 Process Pumps



460 Series OSG

ANSI B73.1 Process Pumps



Features & Benefits

- → Back pull-out design
- → Open, adjustable impellers
- → Heavy walled casing
- → Heavy duty shaft and bearings
- → Oil lubricated bearings
- → Labyrinth oil seals
- → Base mounted, flex-coupled
- → Multiple stuffing box configurations
- → Multiple sealing options
- → Multiple materials of construction options

Technical Data

- → Max. Temperature (standard): 300°F
- → Max. Temperature (modified): 350°F
- → Discharge Sizes: 1"-8"
- → Suction & Discharge Flange Rating: 150# flat face


Standard Construction


- \rightarrow 316 SS / 316 SS fitted
- → Sleeved 4140 steel shaft with 316 SS sleeve
- → Standard bore stuffing box
- → Elastomer bellows mechanical seal with silicon carbide faces

Applications

- → Process
- → Petrochemical
- → Pulp & Paper
- → Steel Mills
- → Municipal
- → Mining

Max Head: 700 feet Max. Flow: 5,500 GPM

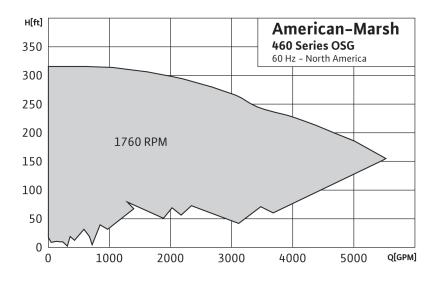

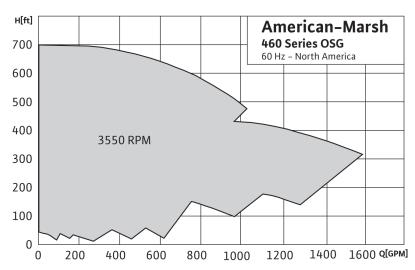

460 Series LF OSG

ANSI B73.1 Low Flow Process Pumps



Features & Benefits

- → Designed for low flow services
- → Back pull-out design
- → Open radial vane, adjustable impellers
- → Concentric circular casing
- → Heavy walled casing
- → Heavy duty shaft and bearings
- → Oil lubricated bearings
- → Labyrinth oil seals
- → Base mounted, flex-coupled
- → Multiple stuffing box configurations
- → Multiple sealing options
- → Multiple materials of construction options

Technical Data

- → Max. Temperature (standard): 300°F
- → Max. Temperature (modified): 350°F
- → Discharge Sizes: 1"-1.5"
- → Suction & Discharge Flange Rating: 150# raised face (300# raised face for the 1.5x3-13)


Standard Construction


- \rightarrow 316 SS / 316 SS fitted
- → Sleeved 4140 steel shaft with 316 SS sleeve
- → Standard bore stuffing box
- → Elastomer bellows mechanical seal with silicon carbide faces

Applications

- → Process
- → Petrochemical
- → Pulp & Paper
- → Steel Mills
- → Municipal
- → Mining

Max Head: 925 feet Max. Flow: 220 GPM

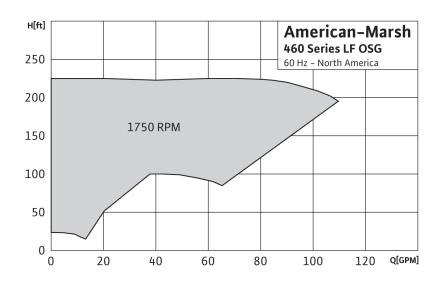

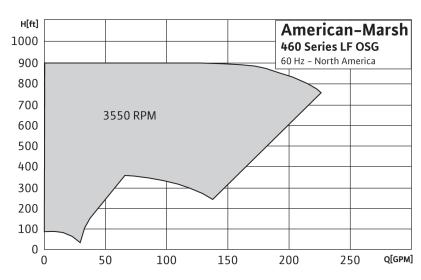





American-Marsh Pumps +1 901-860-2300 www.american-marsh.com amp.cs@wilo.com