

“Building a reputation not resting on one”

*Product Brochure - 60 Hz.*

## In-Line Pumps



## Type II

### Vertical In-Line Close-Coupled Pumps



#### Applications

- Heating and Cooling Systems
- Pressure Boosting
- Municipal Water Supply

**Max Head:** 400 feet  
**Max. Flow:** 4000 GPM

#### Features & Benefits


- Back pull-out design for quick removal
- Quiet, vibration-free operations
- 95% recyclable material
- Energy Saving – optimized hydraulics
- Double volute design (3" and up)

#### Technical Data

- Pump Sizes: 1.25" – 10"
- Max 262 PSI
- Fluid Temp Range: -23°F to 275°F
- 1750 or 3500 RPM Options

#### Materials of Construction

- Cast Iron Casing ASTMA48, CL30
- Impeller Stainless Steel 304
- Sleeve Bronze SAE 660
- Wear Ring Tin Bronze ASTM B584-90500

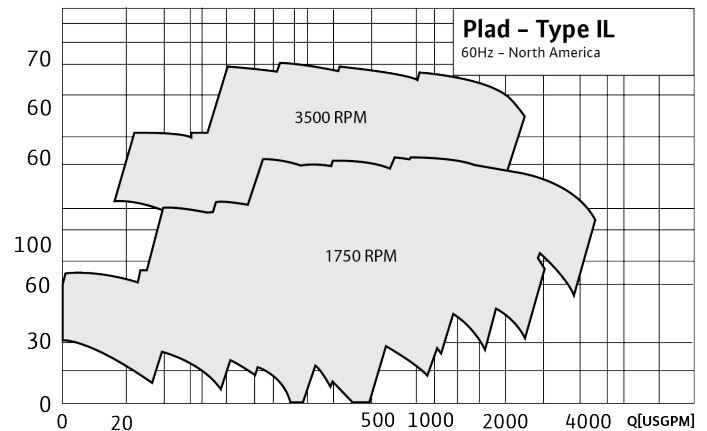

## Type IS

### Spacer Coupling Vertical In-Line Pumps



#### Applications

- Heating and Cooling Systems
- Pressure Boosting
- Municipal Water Supply

**Max Head:** 400 feet  
**Max. Flow:** 4000 GPM

#### Features & Benefits


- Back pull-out design for quick removal
- Quiet, vibration-free operations
- 95% recyclable material
- Energy Saving – optimized hydraulics
- Double volute design (3" and up)

#### Technical Data

- Pump Sizes: 1.25" – 10"
- Max 262 PSI
- Fluid Temp Range: -23°F to 275°F
- 1750 or 3500 RPM Option

#### Materials of Construction

- Cast Iron Casting ASTMA48, CL30

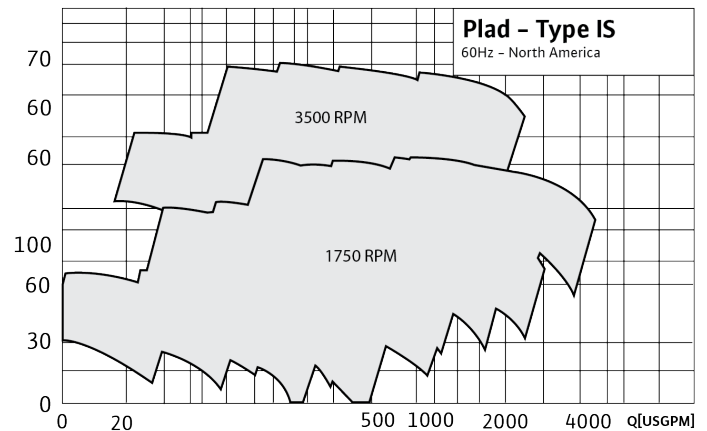



“Building a reputation not resting on one”

**Plad Equipment Ltd.**

+1 450-965-0224

[www.plad.com](http://www.plad.com)

[sales@plad.com](mailto:sales@plad.com)