

“Building a reputation not resting on one”

Product Brochure - 60 Hz.

In-Line Pumps



Type IL

Vertical In-Line Close-Coupled Pumps



Applications

- Heating and Cooling Systems
- Pressure Boosting
- Municipal Water Supply

Max Head: 400 feet
Max. Flow: 4000 GPM

Features & Benefits


- Back pull-out design for quick removal
- Quiet, vibration-free operations
- 95% recyclable material
- Energy Saving – optimized hydraulics
- Double volute design (3" and up)

Technical Data

- Pump Sizes: 1.25" – 10"
- Max 262 PSI
- Fluid Temp Range: -23°F to 275°F
- 1750 or 3500 RPM Options

Materials of Construction

- Cast Iron Casing ASTMA48, CL30
- Impeller Stainless Steel 304
- Sleeve Bronze SAE 660
- Wear Ring Tin Bronze ASTM B584-90500

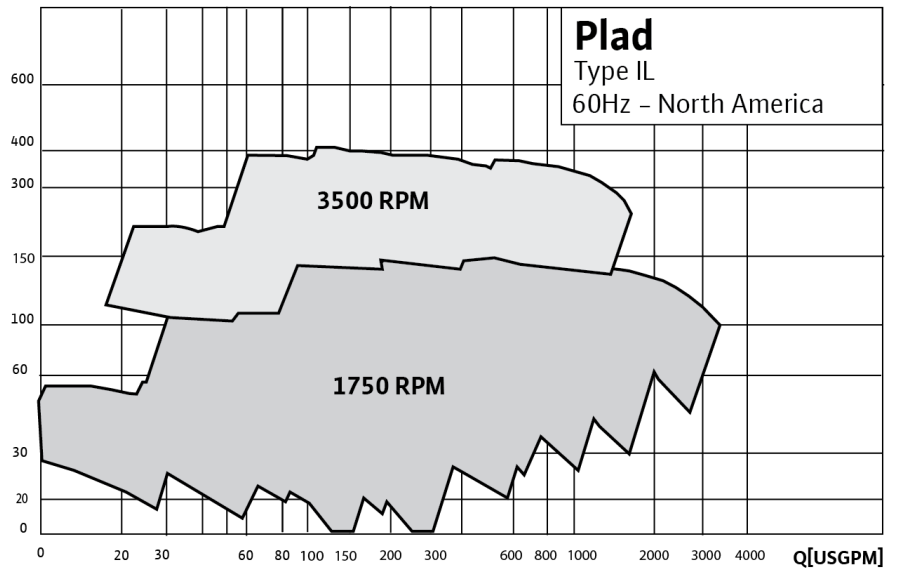

Type IS

Spacer Coupling Vertical In-Line Pumps



Applications

- Heating and Cooling Systems
- Pressure Boosting
- Municipal Water Supply

Max Head: 400 feet
Max. Flow: 4000 GPM

Features & Benefits


- Back pull-out design for quick removal
- Quiet, vibration-free operations
- 95% recyclable material
- Energy Saving – optimized hydraulics
- Double volute design (3" and up)

Technical Data

- Pump Sizes: 1.25" – 10"
- Max 262 PSI
- Fluid Temp Range: -23°F to 275°F
- 1750 or 3500 RPM Option

Materials of Construction

- Cast Iron Casting ASTM48, CL30

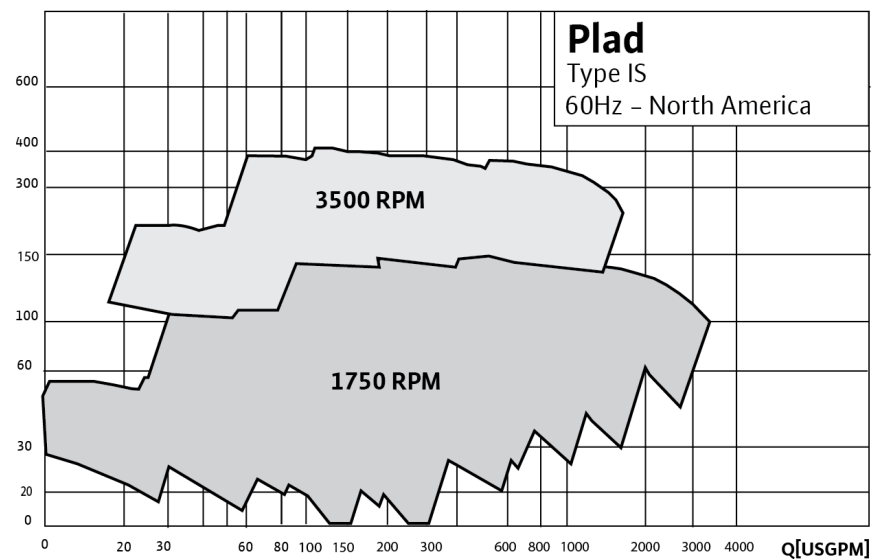



“Building a reputation not resting on one”

Plad Equipment Ltd.

+1 450-965-0224

www.plad.com

sales@plad.com