

Pioneering for You


wilo



Wilo Pumps and Pumping Systems

Wilo-MNC

Self-priming Non-Clog pump & pumpset

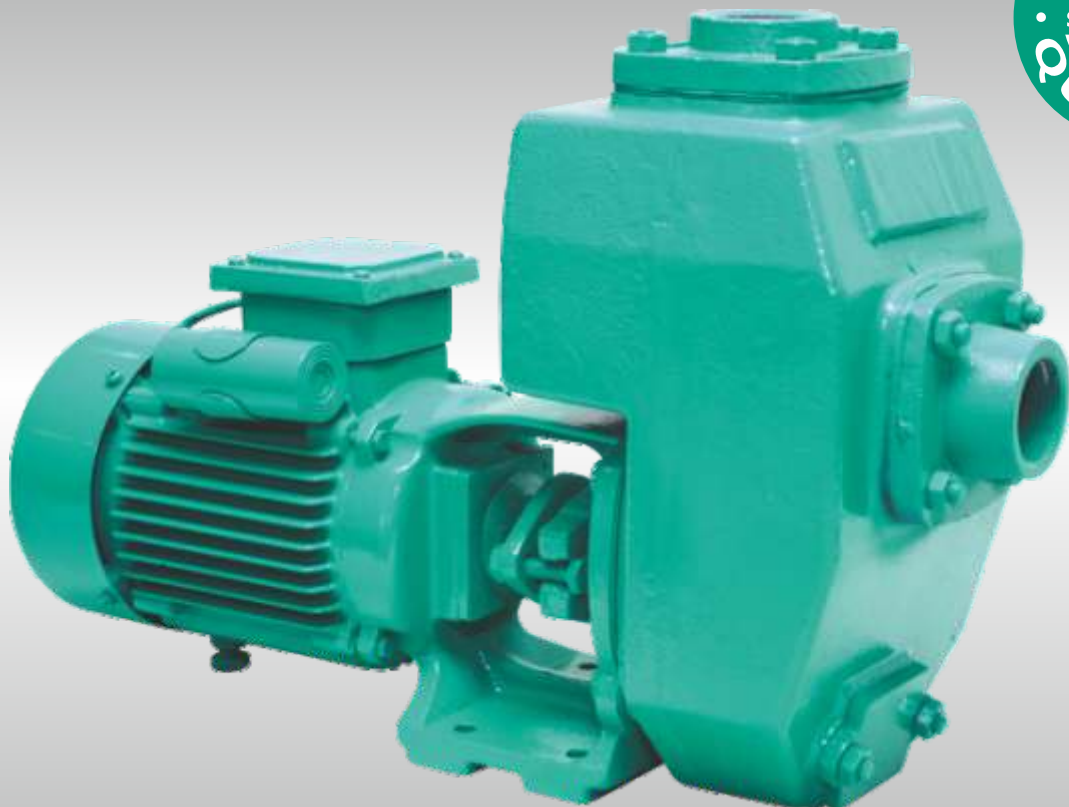



Material of Construction :	<ul style="list-style-type: none"> → Impeller : Cast Iron/Bronze → Casing : Cast Iron → Sealing : Gland pack/ Mech. seal
Application :	<ul style="list-style-type: none"> → De-watering from trenches, pits, basements → Godowns, multistory, shopping malls → Hospitals, hotels → Sewage pumping, rain water, flooding and mud transfer
Volume Flow Q_{Max} :	upto 215 m ³ /hr
Delivery Head H_{Max} :	upto 12 m
Special features :	<ul style="list-style-type: none"> → Self priming and back pull out design for easy maintenance → Non clog and semi open impeller enables to handle solids up to 40 mm → Non asbestos PTFE gland packing along with stuffing box arrangement → Motors are with high operating efficiency and suitable for wide voltage fluctuations → Replaceable wearing parts and rewind able motor. → Stator and rotors are coated with rust proof solution for better corrosion resistance.
Technical data :	<ul style="list-style-type: none"> → Power: upto 0.5 Hp → Voltage: 220 V (Single phase) → 415 V (Three phase)

Selection Table:

Pump Model	Article Number	Power Rating		Pipe Size			Head in meters				Solid Size mm	Imp. Dia. mm	Direction of rotation
		kW	HP	Suction	Delivery		6	8	10	12			
MNC0.5M-CI/MS	8278077	0.37	0.5	40	40	Discharge in LPM	215	175	138	100	6	109	ACW
MNC0.5M-CI/MS	8278078	0.37	0.5	40	40		215	175	138	100	6	109	ACW

Wilo Mather and Platt Pumps Pvt. Ltd.
 Mumbai-Pune Road, Chinchwad, Pune – 411019.
 Maharashtra (India)
 T + 91 20 27442100
 F + 91 20 27442111

www.wilo.in
sales.in@wilo.com

www.facebook.com/WiloIndia

Tech. matter subject to change without prior notice
 Images are for representation purpose only, actual product may differ.