


Pioneering for You

wilo[®]

Product brochure


Wilo-NL

Base Mount End Suction Pumps

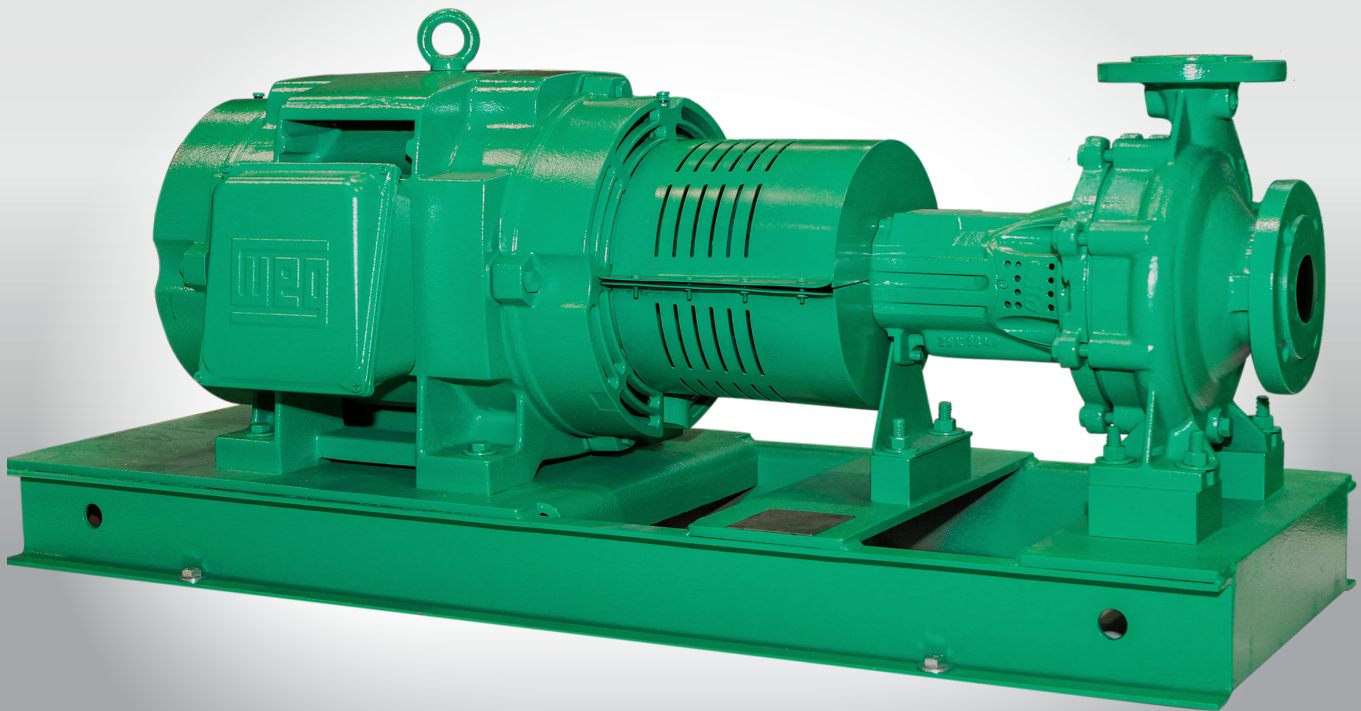


Wilo NL

- Heating and Cooling Systems
- Municipal Water Supply
- Transfer and Pressure Boosting
- Irrigation
- Boiler Feed/Condensate
- Industrial Applications

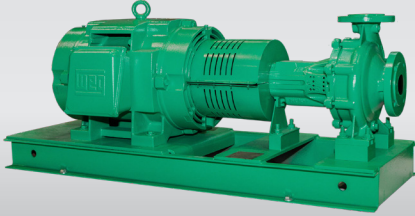

WILO_BRO_NL_0818

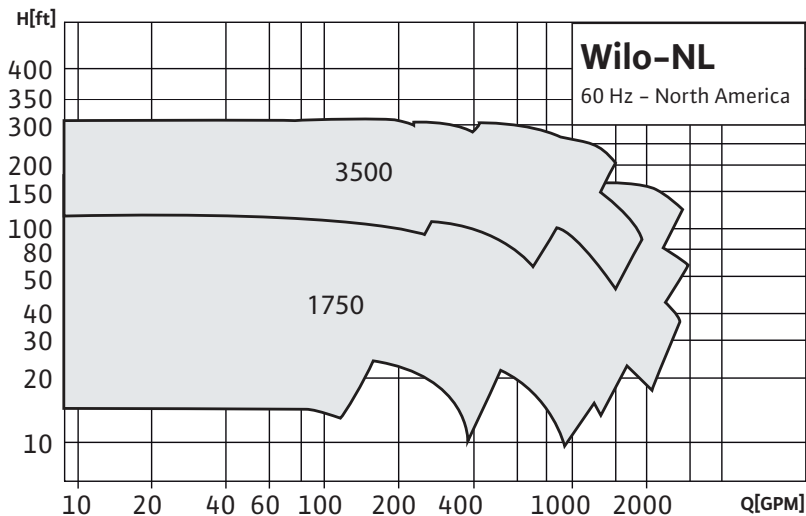

Features & Benefits

- Back pullout design allows replacement of bearings and seals without disturbing the piping
- Three bearing bracket sizes for all models
- Confined gasket between cover and casing
- Maintenance-free bearings
- Improved hydraulics for reduced vibration
- Over 50 models available up to 200 HP

Technical Specifications

- Temp Range: -5°F to 250°F (-20°C to 121°C)
- Horsepower Range: 1-75HP (3500RPM) ½-200HP (1750RPM)
- Flange Size Range: 1¼" to 8"
- Max Pressure: 232 PSI (16 Bar)
- Cast Iron Volute
- Bronze Impeller
- Stainless Steel Shaft
- C/SiC/EPDM Mechanical Seal (other seals available upon request)
- NEMA Standard Motors

Wilo USA

+1 888-945-6872
www.wilo-usa.com
info@wilo-usa.com

Wilo Canada

+1 866-945-6236
www.wilo-canada.com
info@wilo-canada.com

Wilo Mexico

+52 55 5586 3209
www.wilo-mx.com
info@wilo.com.mx