

Zubehör - Accessories - Accessoires

Uniprop TR50-2 ... TR75-2 - Flumen OPTI / EXCEL TR50-3 ... TRE60-3

Rahmen vert. verstellbar - Frame vert. adjustable - Bâti réglable vert.

wilo


Heimgartenstraße 1-3 D-95030 Hof/Saale
 Telefon +49 9281 974-0 Fax +49 9281 96528
 www.wilo.com E-Mail: info@wilo.com

Kunde Projekt Angebot - Quotation - Offre
 Customer Project Auftrag - Order - Commande
 Client Nr. - No.:

Führungsrohrlänge Standard L= 6 m
 Guide pipe length L1= L2= L3= m
 Longueur du tube de guidage


Teile - parts - pièces séparées
 montiert - mounted - monté

Schwenkbereich auftragsbezogen prüfen!!!
 Working range - depending on order!!!
 Gamme d'orientation - dépendant de la commande!!!



Flumen OPTI / EXCEL
 TR50-3 ... TRE60-3

Uniprop -2

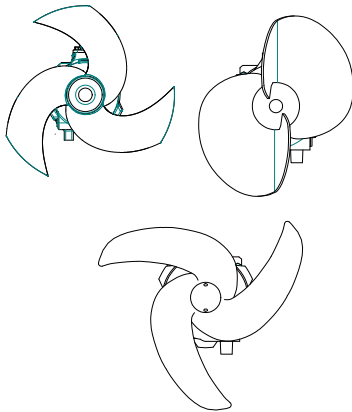

- TR xx-x. _ _ /8V
- TR xx-x. _ _ /8
- TR xx-x. _ _ /12
- TR xx-x. _ _ /16
- TR xx-x. _ _ /24

- KMAT 6000249 - TR 50-2
- KMAT 6000250 - TR 60-2
- KMAT 6000251 - TR 75-2
- KMAT 6081572 - TRE 50-2
- KMAT 6081571 - TRE 60-2

- KMAT 6091012 - TR 50-3
- KMAT 6091005 - TR 60-3
- KMAT 6091006 - TRE 50-3
- KMAT 6091011 - TRE 60-3

A4 = 1.4571 / AISI 316Ti / Z 6 CNDT 17-12
 A2 = 1.4301 / AISI 304 / Z 7 CN 18-09

= Befestigungssatz / fixing elements / éléments de fixation

