

Zubehör - Accessories - Accessoires

Flumen OPTI TR 120-1
AVUS - AVUSH - AVU 120 - AVU 140


wilo

Heimgartenstraße 1-3 D-95030 Hof/Saale
Telefon +49 9281 974-0 Fax +49 9281 96528
www.wilo.com E-Mail: info@wilo.com


Kunde Projekt Angebot - Quotation - Offre
Customer Project Auftrag - Order - Commande
Client Nr. - No.:

Führungsrohrlänge Standard L= 6 m
Guide pipe length L1= L2= L3= m
Longueur du tube de guidage

Teile - parts - pièces séparées
 montiert - mounted - monté

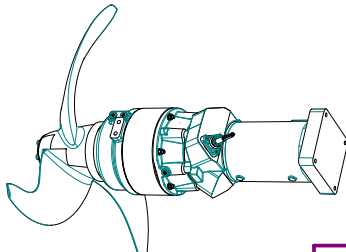

TR 120-1



AVUSH1

KMAT
6000556

6011005
 0° Standard
 15° 30° 45°

A2
 A4 6011007

AVUS1

KMAT
6000556

A2
 A4 6011007

TR 120-1. - /22

TR 120-1. - /30

KMAT 6065238
KMAT 6066679

AVU 120

KMAT
6000553

6010954
 A2
 A4

Schub
Thrust < 3500N
Poussée

AVU 140


KMAT
6000553

L2
 6010954
 A2
 A4

AVU 140

KMAT
6000553

6011005

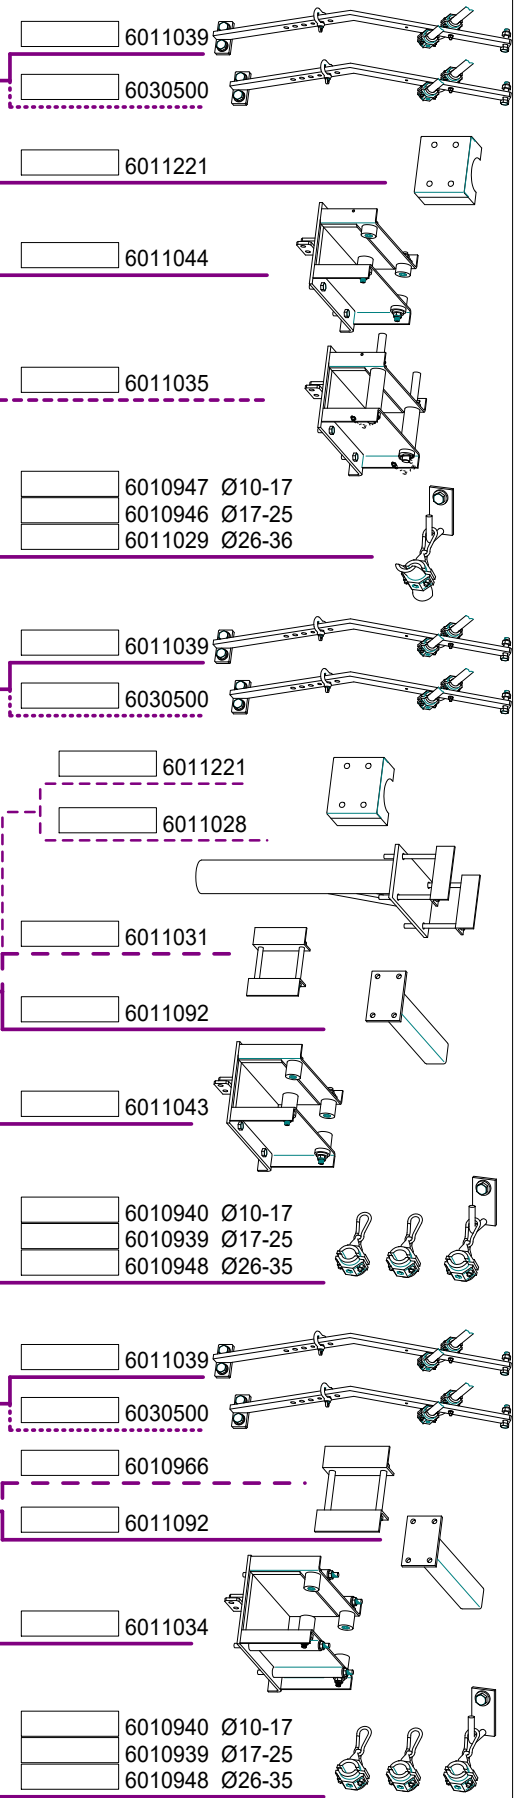

Freigabe ENG erforderlich
Permission by ENG necessary
permis requis (ENG)

A4 = 1.4571 / AISI 316Ti / Z 6 CNDT 17-12
A2 = 1.4301 / AISI 304 / Z 7 CN 18-09
= Befestigungssatz / fixing elements /
éléments de fixation