


Pioneering for You

wilo

Submersible mixer

Flumen EXCEL-TRE 30.95-6/16

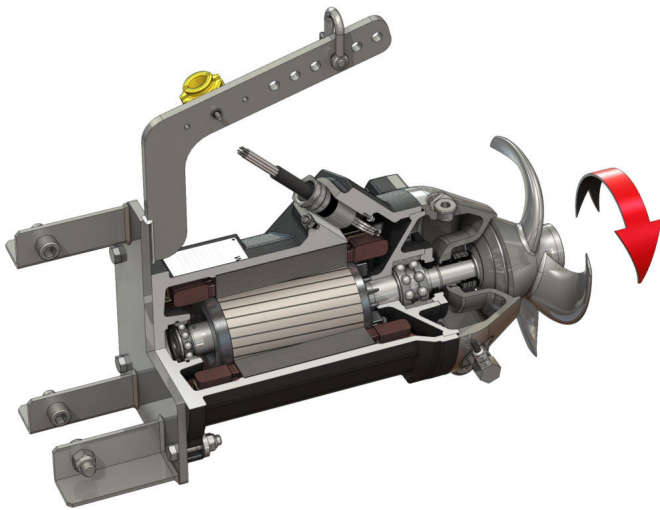

Unit

Power consumption at duty point $P_{1,1}$	1.00 kW
Max. thrust F	240 N
Thrust to power ratio	240 N/kW
Max. weight* m	90 kg
Explosion protection ATEX ATEX	optional
Explosion protection FM FM	optional
Protection class motor	IP68

Propeller

Propeller model	3-blade propeller with self-cleaning hub; clogging- and entwining-free
Nominal propeller diameter D_{nom}	300 mm
Propeller speed n	950 1/min
Transmission ratio	1.000

Filling quantities and types

Filling sealing chamber	White oil
Fill volume sealing chamber V	1.20 l

Motor/electronics

Motor type	TE 17-6/16R (Ex)
Motor design	Submersible motor – surface-cooled
Mains connection	3~400 V, 50 Hz
Rated current I_N	4.70 A
Starting current – direct I_A	39.00 A
Starting current – star-delta I_A	13.00 A
Power consumption $P_{1 max}$	2.60 kW
Rated power P_2	2.1 kW
Speed original n	941 1/min
Motor efficiency class	IE3
Efficiency η_M	81.9 %
Power factor $\cos \varphi$	0.79
Min. fluid temperature T_{min}	3 °C
Max. fluid temperature T_{max}	40 °C
Max. immersion depth	20 m
Insulation class	H
Max. switching frequency t	15 rph
min. switching break t	3 min
Starting torque M	80 Nm
Moment of inertia	0.0206 kg/m ²
Motor bearings	1 grooved ball bearing, 1 two-row inclined ball bearing

Materials

Motor housing	5.1301, EN-GJL-250
Static gaskets	FKM
Motor shaft	1.4021, X20Cr13
Sealing chamber	1.4408, GX5CrNiMo19-11-2
Seal on the fluid side	SiC/SiC, Q1Q1VGG
Propeller	1.4408, GX5CrNiMo19-11-2

*maximum weight including accessories