

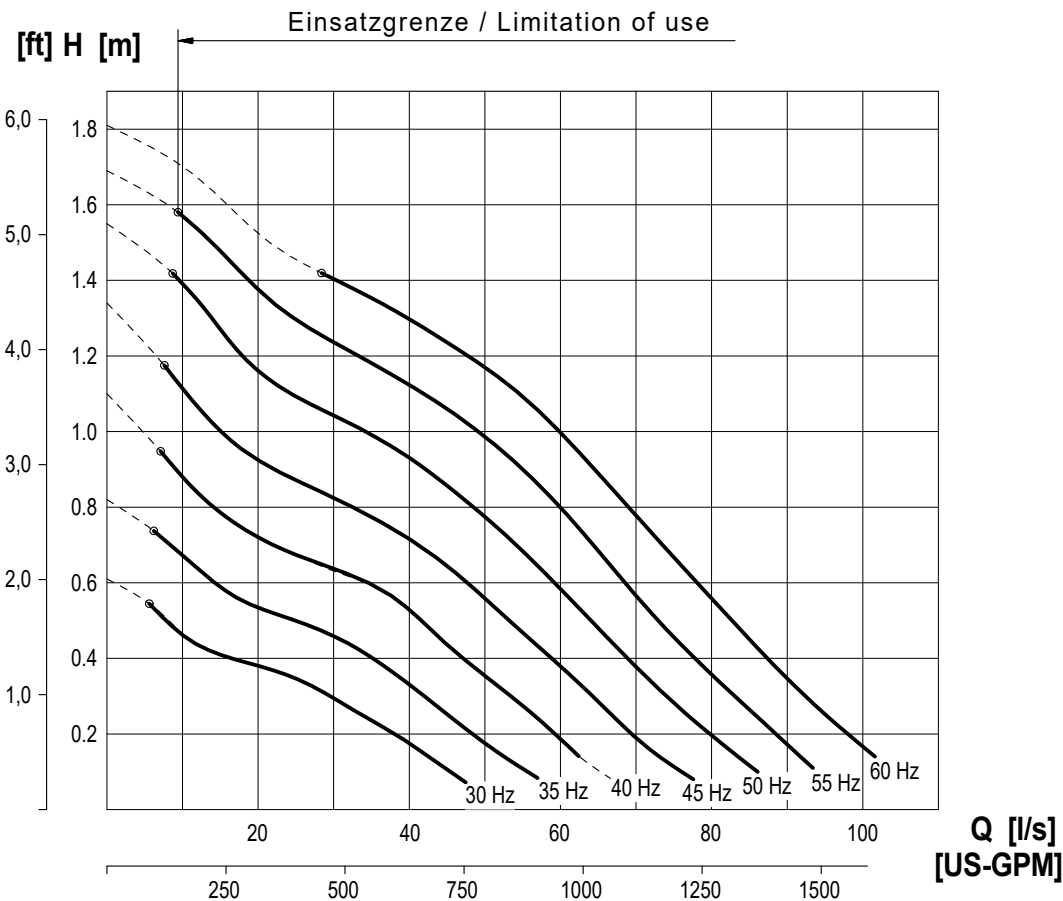
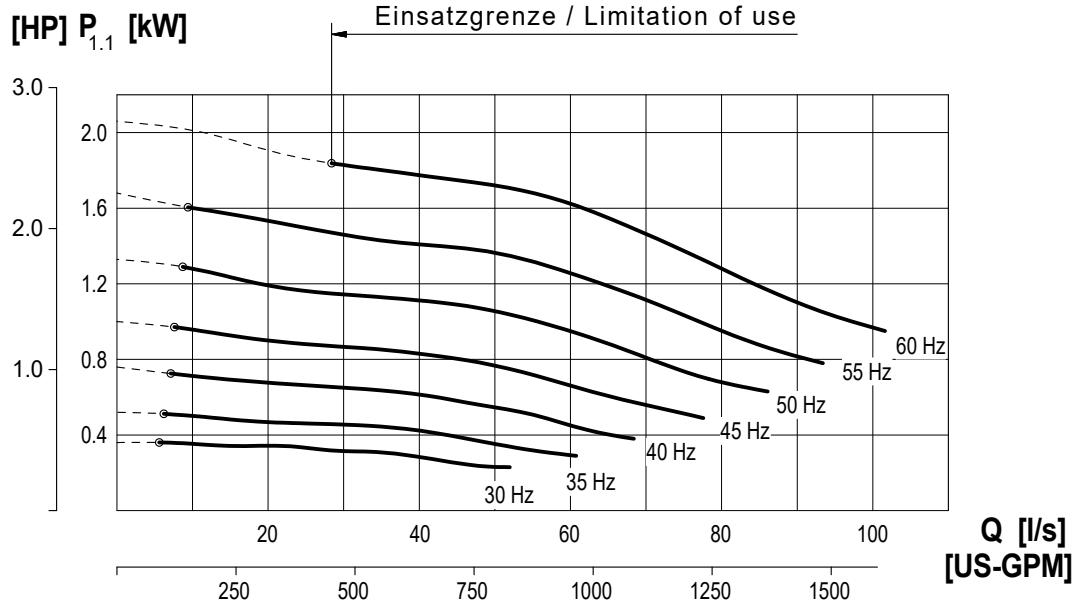


Kennlinie Performance curve	Baureihe Type	<b>RZP 20-1.145-4/13 S1</b>	Nr./ No. Version	<b>KL 0318-1</b> 2020-07-02 Sp
Netz / Main connection	<b>400V~3 / 50Hz</b>		Nenndrehzahl Nom. Speed	<b>1361 [1/min]</b>
Motortyp / Motor type	<b>T 12-4/13 (Ex)</b>		Kugeldurchgang Free ball passage	<b>60 [mm]</b>
Laufrad Ø / Impeller Ø	<b>200 [mm]</b>		Effizienzklasse / Efficiency class	<b>IE<sub>2</sub> / DIN EN 60034-30-1</b>
Nennleistung / Rated output [P2]	<b>1.50 [kW]</b>	Max.-Leistung / power input [P1]	<b>1.94 [kW]</b>	
			Hydr.Nr.	<b>6088666</b>

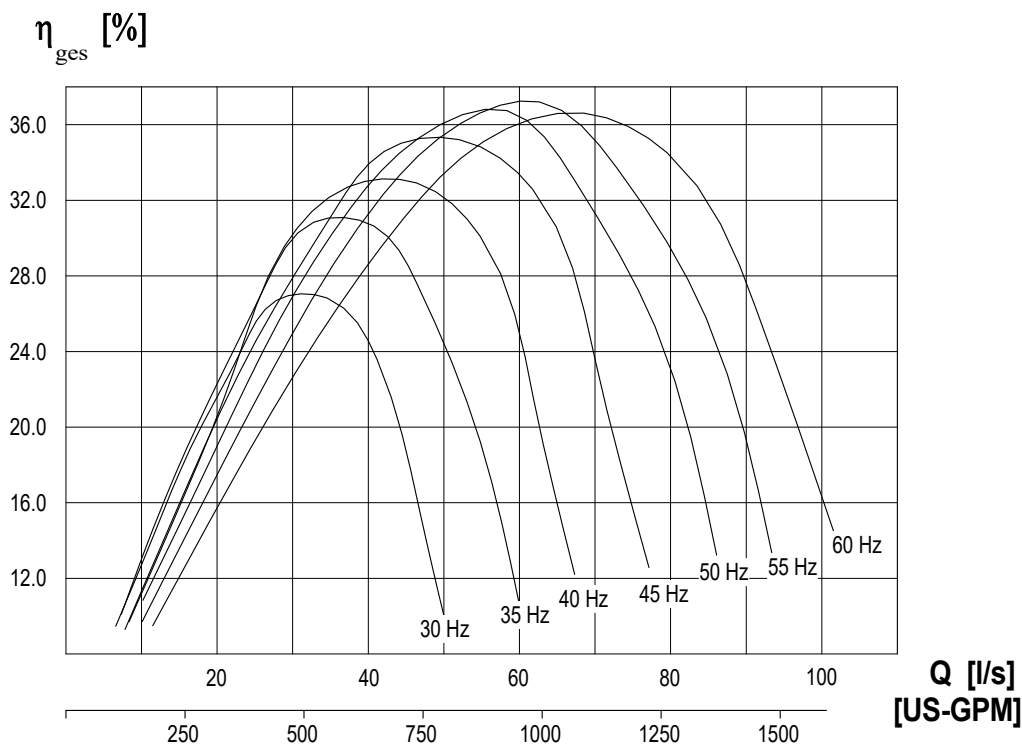

± 10% Toleranz bei linearer U/f-Frequenzregelung / ± 10% tolerance with linear U/f frequency control

Kennlinie Performance curve	Baureihe Type	<b>RZP 20-1.145-4/13 S1</b>	Nr./ No. Version	<b>KL 0318-2</b> 2020-07-02 Sp
Netz / Main connection	<b>400V~3 / 50Hz</b>		Neendrehzahl Nom. Speed	<b>1361 [1/min]</b>
Motortyp / Motor type	<b>T 12-4/13 (Ex)</b>		Kugeldurchgang Free ball passage	<b>60 [mm]</b>
Lauf rad Ø / Impeller Ø	<b>200 [mm]</b>		Effizienzklasse / Efficiency class	<b>IE<sub>2</sub> / DIN EN 60034-30-1</b>
Nennleistung / Rated output [P2]	<b>1.50 [kW]</b>	Max.-Leistung / power input [P1]	<b>1.94 [kW]</b>	
			Hydr.Nr.	<b>6088666</b>

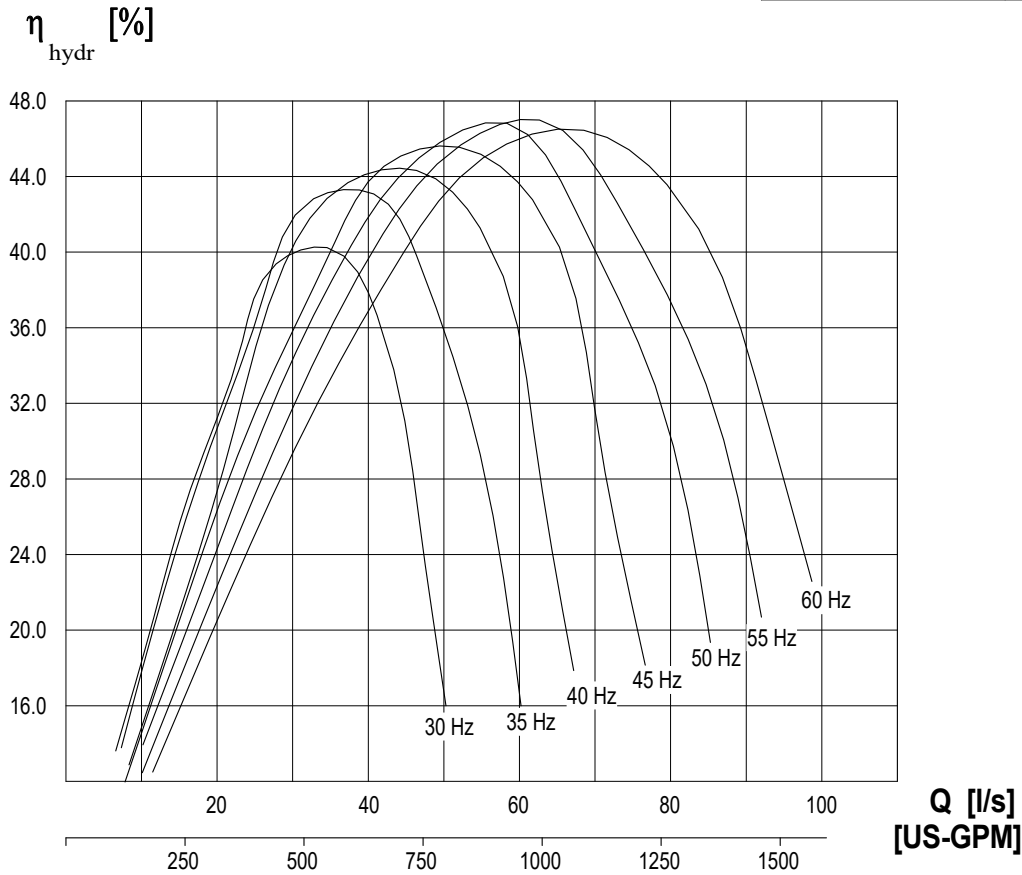

± 10% Toleranz bei linearer U/f-Frequenzregelung / ± 10% tolerance with linear U/f frequency control