
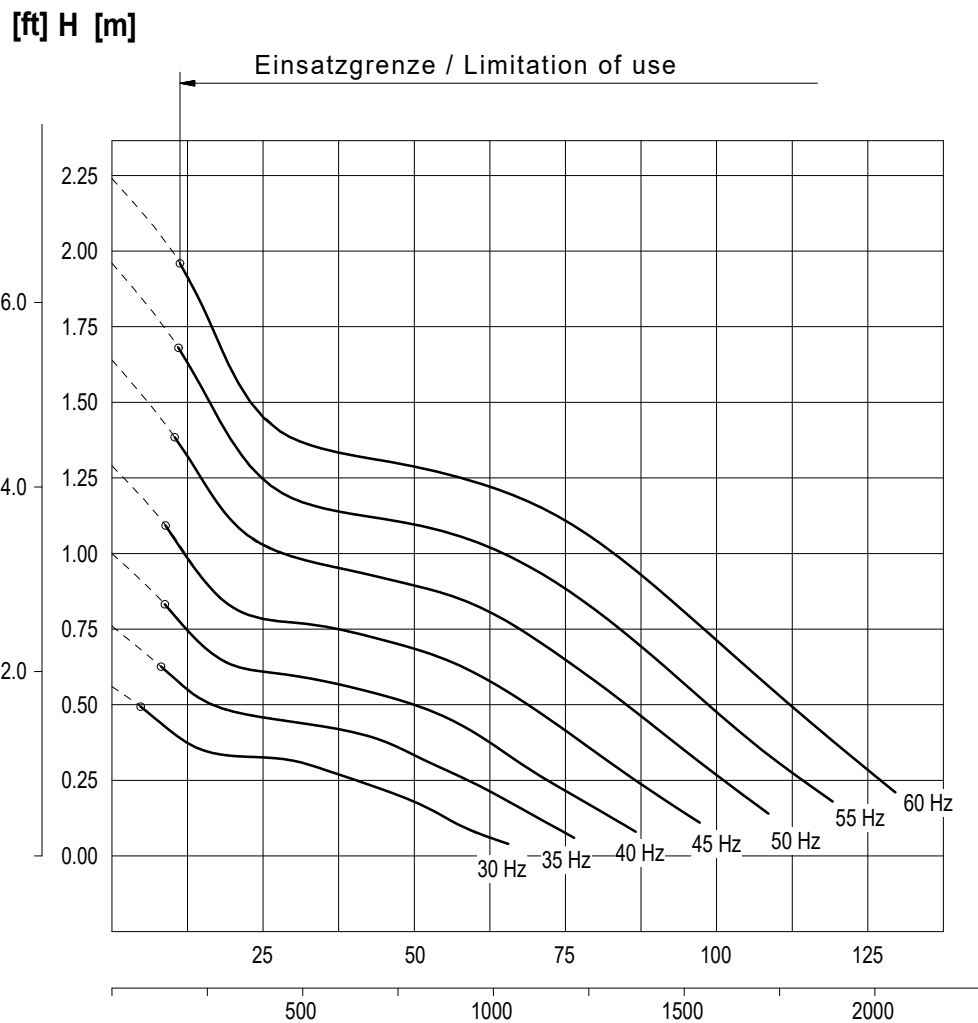



Kennlinie Performance curve	Baureihe Type	RZP 25-3.95-6/12 S1	Nr./No.: Stand:	KL 0327-1 2021-02-23 Sp
Netz/ Main connection	400V~3 / 50Hz		Nennzahl Nom. Speed	920 [1/min]
Motortyp / Motor type	T 17-6/12R (Ex)		Kugeldurchgang Free ball passage	60 [mm]
Lauf rad Ø / Impeller Ø	250 [mm]		Max.-Leistung / power input [P1]	3,45 [kW]
Effizienzklasse / Efficiency class	IE / DIN EN 60034-30-1		Hydr.Nr.	6089099
Nennleistung / Rated output [P2]:	2,5 [kW]			

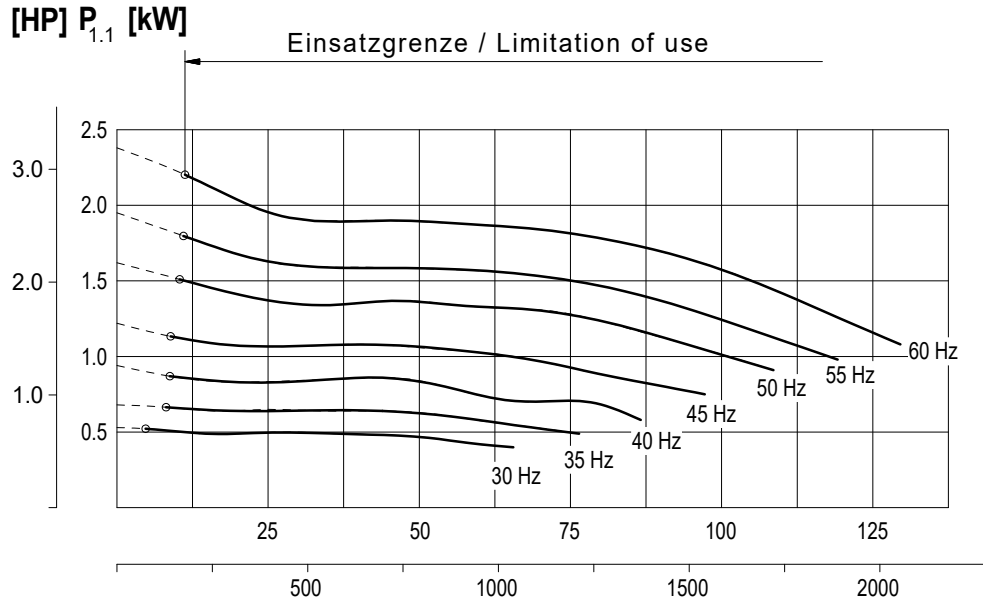

± 10% Toleranz bei linearer U/f-Frequenzregelung / ± 10% tolerance with linear U/f frequency control


Kennlinie Performance curve	Baureihe Type	RZP 25-3.95-6/12 S1	Nr./No.: Stand:	KL 0327-2 2021-02-26 Sp
Netz/ Main connection	400V~3 / 50Hz			Nennzahl Nom. Speed
Motortyp / Motor type	T 17-6/12R (Ex)			920 [1/min]
Laufrad Ø / Impeller Ø	250 [mm]			Kugeldurchgang Free ball passage
Effizienzklasse / Efficiency class	IE / DIN EN 60034-30-1			60 [mm]
Nennleistung / Rated output [P2]:	2,5 [kW]	Max.-Leistung /	power input [P1]	3,45 [kW]
			Hydr.Nr.	6089099

η_{hydr} [%]

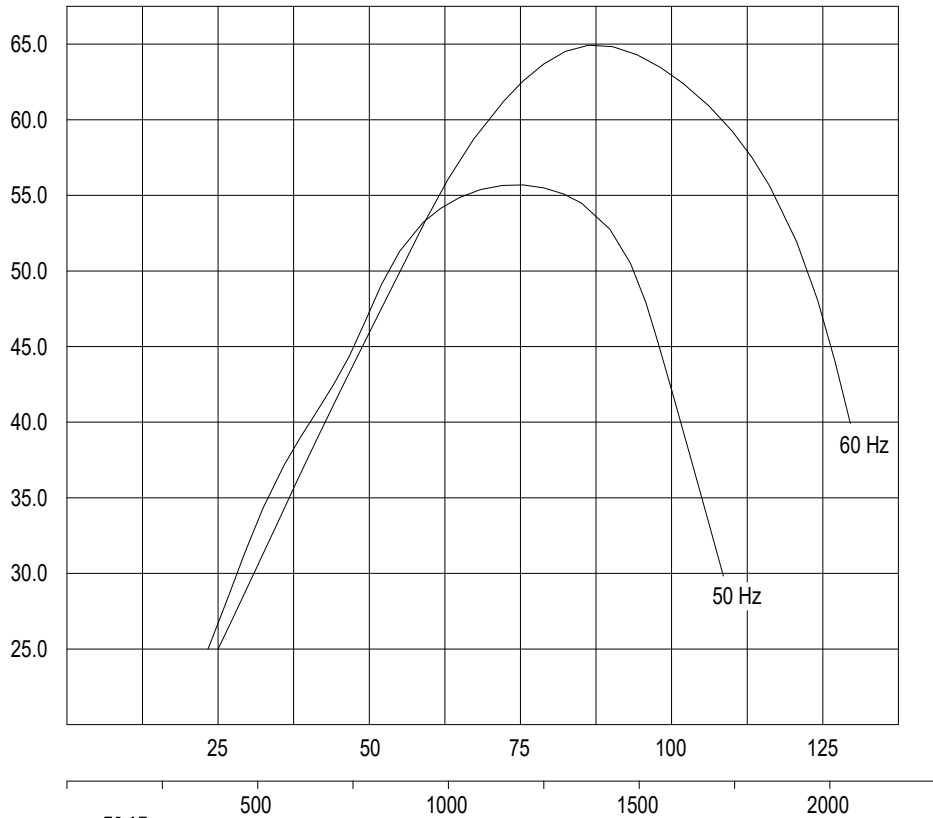

Q [l/s]
[US-GPM]

η_{ges} [%]

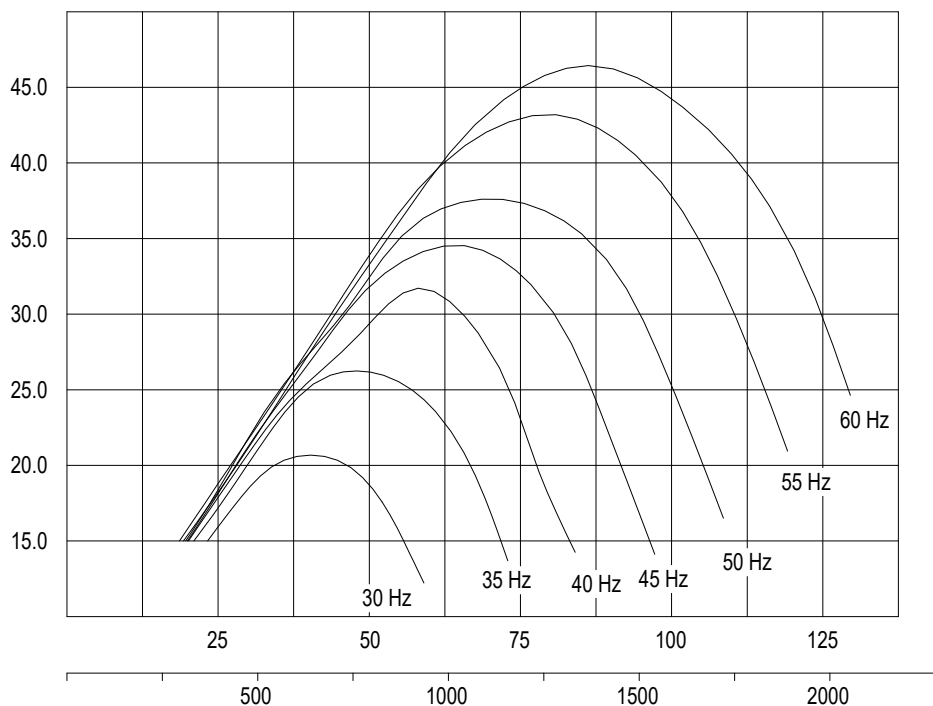

Q [l/s]
[US-GPM]

± 10% Toleranz bei linearer U/f-Frequenzregelung / ± 10% tolerance with linear U/f frequency control