



Kennlinie Performance curve	Baureihe Type	<b>RZP 25-3.145-4/16 S1</b>	Nr./No.: Stand:	<b>KL 0336-1</b> 2021-03-31 Sp
Netz/ Main connection	<b>400V~3 / 50Hz</b>		Nenndrehzahl Nom. Speed	<b>1400 [1/min]</b>
Motortyp / Motor type	<b>T 17-4/16R (Ex)</b>		Kugeldurchgang Free ball passage	<b>60 [mm]</b>
Laufrad Ø / Impeller Ø	<b>250 [mm]</b>		Effizienzklasse /Efficiencyclass	<b>IE<sub>2</sub> / DIN EN 60034-30-1</b>
Nennleistung / Rated output [P2]:	<b>6,5 [kW]</b>	Max.-Leistung / power input [P1]	<b>8,2 [kW]</b>	
			Hydr.Nr.	<b>6089099</b>

[HP] P<sub>1.1</sub> [kW]


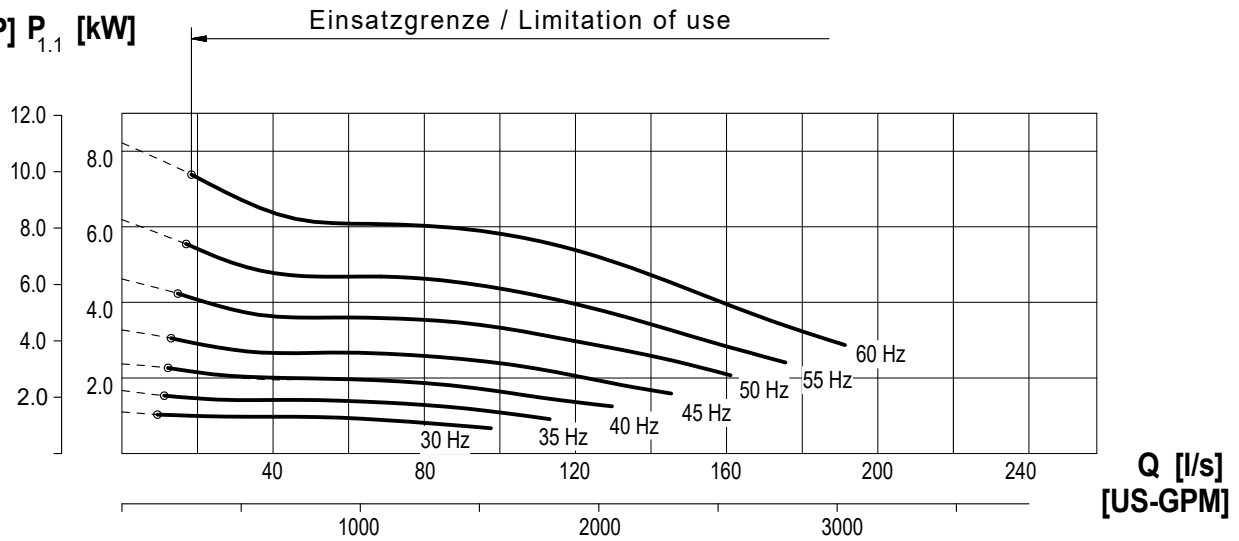


[ft] H [m]

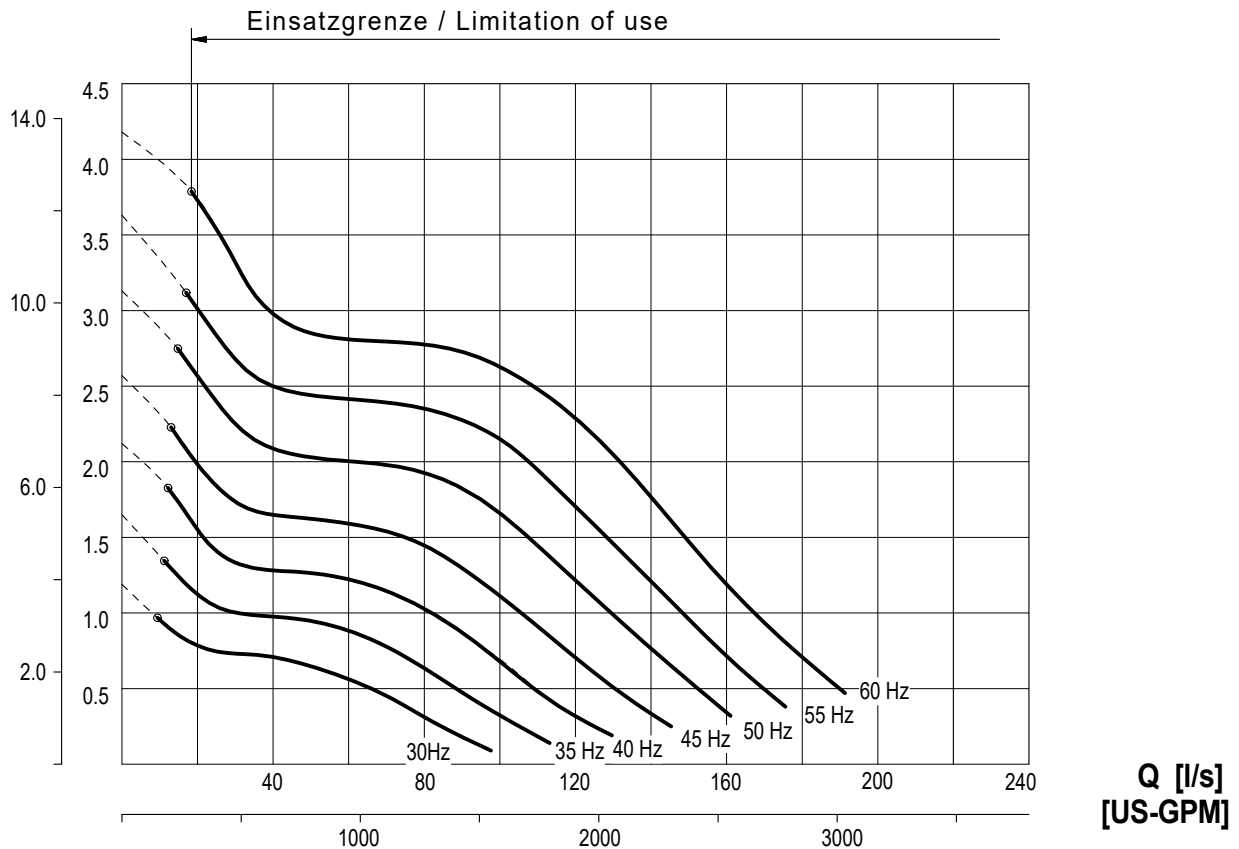

± 10% Toleranz bei linearer U/f-Frequenzregelung / ± 10% tolerance with linear U/f frequency control

Kennlinie Performance curve	Baureihe Type	<b>RZP 25-3.145-4/16 S1</b>	Nr./No.: Stand:	<b>KL 0336-2</b> 2021-03-31 Sp
Netz/ Main connection	<b>400V~3 / 50Hz</b>			Nennzahl Nom. Speed
Motortyp / Motor type	<b>T 17-4/16R (Ex)</b>			<b>1400 [1/min]</b>
Laufrad Ø / Impeller Ø	<b>250 [mm]</b>			Kugeldurchgang Free ball passage
Effizienzklasse / Efficiency class	<b>IE<sub>2</sub> / DIN EN 60034-30-1</b>			<b>60 [mm]</b>
Nennleistung / Rated output [P2]:	<b>6,5 [kW]</b>	Max.-Leistung /	power input [P1]	<b>8,2 [kW]</b>
			Hydr.Nr.	<b>6089099</b>

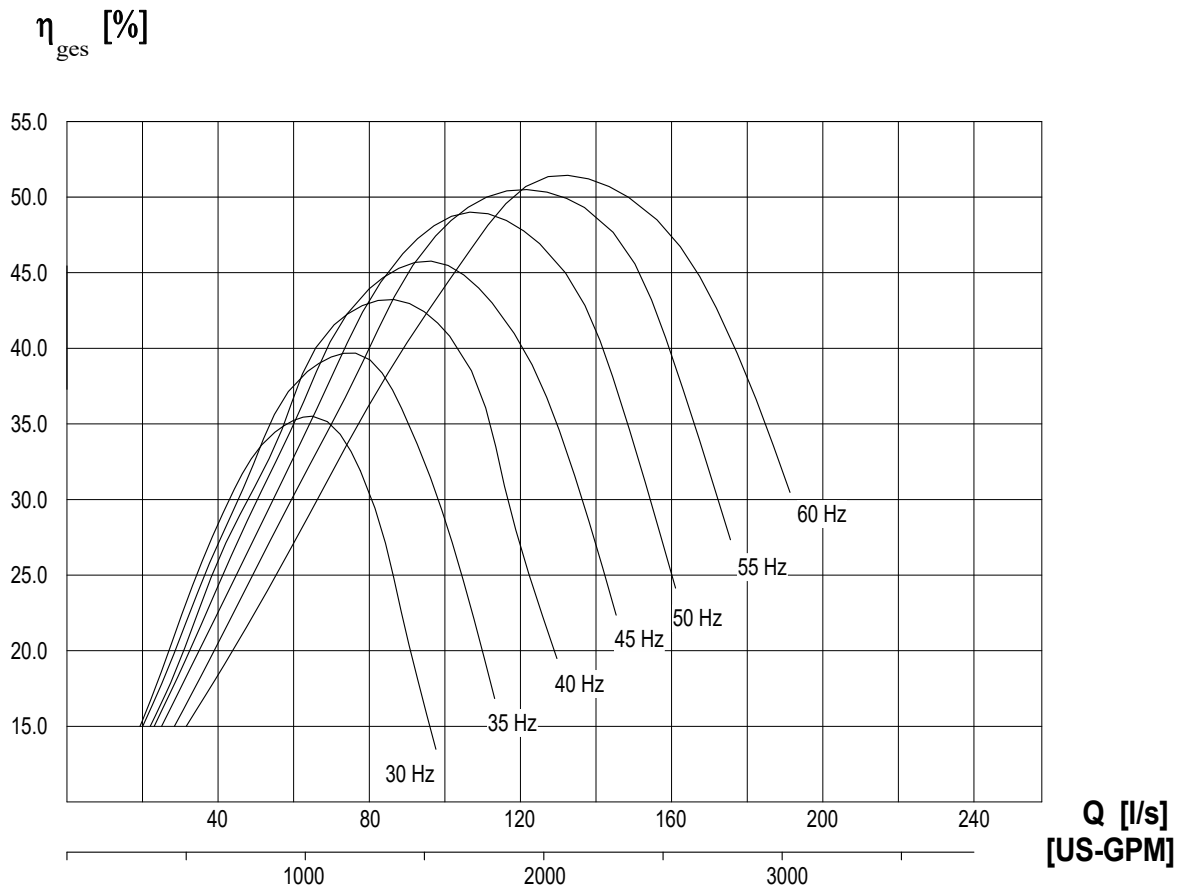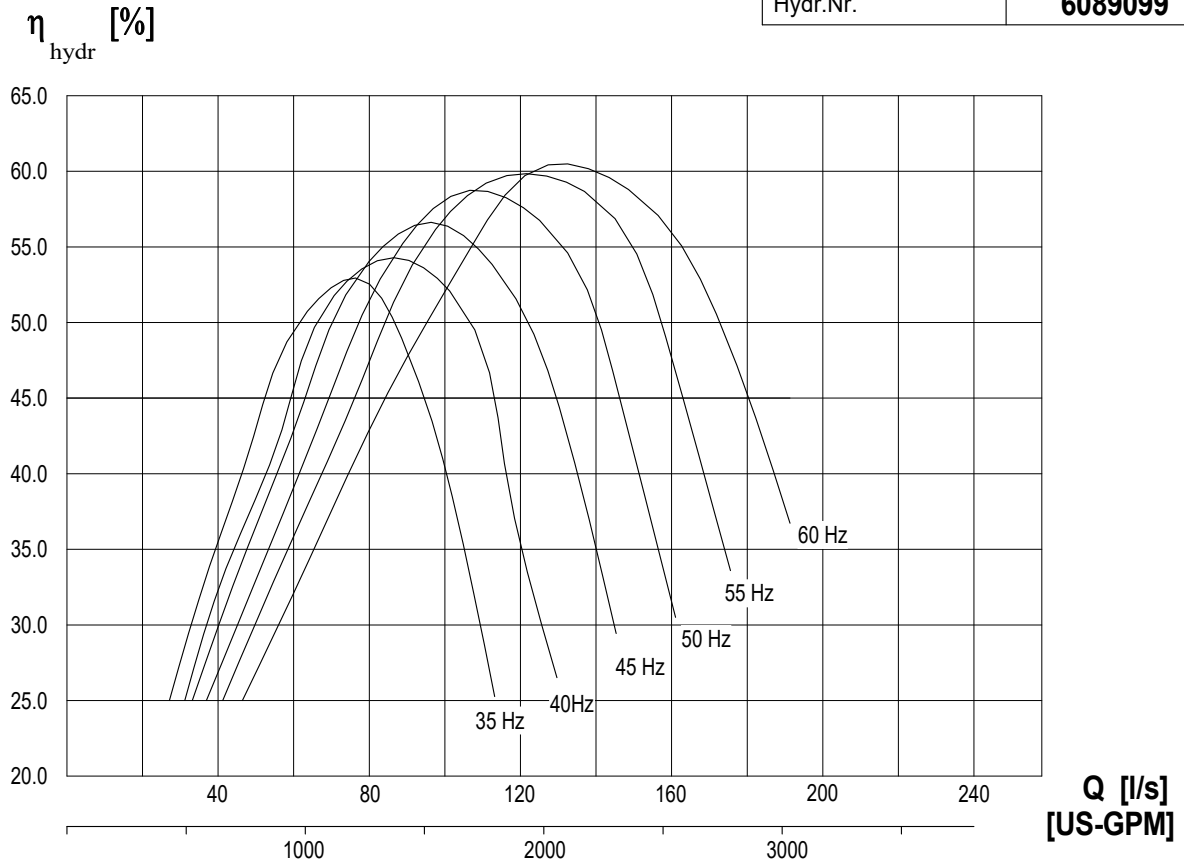

± 10% Toleranz bei linearer U/f-Frequenzregelung / ± 10% tolerance with linear U/f frequency control