

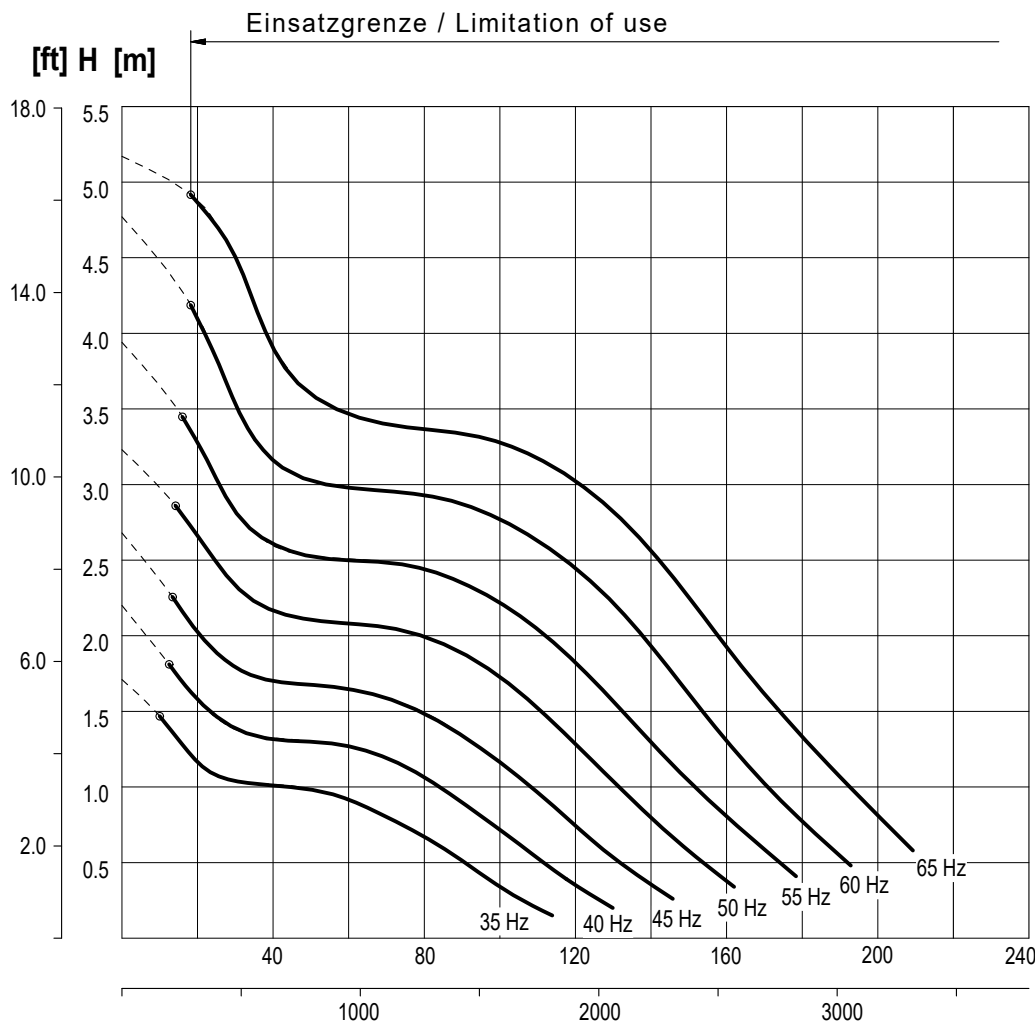
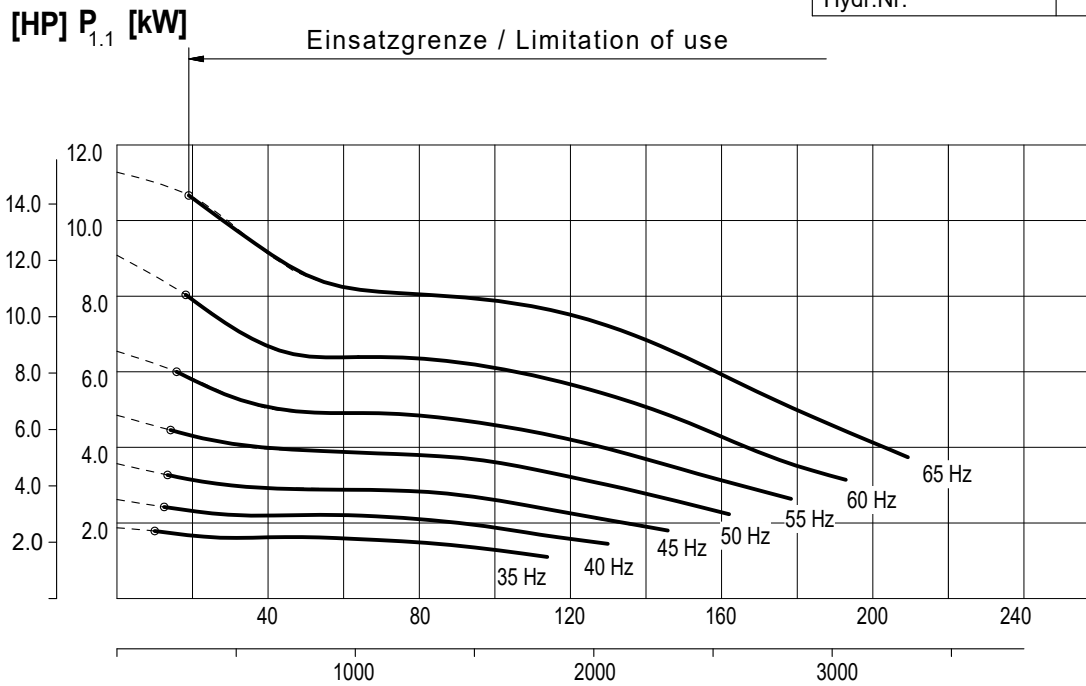


Kennlinie Performance curve	Baureihe Type	RZP 25-3.145-4/24 S1	Nr./No.: Stand:	KL 0333-1 2021-03-29 Sp
Netz/ Main connection	400V~3 / 50Hz		Nennzahl Nom. Speed	1417 [1/min]
Motortyp / Motor type	T 17-4/24R (Ex)		Kugeldurchgang Free ball passage	60 [mm]
Laufrad Ø / Impeller Ø	250 [mm]		Max.-Leistung / power input [P1]	12,2 [kW]
Effizienzklasse /Efficiencyclass	IE₂ / DIN EN 60034-30-1		Hydr.Nr.	6089099
Nennleistung / Rated output [P2]:	10,0 [kW]			

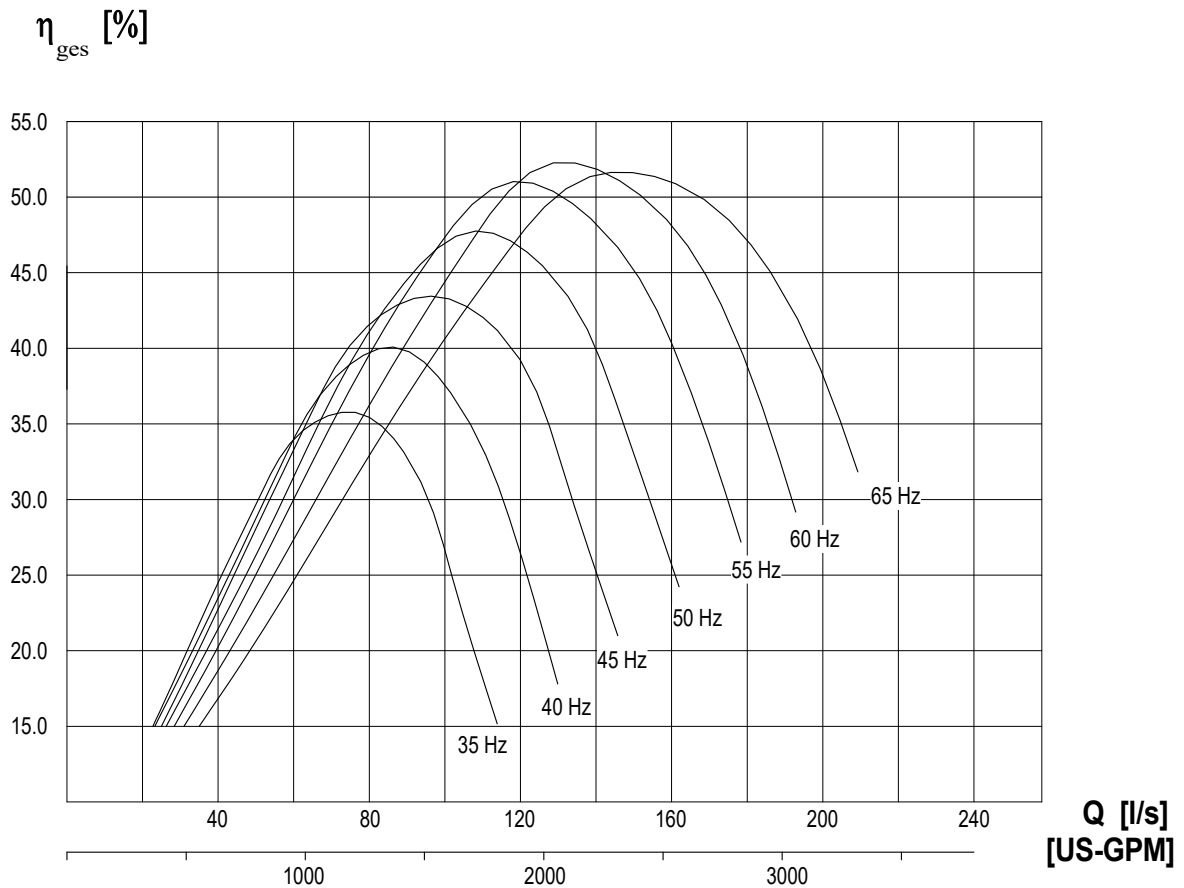

± 10% Toleranz bei linearer U/f-Frequenzregelung / ± 10% tolerance with linear U/f frequency control

Kennlinie Performance curve	Baureihe Type	RZP 25-3.145-4/24 S1	Nr./No.: Stand:	KL 0333-2 2021-03-29 Sp
Netz/ Main connection	400V~3 / 50Hz			Nenn Drehzahl Nom. Speed
Motortyp / Motor type	T 17-4/24R (Ex)			1417 [1/min]
Lauf rad Ø / Impeller Ø	250 [mm]			Kugeldurchgang Free ball passage
Effizienzklasse / Efficiency class	IE₂ / DIN EN 60034-30-1			60 [mm]
Nennleistung / Rated output [P2]:	10,0 [kW]	Max.-Leistung /	power input [P1]	12,2 [kW]
			Hydr.Nr.	6089099

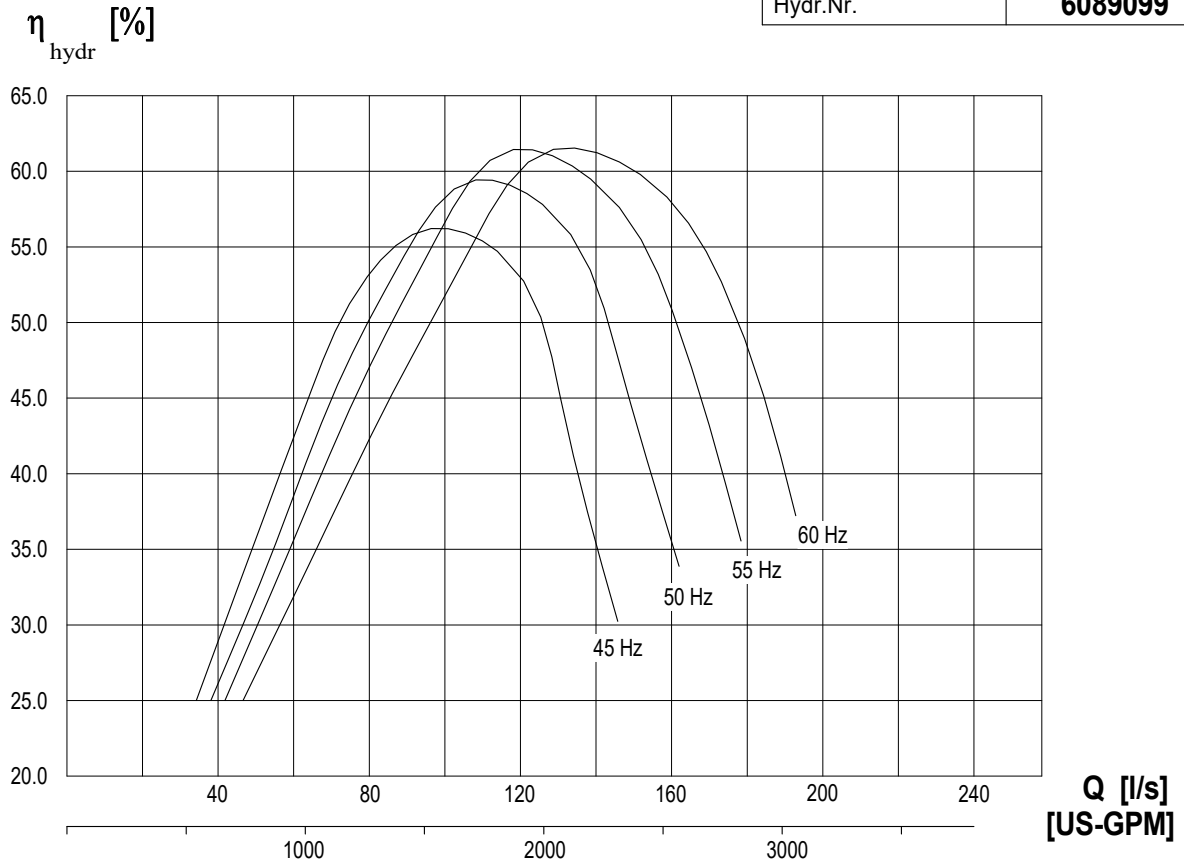

± 10% Toleranz bei linearer U/f-Frequenzregelung / ± 10% tolerance with linear U/f frequency control