
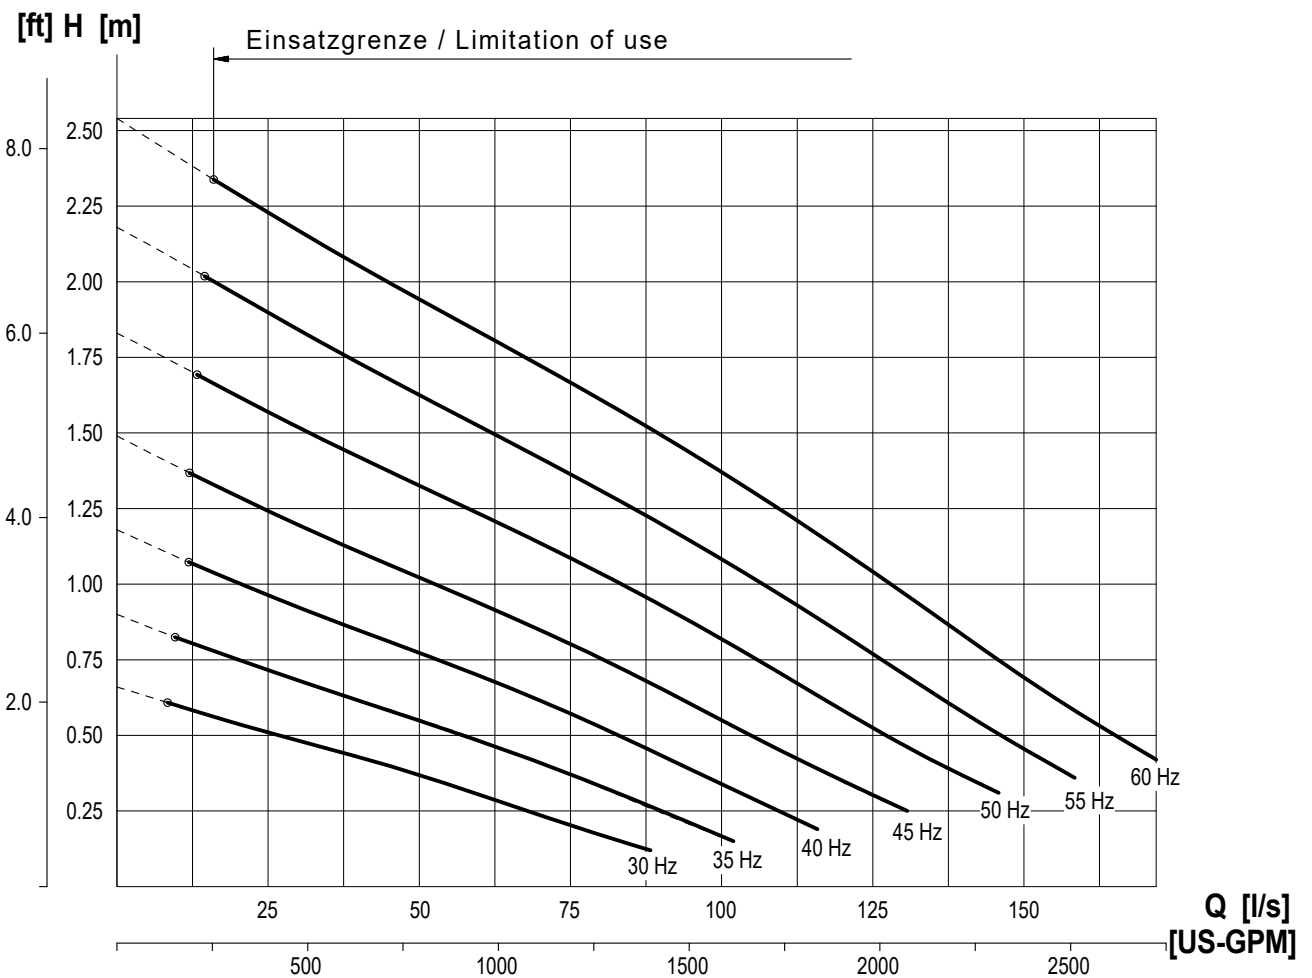



Kennlinie Performance curve	Baureihe Type	RZP 30.95-6/16 S1	Nr./ No. Version	KL 0306-1 2021-04-08 Sp
Netz / Main connection	400V~3 / 50Hz		Nennzahl Nom. Speed	931 [1/min]
Motortyp / Motor type	T 17-6/16R (Ex)		Kugeldurchgang Free ball passage	75 [mm]
Laufrad Ø / Impeller Ø	300 [mm]		Effizienzklasse / Efficiency class	IE₂ / DIN EN 60034-30-1
Nennleistung / Rated output [P2]	3,7 [kW]	Max.-Leistung / power input [P1]	5.2 [kW]	
			Hydr.Nr.	6087099

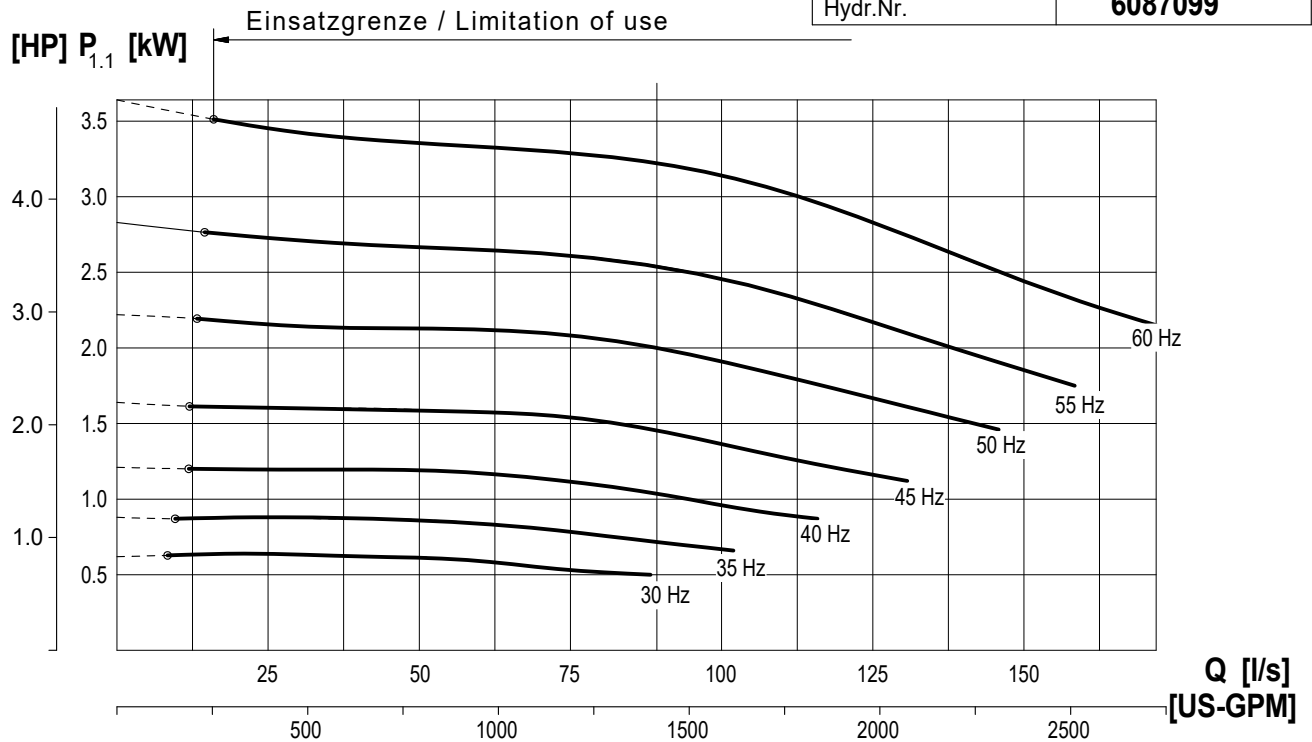


± 10% Toleranz bei linearer U/f-Frequenzregelung / ± 10% tolerance with linear U/f frequency control

Kennlinie Performance curve	Baureihe Type	RZP 30.95-6/16 S1	Nr./ No. Version	KL 0306-2 2021-04-08 Sp
Netz / Main connection	400V~3 / 50Hz		Nennzahl Nom. Speed	931 [1/min]
Motortyp / Motor type	T 17-6/16R (Ex)		Kugeldurchgang Free ball passage	75 [mm]
Laufrad Ø / Impeller Ø	300 [mm]		Effizienzklasse / Efficiency class	IE₂ / DIN EN 60034-30-1
Nennleistung / Rated output [P2]	3,7 [kW]	Max.-Leistung / power input [P1]	5.2 [kW]	
			Hydr.Nr.	6087099

η_{hydr} [%]

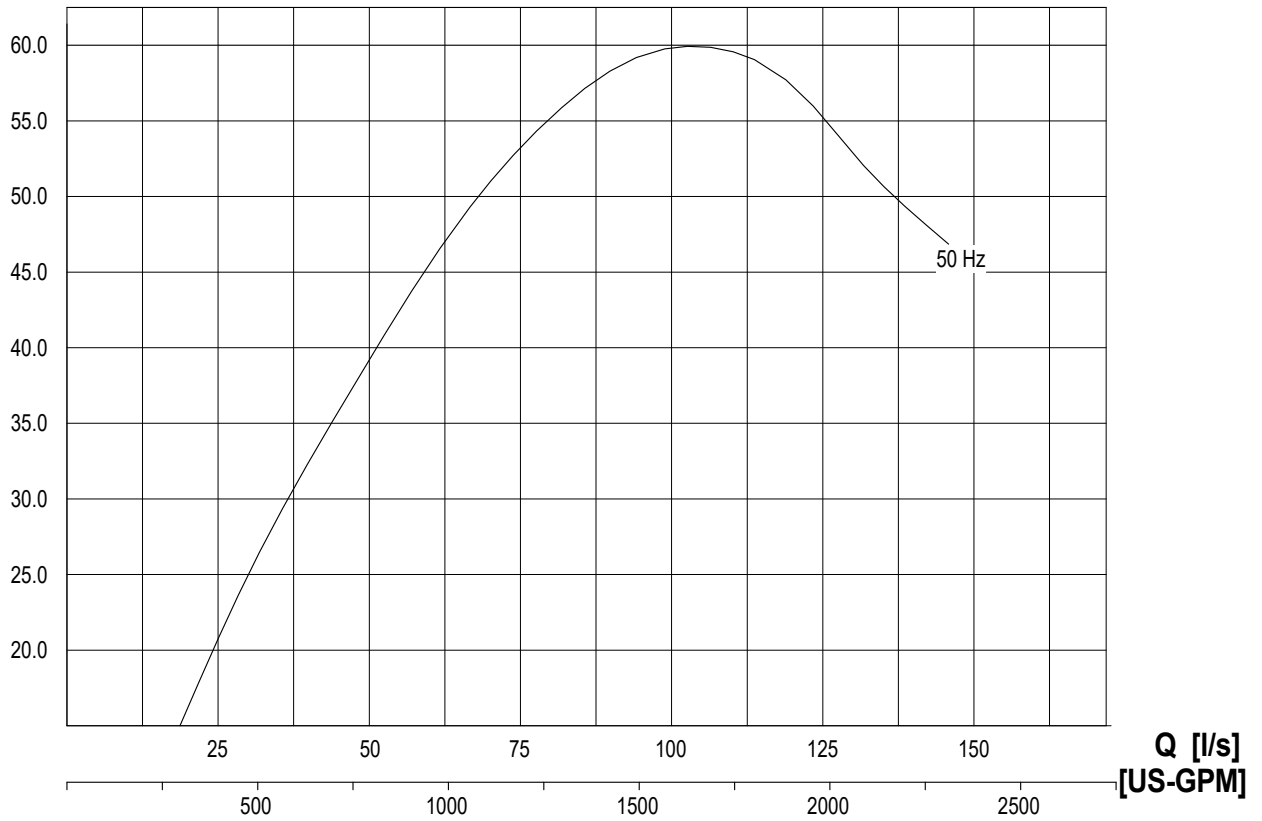

η_{ges} [%]

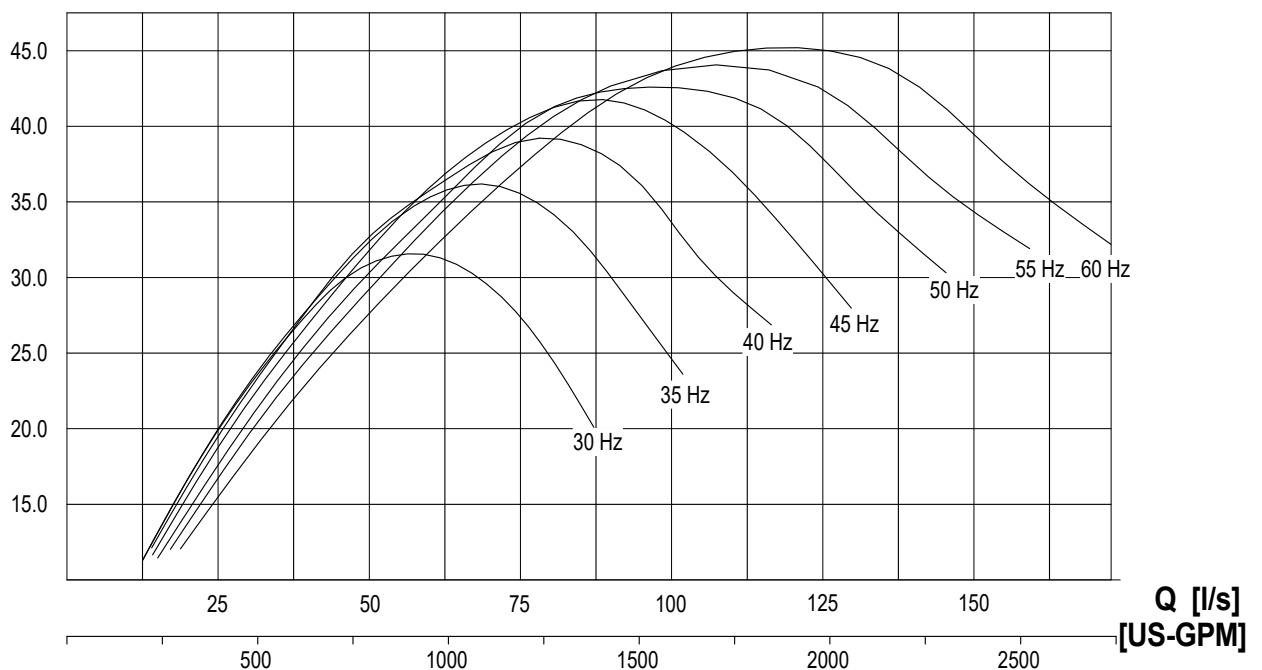

± 10% Toleranz bei linearer U/f-Frequenzregelung / ± 10% tolerance with linear U/f frequency control