
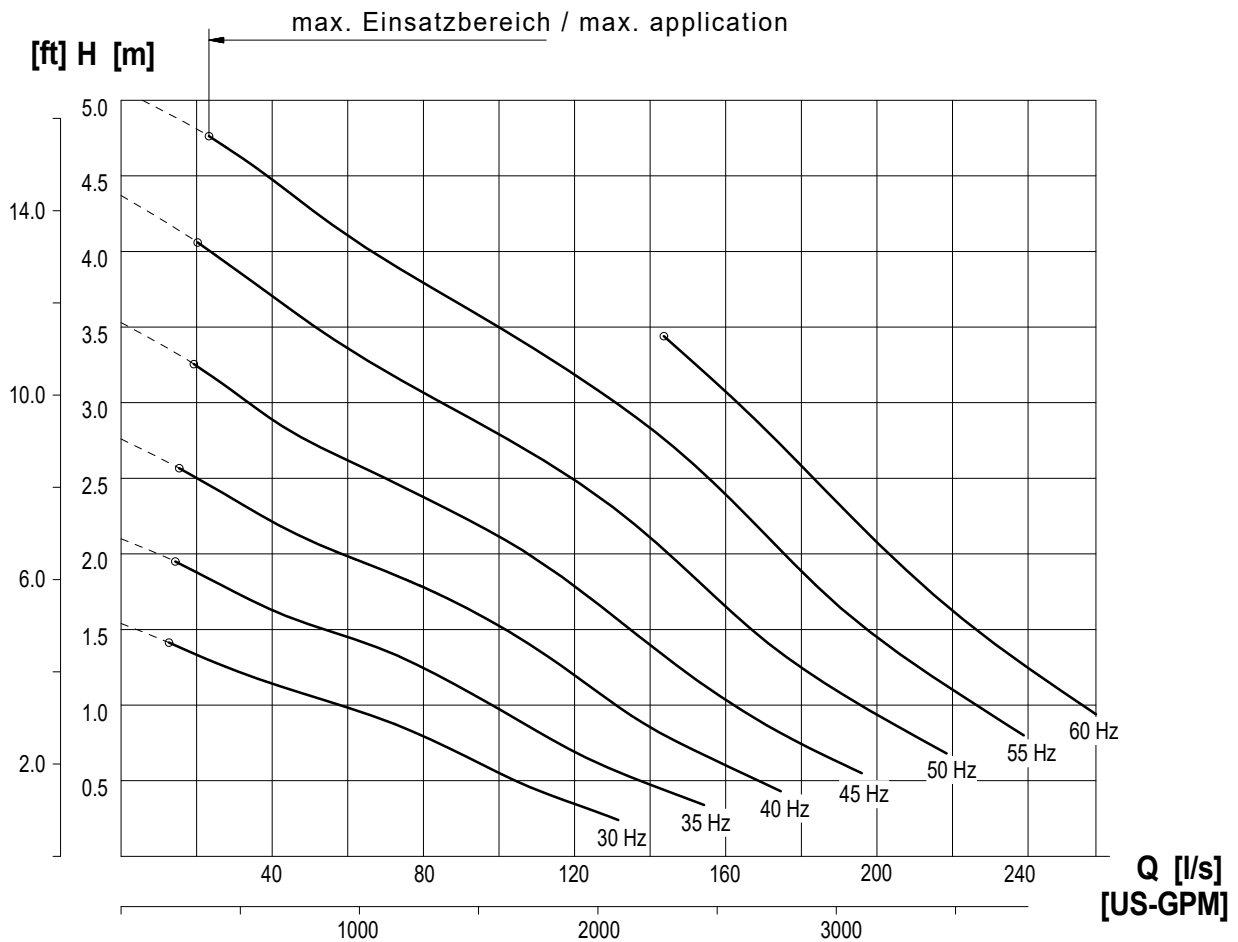




Kennlinie Performance curve	Baureihe Type	RZP30.145-4/24 S1	Nr./No.: Stand:	KL 0301-1 2021-06-28 Sp
Netz/ Main connection	400V~3 / 50Hz		Nennzahl Nom. Speed	1417 [1/min]
Motortyp / Motor type	T 17-4/24R (Ex)		Kugeldurchgang Free ball passage	75 [mm]
Laufgrad Ø / Impeller Ø	300 [mm]		Max.-Leistung / power input [P1]	12,2 [kW]
Effizienzklasse / Efficiency class	IE / DIN EN 60034-30-1		Hydr.Nr.	6087099
Nennleistung / Rated output [P2]:	10,0 [kW]			

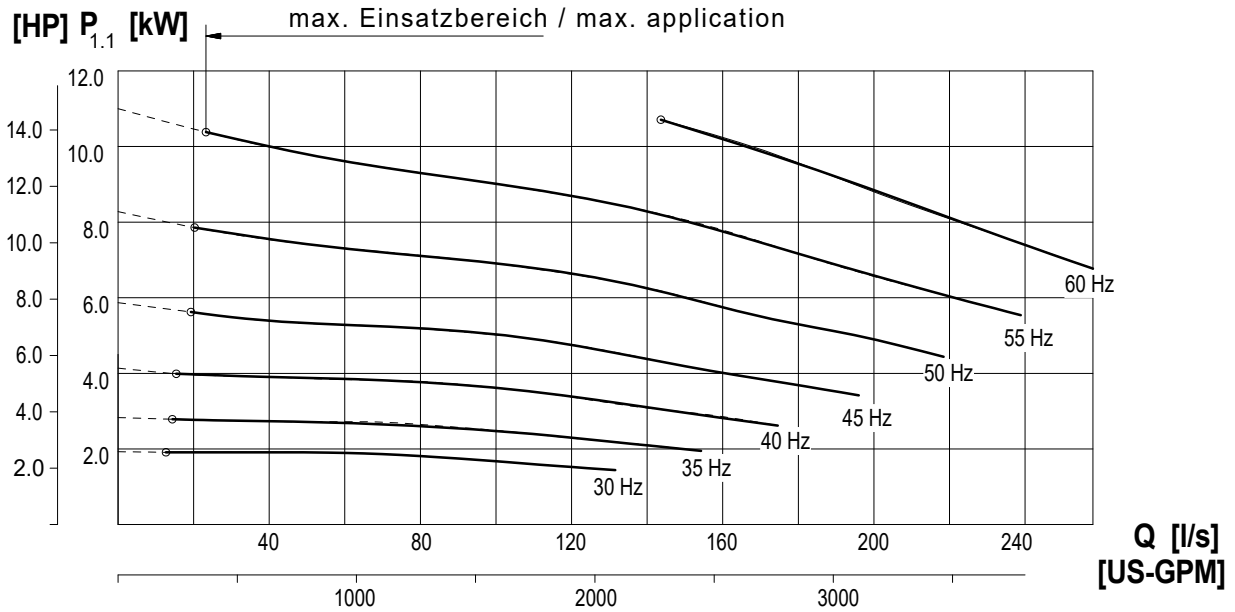

± 10% Toleranz/tolerance

± 10% Toleranz bei linearer U/f-Frequenzregelung / ± 10% tolerance with linear U/f frequency control

Kennlinie Performance curve	Baureihe Type	RZP30.145-4/24 S1	Nr./No.: Stand:	KL 0301-2 2021-06-28 Sp	wilo
Netz/ Main connection	400V~3 / 50Hz		Nennzahl Nom. Speed	1417 [1/min]	
Motortyp / Motor type	T 17-4/24R (Ex)		Nennzahl Nom. Speed	1417 [1/min]	
Laufrad Ø / Impeller Ø	300 [mm]		Kugeldurchgang Free ball passage	75 [mm]	
Effizienzklasse / Efficiency class	IE / DIN EN 60034-30-1		Kugeldurchgang Free ball passage	75 [mm]	
Nennleistung / Rated output [P2]:	10,0 [kW]	Max.-Leistung / power input [P1]	12,2 [kW]	Hydr.Nr.	6087099

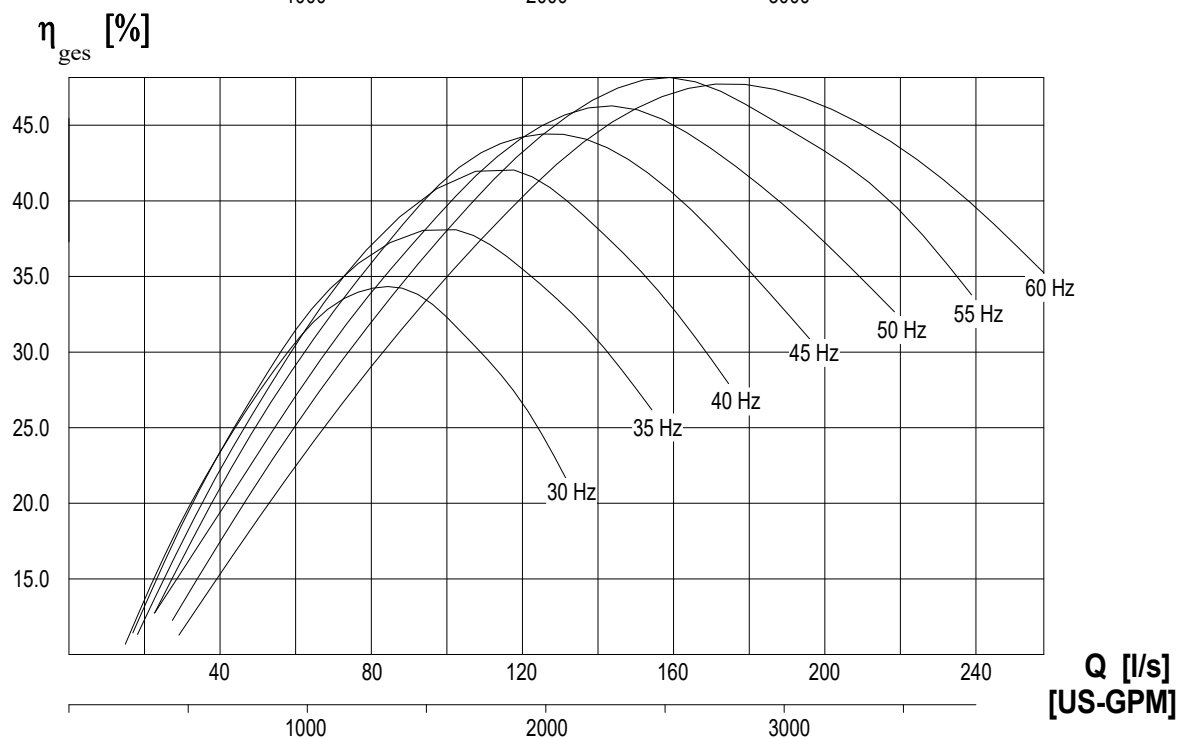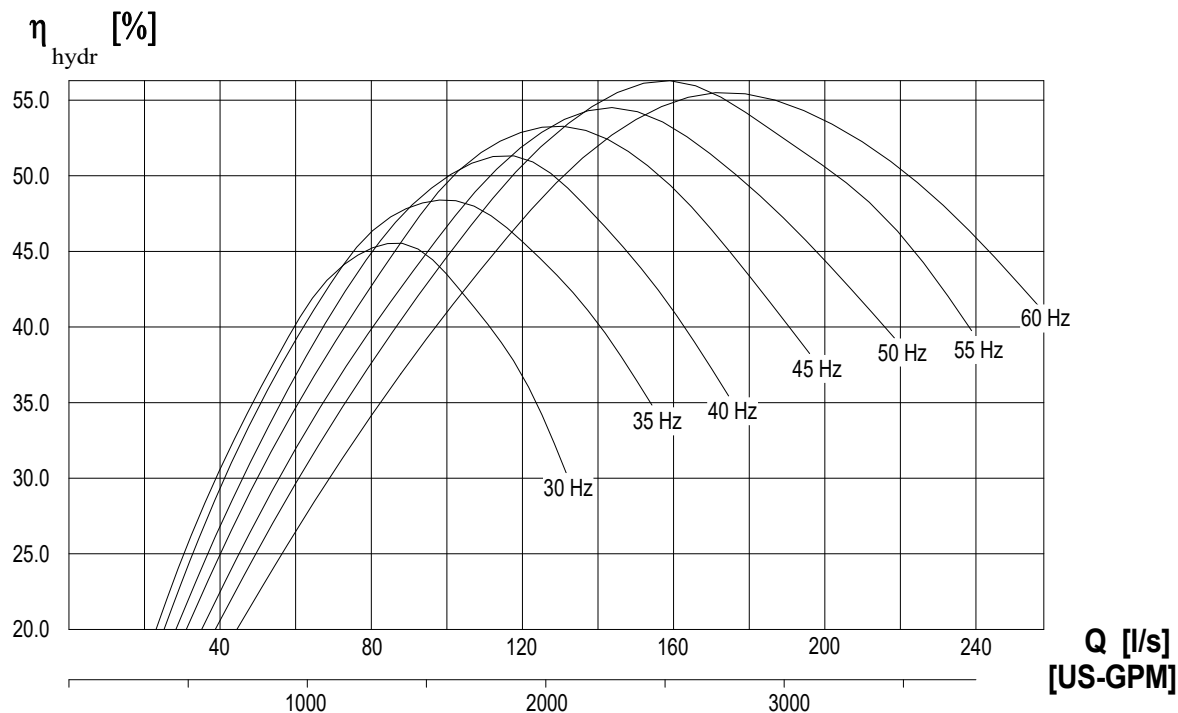

± 10% Toleranz bei linearer U/f-Frequenzregelung / ± 10% tolerance with linear U/f frequency control