
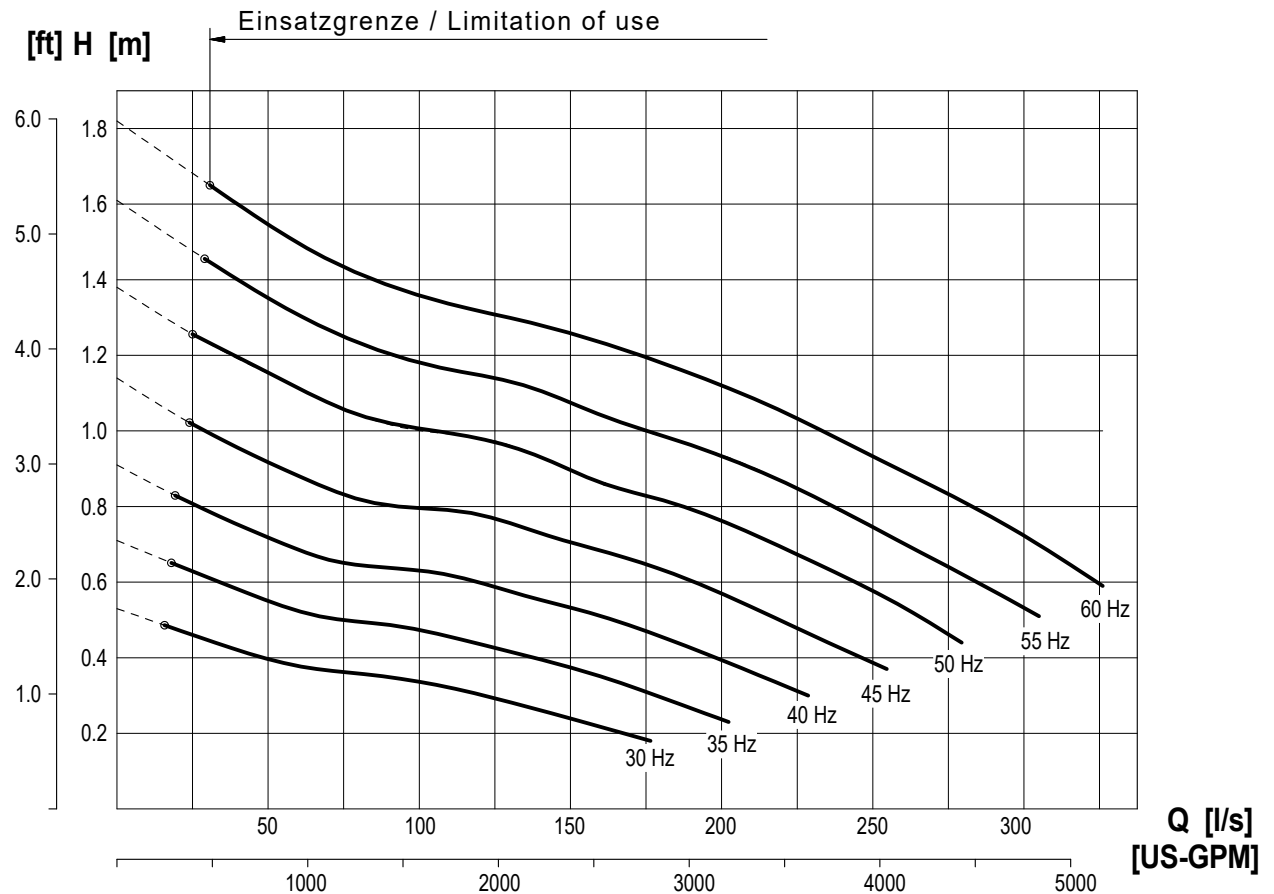



Kennlinie Performance curve	Baureihe Type	RZP 40-1.74-8/24 S1	Nr./ No. Version	KL 0314-1 2020-03-26 Sp
Netz / Main connection	400V~3 / 50Hz		Nenndrehzahl Nom. Speed	703 [1/min]
Motortyp / Motor type	T 17-8/24R (Ex)		Kugeldurchgang Free ball passage	110 [mm]
Laufrad Ø / Impeller Ø	400 [mm]		Max.-Leistung / power input [P1]	7.7 [kW]
Effizienzklasse / Efficiency class	IE₂ / DIN EN 60034-30-1		Hydr.Nr.	6088628
Nennleistung / Rated output [P2]	5.1 [kW]			

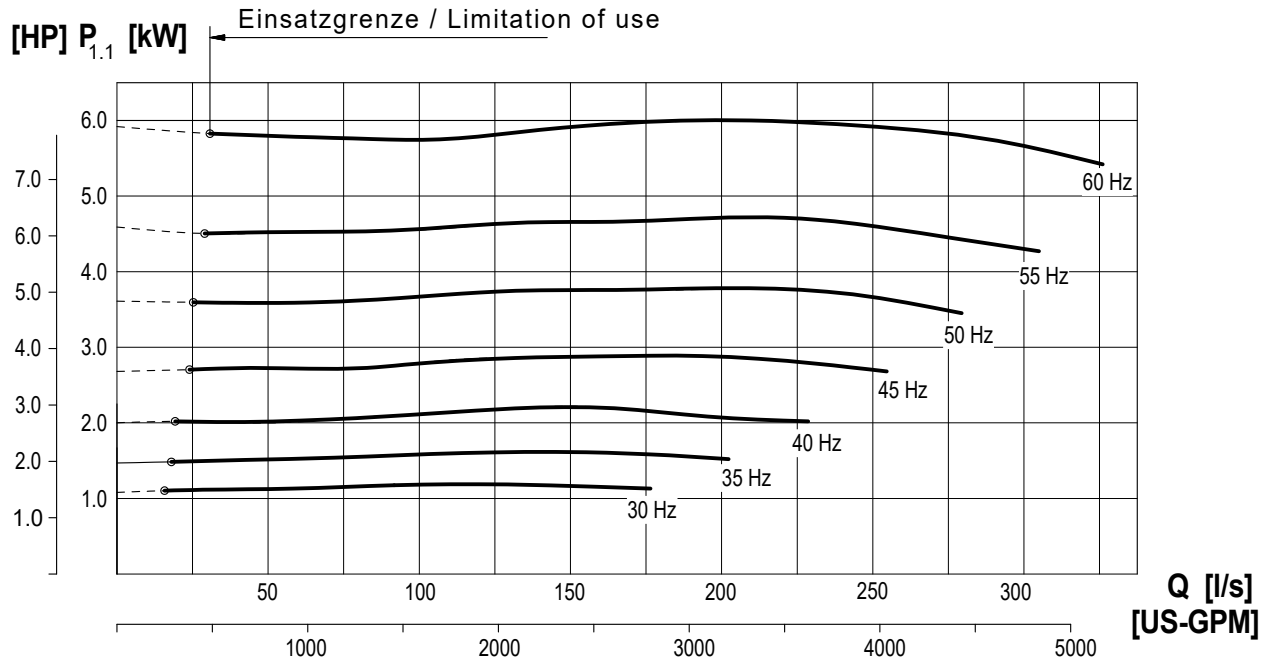


± 10% Toleranz bei linearer U/f-Frequenzregelung / ± 10% tolerance with linear U/f frequency control

Kennlinie Performance curve	Baureihe Type	RZP 40-1.74-8/24 S1	Nr./ No. Version	KL 0314-2 2020-03-27 Sp
Netz / Main connection	400V~3 / 50Hz		Nennzahl Nom. Speed	703 [1/min]
Motortyp / Motor type	T 17-8/24R (Ex)		Kugeldurchgang Free ball passage	110 [mm]
Laufgrad Ø / Impeller Ø	400 [mm]		Max.-Leistung / power input [P1]	7.7 [kW]
Effizienzklasse / Efficiency class	IE₂ / DIN EN 60034-30-1		Hydr.Nr.	6088628
Nennleistung / Rated output [P2]	5.1 [kW]			

η_{hydr} [%]

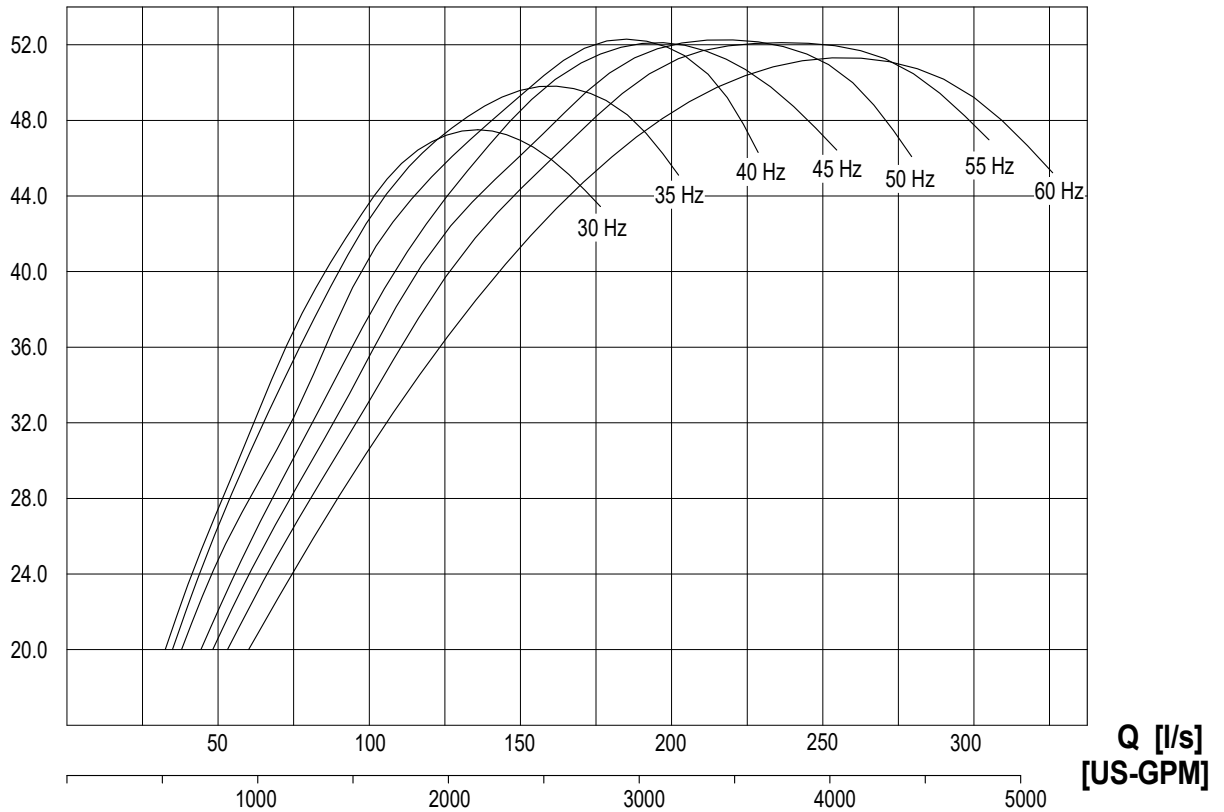

η_{ges} [%]

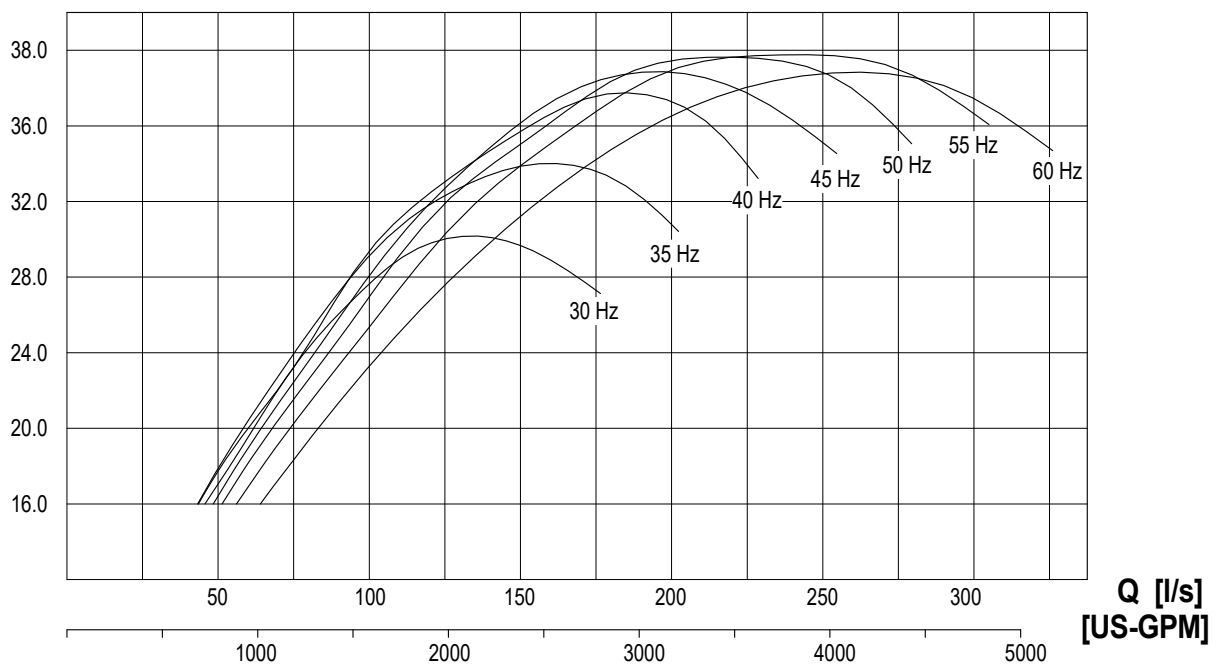

± 10% Toleranz bei linearer U/f-Frequenzregelung / ± 10% tolerance with linear U/f frequency control