



Submittal Data Sheet

Wilo NL-HE – Base Mounted End Suction Pumps



NL-HE 2.5 x 2 x 5 (2 Pole)

	Project:									
	Engineer:									
	Contractor:									
	Submitted By:							Date:		
	Approved By:							Date:		
Tag #	Model #	Flow (USGPM)	Head (Feet)	HP	Enclosure	Frame	Cycle	Phase	Voltage	RPM
	NL-HE 2.5 x 2 x 5						60Hz	3		

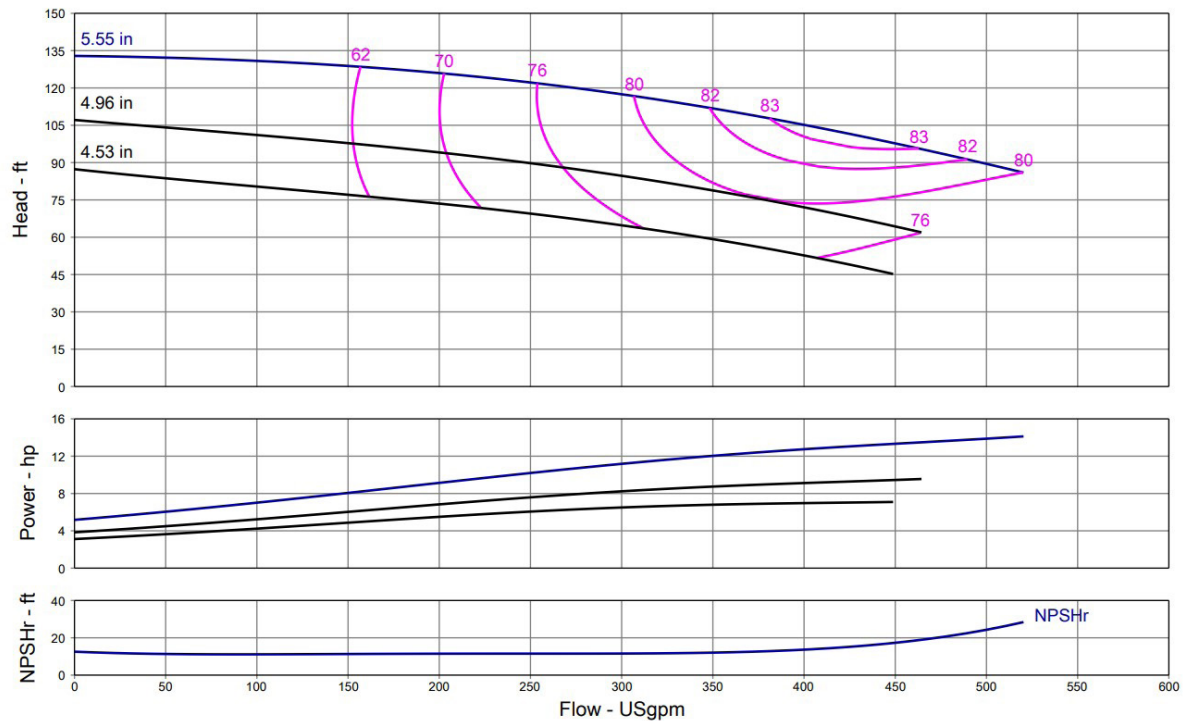

Technical Data	
PEI	
0.90	
Approved Fluids	
Heating Water	
Cooling and cold water	
Pressure /Temperature Ratings	
Ambient Temperature:	+5 °F to +104 °F (–15 °C to +40 °C)
Max Working Pressure & Temperature:	189 psi (up to 284 °F Fluid Temperature) 232 psi (up to 248 °F Fluid Temperature)
Water-Glycol Mixtures for 20–40% glycol and fluid temp ≤ 104°F (40°C)	

Materials of Construction	
Pump Housing	EN–GL–250 Gray Cast Iron
Impeller	EN 1.4408 Cast Stainless Steel
Impeller (optional)	CC480K Bronze or EN–GJL 1030 Cast Iron
Pump Shaft	1.4021 + QT700 Stainless Steel
Mechanical Seal	Carbon/silicon carbide/ EPDM (E1)
Other Mechanical Seals	Avail. on request
Additional Spacer Coupling	Avail. on request
Other:	

Approval Stamp


Submittal Data Sheet

Wilo NL-HE – Base Mounted End Suction Pumps



Dimensions & Weights

Wilo NL-HE

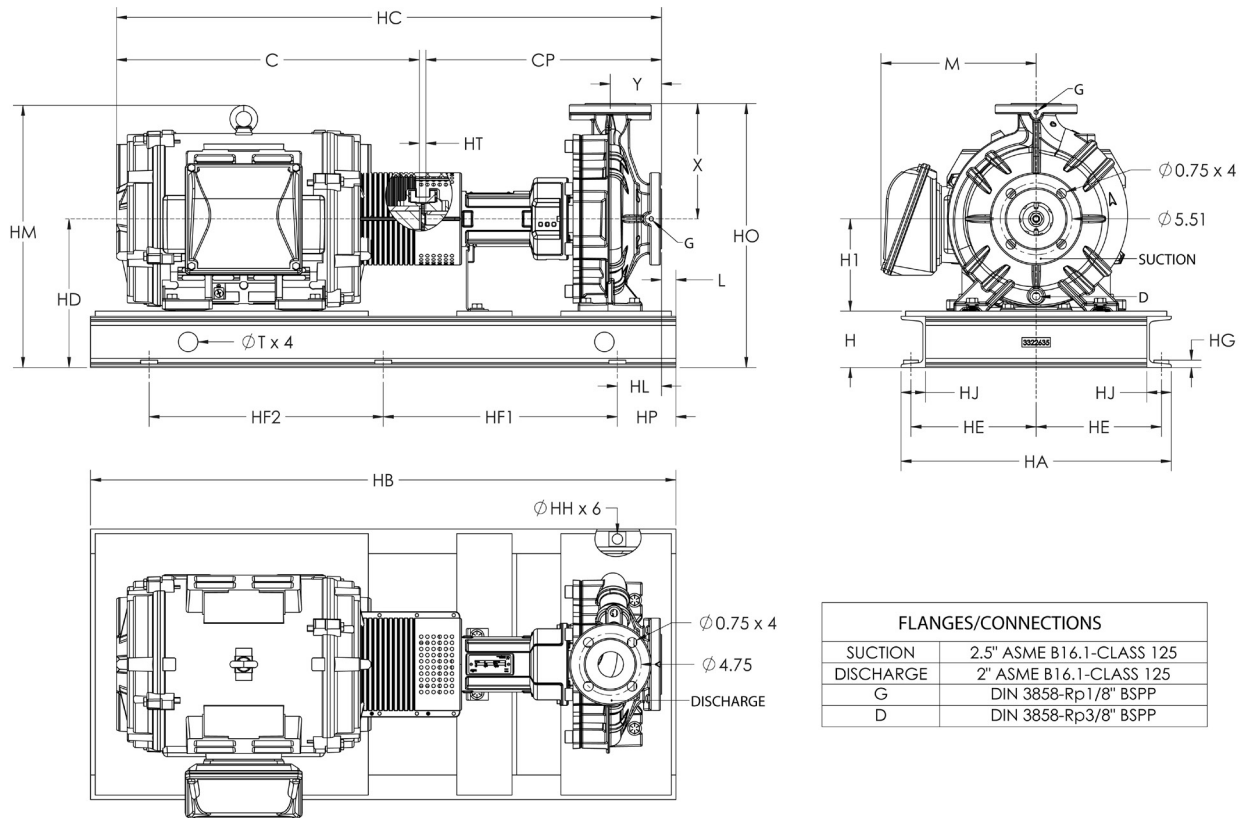

FLANGES/CONNECTIONS	
SUCTION	2.5" ASME B16.1-CLASS 125
DISCHARGE	2" ASME B16.1-CLASS 125
G	DIN 3858-Rp1/8" BSPP
D	DIN 3858-Rp3/8" BSPP

NL-HE 2.5 x 2 x 5


Motor							Dimensions – Inches																								
HP	ENCL	Frame	Volt	RPM	EFF	PF	H	H1	X	HD	HO	HM	M	HA	HE	HG	HJ	Y	HT	HC	C	CP	L	HL	T	HH	HP	HF1	HF2	HB	Wt. (lb)
7.5	ODP	182/4T	208-230/460	3500	88.5	0.9	4.3	5.2	6.3	9.5	15.8	13.6	6.7	17.3	7.9	0.57	1.9	3.9	0.50	33.8	15.2	18.1	0.96	3.54	1.50	0.80	4.5	13	13	35	272
7.5	TEFC	182/4T	208-230/460	3485	89.5	0.88	4.3	5.2	6.3	9.5	15.8	13.9	7.6	17.3	7.9	0.57	1.9	3.9	0.50	34.5	15.9	18.1	0.96	3.54	1.50	0.80	4.5	13	13	35	297
7.5	ODP	182/4T	575	3500	88.5	0.9	4.3	5.2	6.3	9.5	15.8	13.6	6.7	17.3	7.9	0.57	1.9	3.9	0.50	33.8	15.2	18.1	0.96	3.54	1.50	0.80	4.5	13	13	35	272
7.5	TEFC	213/5T	575	3520	89.5	0.88	4.3	5.2	6.3	9.6	15.9	15.2	8.6	17.3	7.9	0.57	1.9	3.9	0.50	38.1	19.5	18.1	0.96	3.54	1.50	0.80	4.5	15	15	39	368
10	ODP	213/5T	208-230/460	3535	89.5	0.88	4.3	5.2	6.3	9.6	15.9	14.5	8.0	17.3	7.9	0.57	1.9	3.9	0.50	35.6	17.0	18.1	0.96	3.54	1.50	0.80	4.5	15	15	39	327
10	TEFC	213/5T	208-230/460	3510	90.2	0.9	4.3	5.2	6.3	9.6	15.9	15.2	8.6	17.3	7.9	0.57	1.9	3.9	0.50	38.1	19.5	18.1	0.96	3.54	1.50	0.80	4.5	15	15	39	372
10	ODP	213/5T	575	3535	89.5	0.88	4.3	5.2	6.3	9.6	15.9	14.5	8.0	17.3	7.9	0.57	1.9	3.9	0.50	35.6	17.0	18.1	0.96	3.54	1.50	0.80	4.5	15	15	39	327
10	TEFC	213/5T	575	3510	90.2	0.9	4.3	5.2	6.3	9.6	15.9	15.2	8.6	17.3	7.9	0.57	1.9	3.9	0.50	38.1	19.5	18.1	0.96	3.54	1.50	0.80	4.5	15	15	39	370
15	ODP	213/5T	208-230/460	3535	90.2	0.89	4.3	5.2	6.3	9.6	15.9	14.5	8.0	17.3	7.9	0.57	1.9	3.9	0.50	36.4	17.8	18.1	0.96	3.54	1.50	0.80	4.5	15	15	39	342
15	TEFC	254/6T	208-230/460	3530	91	0.88	4.3	6.2	6.3	10.6	16.9	19.3	10.5	20.8	9.6	0.57	1.9	3.9	0.50	43.7	25.0	18.1	1.11	3.39	1.50	0.80	4.5	18	18	45	514
15	ODP	213/5T	575	3535	90.2	0.89	4.3	5.2	6.3	9.6	15.9	14.5	8.0	17.3	7.9	0.57	1.9	3.9	0.50	36.4	17.8	18.1	0.96	3.54	1.50	0.80	4.5	15	15	39	341
15	TEFC	254/6T	575	3530	91	0.88	4.3	6.2	6.3	10.6	16.9	19.3	10.5	20.8	9.6	0.57	1.9	3.9	0.50	43.7	25.0	18.1	1.11	3.39	1.50	0.80	4.5	18	18	45	513

Submittal Data Sheet

Wilo NL-HE – Base Mounted End Suction Pumps



NL-HE 2.5 x 2 x 6 (2 Pole)



Project:

Engineer:

Contractor:


Submitted By:

Date:

Approved By:

Date:

Tag #	Model #	Flow (USGPM)	Head (Feet)	HP	Enclosure	Frame	Cycle	Phase	Voltage	RPM
	NL-HE 2.5 x 2 x 6						60Hz	3		

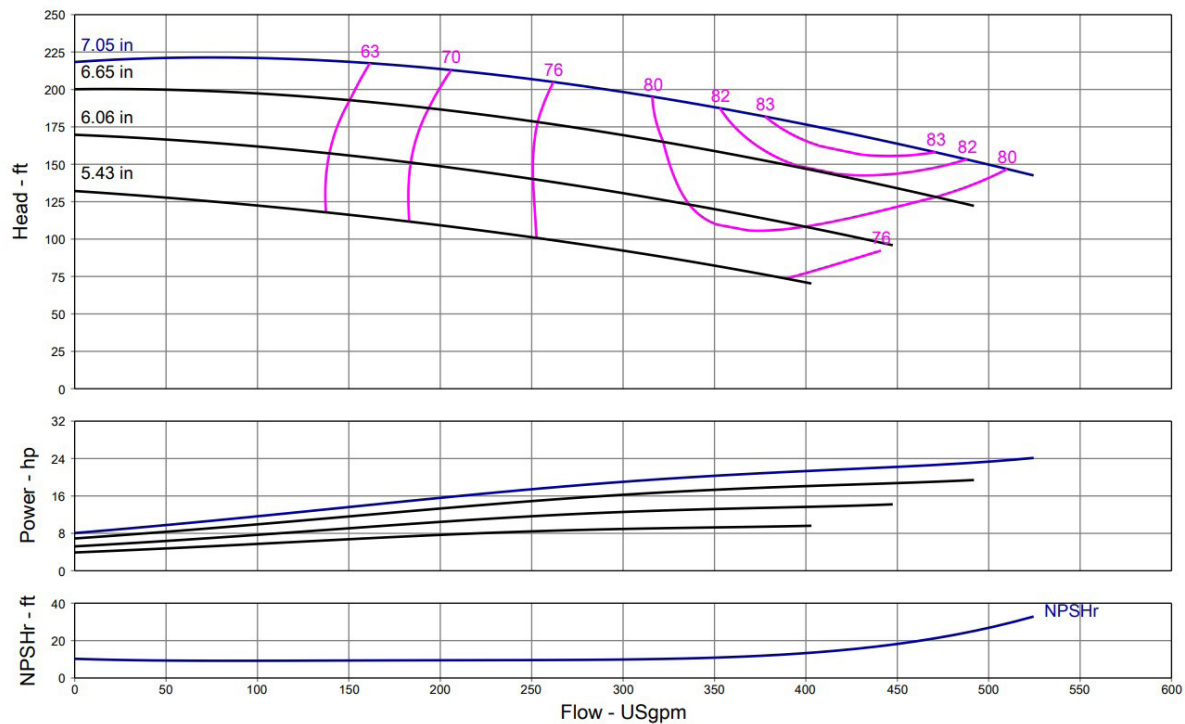


Technical Data	
PEI	
0.94	
Approved Fluids	
Heating Water	
Cooling and cold water	
Pressure /Temperature Ratings	
Ambient Temperature:	+5 °F to +104 °F (–15 °C to +40 °C)
Max Working Pressure & Temperature:	189 psi (up to 284 °F Fluid Temperature) 232 psi (up to 248 °F Fluid Temperature)
Water-Glycol Mixtures for 20–40% glycol and fluid temp ≤ 104°F (40°C)	

Materials of Construction	
Pump Housing	EN–GL–250 Gray Cast Iron
Impeller	EN 1.4408 Cast Stainless Steel
Impeller (optional)	CC480K Bronze or EN–GJL 1030 Cast Iron
Pump Shaft	1.4021 + QT700 Stainless Steel
Mechanical Seal	Carbon/silicon carbide/ EPDM (E1)
Other Mechanical Seals	Avail. on request
Additional Spacer Coupling	Avail. on request
Other:	

Approval Stamp

Wilo NL-HE – Base Mounted End Suction Pumps

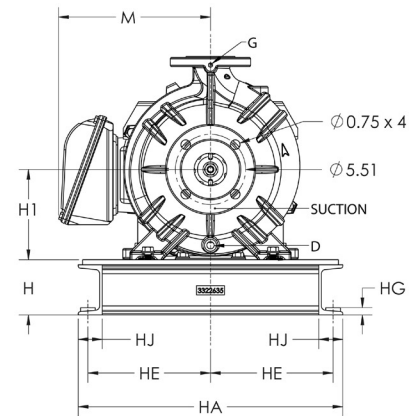

FLANGES/CONNECTIONS	
SUCTION	2.5" ASME B16.1-CLASS 125
DISCHARGE	2" ASME B16.1-CLASS 125
G	DIN 3858-Rp1/8" BSPP
D	DIN 3858-Rp3/8" BSPP


Motor							Dimensions – Inches																											
HP	ENCL	Frame	Volt	RPM	EFF	PF	H	H1	X	HD	HO	HM	M	HA	HE	HG	HJ	Y	HT	HC	C	CP	L	HL	T	HH	HP	HF1	HF2	HB	Wt. (lb)			
10	ODP	213/5T	208-230/460	3535	89.5	0.88	4.3	6.3	7.1	10.6	17.7	15.5	8.0	17.3	7.9	0.57	1.9	3.9	0.50	35.6	17.0	18.1	0.96	3.54	1.50	0.80	4.5	15	15	39	341			
10	TEFC	213/5T	208-230/460	3510	90.2	0.9	4.3	6.3	7.1	10.6	17.7	16.2	8.6	17.3	7.9	0.57	1.9	3.9	0.50	38.1	19.5	18.1	0.96	3.54	1.50	0.80	4.5	15	15	39	387			
10	ODP	213/5T	575	3535	89.5	0.88	4.3	6.3	7.1	10.6	17.7	15.5	8.0	17.3	7.9	0.57	1.9	3.9	0.50	35.6	17.0	18.1	0.96	3.54	1.50	0.80	4.5	15	15	39	341			
10	TEFC	213/5T	575	3510	90.2	0.9	4.3	6.3	7.1	10.6	17.7	16.2	8.6	17.3	7.9	0.57	1.9	3.9	0.50	38.1	19.5	18.1	0.96	3.54	1.50	0.80	4.5	15	15	39	385			
15	ODP	213/5T	208-230/460	3535	90.2	0.89	4.3	6.3	7.1	10.6	17.7	15.5	8.0	17.3	7.9	0.57	1.9	3.9	0.50	36.4	17.8	18.1	0.96	3.54	1.50	0.80	4.5	15	15	39	356			
15	TEFC	254/6T	208-230/460	3530	91	0.88	4.3	6.3	7.1	10.6	17.7	19.3	10.5	20.8	9.6	0.57	1.9	3.9	0.50	43.7	25.0	18.1	1.11	3.39	1.50	0.80	4.5	18	18	45	521			
15	ODP	213/5T	575	3535	90.2	0.89	4.3	6.3	7.1	10.6	17.7	15.5	8.0	17.3	7.9	0.57	1.9	3.9	0.50	36.4	17.8	18.1	0.96	3.54	1.50	0.80	4.5	15	15	39	355			
15	TEFC	254/6T	575	3530	91	0.88	4.3	6.3	7.1	10.6	17.7	19.3	10.5	20.8	9.6	0.57	1.9	3.9	0.50	43.7	25.0	18.1	1.11	3.39	1.50	0.80	4.5	18	18	45	520			
20	ODP	254/6T	208-230/460	3525	91	0.87	4.3	6.3	7.1	10.6	17.7	16.4	9.5	20.8	9.6	0.57	1.9	3.9	0.50	39.1	20.5	18.1	1.11	3.39	1.50	0.80	4.5	18	18	45	424			
20	TEFC	254/6T	208-230/460	3520	91	0.89	4.3	6.3	7.1	10.6	17.7	19.3	10.5	20.8	9.6	0.57	1.9	3.9	0.50	43.7	25.0	18.1	1.11	3.39	1.50	0.80	4.5	18	18	45	546			
20	ODP	254/6T	575	3525	91	0.87	4.3	6.3	7.1	10.6	17.7	16.4	9.5	20.8	9.6	0.57	1.9	3.9	0.50	39.1	20.5	18.1	1.11	3.39	1.50	0.80	4.5	18	18	45	423			
20	TEFC	254/6T	575	3520	91	0.89	4.3	6.3	7.1	10.6	17.7	19.3	10.5	20.8	9.6	0.57	1.9	3.9	0.50	43.7	25.0	18.1	1.11	3.39	1.50	0.80	4.5	18	18	45	545			
25	ODP	254/6T	208-230/460	3530	91.7	0.87	4.3	6.3	7.1	10.6	17.7	16.4	9.5	20.8	9.6	0.57	1.9	3.9	0.50	39.1	20.5	18.1	1.11	3.39	1.50	0.80	4.5	18	18	45	441			
25	TEFC	284/6TS	208-230/460	3545	91.7	0.88	4.3	7.0	7.1	11.3	18.4	20.5	11.1	20.8	9.6	0.57	1.9	3.9	0.50	45.2	26.6	18.1	0.96	3.54	1.50	0.80	4.5	20	20	49	668			
25	ODP	254/6T	575	3530	91.7	0.87	4.3	6.3	7.1	10.6	17.7	16.4	9.5	20.8	9.6	0.57	1.9	3.9	0.50	39.1	20.5	18.1	1.11	3.39	1.50	0.80	4.5	18	18	45	440			
25	TEFC	284/6TS	575	3535	91.7	0.89	4.3	7.0	7.1	11.3	18.4	20.5	11.1	20.8	9.6	0.57	1.9	3.9	0.50	45.2	26.6	18.1	0.96	3.54	1.50	0.80	4.5	20	20	49	666			
30	ODP	284TS	208-230/460	3545	91.7	0.86	4.3	7.0	7.1	11.3	18.4	20.1	11.9	20.8	9.6	0.57	1.9	3.9	0.50	40.6	22.0	18.1	1.11	3.39	1.50	0.80	4.5	18	18	45	566			
30	TEFC	284/6TS	208-230/460	3540	91.7	0.89	4.3	7.0	7.1	11.3	18.4	20.5	11.1	20.8	9.6	0.57	1.9	3.9	0.50	45.2	26.6	18.1	0.96	3.54	1.50	0.80	4.5	20	20	49	686			
30	ODP	284TS	575	3545	91.7	0.86	4.3	7.0	7.1	11.3	18.4	20.1	11.9	20.8	9.6	0.57	1.9	3.9	0.50	40.6	22.0	18.1	1.11	3.39	1.50	0.80	4.5	18	18	45	564			
30	TEFC	284/6TS	575	3535	91.7	0.89	4.3	7.0	7.1	11.3	18.4	20.5	11.1	20.8	9.6	0.57	1.9	3.9	0.50	45.2	26.6	18.1	0.96	3.54	1.50	0.80	4.5	20	20	49	688			

Submittal Data Sheet

Wilo NL-HE – Base Mounted End Suction Pumps



NL-HE 2.5 x 2 x 8 (2 Pole)



Project:

Engineer:

Contractor:


Submitted By:

Date:

Approved By:

Date:

Tag #	Model #	Flow (USGPM)	Head (Feet)	HP	Enclosure	Frame	Cycle	Phase	Voltage	RPM
	NL-HE 2.5 x 2 x 8						60Hz	3		

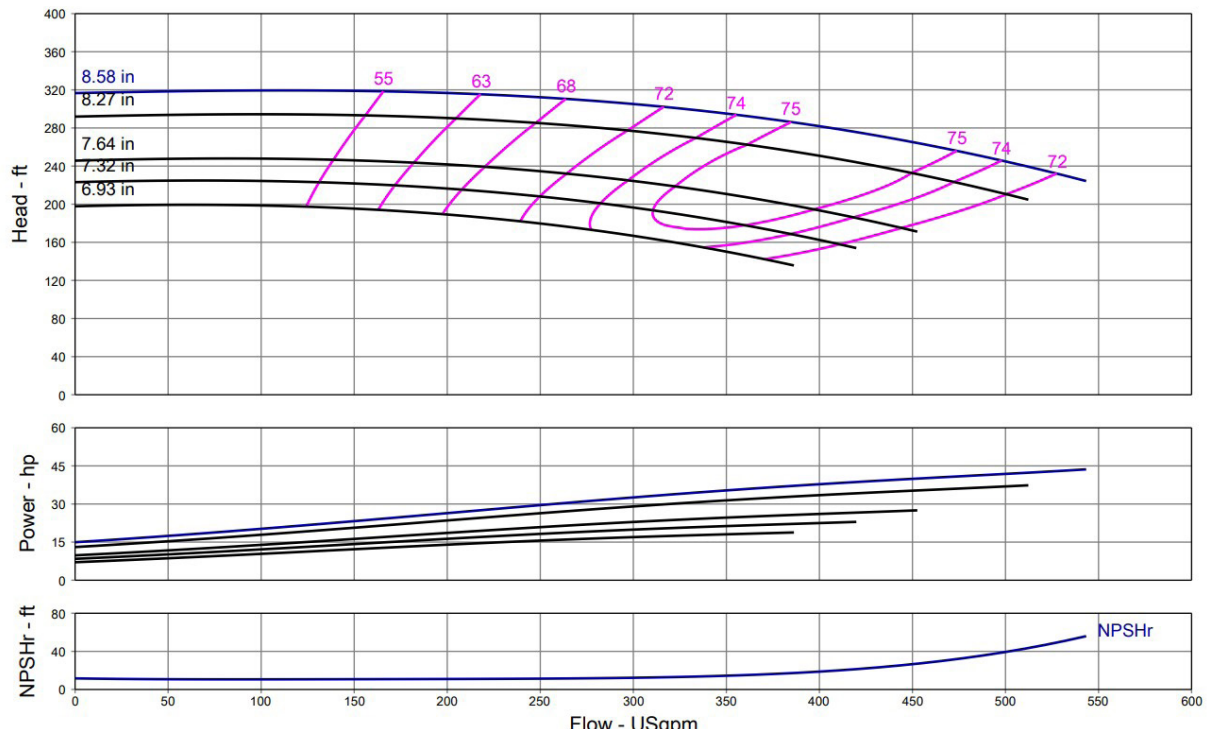

Technical Data	
PEI	
0.91	
Approved Fluids	
Heating Water	
Cooling and cold water	
Pressure /Temperature Ratings	
Ambient Temperature:	+5 °F to +104 °F (–15 °C to +40 °C)
Max Working Pressure & Temperature:	189 psi (up to 284 °F Fluid Temperature) 232 psi (up to 248 °F Fluid Temperature)
Water-Glycol Mixtures for 20–40% glycol and fluid temp ≤ 104°F (40°C)	

Materials of Construction	
Pump Housing	EN-GL-250 Gray Cast Iron
Impeller	EN 1.4408 Cast Stainless Steel
Impeller (optional)	CC480K Bronze or EN-GJL 1030 Cast Iron
Pump Shaft	1.4021 + QT700 Stainless Steel
Mechanical Seal	Carbon/silicon carbide/ EPDM (E1)
Other Mechanical Seals	Avail. on request
Additional Spacer Coupling	Avail. on request
Other:	

Approval Stamp

Wilo NL-HE – Base Mounted End Suction Pumps



FLANGES/CONNECTIONS	
SUCTION	2.5" ASME B16.1-CLASS 125
DISCHARGE	2" ASME B16.1-CLASS 125
G	DIN 3858-Rp1/8" BSPP
D	DIN 3858-Rp3/8" BSPP

NL-HE 2.5 x 2 x 8


Motor							Dimensions - Inches																											
HP	ENCL	Frame	Volt	RPM	EFF	PF	H	H1	X	HD	HO	HM	M	HA	HE	HG	HJ	Y	HT	HC	C	CP	L	HL	T	HH	HP	HF1	HF2	HB	Wt. (lb)			
20	ODP	254/6T	208-230/460	3525	91	0.87	4.3	6.3	7.9	10.6	18.5	16.4	9.5	20.8	9.6	0.57	1.9	3.9	0.50	39.1	20.5	18.1	1.11	3.39	1.50	0.80	4.5	18	18	45	441			
20	TEFC	254/6T	208-230/460	3520	91	0.89	4.3	6.3	7.9	10.6	18.5	19.3	10.5	20.8	9.6	0.57	1.9	3.9	0.50	43.7	25.0	18.1	1.11	3.39	1.50	0.80	4.5	18	18	45	563			
20	ODP	254/6T	575	3525	91	0.87	4.3	6.3	7.9	10.6	18.5	16.4	9.5	20.8	9.6	0.57	1.9	3.9	0.50	39.1	20.5	18.1	1.11	3.39	1.50	0.80	4.5	18	18	45	440			
20	TEFC	254/6T	575	3520	91	0.89	4.3	6.3	7.9	10.6	18.5	19.3	10.5	20.8	9.6	0.57	1.9	3.9	0.50	43.7	25.0	18.1	1.11	3.39	1.50	0.80	4.5	18	18	45	562			
25	ODP	254/6T	208-230/460	3530	91.7	0.87	4.3	6.3	7.9	10.6	18.5	16.4	9.5	20.8	9.6	0.57	1.9	3.9	0.50	39.1	20.5	18.1	1.11	3.39	1.50	0.80	4.5	18	18	45	458			
25	TEFC	284/6TS	208-230/460	3545	91.7	0.88	4.3	7.0	7.9	11.3	19.2	20.5	11.1	20.8	9.6	0.57	1.9	3.9	0.50	45.2	26.6	18.1	0.96	3.54	1.50	0.80	4.5	20	20	49	685			
25	ODP	254/6T	575	3530	91.7	0.87	4.3	6.3	7.9	10.6	18.5	16.4	9.5	20.8	9.6	0.57	1.9	3.9	0.50	39.1	20.5	18.1	1.11	3.39	1.50	0.80	4.5	18	18	45	457			
25	TEFC	284/6TS	575	3535	91.7	0.89	4.3	7.0	7.9	11.3	19.2	20.5	11.1	20.8	9.6	0.57	1.9	3.9	0.50	45.2	26.6	18.1	0.96	3.54	1.50	0.80	4.5	20	20	49	683			
30	ODP	284TS	208-230/460	3545	91.7	0.86	4.3	7.0	7.9	11.3	19.2	20.1	11.9	20.8	9.6	0.57	1.9	3.9	0.50	40.6	22.0	18.1	1.11	3.39	1.50	0.80	4.5	18	18	45	583			
30	TEFC	284/6TS	208-230/460	3540	91.7	0.89	4.3	7.0	7.9	11.3	19.2	20.5	11.1	20.8	9.6	0.57	1.9	3.9	0.50	45.2	26.6	18.1	0.96	3.54	1.50	0.80	4.5	20	20	49	703			
30	ODP	284TS	575	3545	91.7	0.86	4.3	7.0	7.9	11.3	19.2	20.1	11.9	20.8	9.6	0.57	1.9	3.9	0.50	40.6	22.0	18.1	1.11	3.39	1.50	0.80	4.5	18	18	45	581			
30	TEFC	284/6TS	575	3535	91.7	0.89	4.3	7.0	7.9	11.3	19.2	20.5	11.1	20.8	9.6	0.57	1.9	3.9	0.50	45.2	26.6	18.1	0.96	3.54	1.50	0.80	4.5	20	20	49	702			
40	ODP	284/6TS	208-230/460	3540	92.4	0.87	4.3	7.0	7.9	11.3	19.2	20.1	11.9	20.8	9.6	0.57	1.9	3.9	0.50	41.9	23.3	18.1	1.11	3.39	1.50	0.80	4.5	18	18	45	627			
40	TEFC	324/6TS	208-230/460	3555	92.4	0.89	4.3	8.0	7.9	12.3	20.2	22.7	12.6	20.8	9.6	0.57	1.9	3.9	0.85	48.6	29.6	18.1	0.96	3.54	1.50	0.80	4.5	20	20	49	857			
40	ODP	284/6TS	575	3540	92.4	0.87	4.3	7.0	7.9	11.3	19.2	20.1	11.9	20.8	9.6	0.57	1.9	3.9	0.50	41.9	23.3	18.1	1.11	3.39	1.50	0.80	4.5	18	18	45	625			
40	TEFC	324/6TS	575	3555	92.4	0.89	4.3	8.0	7.9	12.3	20.2	22.7	12.6	20.8	9.6	0.57	1.9	3.9	0.85	48.6	29.6	18.1	0.96	3.54	1.50	0.80	4.5	20	20	49	854			
50	ODP	324TS	208-230/460	3560	93	0.85	4.3	8.0	7.9	12.3	20.2	22.1	13.4	20.8	9.6	0.57	1.9	3.9	0.85	43.3	24.3	18.1	0.96	3.54	1.50	0.80	4.5	20	20	49	733			
50	TEFC	324/6TS	208-230/460	3550	93	0.89	4.3	8.0	7.9	12.3	20.2	22.7	12.6	20.8	9.6	0.57	1.9	3.9	0.85	48.6	29.6	18.1	0.96	3.54	1.50	0.80	4.5	20	20	49	880			
50	ODP	324TS	575	3560	93	0.85	4.3	8.0	7.9	12.3	20.2	22.1	13.4	20.8	9.6	0.57	1.9	3.9	0.85	43.3	24.3	18.1	0.96	3.54	1.50	0.80	4.5	20	20	49	730			
50	TEFC	324/6TS	575	3550	93	0.89	4.3	8.0	7.9	12.3	20.2	22.7	12.6	20.8	9.6	0.57	1.9	3.9	0.85	48.6	29.6	18.1	0.96	3.54	1.50	0.80	4.5	20	20	49	876			

Submittal Data Sheet

Wilo NL-HE – Base Mounted End Suction Pumps



NL-HE 2.5 x 2 x 10 (2 Pole)



Project:

Engineer:

Contractor:


Submitted By:

Date:

Approved By:

Date:

Tag #	Model #	Flow (USGPM)	Head (Feet)	HP	Enclosure	Frame	Cycle	Phase	Voltage	RPM
	NL-HE 2.5 x 2 x 10						60Hz	3		

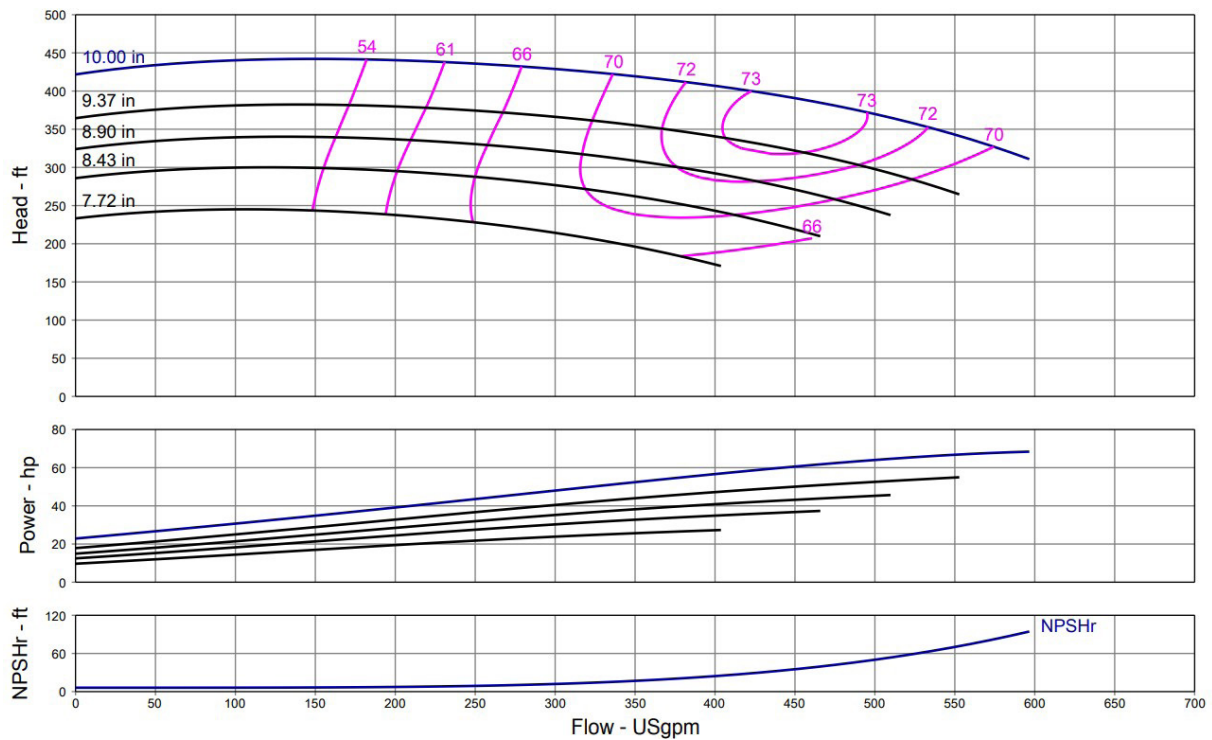

Technical Data	
PEI	
0.89	
Approved Fluids	
Heating Water	
Cooling and cold water	
Pressure /Temperature Ratings	
Ambient Temperature:	+5 °F to +104 °F (–15 °C to +40 °C)
Max Working Pressure & Temperature:	189 psi (up to 284 °F Fluid Temperature) 232 psi (up to 248 °F Fluid Temperature)
Water-Glycol Mixtures for 20–40% glycol and fluid temp ≤ 104°F (40°C)	

Materials of Construction	
Pump Housing	EN–GL–250 Gray Cast Iron
Impeller	EN 1.4408 Cast Stainless Steel
Impeller (optional)	CC480K Bronze or EN–GJL 1030 Cast Iron
Pump Shaft	1.4021 + QT700 Stainless Steel
Mechanical Seal	Carbon/silicon carbide/ EPDM (E1)
Other Mechanical Seals	Avail. on request
Additional Spacer Coupling	Avail. on request
Other:	

Approval Stamp

Wilo NL-HE – Base Mounted End Suction Pumps



FLANGES/CONNECTIONS	
SUCTION	2.5" ASME B16.1-CLASS 125
DISCHARGE	2" ASME B16.1-CLASS 125
G	DIN 3858-Rp1/8" BSPP
D	DIN 3858-Rp3/8" BSPP

Motor							Dimensions – Inches																										
HP	ENCL	Frame	Volt	RPM	EFF	PF	H	H1	X	HD	HO	HM	M	HA	HE	HG	HJ	Y	HT	HC	C	CP	L	HL	T	HH	HP	HF1	HF2	HB	Wt. (lb)		
30	ODP	284TS	208-230/460	3545	91.7	0.86	4.3	7.1	8.9	11.4	20.3	20.1	11.9	20.8	9.6	0.57	1.9	3.9	0.50	40.6	22.0	18.1	1.11	3.39	1.50	0.80	4.5	18	18	45	594		
30	TEFC	284/6TS	208-230/460	3540	91.7	0.89	4.3	7.1	8.9	11.4	20.3	20.6	11.1	20.8	9.6	0.57	1.9	3.9	0.50	45.2	26.6	18.1	1.11	3.39	1.50	0.80	4.5	20	20	49	714		
30	ODP	284TS	575	3545	91.7	0.86	4.3	7.1	8.9	11.4	20.3	20.1	11.9	20.8	9.6	0.57	1.9	3.9	0.50	40.6	22.0	18.1	1.11	3.39	1.50	0.80	4.5	18	18	45	592		
30	TEFC	284/6TS	575	3535	91.7	0.89	4.3	7.1	8.9	11.4	20.3	20.6	11.1	20.8	9.6	0.57	1.9	3.9	0.50	45.2	26.6	18.1	1.11	3.39	1.50	0.80	4.5	20	20	49	713		
40	ODP	284/6TS	208-230/460	3540	92.4	0.87	4.3	7.1	8.9	11.4	20.3	20.1	11.9	20.8	9.6	0.57	1.9	3.9	0.50	41.9	23.3	18.1	1.11	3.39	1.50	0.80	4.5	18	18	45	638		
40	TEFC	324/6TS	208-230/460	3555	92.4	0.89	4.3	8.0	8.9	12.3	21.2	22.7	12.6	20.8	9.6	0.57	1.9	3.9	0.85	48.6	29.6	18.1	1.11	3.39	1.50	0.80	4.5	20	20	49	871		
40	ODP	284/6TS	575	3540	92.4	0.87	4.3	7.1	8.9	11.4	20.3	20.1	11.9	20.8	9.6	0.57	1.9	3.9	0.50	41.9	23.3	18.1	1.11	3.39	1.50	0.80	4.5	18	18	45	636		
40	TEFC	324/6TS	575	3555	92.4	0.89	4.3	8.0	8.9	12.3	21.2	22.7	12.6	20.8	9.6	0.57	1.9	3.9	0.85	48.6	29.6	18.1	1.11	3.39	1.50	0.80	4.5	20	20	49	868		
50	ODP	324TS	208-230/460	3560	93	0.85	4.3	8.0	8.9	12.3	21.2	22.1	13.4	20.8	9.6	0.57	1.9	3.9	0.85	43.3	24.3	18.1	1.11	3.39	1.50	0.80	4.5	18	18	45	723		
50	TEFC	324/6TS	208-230/460	3550	93	0.89	4.3	8.0	8.9	12.3	21.2	22.7	12.6	20.8	9.6	0.57	1.9	3.9	0.85	48.6	29.6	18.1	1.11	3.39	1.50	0.80	4.5	20	20	49	894		
50	ODP	324TS	575	3560	93	0.85	4.3	8.0	8.9	12.3	21.2	22.1	13.4	20.8	9.6	0.57	1.9	3.9	0.85	43.3	24.3	18.1	1.11	3.39	1.50	0.80	4.5	18	18	45	720		
50	TEFC	324/6TS	575	3550	93	0.89	4.3	8.0	8.9	12.3	21.2	22.7	12.6	20.8	9.6	0.57	1.9	3.9	0.85	48.6	29.6	18.1	1.11	3.39	1.50	0.80	4.5	20	20	49	890		
60	ODP	324/6TS	208-230/460	3560	93.6	0.85	4.3	8.0	8.9	12.3	21.2	22.1	13.4	20.8	9.6	0.57	1.9	3.9	0.85	44.8	25.8	18.1	1.11	3.39	1.50	0.80	4.5	18	18	45	768		
60	TEFC	364/5TS	208-230/460	3560	93.6	0.9	6.0	9.0	8.9	15.0	23.8	24.0	16.0	23.7	10.9	0.64	2.4	3.9	0.85	51.3	32.3	18.1	1.56	4.44	2.25	0.95	6.0	2					