

Zubehör - Accessories - Accessoires

Flumen OPTI TR 50-3
AVU 80 - AVU 100 - AVU 120




Heimgartenstraße 1-3 D-95030 Hof/Saale
Telefon +49 9281 974-0 Fax +49 9281 96528
www.wilo.com E-Mail: info@wilo.com

Kunde Projekt Angebot - Quotation - Offre
Customer Project Auftrag - Order - Commande
Client Projct Nr. - No.:


Führungsrohrlänge Standard L= 6 m
Guide pipe length L1= L2= L3= m
Longueur du tube de guidage

Teile - parts - pièces séparées
 montiert - mounted - monté

Standard 6010954
 L=900
 L=1000/90°



TR 50-3

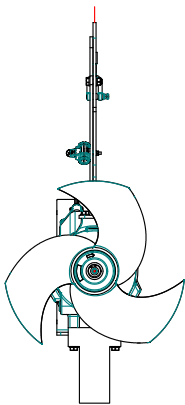

TR 50-3. - /
KMAT 6091012

AVU 80

6011094
KMAT 6000553 A2 6011005
 A4

Schub
Thrust < 1450N
Poussée

L2
 L3
 Standard 6010954
 L=900
 L=1000/90°

AVU 100

6011094
KMAT 6000553 A2 6011005
 A4

Schub < 1700N - Lmax 8m
Thrust < 3000N - Lmax 6m
Poussée

L2
 L3
 Standard 6010954
 L=900
 L=1000/90°

AVU 120

6011094
KMAT 6000553 A2 6011005
 A4

A4 = 1.4571 / AISI 316Ti / Z 6 CNDT 17-12
A2 = 1.4301 / AISI 304 / Z 7 CN 18-09
 = Befestigungssatz / fixing elements / éléments de fixation

6068158 (6068160...64)

6011193 (6011116)

6011090

6010961 Gr.80

6010940 #1 (Ø10-17)
 6010939 #2 (Ø17-26)
 6010948 #3 (Ø26-36)
 6061713 #1+3
 6061712 #2+3

6068158 (6068160...64)

6011193 (6011116)

6011221

6010956 (Gr.100)
 6047291 (Gr.120)

6011090

6010963 Gr.100
 6011040 Gr.120

6010940 #1 (Ø10-17)
 6010939 #2 (Ø17-26)
 6010948 #3 (Ø26-36)
 6061713 #1+3
 6061712 #2+3