

Zubehör - Accessories - Accessoires

Flumen EXCEL TRE 50-3
AVU 80 - AVU 100 - AVU 120

wilo

Kunde
Customer
Client

Projekt
Project
Projet


Angebot - Quotation - Offre
Auftrag - Order - Commande
Nr. - No.:

Heimgartenstraße 1-3 D-95030 Hof/Saale
Telefon +49 9281 974-0 Fax +49 9281 96528
www.wilo.com E-Mail: info@wilo.com


Führungsrohrlänge Standard L= 6 m
Guide pipe length L1= L2= L3= m
Longueur du tube de guidage

Teile - parts - pièces séparées
 montiert - mounted - monté

Standard 6010954
 L=900
 L=1000/90°

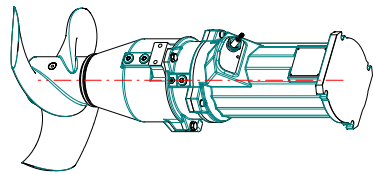

TRE 50-3

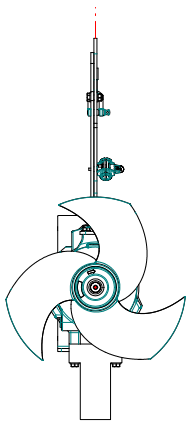

TRE 50-3. ___ - ___ / ___

KMAT 6091006

AVU 80

KMAT 6000553 A2 A4 6011005

Schub
Thrust < 1800N
Poussée

L2
 L3

Standard 6010954
 L=900
 L=1000/90°

AVU 100

KMAT 6000553 A2 A4 6011005

Schub
Thrust < 1700N - Lmax 8m
Poussée < 3000N - Lmax 6m

L2
 L3

Standard 6010954
 L=900
 L=1000/90°

AVU 120

KMAT 6000553 A2 A4 6011005

A4 = 1.4571 / AISI 316Ti / Z 6 CNDT 17-12
A2 = 1.4301 / AISI 304 / Z 7 CN 18-09

= Befestigungssatz / fixing elements / éléments de fixation

6068158 (6068160...64)

6011193 (6011116)

6011090

6010961 Gr.80

6010940 #1 (Ø10-17)
 6010939 #2 (Ø17-26)
 6010948 #3 (Ø26-36)
 6061713 #1+3
 6061712 #2+3

6068158

(6068160...64)

6011193 (6011116)

6011221

6010956 (Gr.100)
 6047291 (Gr.120)

6011090

6010963 Gr.100
 6011040 Gr.120

6010940 #1 (Ø10-17)
 6010939 #2 (Ø17-26)
 6010948 #3 (Ø26-36)
 6061713 #1+3
 6061712 #2+3