
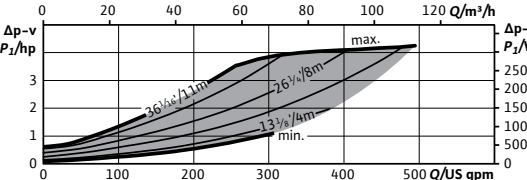
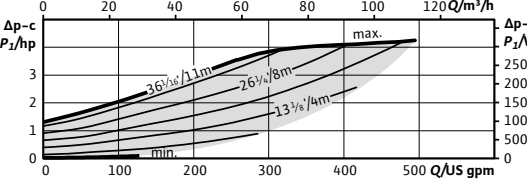
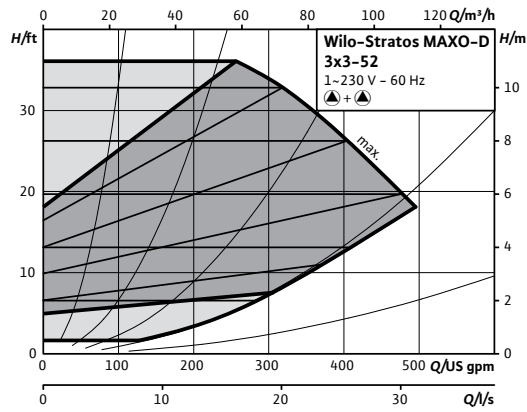
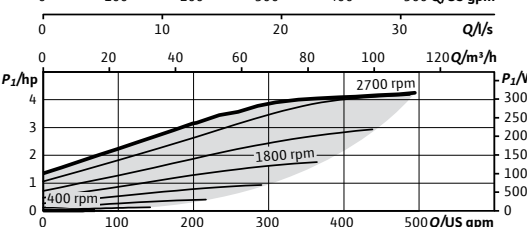


Wilo-Stratos MAXO-D

		Project:					
		Engineer:					
		Contractor:					
		Submitted By:			Date:		
		Approved By:			Date:		
Tag #	Model #	Flow	Head	Control Mode	Cycle	Phase	Voltage
	Maxo-D 3x3-52				60Hz	1~	230-240V

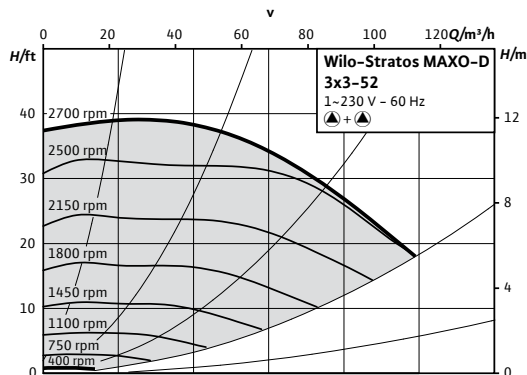

Product Info

Brand	Wilo
Product Description	Stratos MAXO-D 3x3-52
Article Number	2164622
Net Weight (approx.)	144 lbs

Hydraulic Data

Max Operating Pressure PN	145 PSI
Min. Suction Head (122°F)	10 PSI
Min. Suction Head (203°F)	21.3 PSI
Min. Suction Head (230°F)	32.7 PSI
Min. Fluid Temp.	14°F
Max Fluid Temp.	230°F
Min. Ambient Temp	14°F
Max. Ambient Temp	104°F




CIF Module Selection

- BACnet MS/TP
- Modbus RTU
- CANopen
- LON TP/FT-10
- PLR

Accessory Selection

- Immersion Temp. Sensor Pt 1000 AA
- Immersion Sleeve G ½", 45mm
- Pipe Surface Contact Sensor Pt 1000 B
- Immersion Sleeve G ½", 100mm

- Dia. 3"
- ØD 7 9/16"
- Ød 5 1/16"
- Øk 6"
- n x d<sub>L</sub> 4 x 3/4"

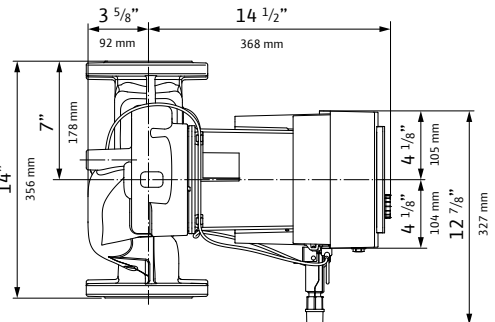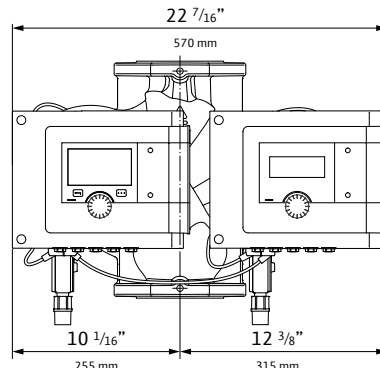

Materials

Pump Housing	EN-GJL-250
Impeller	PPS-GF40
Shaft	X30Cr13
Bearing	Carbon, Antimony-Impregnated

Motor Data

Mains Connection	1~230-240V ±10%, 50/60Hz
Motor Type	ECM
Rated Power P <sub>2</sub>	2.038 hp
Min. Speed n <sub>min</sub>	400 RPM
Max. Speed n <sub>max</sub>	3200 RPM
Power Consumption P <sub>1,max</sub>	2.206 hp
Power Consumption P <sub>1,min</sub>	0.020 hp
Max Current (1~230V) I <sub>max</sub>	7.14 A
Min Current (1~230V) I <sub>min</sub>	0.3 A
Insulation Class	F
Protection Class	Enclosure 2

Electrical Inputs

- Analog Inputs (2x) 0-10V / 0-20mA / 4-20mA / PT 1000 Passive/Active +24V DC
- Digital Inputs (2x) Ext Off / Ext Min / Ext Max / Ext. MANUAL (BMS off) / External Key Lock / Switch heating, cooling
- Wilo NET Multi-Pump Communication
- SSM Fault Signal
- SBM Run Signal

Installation Dimensions

- Pipe Connection (discharge) 3"
- Pipe Connection (suction) 3"
- Flange to Flange 14"