


Pioneering for You

wilo®

Product Brochure - 60 Hz

Wilo-Atmos TERA-SCH-HE


Base Mounted Split Case Pump

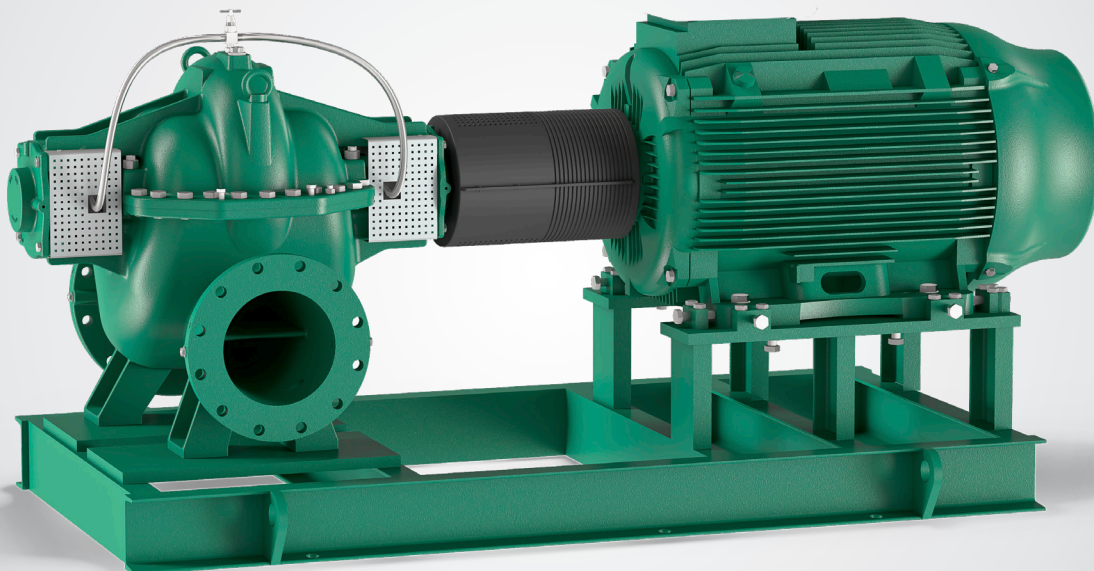

SCH_081424

Base Mounted Split Case Pump

Wilo-Atmos TERA-SCH-HE

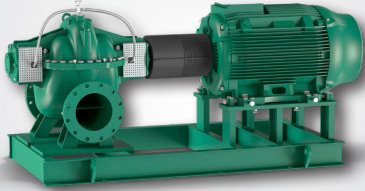

Discover the power and reliability of our NSF-61 compliant Atmos TERA-SCH-HE. Engineered to exceed industry standards, delivering clean, potable water to communities

Applications

- HVAC
- Water Supply
- Process

Head Range: 65 feet – 770 feet

Flow Range: 1,000 GPM – 20,500 GPM

Features & Benefits

- NSF-61 Compliance: Guarantees the highest standards of water purity and safety
- Robust Performance: Designed for efficiency and durability, meeting the rigorous demands of municipal operations
- Trusted Reliability: Built with state-of-the-art Hydraulics to optimize low NPSH requirements
- Welded base frame with easy alignment
- Easy maintenance

Technical Data

- Fluid Temperature: 18°F to 248°F (212°F for gland packing version)
- Max. Operating Pressure Rating: 175 PSI (12 bar) or 232 PSI (16 bar) depending on the size of pump

Materials of Construction

- Pump Housing: ASTM 2001 A48 CLASS-35 high grade cast iron
- Pump Shaft: ASTM A276, GR. 410 Stainless Steel
- Impeller: ASTM A743 Gr.CF8 Stainless Steel

