




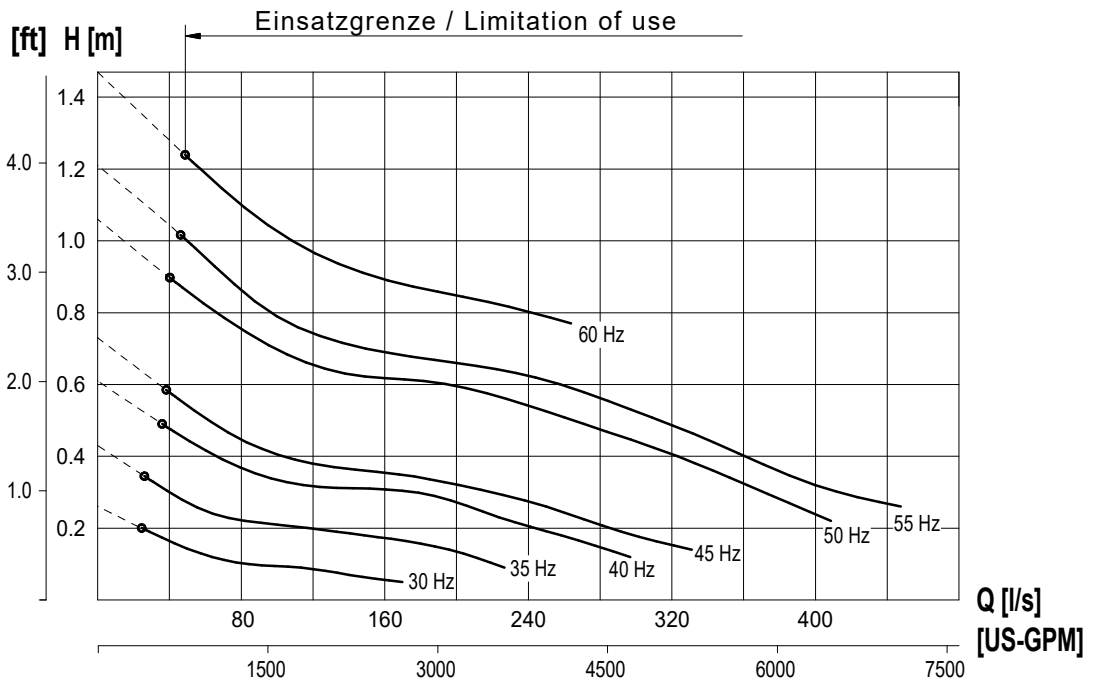


Kennlinie Performance curve	Baureihe Type	<b>RZPE 50-4.37-4/24</b>	Nr./ No. Version	<b>KL 0347-1</b> 2023-07-06 Sp
Netz / Main connection	<b>400V~3 / 50Hz</b>		Nennzahl Nom. Speed	<b>376 [1/min]</b>
Motortyp / Motor type	<b>TE 17-4/24R (Ex)</b>		Kugeldurchgang Free ball passage	<b>150 [mm]</b>
Nenn-Laufrad Ø / Nom. Impeller Ø	<b>500 [mm]</b>		Max.-Leistung / power input [P1]	<b>5.9 [kW]</b>
Effizienzklasse / Efficiency class	<b>IE 3 / DIN EN 60034-30-1</b>		Hydr.Nr.	<b>6089115</b>
Nennleistung / Rated output [P2]	<b>5.0 [kW]</b>			

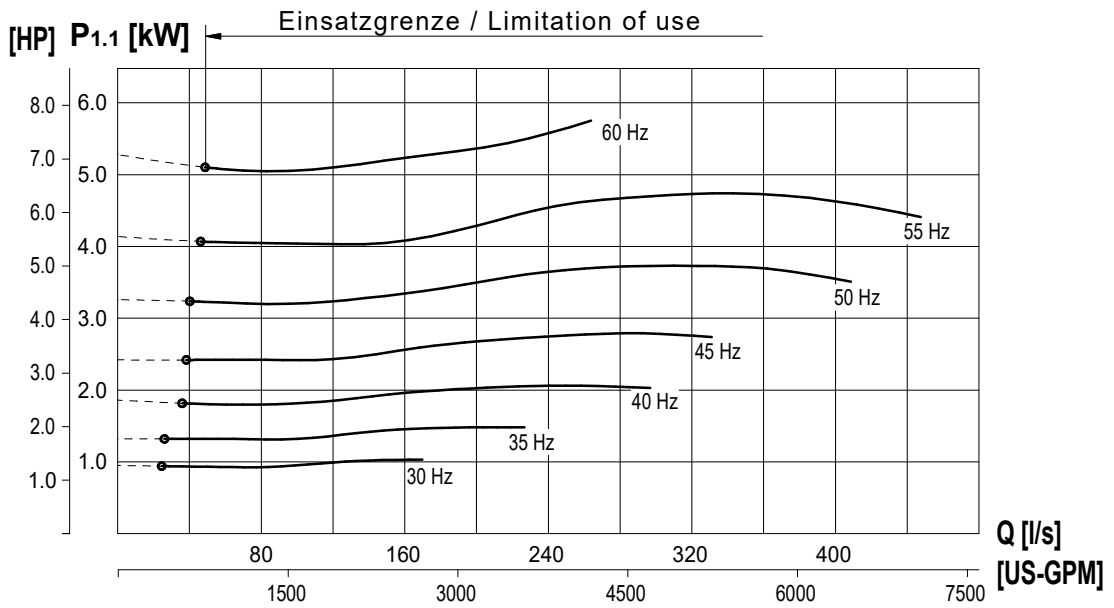

± 10% Toleranz bei linearer U/f-Frequenzregelung / ± 10% tolerance with linear U/f frequency control

Kennlinie Performance curve	Baureihe Type	<b>RZPE 50-4.37-4/24</b>	Nr./ No. Version	<b>KL 0347-2</b> 2023-07-06 Sp
Netz / Main connection	<b>400V~3 / 50Hz</b>		Nenndrehzahl Nom. Speed	<b>376 [1/min]</b>
Motortyp / Motor type	<b>TE 17-4/24R (Ex)</b>		Kugeldurchgang Free ball passage	<b>150 [mm]</b>
Nenn-Laufrad Ø / Nom. Impeller Ø	<b>500 [mm]</b>		Max.-Leistung / power input [P1]	<b>5.9 [kW]</b>
Effizienzklasse / Efficiency class	<b>IE 3 / DIN EN 60034-30-1</b>		Hydr.Nr.	<b>6089115</b>
Nennleistung / Rated output [P2]	<b>5.0 [kW]</b>			

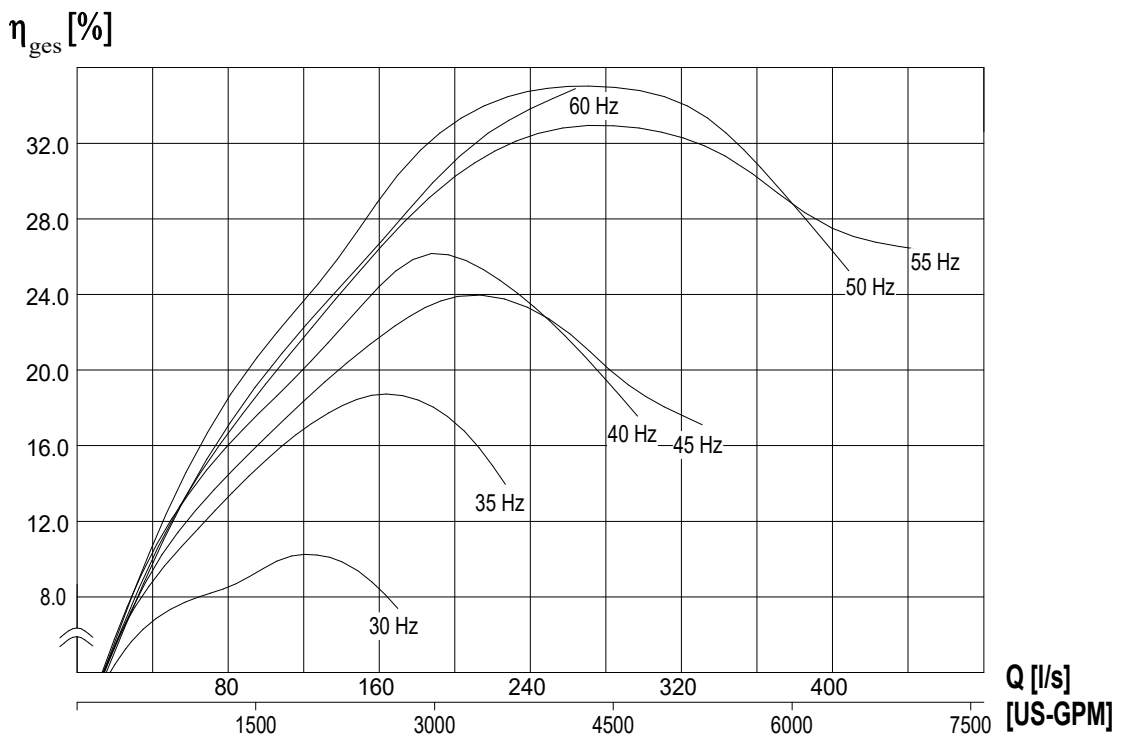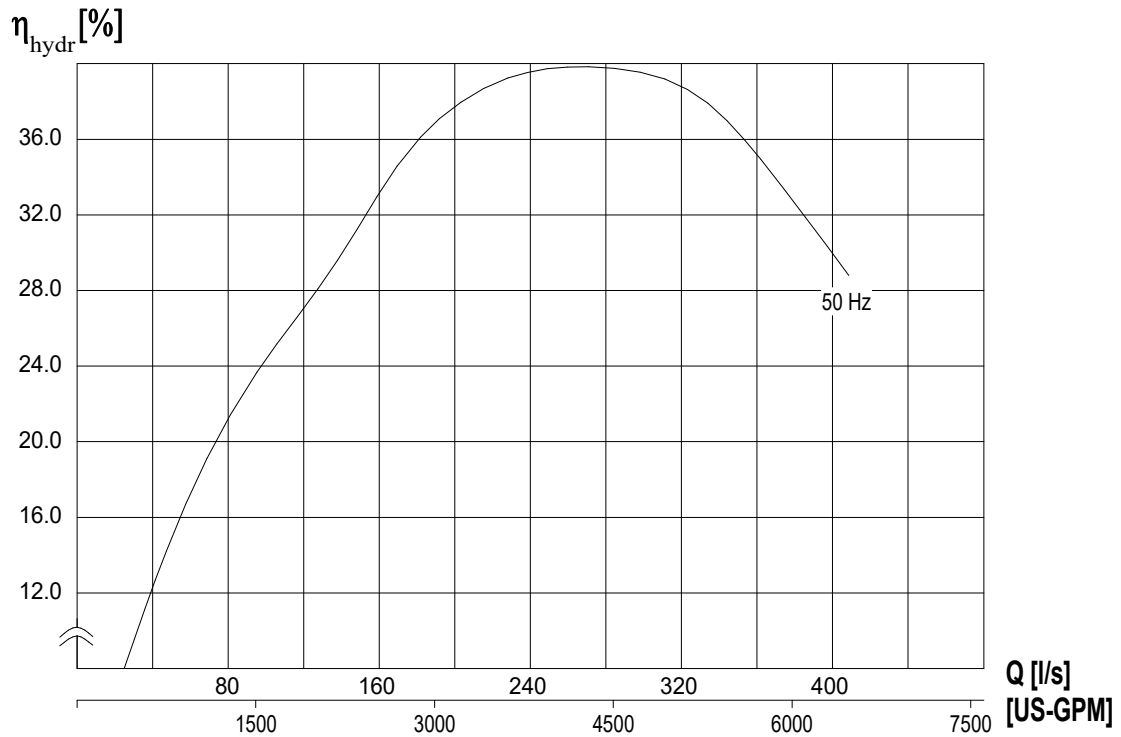

± 10% Toleranz bei linearer U/f-Frequenzregelung / ± 10% tolerance with linear U/f frequency control