




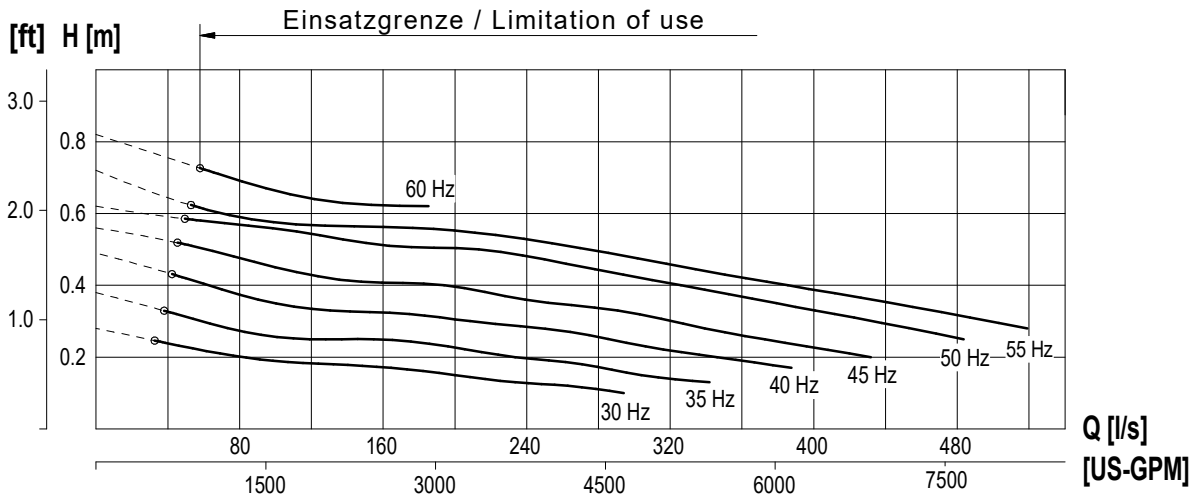


Kennlinie Performance curve	Baureihe Type	RZP 60-4.29-4/8	Nr./ No. Version	KL 0361-1 2024-01-16 Sp
Netz / Main connection	400V~3 / 50Hz		Nenndrehzahl Nom. Speed	293 [1/min]
Motortyp / Motor type	T 17-4/8R (Ex)		Kugeldurchgang Free ball passage	150 [mm]
Nenn-Laufrad Ø / Nom. Impeller Ø	600 [mm]		Max.-Leistung / power input [P1]	4,50 [kW]
Effizienzklasse / Efficiency class	DIN EN 60034-30-1		Hydr.Nr.	6088168
Nennleistung / Rated output [P2]	3,50 [kW]			

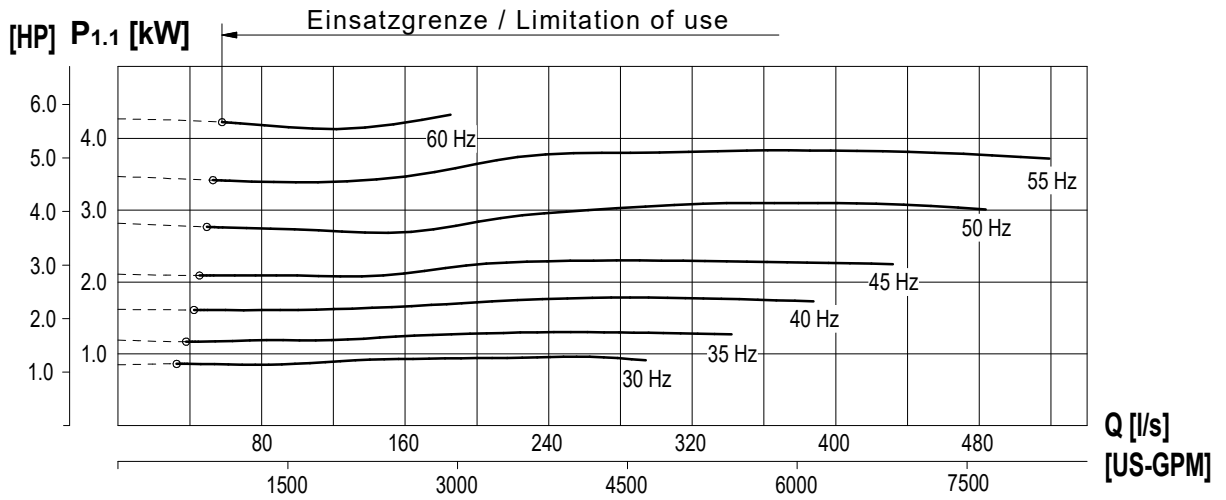

± 10% Toleranz bei linearer U/f-Frequenzregelung / ± 10% tolerance with linear U/f frequency control

Kennlinie Performance curve	Baureihe Type	RZP 60-4.29-4/8	Nr./ No. Version	KL 0361-2 2024-01-16 Sp
Netz / Main connection	400V~3 / 50Hz		Nenndrehzahl Nom. Speed	293 [1/min]
Motortyp / Motor type	T 17-4/8R (Ex)		Kugeldurchgang Free ball passage	150 [mm]
Nenn-Laufrad Ø / Nom. Impeller Ø	600 [mm]		Max.-Leistung / power input [P1]	4,50 [kW]
Effizienzklasse / Efficiency class	DIN EN 60034-30-1		Hydr.Nr.	6088168
Nennleistung / Rated output [P2]	3,50 [kW]			

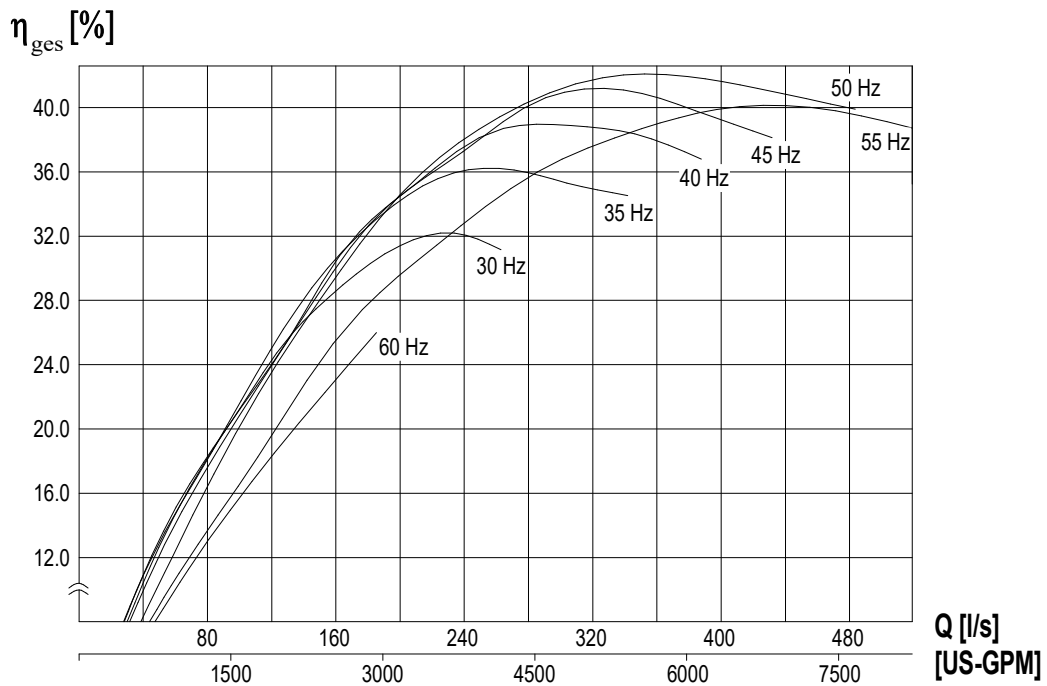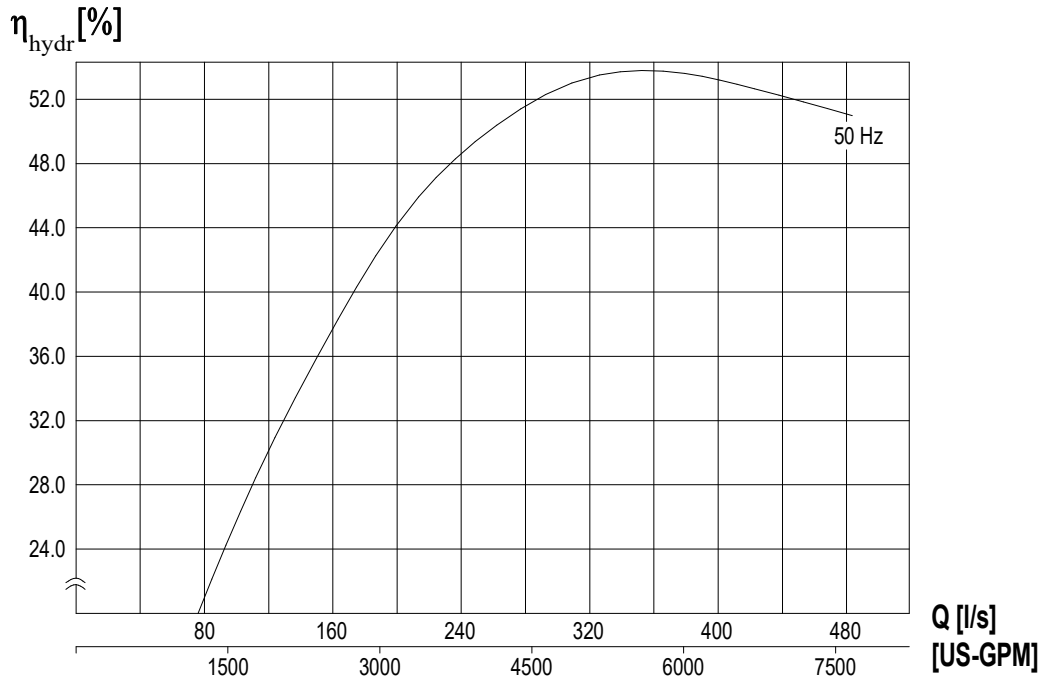

± 10% Toleranz bei linearer U/f-Frequenzregelung / ± 10% tolerance with linear U/f frequency control