




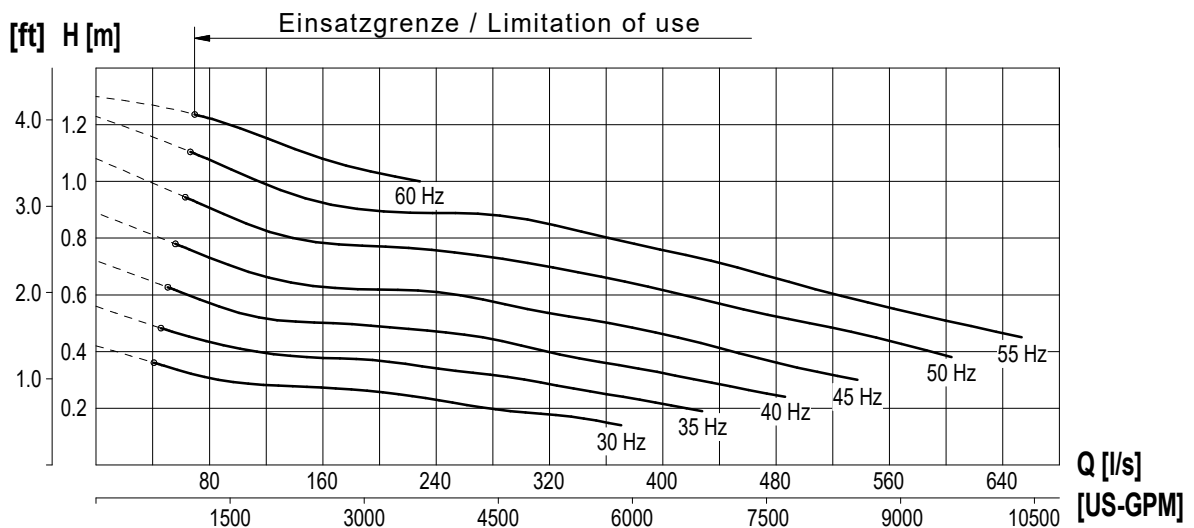


Kennlinie Performance curve	Baureihe Type	RZP 60-4.37-4/16	Nr./ No. Version	KL 0363-1 2024-02-28 Sp
Netz / Main connection	400V~3 / 50Hz		Nenndrehzahl Nom. Speed	368 [1/min]
Motortyp / Motor type	T 17-4/16R (Ex)		Kugeldurchgang Free ball passage	150 [mm]
Nenn-Laufrad Ø / Nom. Impeller Ø	600 [mm]		Max.-Leistung / power input [P1]	8,20 [kW]
Effizienzklasse / Efficiency class	DIN EN 60034-30-1		Hydr.Nr.	6088168
Nennleistung / Rated output [P2]	6,50 [kW]			

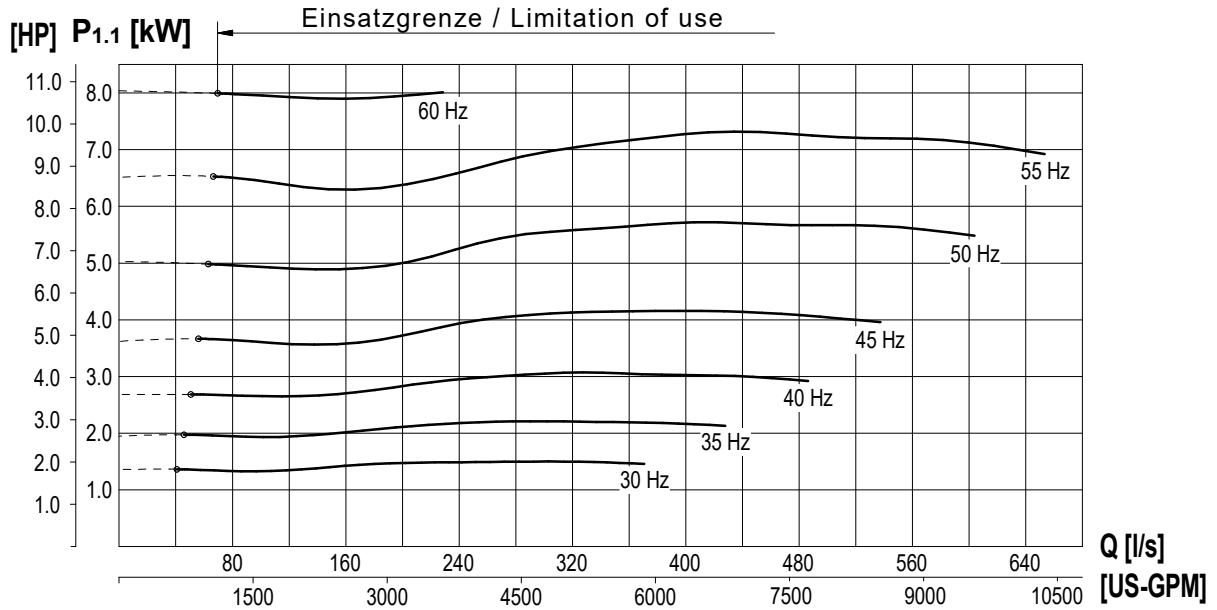

± 10% Toleranz bei linearer U/f-Frequenzregelung / ± 10% tolerance with linear U/f frequency control

Kennlinie Performance curve	Baureihe Type	RZP 60-4.37-4/16	Nr./ No.	KL 0363-2	
			Version	2024-02-28	Sp
Netz / Main connection		400V~3 / 50Hz		Nenn-drehzahl Nom. Speed	368 [1/min]
Motortyp / Motor type		T 17-4/16R (Ex)		Nom. Speed	
Nenn-Laufrad Ø / Nom. Impeller Ø		600 [mm]		Kugeldurchgang Free ball passage	150 [mm]
Effizienzklasse / Efficiency class		DIN EN 60034-30-1		Free ball passage	
Nennleistung / Rated output [P2]		6,50 [kW]	Max.-Leistung / power input [P1]	8,20 [kW]	
				Hydr.Nr.	6088168

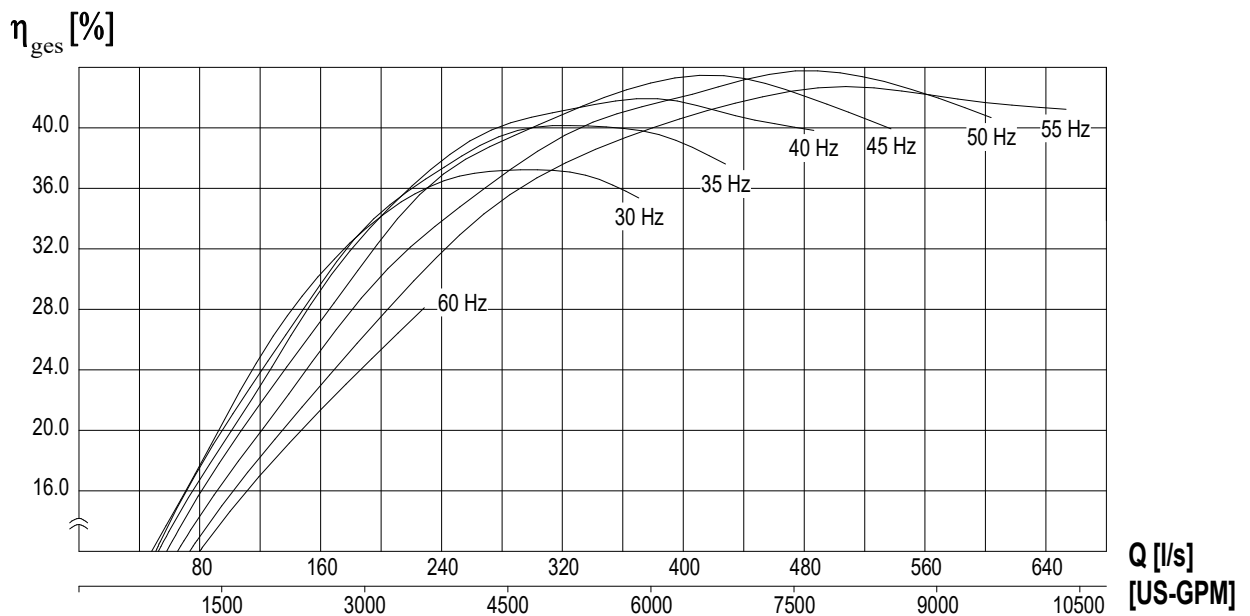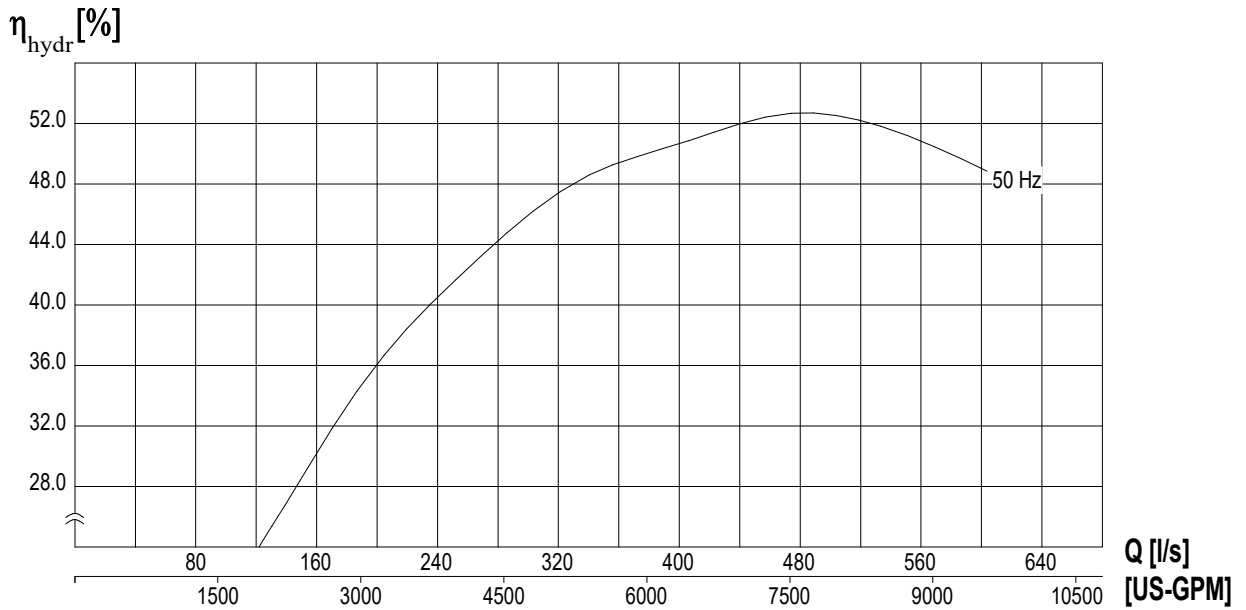

± 10% Toleranz bei linearer U/f-Frequenzregelung / ± 10% tolerance with linear U/f frequency control