



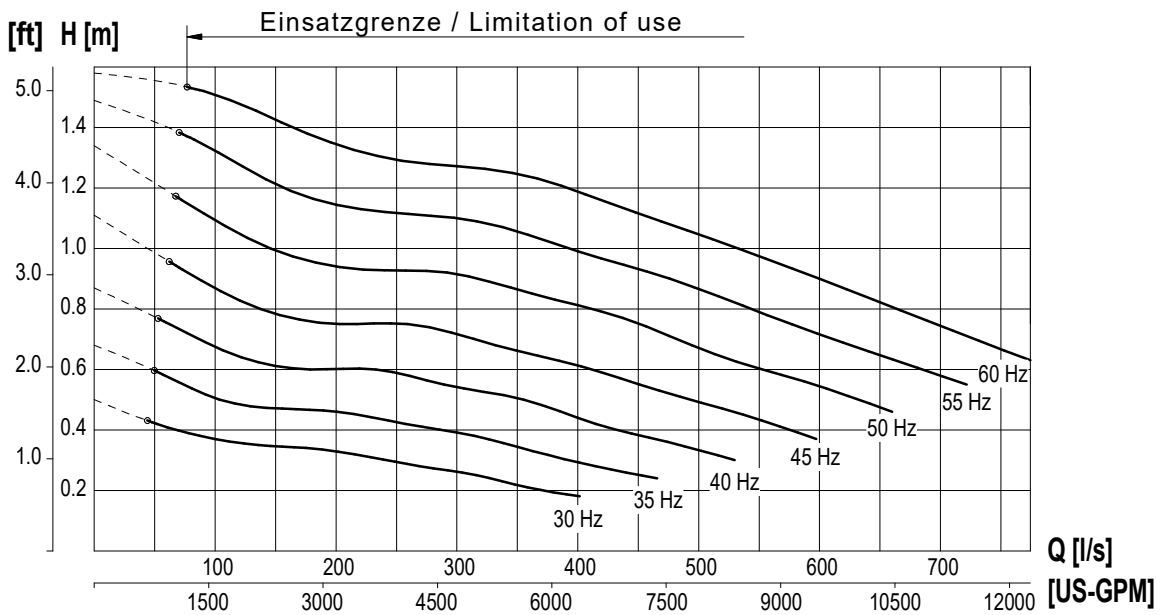


Kennlinie Performance curve	Baureihe Type	RZP 60-4.40-4/24	Nr./ No. Version	KL 0374-1 2024-03-25 Sp
Netz / Main connection	400V~3 / 50Hz		Nennzahl Nom. Speed	405 [1/min]
Motortyp / Motor type	T 17-4/24R (Ex)		Kugeldurchgang Free ball passage	150 [mm]
Nenn-Laufrad Ø / Nom. Impeller Ø	600 [mm]		Effizienzklasse / Efficiency class	DIN EN 60034-30-1
Nennleistung / Rated output [P2]	10,00 [kW]	Max.-Leistung / power input [P1]	12,20 [kW]	
			Hydr.Nr.	6088168

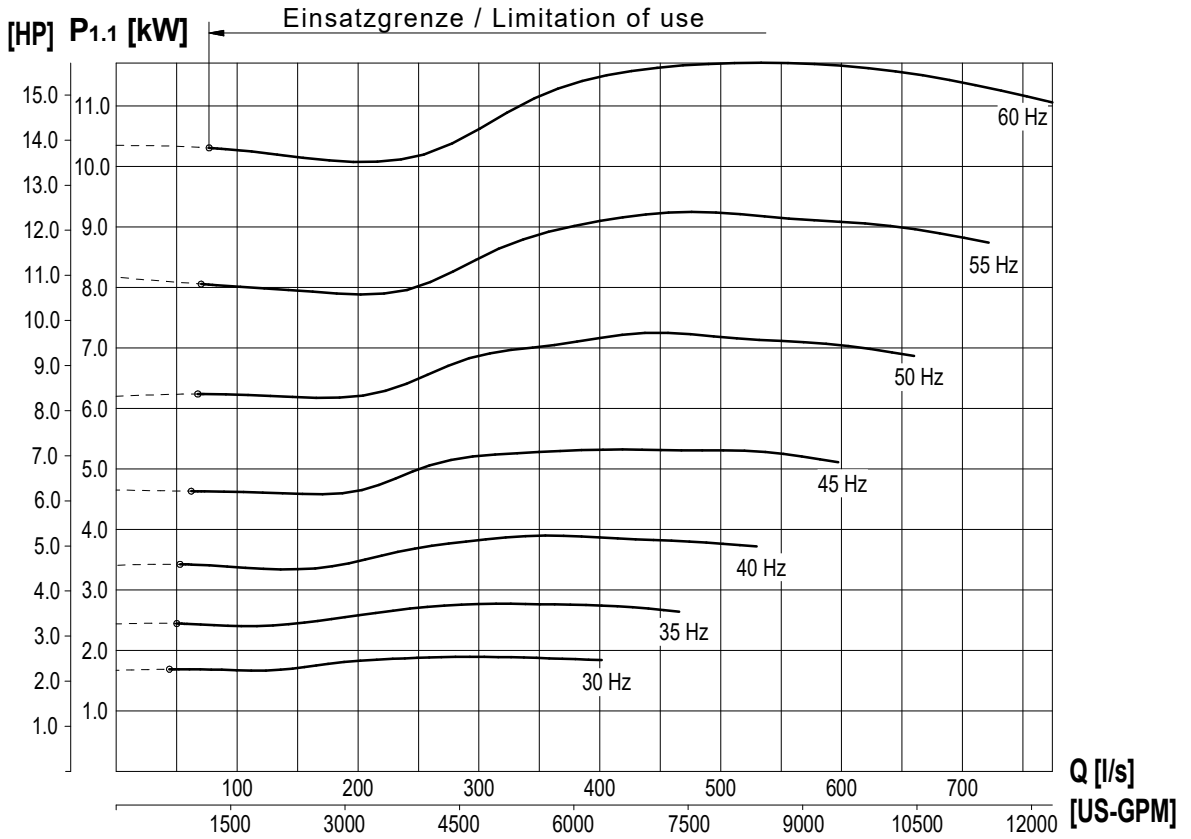

± 10% Toleranz bei linearer U/f-Frequenzregelung / ± 10% tolerance with linear U/f frequency control


Kennlinie Performance curve	Baureihe Type	RZP 60-4.40-4/24	Nr./ No. Version	KL 0374-2 2024-03-25 Sp
Netz / Main connection	400V~3 / 50Hz		Nennzahl Nom. Speed	405 [1/min]
Motortyp / Motor type	T 17-4/24R (Ex)		Kugeldurchgang Free ball passage	150 [mm]
Nenn-Laufrad Ø / Nom. Impeller Ø	600 [mm]		Max.-Leistung / power input [P1]	12,20 [kW]
Effizienzklasse / Efficiency class	DIN EN 60034-30-1		Hydr.Nr.	6088168
Nennleistung / Rated output [P2]	10,00 [kW]			

η_{hydr} [%]

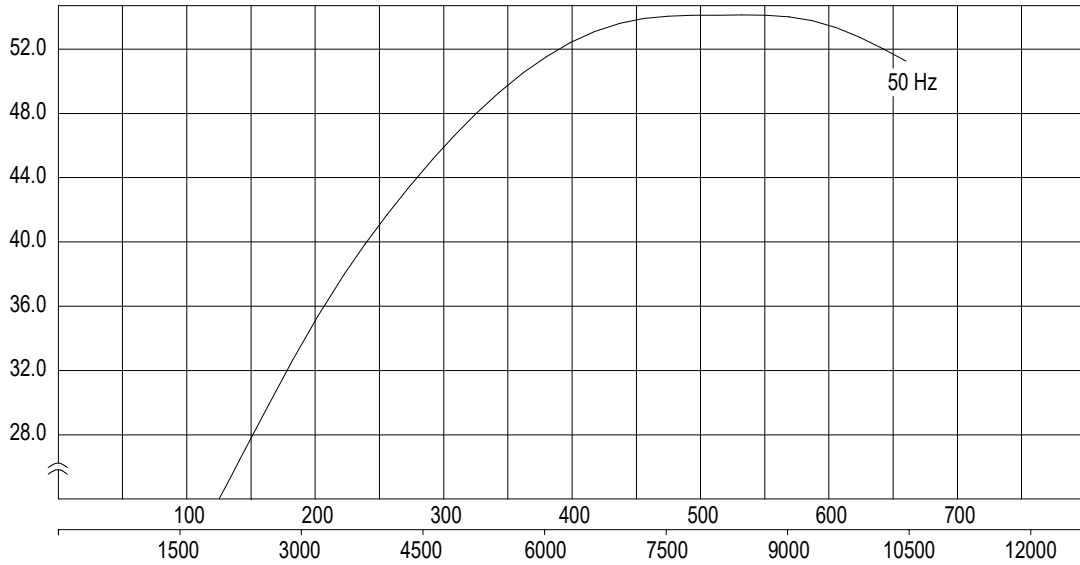

Q [l/s]
[US-GPM]

η_{ges} [%]

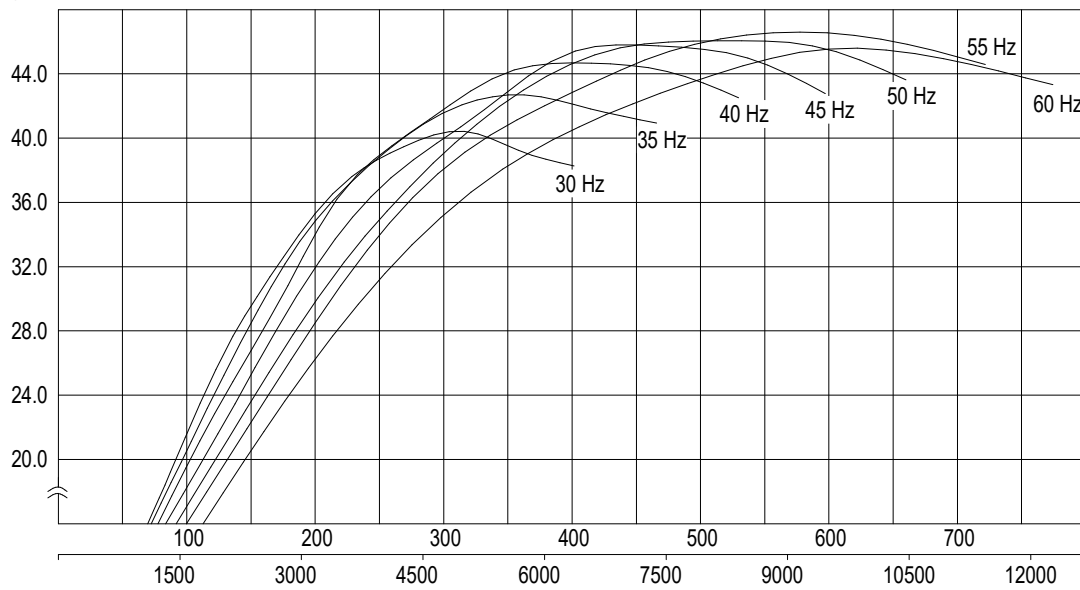

Q [l/s]
[US-GPM]

± 10% Toleranz bei linearer U/f-Frequenzregelung / ± 10% tolerance with linear U/f frequency control