




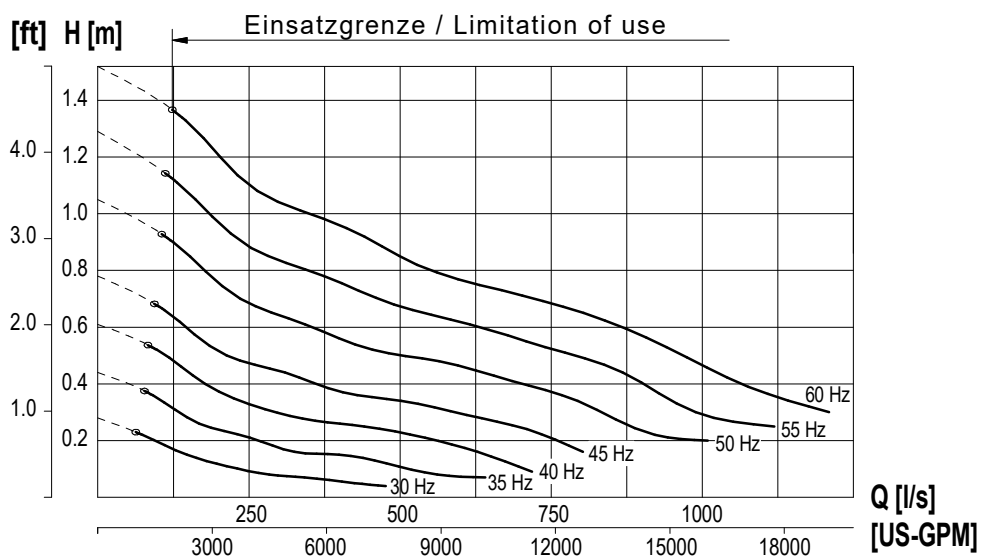


Kennlinie Performance curve	Baureihe Type	RZP 80-3.24-6/32	Nr./ No.	KL 0358-1
			Version	2024-01-22 Sp
Netz / Main connection		400V~3 / 50Hz	Nenndrehzahl Nom. Speed	245 [1/min]
Motortyp / Motor type		T 20-6/32R (Ex)	Kugeldurchgang Free ball passage	240 [mm]
Nenn-Laufrad Ø / Nom. Impeller Ø		800 [mm]	Max.-Leistung / power input [P1]	14,90 [kW]
Effizienzklasse / Efficiency class		DIN EN 60034-30-1	Hydr.Nr.	6089789
Nennleistung / Rated output [P2]		12,50 [kW]		

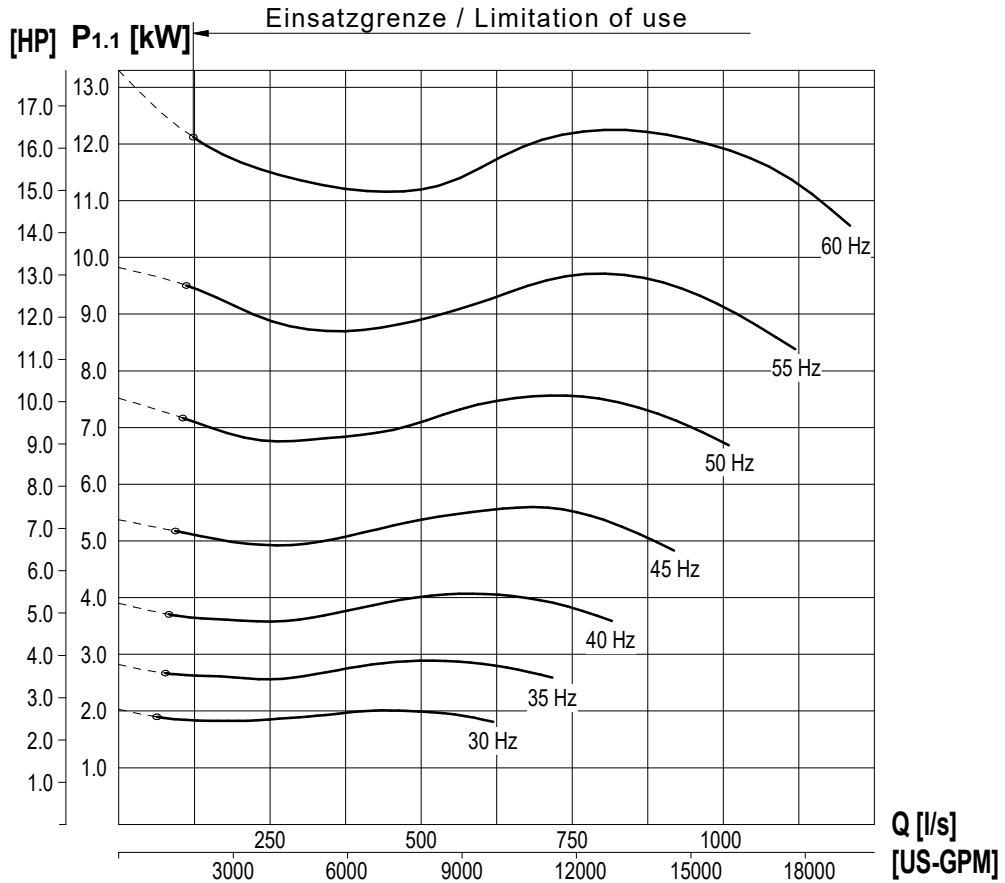

± 10% Toleranz bei linearer U/f-Frequenzregelung / ± 10% tolerance with linear U/f frequency control

Kennlinie Performance curve	Baureihe Type	RZP 80-3.24-6/32	Nr./ No. Version	KL 0358-2 2024-01-22 Sp
Netz / Main connection	400V~3 / 50Hz		Nennzahl Nom. Speed	245 [1/min]
Motortyp / Motor type	T 20-6/32R (Ex)		Kugeldurchgang Free ball passage	240 [mm]
Nenn-Laufrad Ø / Nom. Impeller Ø	800 [mm]		Max.-Leistung / power input [P1]	14,90 [kW]
Effizienzklasse / Efficiency class	DIN EN 60034-30-1		Hydr.Nr.	6089789
Nennleistung / Rated output [P2]	12,50 [kW]			

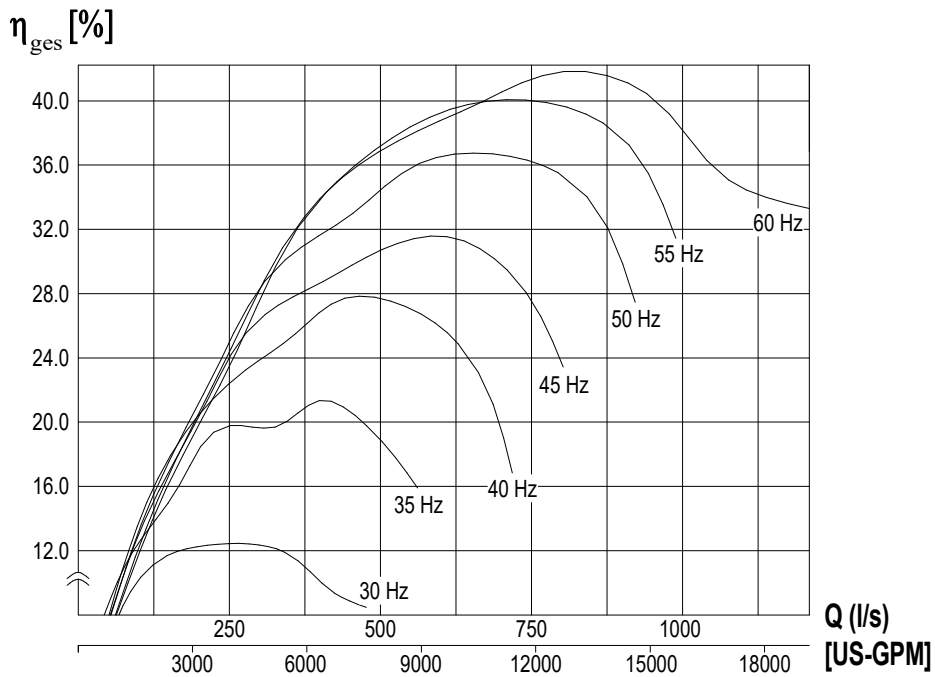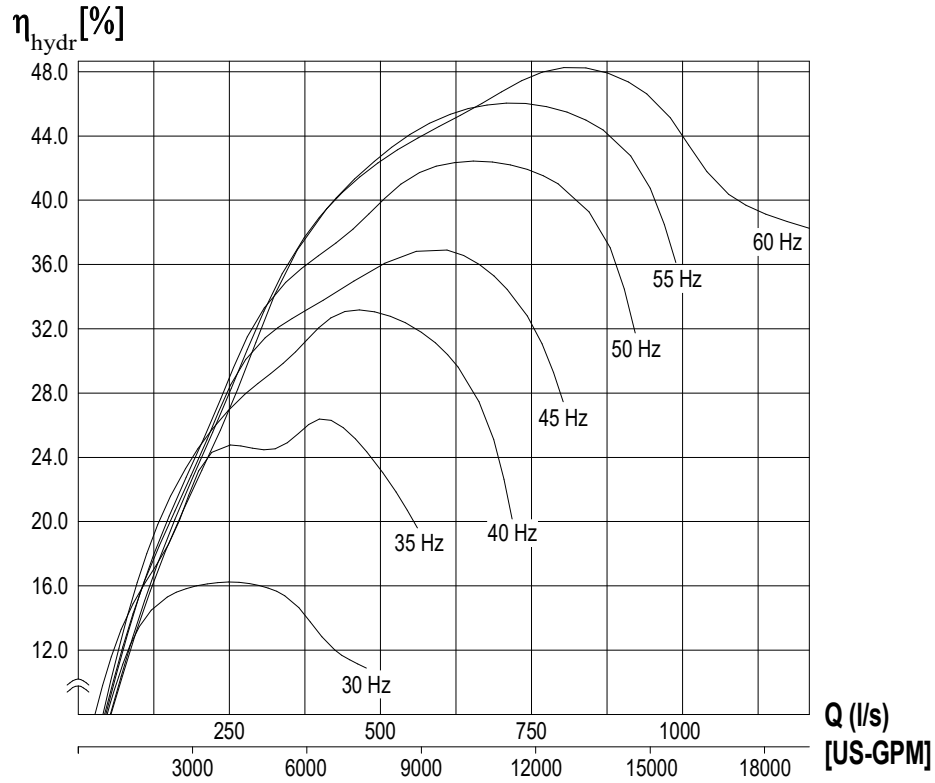

± 10% Toleranz bei linearer U/f-Frequenzregelung / ± 10% tolerance with linear U/f frequency control