

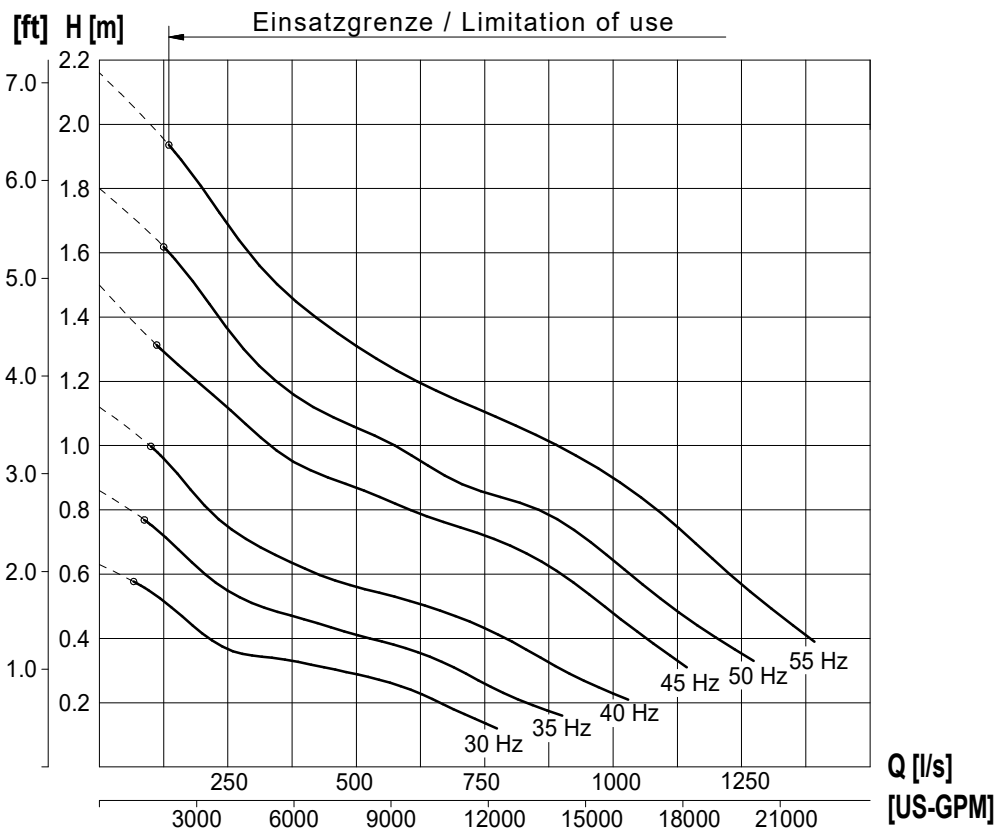
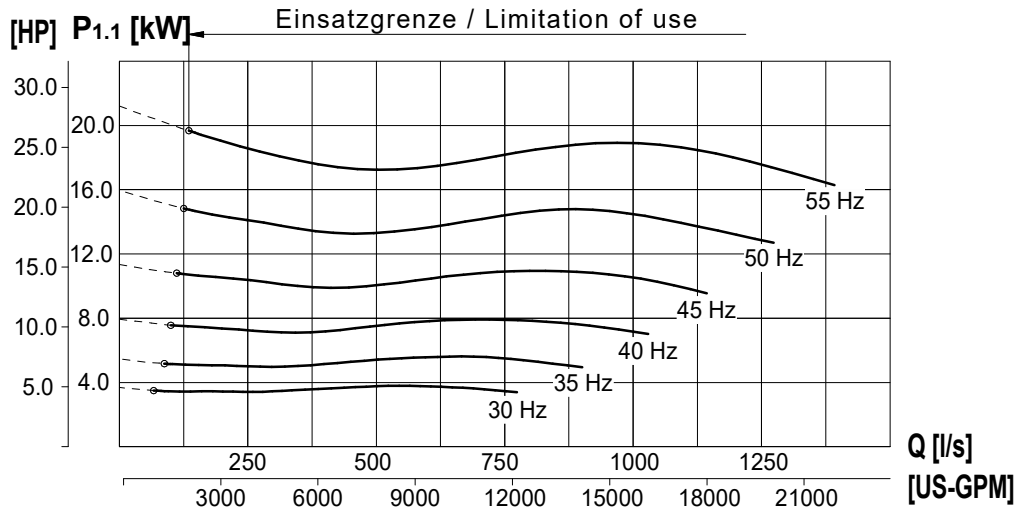


Kennlinie Performance curve	Baureihe Type	RZP 80-3.31-4/30	Nr./ No. Version	KL 0346-1 2024-02-06 Sp
Netz / Main connection	400V~3 / 50Hz		Nennzahl Nom. Speed	309 [1/min]
Motortyp / Motor type	T 20-4/30R (Ex)		Kugeldurchgang Free ball passage	240 [mm]
Nenn-Laufrad Ø / Nom. Impeller Ø	800 [mm]		Max.-Leistung / power input [P1]	22,0 [kW]
Effizienzklasse / Efficiency class	DIN EN 60034-30-1		Hydr.Nr.	6089789
Nennleistung / Rated output [P2]	18,5 [kW]			

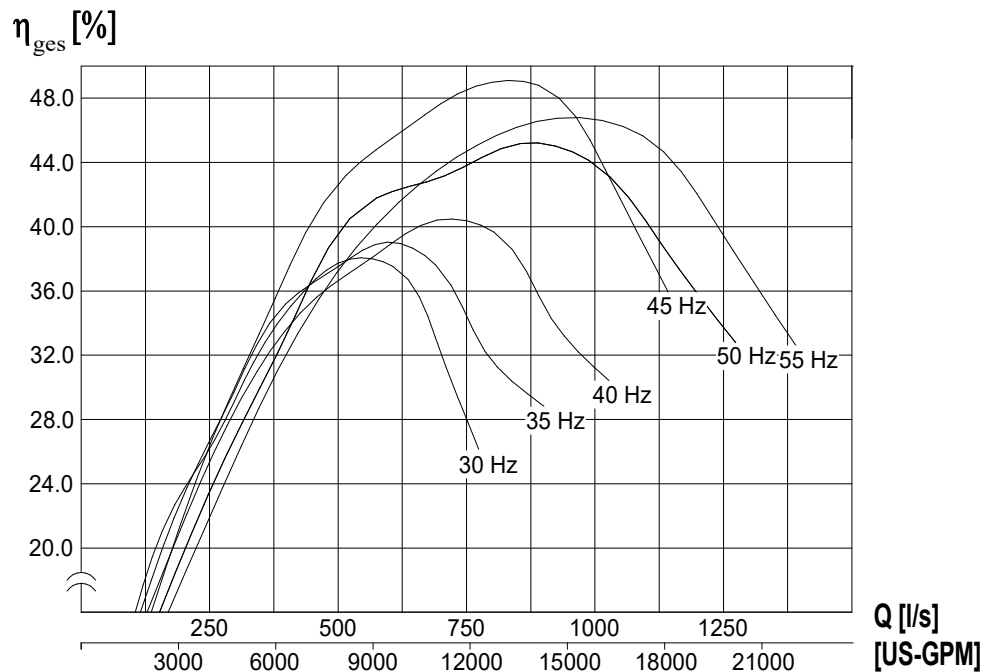

± 10% Toleranz bei linearer U/f-Frequenzregelung / ± 10% tolerance with linear U/f frequency control

Kennlinie Performance curve	Baureihe Type	RZP 80-3.31-4/30	Nr./ No.	KL 0346-2	
			Version	2024-02-06 Sp	
Netz / Main connection	400V~3 / 50Hz			Nenndrehzahl Nom. Speed	309 [1/min]
Motortyp / Motor type	T 20-4/30R (Ex)			Nom. Speed	
Nenn-Laufrad Ø / Nom. Impeller Ø	800 [mm]			Kugeldurchgang Free ball passage	240 [mm]
Effizienzklasse / Efficiency class	DIN EN 60034-30-1			Free ball passage	
Nennleistung / Rated output [P2]	18,5 [kW]		Max.-Leistung / power input [P1]		22,0 [kW]
				Hydr.Nr.	6089789

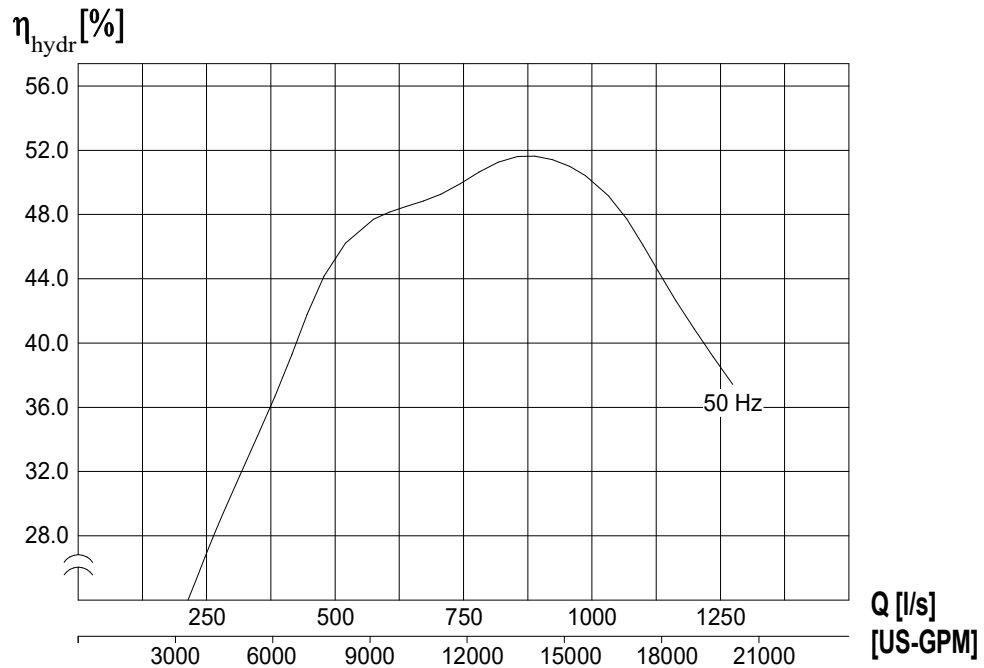

± 10% Toleranz bei linearer U/f-Frequenzregelung / ± 10% tolerance with linear U/f frequency control