

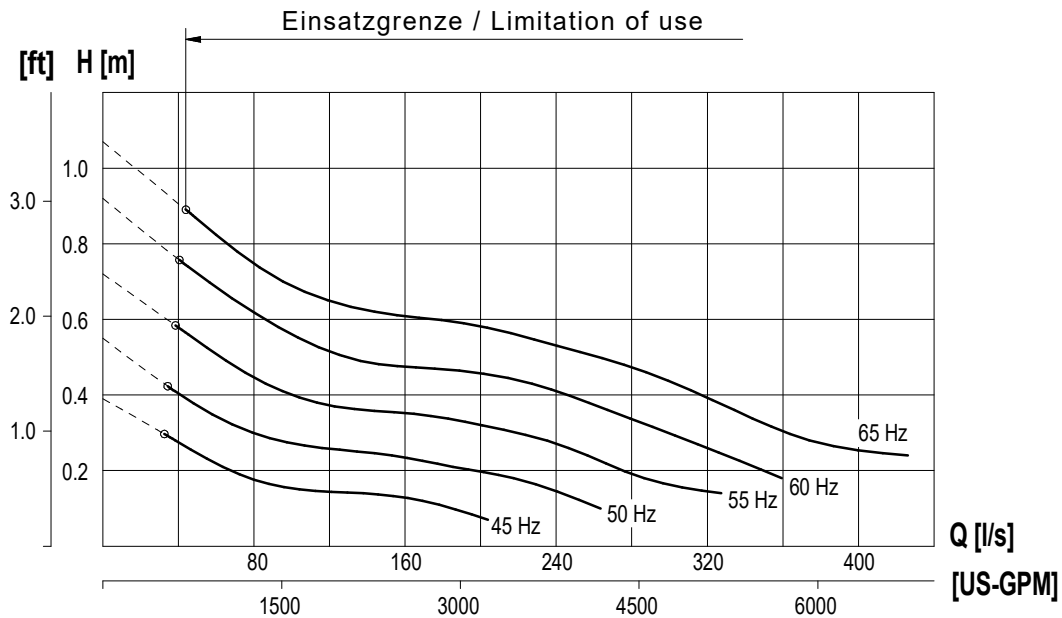
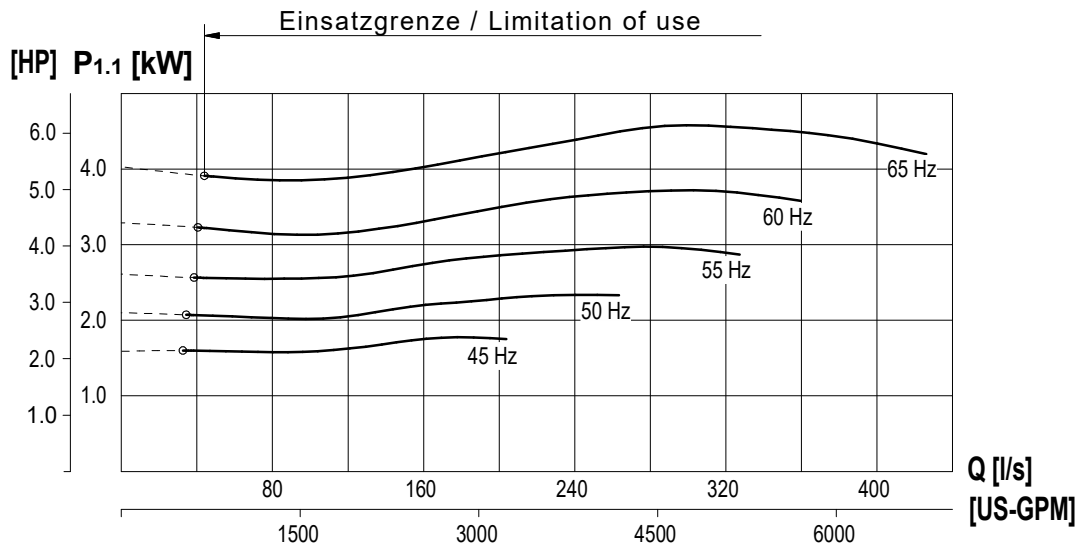


Kennlinie Performance curve	Baureihe Type	RZP 50-4.37-4/8	Nr./ No. Version	KL 0357-1 2023-11-30 Sp
Netz / Main connection	460V~3 / 60Hz		Nenndrehzahl Nom. Speed	365 [1/min]
Motortyp / Motor type	T 17-4/8R (Ex)		Kugeldurchgang Free ball passage	150 [mm]
Nenn-Laufrad Ø / Nom. Impeller Ø	500 [mm]		Effizienzklasse / Efficiency class	DIN EN 60034-30-1
Nennleistung / Rated output [P2]	4,20 [kW]	Max.-Leistung / power input [P1]	5,40 [kW]	
			Hydr.Nr.	6089115

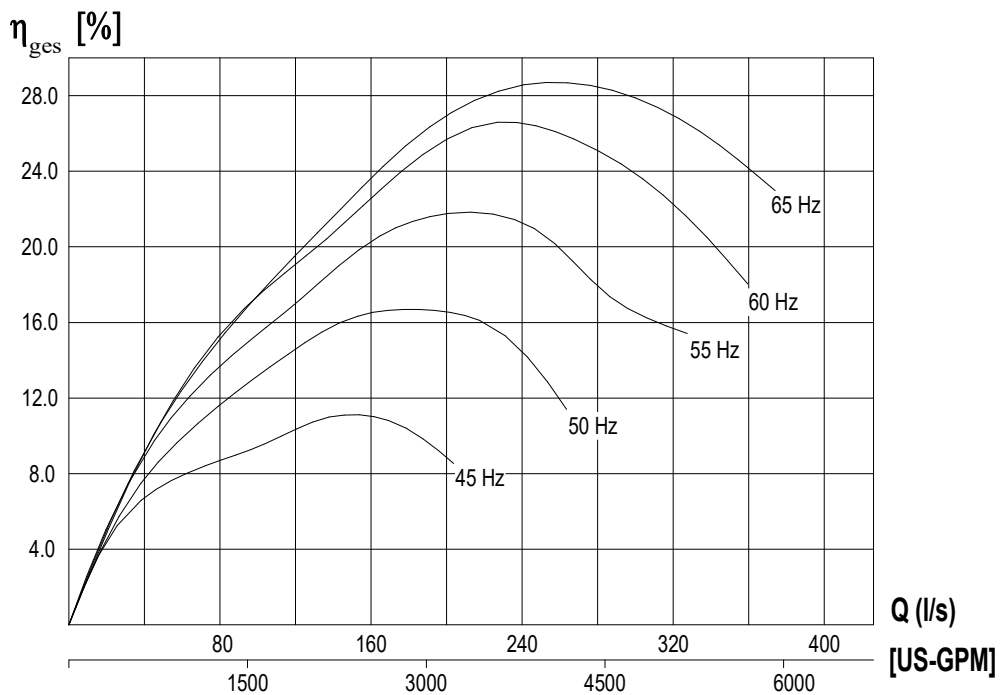

± 10% Toleranz bei linearer U/f-Frequenzregelung / ± 10% tolerance with linear U/f frequency control

Kennlinie Performance curve	Baureihe Type	RZP 50-4.37-4/8	Nr./ No. Version	KL 0357-2 2023-11-30 Sp
Netz / Main connection	460V~3 / 60Hz		Nenndrehzahl Nom. Speed	365 [1/min]
Motortyp / Motor type	T 17-4/8R (Ex)		Kugeldurchgang Free ball passage	150 [mm]
Nenn-Laufrad Ø / Nom. Impeller Ø	500 [mm]		Effizienzklasse / Efficiency class	DIN EN 60034-30-1
Nennleistung / Rated output [P2]	4,20 [kW]	Max.-Leistung / power input [P1]	5,40 [kW]	
			Hydr.Nr.	6089115

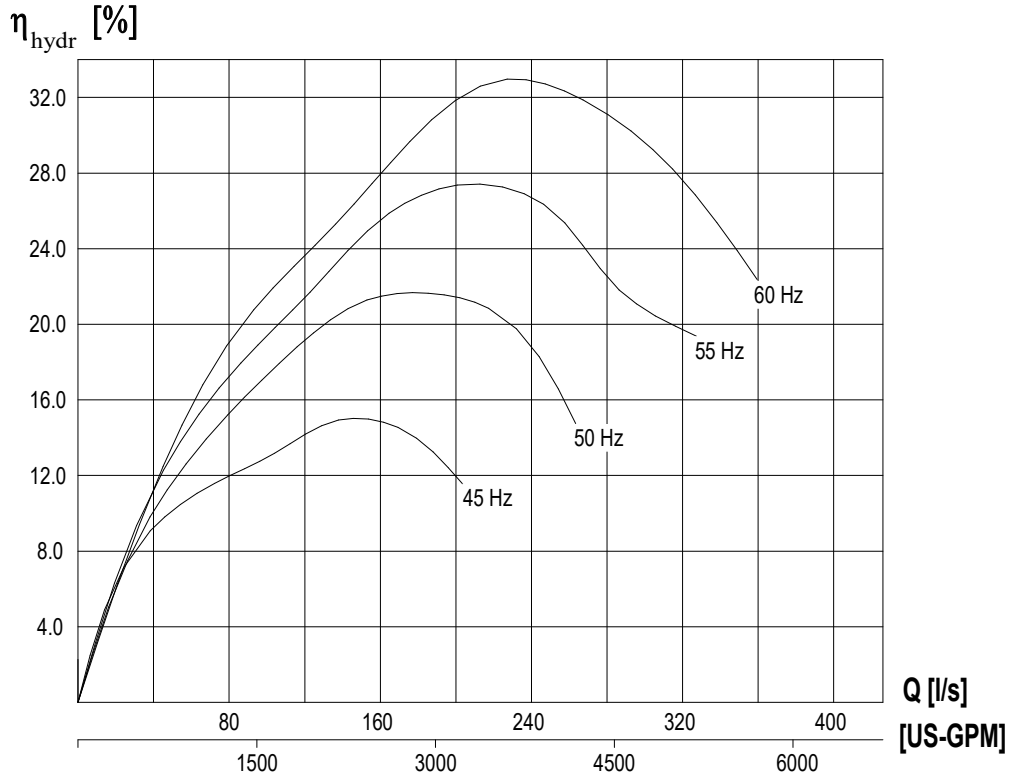

± 10% Toleranz bei linearer U/f-Frequenzregelung / ± 10% tolerance with linear U/f frequency control