

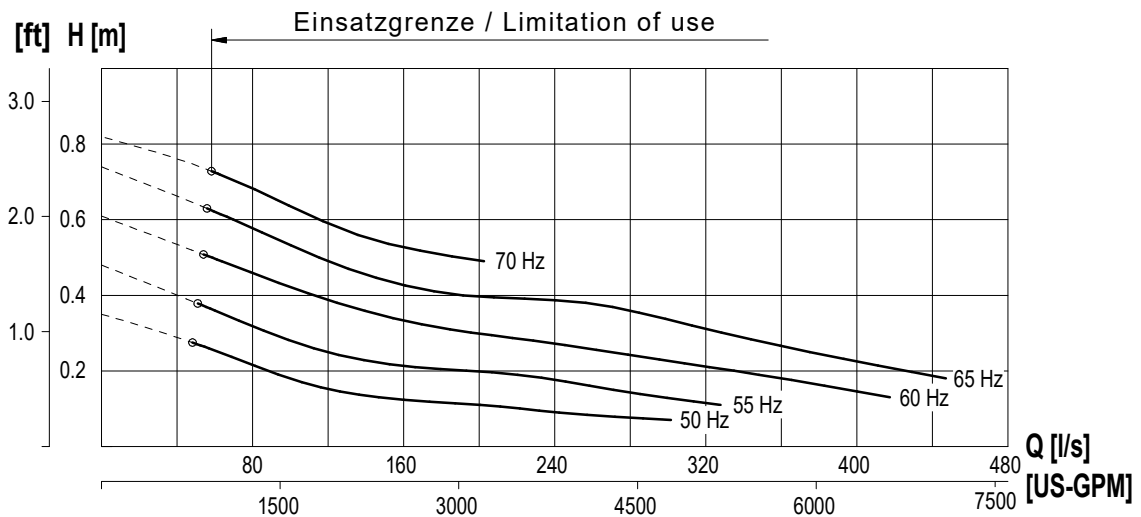
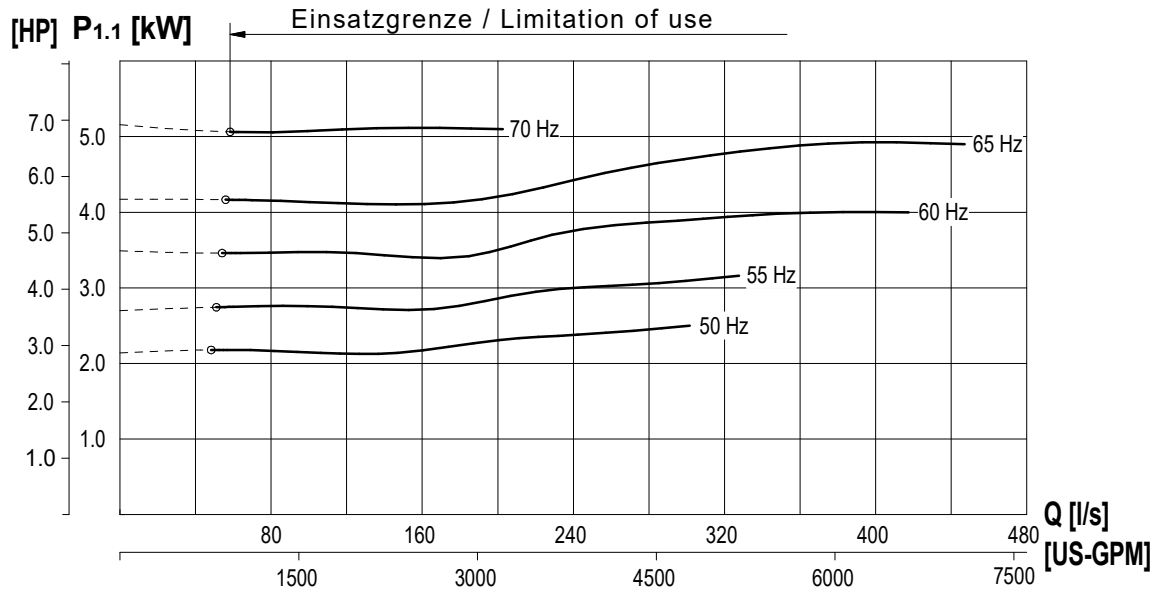


Kennlinie Performance curve	Baureihe Type	<b>RZP 60-4.32-4/8</b>	Nr./ No.	<b>KL 0364-1</b>	
			Version	2023-12-07	Sp
Netz / Main connection		<b>460V~3 / 60Hz</b>		Nennzahl Nom. Speed	<b>322 [1/min]</b>
Motortyp / Motor type		<b>T 17-4/8R (Ex)</b>		Nom. Speed	
Nenn-Laufrad Ø / Nom. Impeller Ø		<b>600 [mm]</b>		Kugeldurchgang Free ball passage	<b>150 [mm]</b>
Effizienzklasse / Efficiency class		<b>DIN EN 60034-30-1</b>			
Nennleistung / Rated output [P2]		<b>4,20 [kW]</b>	Max.-Leistung / power input [P1]	<b>5,40 [kW]</b>	
			Hydr.Nr.	<b>6088168</b>	

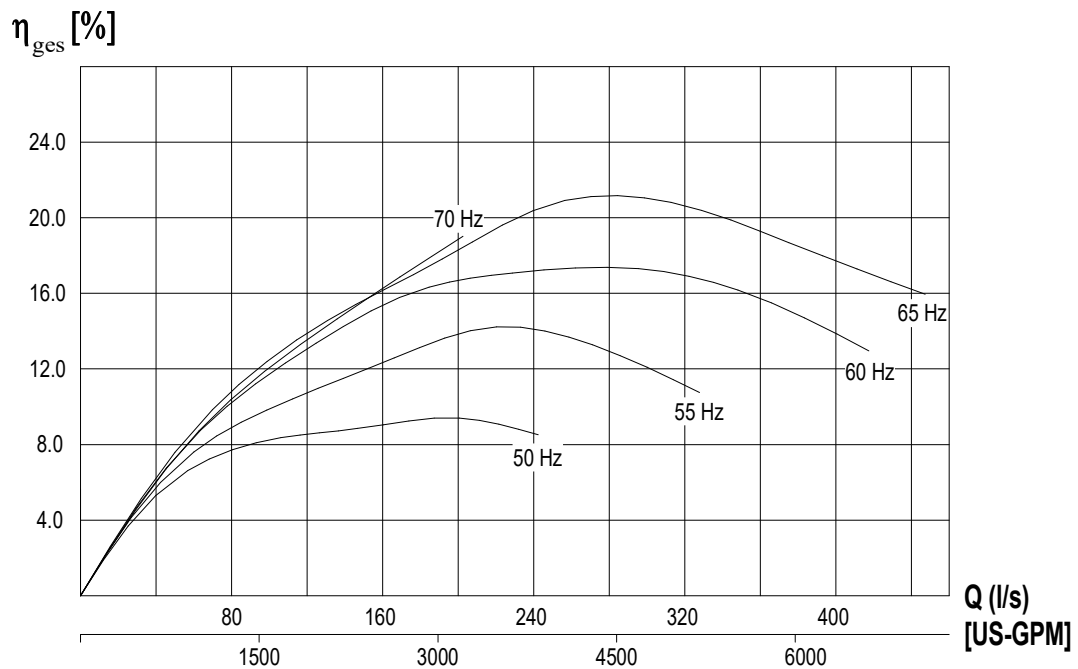

± 10% Toleranz bei linearer U/f-Frequenzregelung / ± 10% tolerance with linear U/f frequency control

Kennlinie Performance curve	Baureihe Type	<b>RZP 60-4.32-4/8</b>	Nr./ No. Version	<b>KL 0364-2</b> 2023-12-07 Sp
Netz / Main connection	<b>460V~3 / 60Hz</b>		Nennzahl Nom. Speed	<b>322 [1/min]</b>
Motortyp / Motor type	<b>T 17-4/8R (Ex)</b>		Kugeldurchgang Free ball passage	<b>150 [mm]</b>
Nenn-Laufrad Ø / Nom. Impeller Ø	<b>600 [mm]</b>		Effizienzklasse / Efficiency class	<b>DIN EN 60034-30-1</b>
Nennleistung / Rated output [P2]	<b>4,20 [kW]</b>	Max.-Leistung / power input [P1]	<b>5,40 [kW]</b>	
			Hydr.Nr.	<b>6088168</b>

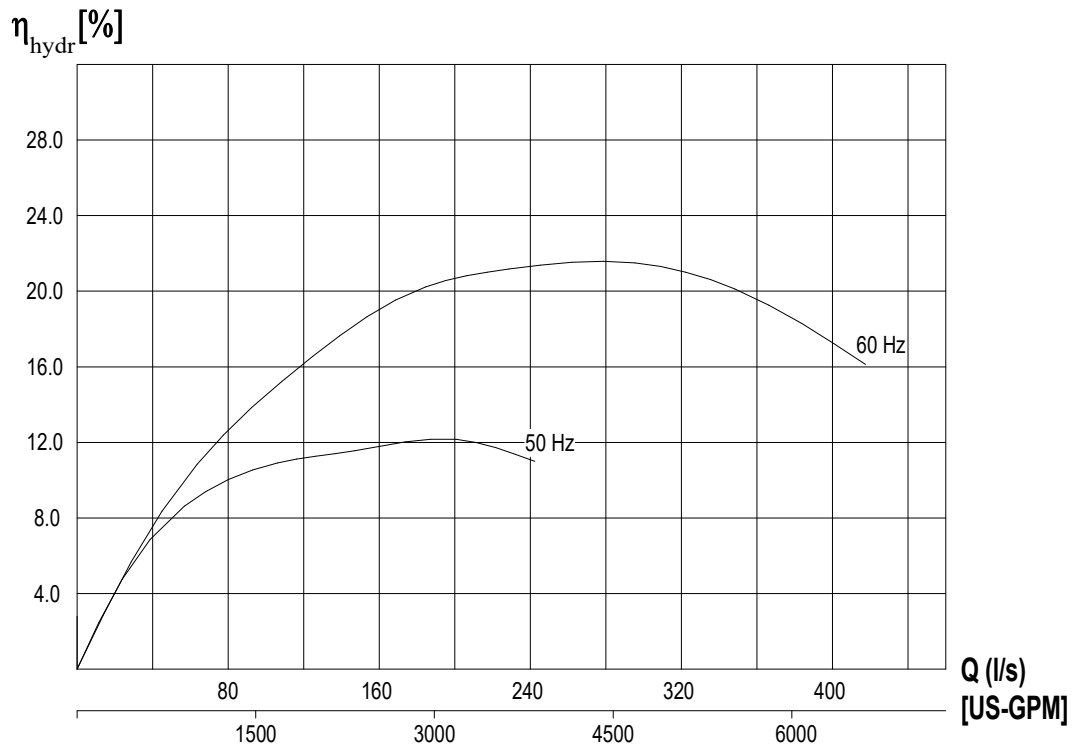

± 10% Toleranz bei linearer U/f-Frequenzregelung / ± 10% tolerance with linear U/f frequency control