







Kennlinie Performance curve	Baureihe Type	RZP 60-4.36-4/12	Nr./ No. Version	KL 0365-1 2024-03-04 Sp
Netz / Main connection	460V~3 / 60Hz		Nennzahl Nom. Speed	364 [1/min]
Motortyp / Motor type	T 17-4/12R (Ex)		Kugeldurchgang Free ball passage	150 [mm]
Nenn-Laufrad Ø / Nom. Impeller Ø	600 [mm]		Effizienzklasse / Efficiency class	DIN EN 60034-30-1
Nennleistung / Rated output [P2]	5,50 [kW]	Max.-Leistung / power input [P1]	7,10 [kW]	
		Hydr.Nr.	6088168	

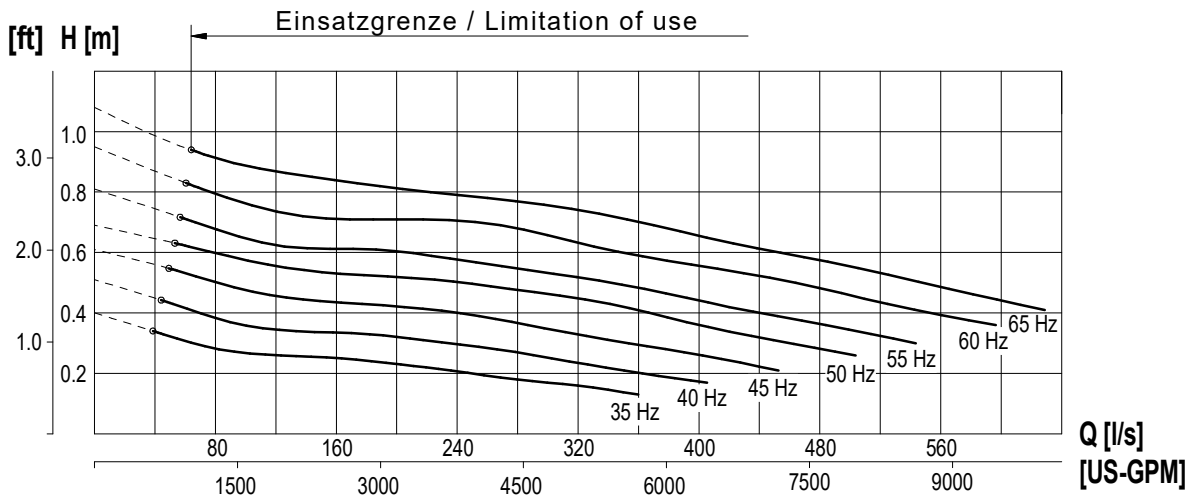

± 10% Toleranz bei linearer U/f-Frequenzregelung / ± 10% tolerance with linear U/f frequency control

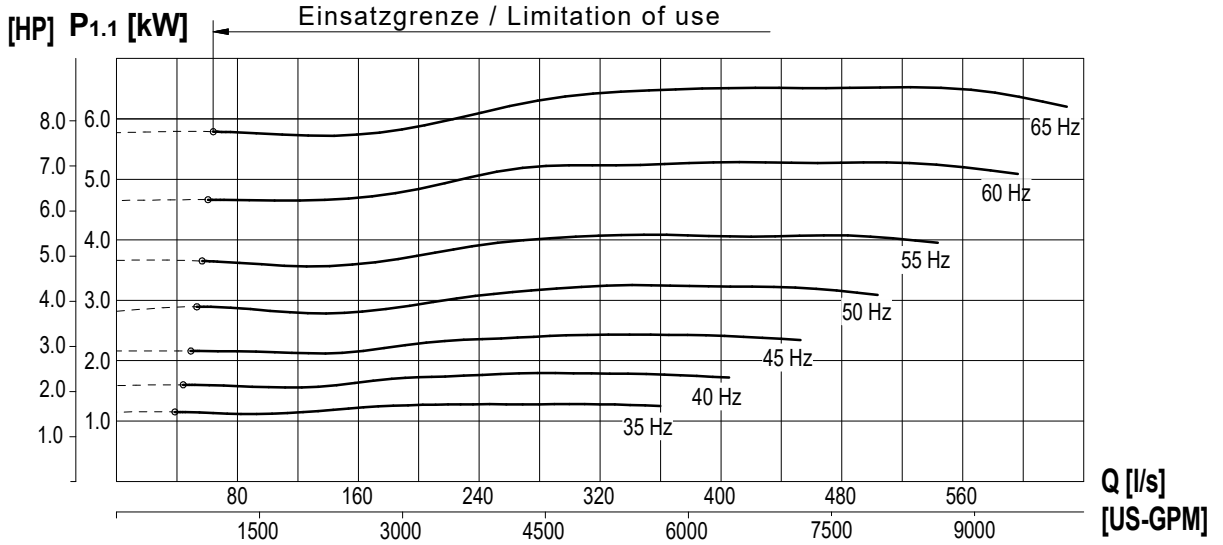

Kennlinie Performance curve	Baureihe Type	RZP 60-4.36-4/12	Nr./ No. Version	KL 0365-2 2024-03-04 Sp
Netz / Main connection	460V~3 / 60Hz		Nennzahl Nom. Speed	364 [1/min]
Motortyp / Motor type	T 17-4/12R (Ex)		Kugeldurchgang Free ball passage	150 [mm]
Nenn-Laufrad Ø / Nom. Impeller Ø	600 [mm]		Max.-Leistung / power input [P1]	7,10 [kW]
Effizienzklasse / Efficiency class	DIN EN 60034-30-1		Hydr.Nr.	6088168
Nennleistung / Rated output [P2]	5,50 [kW]			

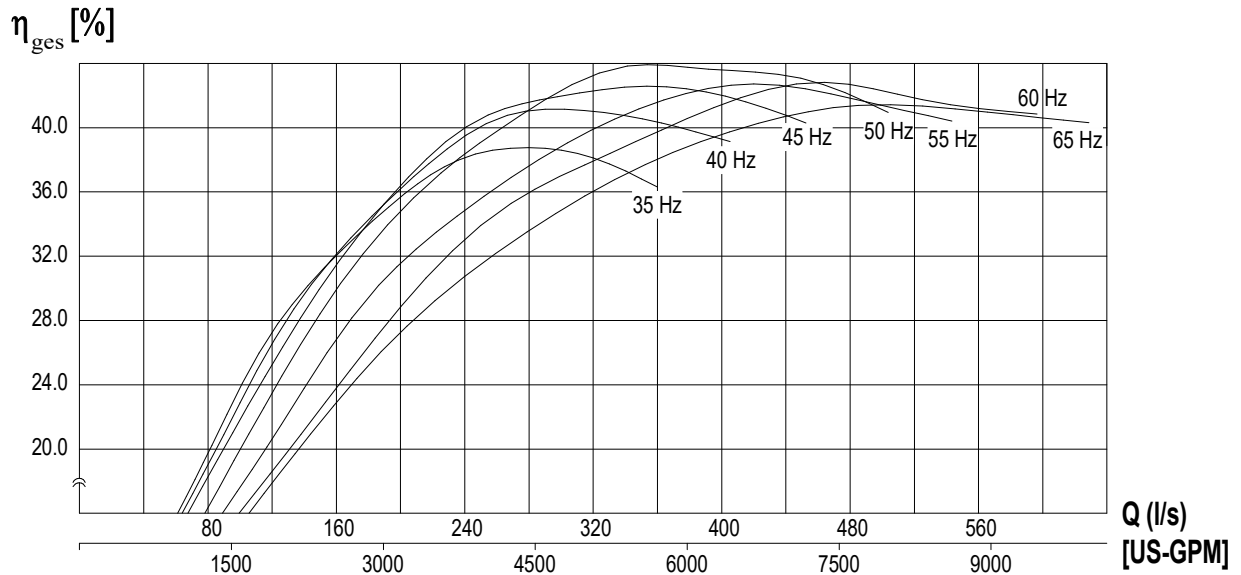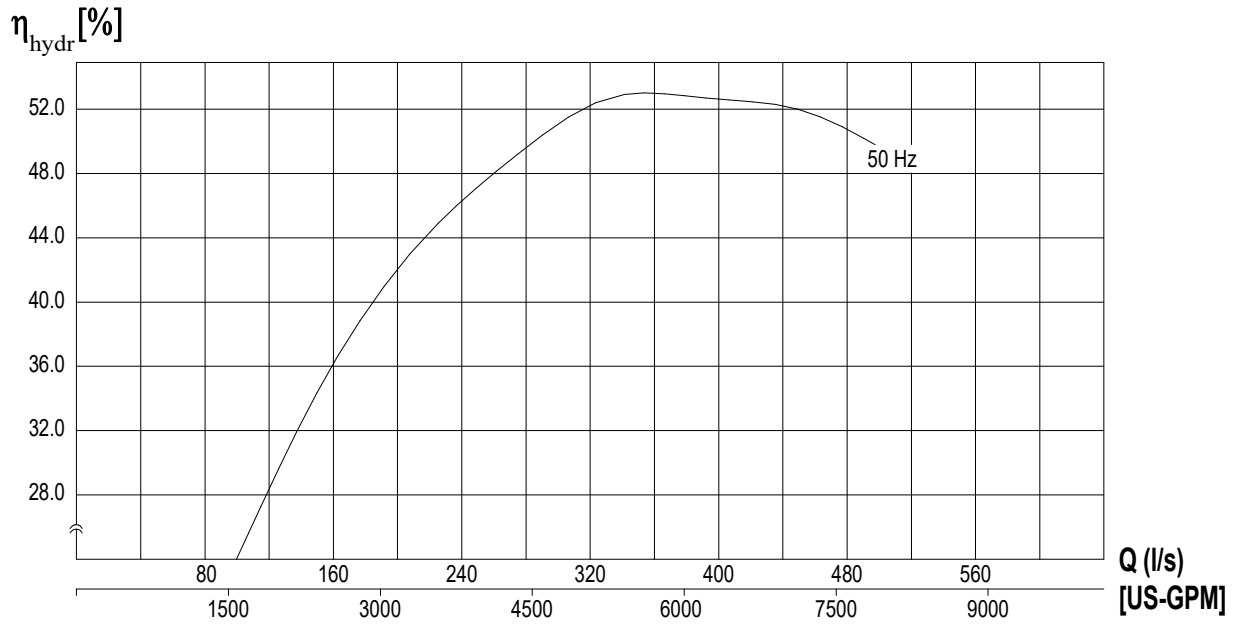

± 10% Toleranz bei linearer U/f-Frequenzregelung / ± 10% tolerance with linear U/f frequency control