



Kennlinie Performance curve	Baureihe Type	<b>RZP 60-4.45-4/24</b>	Nr./ No. Version	<b>KL 0375-1</b> 2024-04-02 Sp
Netz / Main connection	<b>460V~3 / 60Hz</b>		Neendrehzahl Nom. Speed	<b>448 [1/min]</b>
Motortyp / Motor type	<b>T 17-4/24R (Ex)</b>		Kugeldurchgang Free ball passage	<b>150 [mm]</b>
Nenn-Laufrad Ø / Nom. Impeller Ø	<b>600 [mm]</b>		Max.-Leistung / power input [P1]	<b>14,10 [kW]</b>
Effizienzklasse / Efficiency class	<b>DIN EN 60034-30-1</b>		Hydr.Nr.	<b>6088168</b>
Nennleistung / Rated output [P2]	<b>11,50 [kW]</b>			

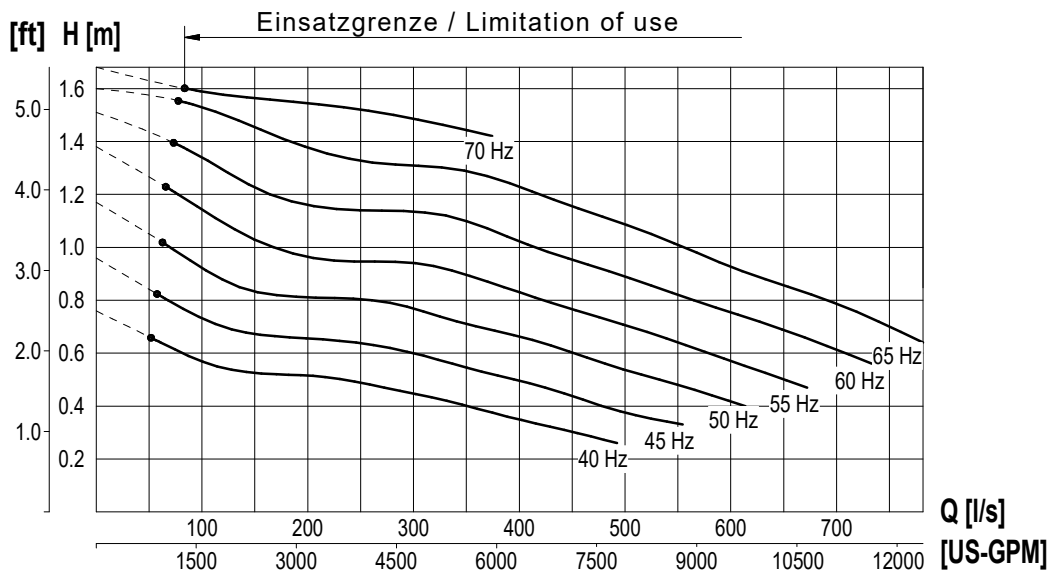


± 10% Toleranz bei linearer U/f-Frequenzregelung / ± 10% tolerance with linear U/f frequency control

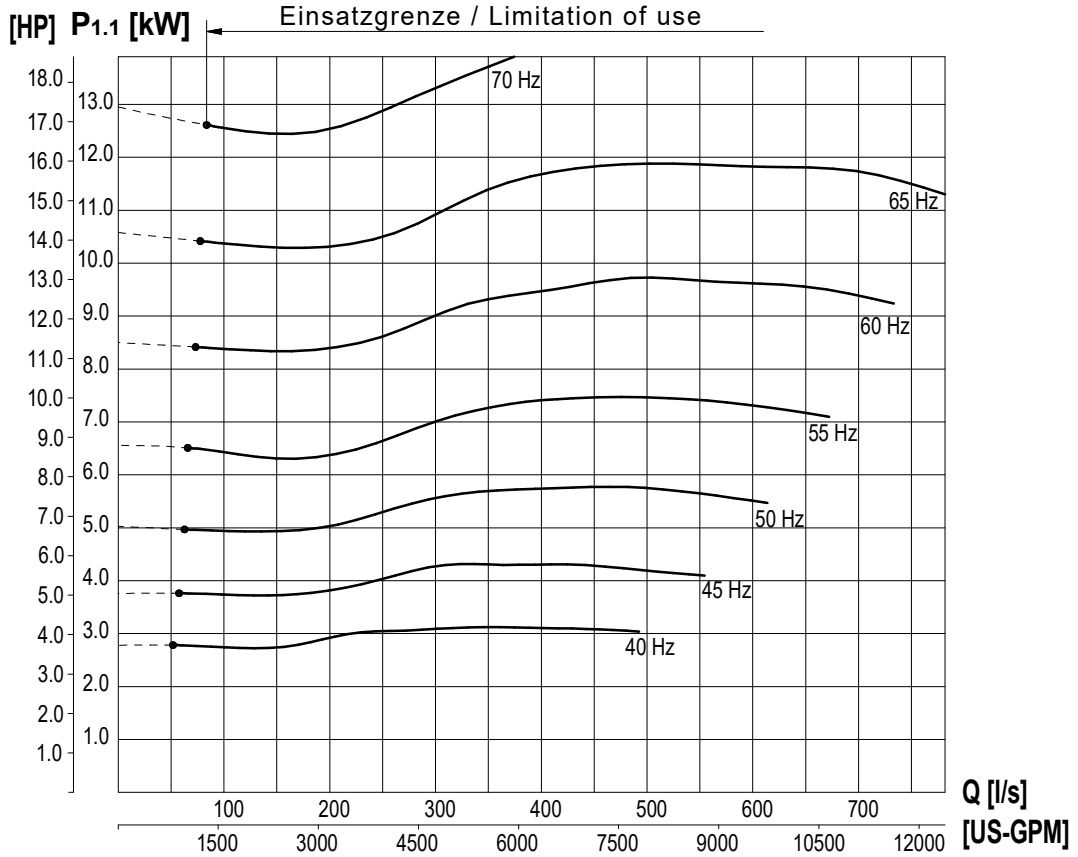


Kennlinie Performance curve	Baureihe Type	<b>RZP 60-4.45-4/24</b>	Nr./ No. Version	<b>KL 0375-2</b> 2024-04-02 Sp
Netz / Main connection	<b>460V~3 / 60Hz</b>		Nennzahl Nom. Speed	<b>448 [1/min]</b>
Motortyp / Motor type	<b>T 17-4/24R (Ex)</b>		Kugeldurchgang Free ball passage	<b>150 [mm]</b>
Nenn-Laufrad Ø / Nom. Impeller Ø	<b>600 [mm]</b>		Max.-Leistung / power input [P1]	<b>14,10 [kW]</b>
Effizienzklasse / Efficiency class	<b>DIN EN 60034-30-1</b>		Hydr.Nr.	<b>6088168</b>
Nennleistung / Rated output [P2]	<b>11,50 [kW]</b>			

$\eta_{hydr}$  [%]

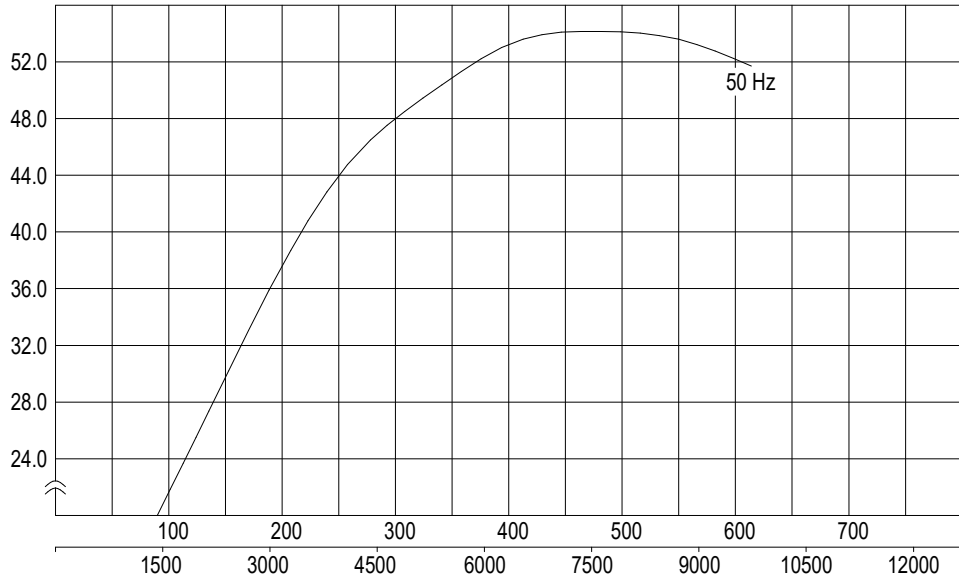

Q (l/s)  
[US-GPM]

$\eta_{ges}$  [%]

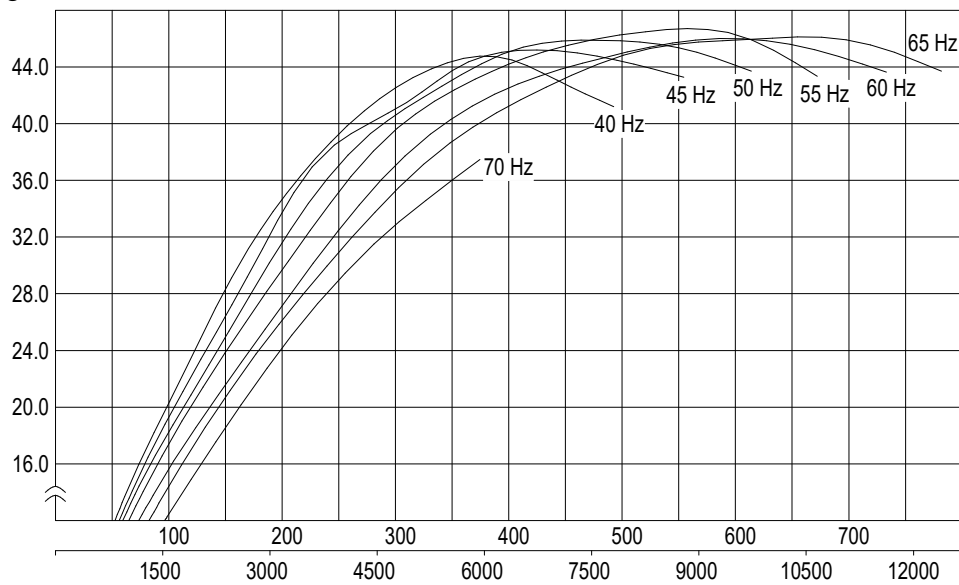

Q (l/s)  
[US-GPM]

± 10% Toleranz bei linearer U/f-Frequenzregelung / ± 10% tolerance with linear U/f frequency control