




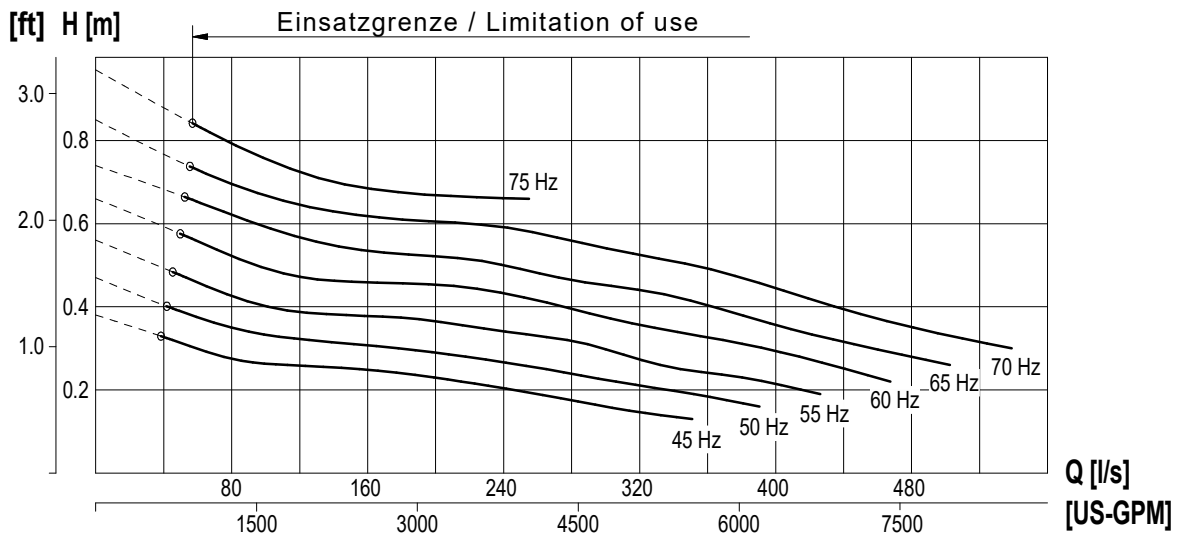


Kennlinie Performance curve	Baureihe Type	<b>RZPE 60-4.28-4/16</b>	Nr./ No. Version	<b>KL 0368-1</b> 2024-03-06 Sp
Netz / Main connection	<b>460V~3 / 60Hz</b>		Nenn-drehzahl Nom. Speed	<b>284 [1/min]</b>
Motortyp / Motor type	<b>TE 17-4/16R (Ex)</b>		Kugeldurchgang Free ball passage	<b>150 [mm]</b>
Nenn-Laufrad Ø / Nom. Impeller Ø	<b>600 [mm]</b>		Max.-Leistung / power input [P1]	<b>4,60 [kW]</b>
Effizienzklasse / Efficiency class	<b>IE3 / DIN EN 60034-30-1</b>		Hydr.Nr.	<b>6088168</b>
Nennleistung / Rated output [P2]	<b>4,00 [kW]</b>			

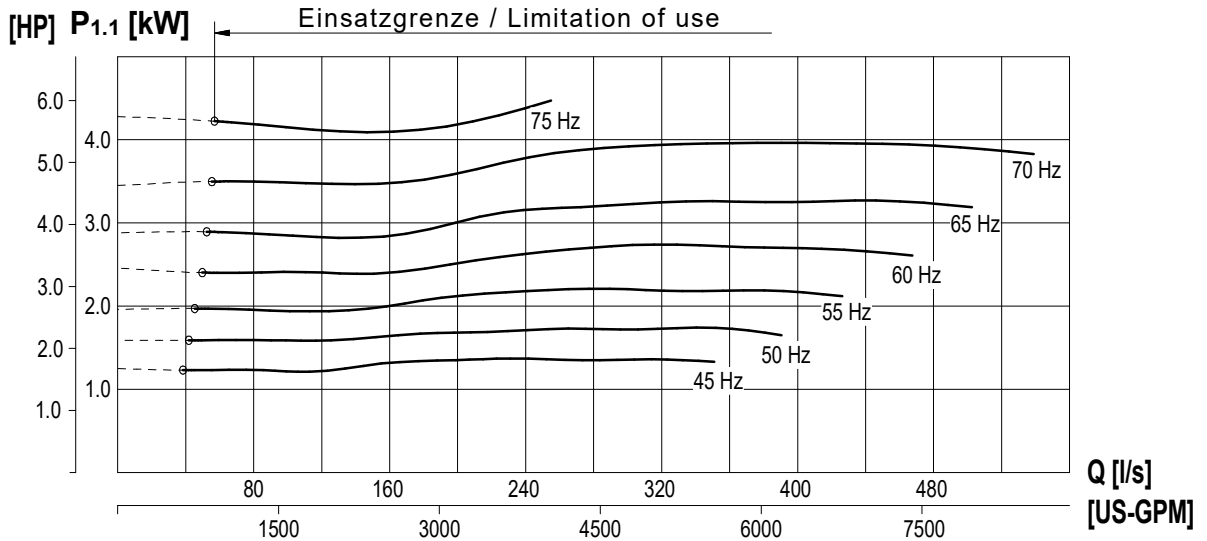

± 10% Toleranz bei linearer U/f-Frequenzregelung / ± 10% tolerance with linear U/f frequency control

Kennlinie Performance curve	Baureihe Type	<b>RZPE 60-4.28-4/16</b>	Nr./ No. Version	<b>KL 0368-2</b> 2024-03-06 Sp
Netz / Main connection	<b>460V~3 / 60Hz</b>		Nenn Drehzahl Nom. Speed	<b>284 [1/min]</b>
Motortyp / Motor type	<b>TE 17-4/16R (Ex)</b>		Kugeldurchgang Free ball passage	<b>150 [mm]</b>
Nenn-Laufrad Ø / Nom. Impeller Ø	<b>600 [mm]</b>		Max.-Leistung / power input [P1]	<b>4,60 [kW]</b>
Effizienzklasse / Efficiency class	<b>IE3 / DIN EN 60034-30-1</b>		Hydr.Nr.	<b>6088168</b>
Nennleistung / Rated output [P2]	<b>4,00 [kW]</b>			

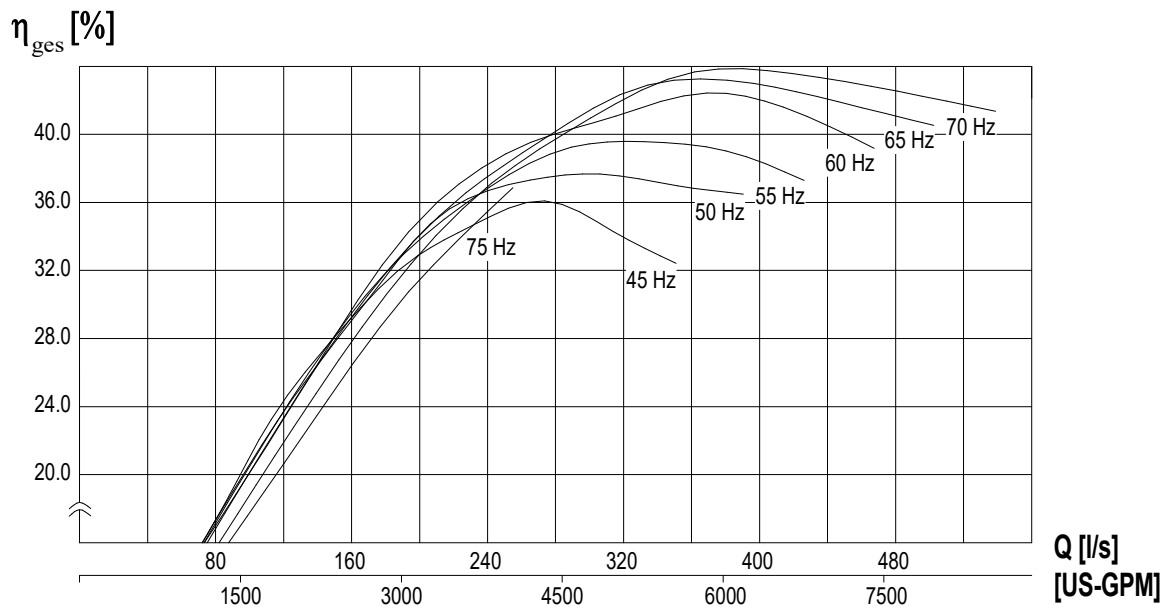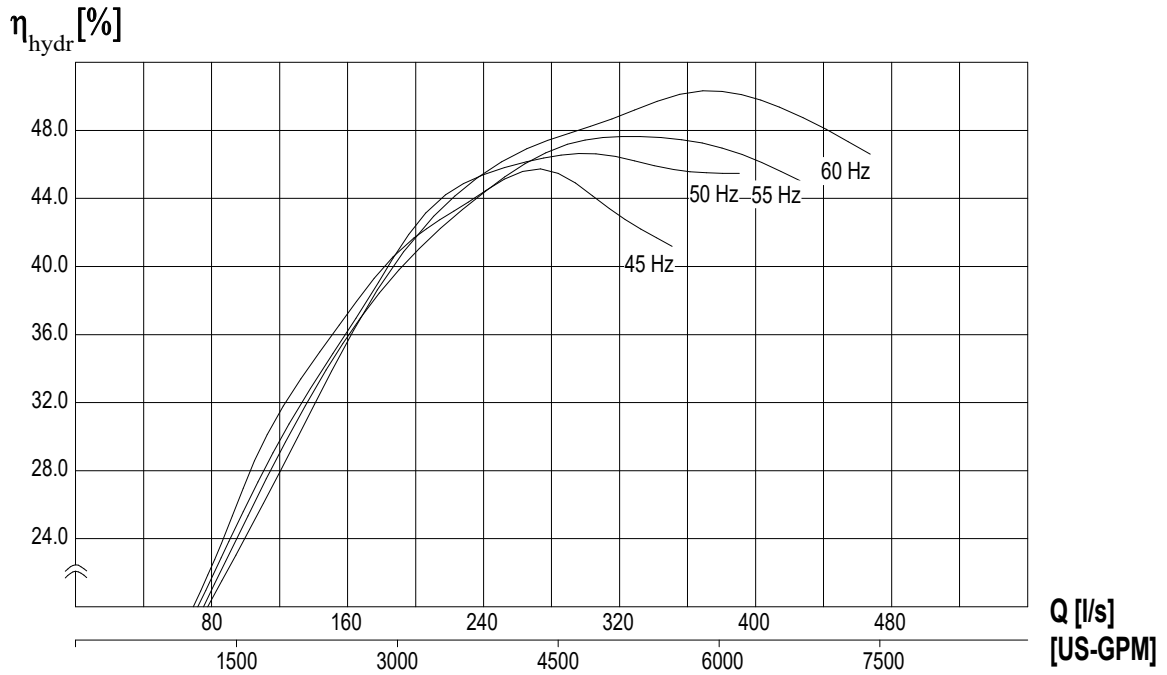

± 10% Toleranz bei linearer U/f-Frequenzregelung / ± 10% tolerance with linear U/f frequency control