




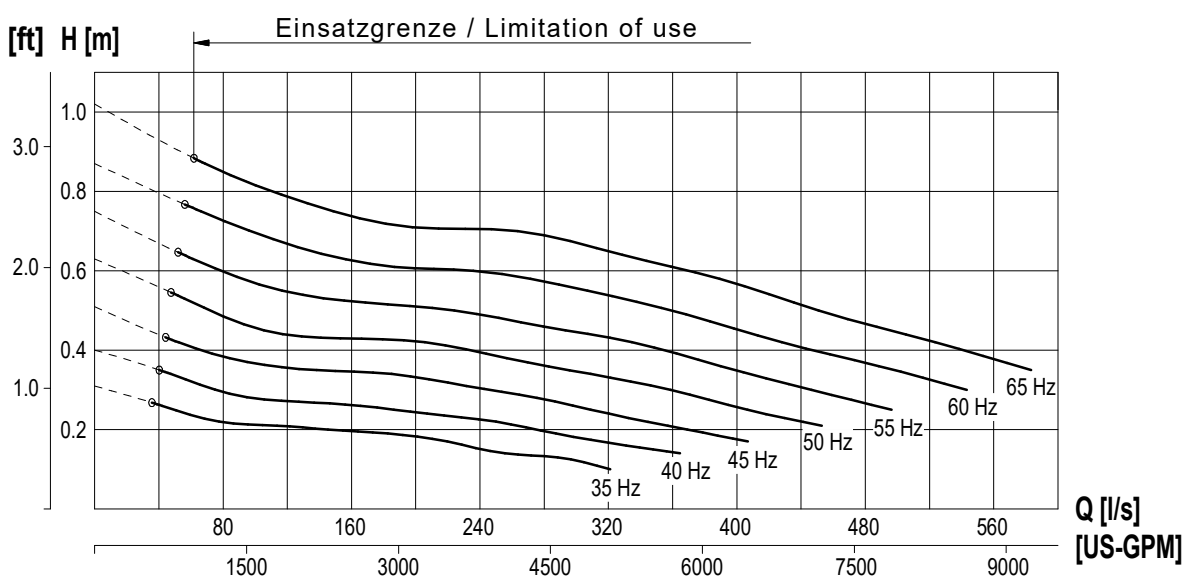


Kennlinie Performance curve	Baureihe Type	RZPE 60-4.33-4/24	Nr./ No. Version	KL 0369-1 2024-03-11 Sp
Netz / Main connection	460V~3 / 60Hz		Nennzahl Nom. Speed	331 [1/min]
Motortyp / Motor type	TE 17-4/24R (Ex)		Kugeldurchgang Free ball passage	150 [mm]
Nenn-Laufrad Ø / Nom. Impeller Ø	600 [mm]		Max.-Leistung / power input [P1]	5,10 [kW]
Effizienzklasse / Efficiency class	IE3 / DIN EN 60034-30-1		Hydr.Nr.	6088168
Nennleistung / Rated output [P2]	4,50 [kW]			

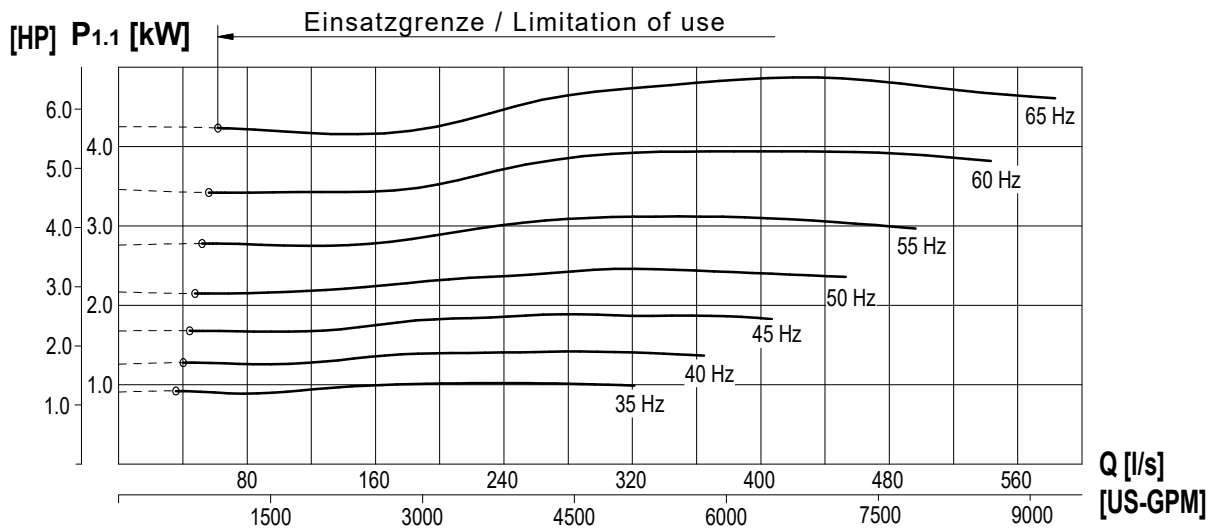

± 10% Toleranz bei linearer U/f-Frequenzregelung / ± 10% tolerance with linear U/f frequency control

Kennlinie Performance curve	Baureihe Type	RZPE 60-4.33-4/24	Nr./ No. Version	KL 0369-2 2024-03-11 Sp
Netz / Main connection	460V~3 / 60Hz		Nennzahl Nom. Speed	331 [1/min]
Motortyp / Motor type	TE 17-4/24R (Ex)		Kugeldurchgang Free ball passage	150 [mm]
Nenn-Laufrad Ø / Nom. Impeller Ø	600 [mm]		Max.-Leistung / power input [P1]	5,10 [kW]
Effizienzklasse / Efficiency class	IE3 / DIN EN 60034-30-1		Hydr.Nr.	6088168
Nennleistung / Rated output [P2]	4,50 [kW]			

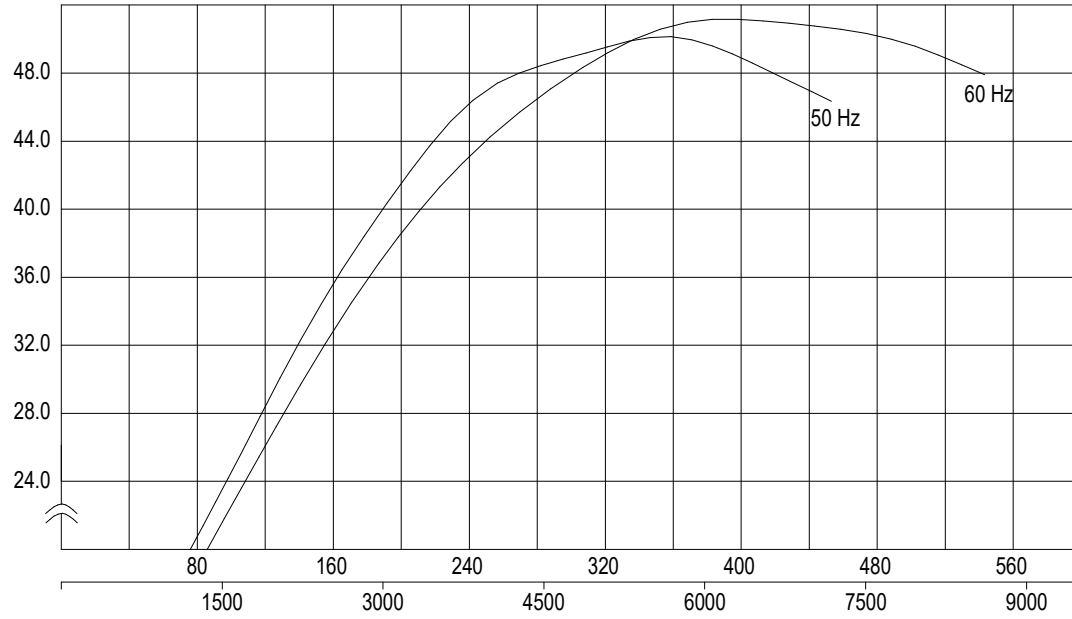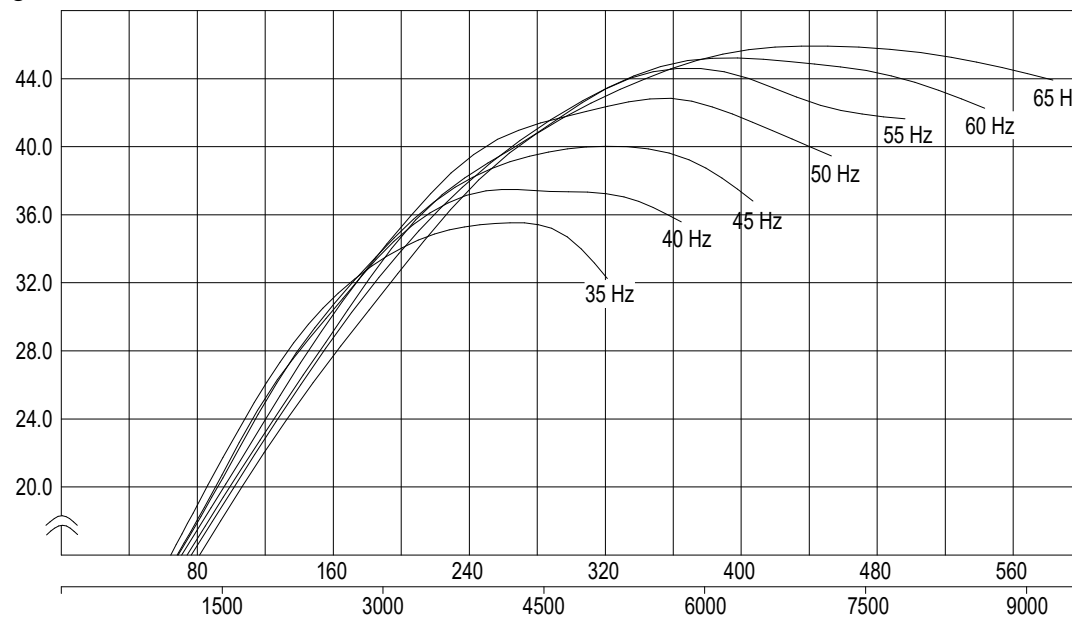 $\eta_{hydr} [\%]$

 $Q [l/s]$
 $[US-GPM]$
 $\eta_{ges} [\%]$

 $Q [l/s]$
 $[US-GPM]$

± 10% Toleranz bei linearer U/f-Frequenzregelung / ± 10% tolerance with linear U/f frequency control