

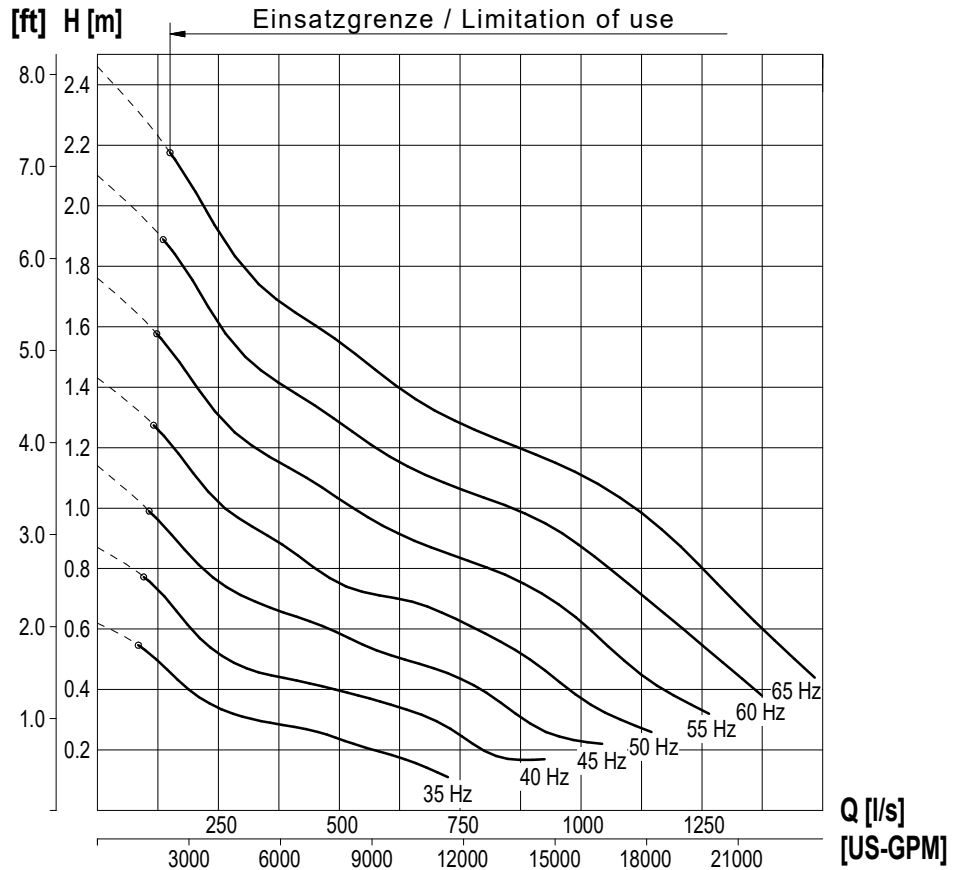
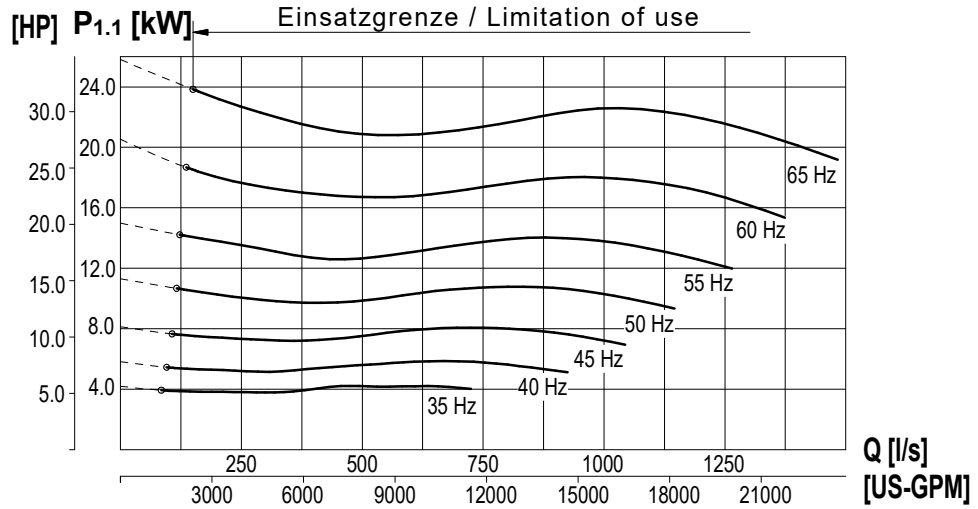


Kennlinie Performance curve	Baureihe Type	RZP 80-3.33-4/30	Nr./ No. Version	KL 0343-1 2024-02-08 Sp
Netz / Main connection	460V~3 / 60Hz		Neendrehzahl Nom. Speed	334 [1/min]
Motortyp / Motor type	T 20-4/30R (Ex)		Kugeldurchgang Free ball passage	240 [mm]
Nenn-Laufrad Ø / Nom. Impeller Ø	800 [mm]		Effizienzklasse / Efficiency class	DIN EN 60034-30-1
Nennleistung / Rated output [P2]	22,50 [kW]	Max.-Leistung / power input [P1]	26,50 [kW]	
		Hydr.Nr.	6089789	

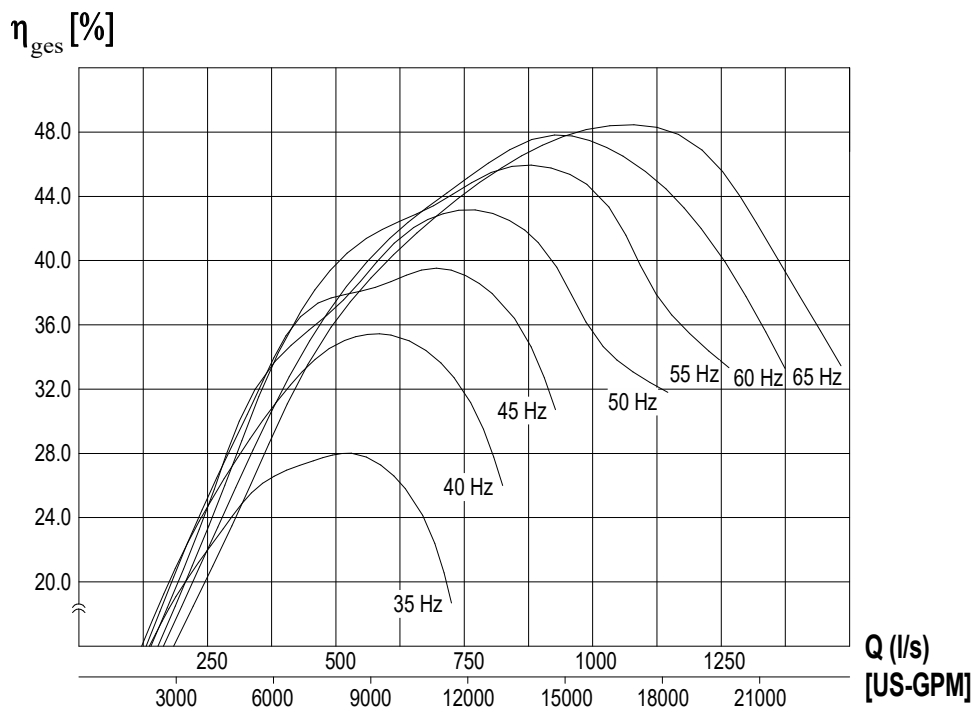

± 10% Toleranz bei linearer U/f-Frequenzregelung / ± 10% tolerance with linear U/f frequency control

Kennlinie Performance curve	Baureihe Type	RZP 80-3.33-4/30	Nr./ No. Version	KL 0343-2 2024-02-08 Sp
Netz / Main connection	460V~3 / 60Hz		Nennzahl Nom. Speed	334 [1/min]
Motortyp / Motor type	T 20-4/30R (Ex)		Kugeldurchgang Free ball passage	240 [mm]
Nenn-Laufrad Ø / Nom. Impeller Ø	800 [mm]		Max.-Leistung / power input [P1]	26,50 [kW]
Effizienzklasse / Efficiency class	DIN EN 60034-30-1		Hydr.Nr.	6089789
Nennleistung / Rated output [P2]	22,50 [kW]			

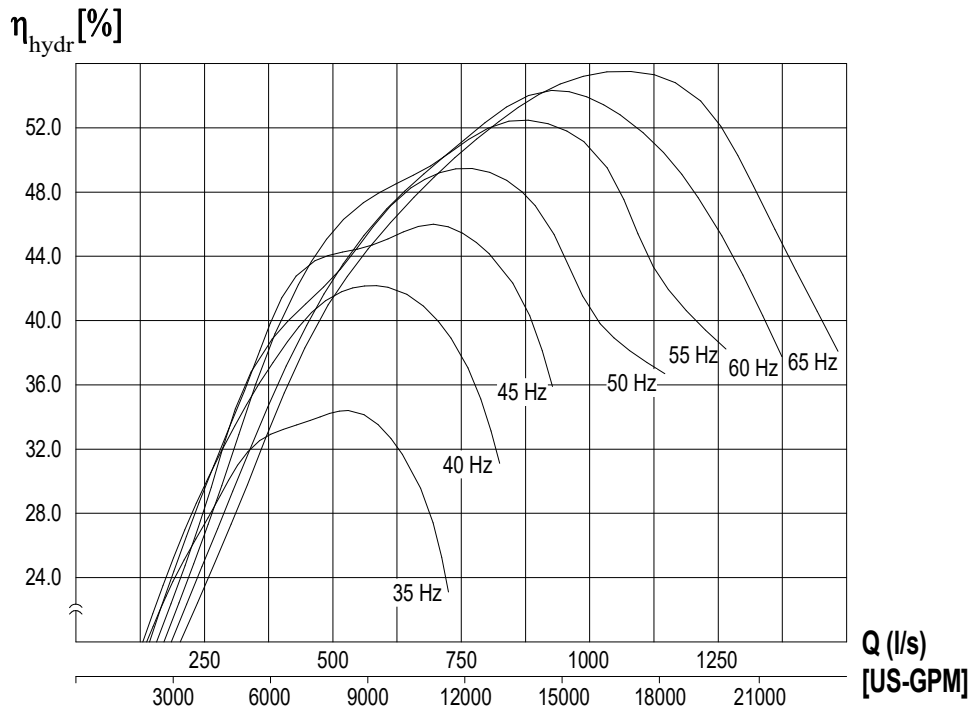

± 10% Toleranz bei linearer U/f-Frequenzregelung / ± 10% tolerance with linear U/f frequency control