

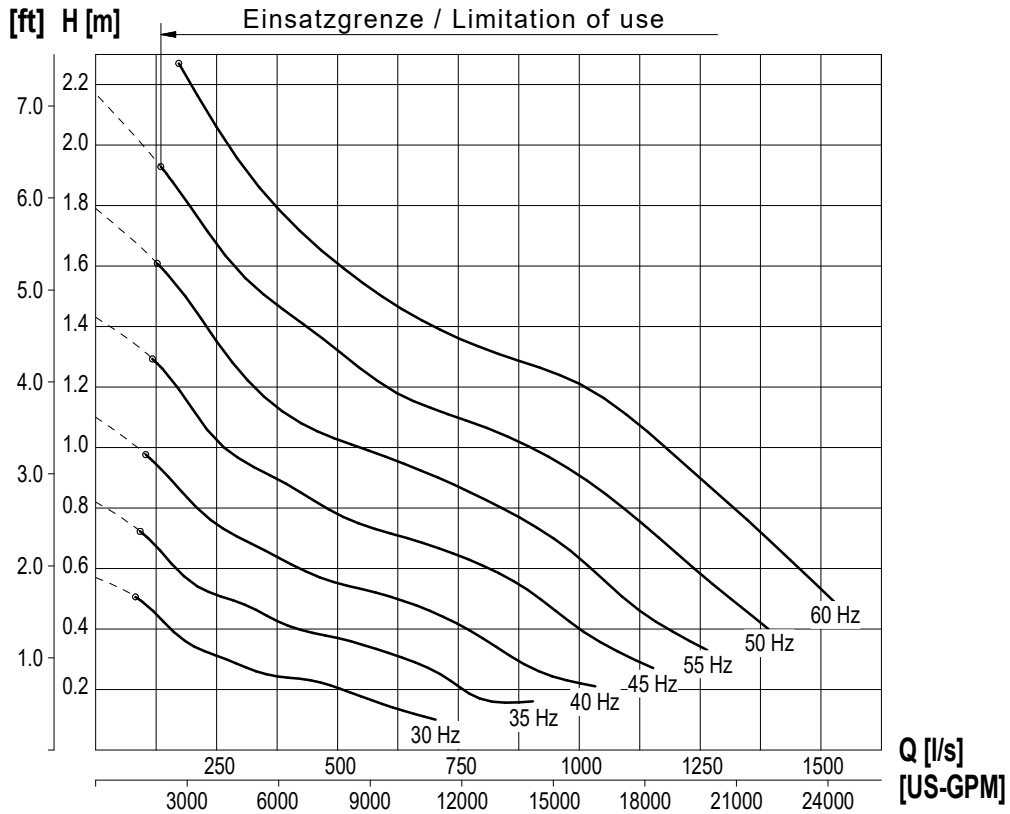
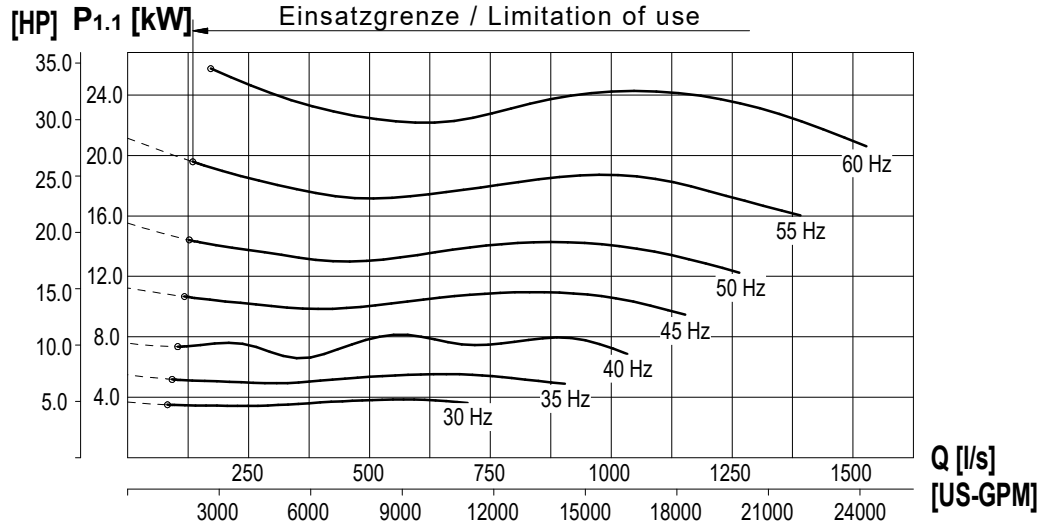


Kennlinie Performance curve	Baureihe Type	<b>RZP 80-3.37-4/30</b>	Nr./ No. Version	<b>KL 0360-1</b> 2024-02-14 Sp
Netz / Main connection	<b>460V~3 / 60Hz</b>		Nenndrehzahl Nom. Speed	<b>366 [1/min]</b>
Motortyp / Motor type	<b>T 20-4/30R (Ex)</b>		Kugeldurchgang Free ball passage	<b>240 [mm]</b>
Nenn-Laufrad Ø / Nom. Impeller Ø	<b>800 [mm]</b>		Effizienzklasse / Efficiency class	<b>DIN EN 60034-30-1</b>
Nennleistung / Rated output [P2]	<b>22,50 [kW]</b>	Max.-Leistung / power input [P1]	<b>26,50 [kW]</b>	
		Hydr.Nr.	<b>6089789</b>	

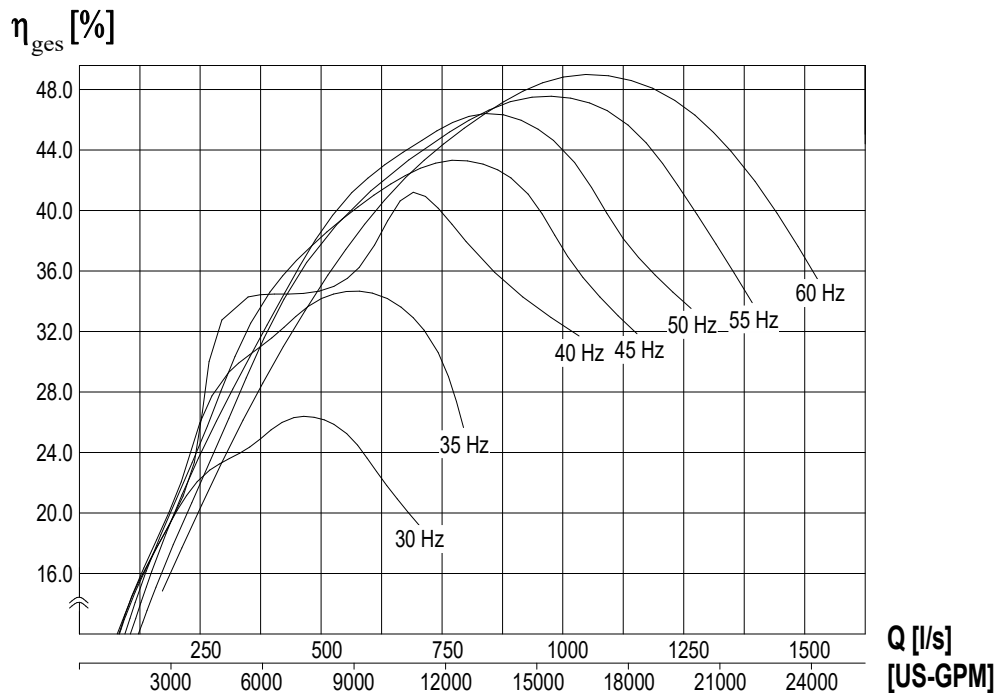

± 10% Toleranz bei linearer U/f-Frequenzregelung / ± 10% tolerance with linear U/f frequency control

Kennlinie Performance curve	Baureihe Type	<b>RZP 80-3.37-4/30</b>	Nr./ No.	<b>KL 0360-2</b>
			Version	2024-02-14 Sp
Netz / Main connection		<b>460V~3 / 60Hz</b>	Nennzahl Nom. Speed	<b>366 [1/min]</b>
Motortyp / Motor type		<b>T 20-4/30R (Ex)</b>	Kugeldurchgang Free ball passage	<b>240 [mm]</b>
Nenn-Laufrad Ø / Nom. Impeller Ø		<b>800 [mm]</b>	Max.-Leistung / power input [P1]	<b>26,50 [kW]</b>
Effizienzklasse / Efficiency class		<b>DIN EN 60034-30-1</b>	Hydr.Nr.	<b>6089789</b>
Nennleistung / Rated output [P2]		<b>22,50 [kW]</b>		

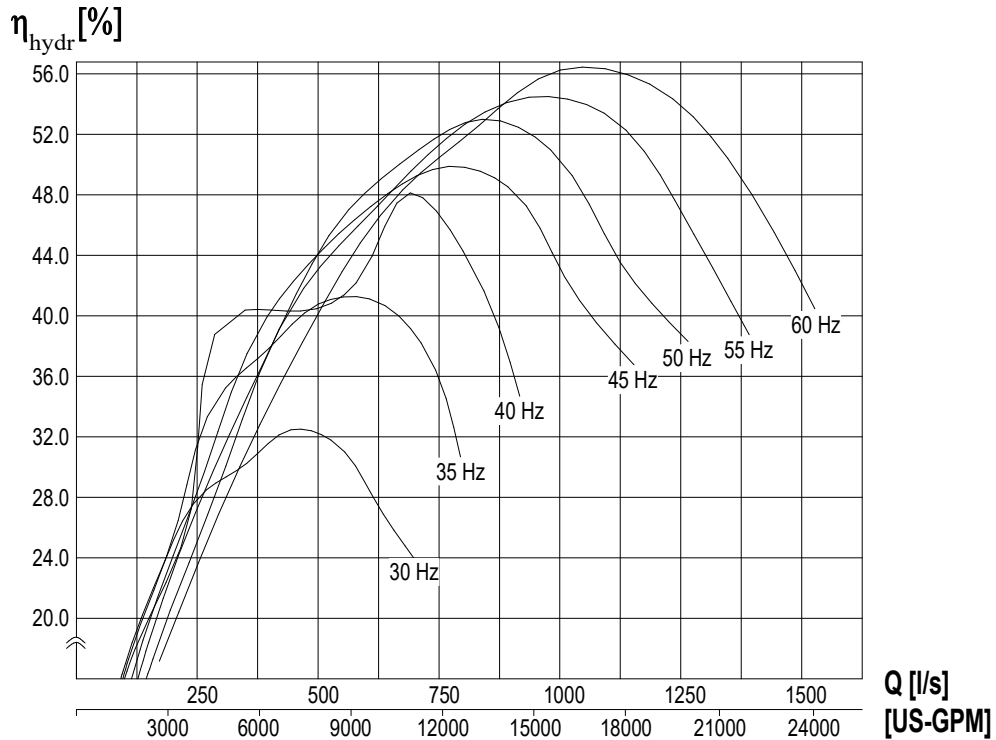

± 10% Toleranz bei linearer U/f-Frequenzregelung / ± 10% tolerance with linear U/f frequency control